



CONTRACT PRICING WORKSHEET
For MOTOR VEHICLES Only

Contract No.: HT11-07

Date Prepared: 10/28/2009

This Worksheet is prepared by Contractor and given to End User. If a PO is issued, both documents MUST be faxed to H-GAC @ 713-993-4548. Therefore please type or print legibly.

Buying Agency:	City of Texas City	Contractor:	Santex Truck Center
Contact Person:	David Reeves	Prepared By:	Rick DeNolf
Phone:	409-643-5870	Phone:	800 373-8370
Fax:	409-945-0856	Fax:	210 661-0226
Email:	dreeves@texas-city-tx.org	Email:	rdenolf@santextrucks.com
Product Code:	HB	Description:	2011 International 4300 4x2

A. Product Item Base Unit Price Per Contractor's H-GAC Contract: 43227

B. Published Options - Itemize below - Attach additional sheet(s) if necessary - Include Option Code in description if applicable.
(Note: Published Options are options which were submitted and priced in Contractor's bid.)

Description	Cost	Description	Cost
1570 Front Tow Hooks	73		
1CAD HD Frame Rails	197	Warren F-10 Steel 10 ft. 7-8 yd Dump Body w/Pintle	10410
7BDM Aftertreatment Exhaust w/Vertical Tail Pipe	671	Hitch & Electric Trailer Brake Control & Tarp System	
8HAH Electric Trailer Brake/Lights Wiring	244	As per Warren Quote #WTLLC00002363 (attached)	
8RKB Radio	305		
8XAH Circuit Breakers in Lieu of Fuses	99		
13AHP Allison Automatic Transmission	3832	Note: This will have the 2007 Emissions Engine, not the	
14ANP 17.5k Rear Axle	281	2010 Emissions Engine.	
14VAD 18.5k Rear Suspension	46		
16WKB Air Conditioner	823		
Subtotal From Additional Sheet(s):			
Subtotal B:			16981

C. Unpublished Options - Itemize below / attach additional sheet(s) if necessary.
(Note: Unpublished options are items which were not submitted and priced in Contractor's bid.)

Description	Cost	Description	Cost
Customer Required Unpublished Options for Dump Truck	1670		
Application			
Subtotal From Additional Sheet(s):			
Subtotal C:			1670

Check: Total cost of Unpublished Options (C) cannot exceed 25% of the total of the Base Unit Price plus Published Options (A+B). **For this transaction the percentage is:** 3%

D. Total Cost Before Any Applicable Trade-In / Other Allowances / Discounts (A+B+C)

Quantity Ordered:	1	X Subtotal of A + B + C:	61878	=	Subtotal D:	61878
-------------------	---	--------------------------	-------	---	-------------	-------

E. H-GAC Order Processing Charge (Amount Per Current Policy) Subtotal E: 1000

F. Trade-Ins / Other Allowances / Special Discounts / Freight / Installation

Description	Cost	Description	Cost
Subtotal F:			0

Delivery Date: Approx 3/15/10 **G. Total Purchase Price (D+E+F):** 62878



4300 SBA 4x2

Sales Proposal For:

Texas City Texas


Presented By:

SANTEX TRUCK CENTERS, LTD.

Prepared For:
 Texas City Texas
 David Reeves
 301 6th St. N
 Texas City, TX 77590-7853
 (409)643 - 5870
 Reference ID: N/A

Presented By:
 SANTEX TRUCK CENTERS, LTD.
 Rick DeNolf
 1380 ACKERMAN RD.
 SAN ANTONIO TX 78219 -
 (210)661-8371

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

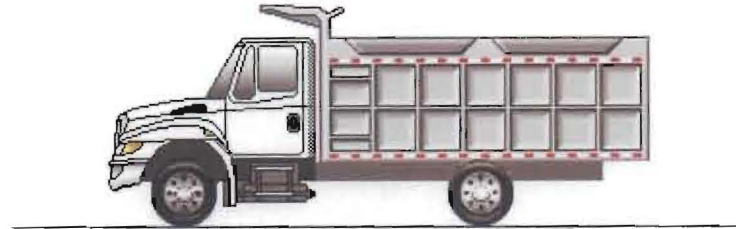

Model Profile
2011 4300 SBA 4X2 (MA025)

APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 25500. Calc. GVWR: 25500 Calc. Start / Grade Ability: 24.80% / 2.53% @ 55 MPH Calc. Geared Speed: 69.4 MPH
FUEL ECONOMY:	7.87 MPG @ 55 MPH
DIMENSION:	Wheelbase: 152.00, CA: 84.90, Axle to Frame: 63.00
ENGINE, DIESEL:	{International MaxxForce DT} EPA 07, 210 HP, @ 2300 RPM, 560 lb-ft Torque @ 1400 RPM, 2600 RPM Governed Speed, # 2 Bell Housing
TRANSMISSION, AUTOMATIC:	{Allison 2100_RDS_P} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; With PTO Provision, Less Retarder, With 26,000-lb GVW & GCW Max., on/off hwy
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-08-153B} I-Beam Type, 8,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor MS-17-14X-3DFL} Single Reduction, 17,500-lb Capacity, With 190 Wheel Ends Gear Ratio: 5.57
CAB:	Conventional
TIRE, FRONT:	(2) 255/70R22.5 RT500 (DOUBLE COIN) 568 rev/mile, load range H, 16 ply
TIRE, REAR:	(4) 255/70R22.5 RT500 (DOUBLE COIN) 568 rev/mile, load range H, 16 ply
SUSPENSION, RR, SPRING, SINGLE:	Vari-Rate; 18,500-lb Capacity, With 4500 lb Auxiliary Rubber Spring
PAINT:	Cab schematic 100GA Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Description</u>	<u>(USA DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$69,960.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$69,960.00
CVI & Safety Equipment	\$250.00	
MD Preparation & Delivery	\$350.00	
Total Preparation And Delivery:		\$600.00
Freight	\$1,650.00	
Total Freight:		\$1,650.00
Total Factory List Price Including Freight:		\$72,210.00
Less Customer Allowance:		(\$20,742.00)
Total Vehicle Price:		\$51,468.00
Total Body/Allied Equipment:		\$10,410.00
Total Sale Price:		\$61,878.00
Total Per Vehicle Sales Price:		\$61,878.00
Net Sales Price:		\$61,878.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

<u>Code</u>	<u>Description</u>
MA02500	Base Chassis, Model 4300 SBA 4X2 with 152.00 Wheelbase, 84.90 CA, and 63.00 Axle to Frame.
1570	TOW HOOK, FRONT (2) Inside Rail, Frame Mounted.
1CAD	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm); 427.0" (10846mm) Maximum OAL
1LLD	BUMPER, FRONT Full Width, Aerodynamic, Steel; 0.142" Material Thickness <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WEH	WHEELBASE RANGE 134" (340cm) Through and Including 197" (500cm)
2ATK	AXLE, FRONT NON-DRIVING {Meritor MFS-08-153B} I-Beam Type, 8,000-lb Capacity
3ADA	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf, 8,000-lb Capacity; With Shock Absorbers <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free
4085	BRAKE SYSTEM, HYDRAULIC {Meritor WABCO} Split System, Full Power, With Automatic Adjustment And With Four Channel ABS
4GAR	BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Activated by Lever in Cab; Differential Mounted <u>Includes</u> : PARKING BRAKE CONTROL Lever, Floor Mounted, Located Right of Driver
4JNP	BRAKES, FRONT, HYDRAULIC DISC Quadraulic; four 70mm Diameter Pistons
4NNL	BRAKES, REAR, HYDRAULIC DISC Quadraulic; four 70mm Diameter Pistons
5AAA	STEERING COLUMN Stationary
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black
5PRG	STEERING GEAR {TRW (Ross) TAS-40} Power
7BDM	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Right Side Back of Cab; Includes Vertical Tail Pipe and Guard <u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : MUFFLER/TAIL PIPE GUARD Bright Finish
7WAZ	TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment <u>Includes</u> : BATTERY BOX Steel : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HORN, ELECTRIC Single : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature

<u>Code</u>	<u>Description</u>
	: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered
8GGZ	ALTERNATOR {Leece-Neville LBP2224H} Brush Type; 12 Volt 120 Amp. Capacity, Pad Mounted
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn
8HAH	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package With Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket
8MEP	BATTERY SYSTEM {International} Maintenance-Free (2) 12-Volt 1300CCA Total.
8RKB	RADIO {Panasonic CQ120} AM/FM, Includes Multiple Dual Cone Speakers, Includes Auxiliary Input <u>Includes</u> : SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection
8WZK	HEADLIGHTS Halogen; Composite Aero Design for Two Light System
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses
9HAD	GRILLE Chrome
9WAY	FRONT END Tilting, Fiberglass, With Three Piece Construction
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100 <u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GA"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
11001	CLUTCH Omit Item (Clutch & Control)
12NUA	ENGINE, DIESEL {International MaxxForce DT} EPA 07, 210 HP, @ 2300 RPM, 560 lb-ft Torque @ 1400 RPM, 2600 RPM Governed Speed, # 2 Bell Housing <u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated : COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted : GOVERNOR Electronic : OIL FILTER, ENGINE Spin-On Type : WET TYPE CYLINDER SLEEVES
12TSY	FAN DRIVE {Borg-Warner SA85} Viscous Type, Screw On <u>Includes</u> : FAN Nylon

<u>Code</u>	<u>Description</u>
12UXV	FEDERAL EMISSIONS for 2004; for International VT365, DT466 and DT570 Engines
12UYE	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 717 SqIn Louvered, With 313 SqIn Charge Air Cooler. With In-Tank Transmission Cooler <u>Includes</u> : ANTI-FREEZE Red Shell Rotella Extended Life Coolant -40F (-40C) : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12VBC	AIR CLEANER Single Element <u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYP	ENGINE CONTROL, REMOTE MOUNTED - No Provision Furnished for Remote Mounted Engine Control
12VYX	FEDERAL EMISSIONS 2007 for International MaxxForce DT Engines (DT466)
12WYS	EXPANDED ENGINE TEMP EFFECTS to Allow Higher Engine Operating Temperature Range; Includes Nylon Surge Tank and 15 psi Pressure Cap
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Regulations
13AHP	TRANSMISSION, AUTOMATIC {Allison 2100_RDS_P} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; With PTO Provision, Less Retarder, With 26,000-lb GVW & GCW Max., on/off hwy <u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan
14ANP	AXLE, REAR, SINGLE {Meritor MS-17-14X-3DFL} Single Reduction, 17,500-lb Capacity, With 190 Wheel Ends . Gear Ratio: 5.57
14VAD	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 18,500-lb Capacity, With 4500 lb Auxiliary Rubber Spring
15SCE	FUEL TANK Top Draw; D Style, Steel, 50 U.S. Gal., 189 L Capacity, With Quick Connect Outlet, 16" Tank Depth, Mounted Left Side Under Cab
16030	CAB Conventional <u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color
16400	SEAT, PASSENGER Omit Item
16HBA	GAUGE CLUSTER English With English Electronic Speedometer <u>Includes</u> : GAUGE CLUSTER (5) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout

<u>Code</u>	<u>Description</u>
	: WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JPU	SEAT, FRONT BENCH {Gra-Mag} Full Width; Vinyl, With Fixed Mid Back <u>Includes</u> : SEAT BELT (3) Two 3-Point Shoulder Belts for Driver and Outer Passenger and One 2-Point Lap Belt for Center Passenger
16SDJ	MIRRORS (2) {Lang Mekra} Rectangular, 7.44" x 14.84" & 7.44" sq. Convex Both Sides, 102" Inside Spacing, Breakaway Type, Black Heads, Brackets & Arms
16WJS	INSTRUMENT PANEL Center Section, Flat Panel
16WKB	AIR CONDITIONER {International Blend-Air} With Integral Heater & Defroster <u>Includes</u> : HEATER HOSES Premium : REFRIGERANT Hydrofluorocarbon HFC-134A
16WKY	FRESH AIR FILTER for HVAC
16WRX	CAB INTERIOR TRIM Deluxe <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket : DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors : FLOOR COVERING Rubber, Black : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door : SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console
27DNS	WHEELS, FRONT DISC; 22.5" Painted Steel, 10-Stud (285.75MM BC) Hub Piloted, 5 Hand Hold, Flanged Nut, Metric Mount, 7.50 DC Rims; With Steel Hubs. <u>Includes</u> : PAINT IDENTITY, FRONT WHEELS White : WHEEL SEALS, FRONT Grease Lubricated, Includes Wheel Bearings
28DNS	WHEELS, REAR DUAL DISC; 22.5" Painted Steel, 10-Stud (285.75MM BC) Hub Piloted, 5 Hand Hold, Flanged Nut, Metric Mount, 7.50 DC Rims; With Steel Hubs <u>Includes</u> : PAINT IDENTITY, REAR WHEELS White : WHEEL SEALS, REAR Oil Lubricated, Includes Wheel Bearings
7752526502	(2) TIRE, FRONT 255/70R22.5 RT500 (DOUBLE COIN) 568 rev/mile, load range H, 16 ply
7752526502	(4) TIRE, REAR 255/70R22.5 RT500 (DOUBLE COIN) 568 rev/mile, load range H, 16 ply
1	Warren F-10 10' Steel Dump Body w/PTO, Pintle Hitch, Electric Brake Controller, and Tarp System