



Professional Turf Products, L.P.
 5520 Brittonmoore
 Houston, Texas 77041
 Jim Norris
 (832) 566-2205
 norrisj@proturf.com



Ship To	Bayou Golf Club	Date:	10/29/2024
Bill To	BUYBOARD (CONTRACT # 706-23) - Credit Cards Not Accepted	Tax Rate	0.00000
Contact	Ben Huerta	Destination	6.00%
Address	2800 Ted Dudley Dr., Texas City, TX 77590	Trade-In	\$0.00
		Finance	
Phone	(409) 643 5850	Account Type	Corp
Email		QMS: ID	Q170788
Comments:	0		

Proposal

Qty	Model #	Description	Unit	Extended
1	04384	Greensmaster 3250-D		
3	04654	11 Blade Cutting Unit		
3	04255	Narrow Wiehle Roller (One roller)		
1	133-1308	Seat Cover		
1	04554	Light Kit - LED		
		Greensmaster 3250-D		\$ 49,685.46
SubTotal				\$ 49,685.46
Destination				\$ 2,981.13
Tax (Estimated)				\$ -
TOTAL				\$ 52,666.59

Comments:

For all New Equipment, Demo units may be available for up to 20% savings.
 For all New Equipment, Refurbished units may be available for up to 40% savings.
 Due to unexpected issues with much of our supply chain, we are experiencing longer lead times than we have seen in the past. We are doing everything we can to get products to you as quickly as possible.

Terms & Conditions:

- Prices & Finance Rates are subject to change at any time. Monthly Payments are Estimates based on Prices & Rates when quoted.
- Due to the volatility of inflation, rising transportation costs, and supply shortages, some orders may incur additional cost increases that are beyond the control of PTP and the vendors we represent. These pricing adjustments may be made from the time the order is entered through equipment delivery. Any adjustments will be communicated to customers with orders in the system with a new sale price as they occur.
- Order cancellations are subject to fees up to 10% of the original order value.
- Equipment delivery time is estimated once credit is approved & documents are executed & is contingent on Manufacturer availability.
- Payments by Credit Card are subject to convenience fee.
- Used and Demo equipment is in high demand and availability is subject to change.
 - Upon firm customer commitment to purchase & credit is approved, said equipment availability will be determined.
 - In the event equipment is unavailable at time of order, PTP will employ every resource to secure an acceptable substitute.
 - PTP strongly advises the customer to issue a firm PO as quickly as possible after acceptance of quotation.
- "Trade In Allowances" will be treated as a credit for future parts purchases on PTP account unless other arrangements have been made.

Returns Policy:

- All returns & Canceled PO's are subject to restocking, refurbishing, usage, and shipping fees.
- All returns must be able to be sold as new.
- Items missing parts are non returnable.

Payment:

- Terms are net 10 unless prior arrangements have been made.
- Quoted prices are subject to credit approval.
 - PTP will work with third party financial institutions to secure leases when requested to do so.
 - When using third party financiers, documentation fees & advance payments may be required.
 - For convenience, monthly payments are estimated based on third party rate factors in effect at time of the quotation.
 - PTP assumes no liability in the event credit becomes unavailable or rates change during the approval process.
- There will be a service charge equal to 1.5% per month (18% per annum) on all past due invoices.
- By Law we are required to file a "Notice to Owner" of our intent to file lien in the event of payment default. This notice must be sent within 60 days of the date the original invoice and will happen automatically regardless of any special payment arrangements that may have been made.

Authorized Signature: _____

Date: _____



○○

- [Find a Distributor \(https://comm.toro.com/lookup\)](https://comm.toro.com/lookup)
- [Sell Sheet \(https://cdn.thetorocompany.com/api/assetstorage/623_804f866d-01e7-45cf-9e45-7f463a44c5ed\)](https://cdn.thetorocompany.com/api/assetstorage/623_804f866d-01e7-45cf-9e45-7f463a44c5ed)
- [Accessory Guide \(https://cdn.thetorocompany.com/api/assetstorage/623_a087997c-a517-4be5-8b69-2836fbca15d1\)](https://cdn.thetorocompany.com/api/assetstorage/623_a087997c-a517-4be5-8b69-2836fbca15d1)

Greensmaster® 3250-D

Model: 04384

[See All Items in Greensmaster® 3150/3250 Series \(/en/product/Greensmaster-3150-3250-Series#variantTable\)](/en/product/Greensmaster-3150-3250-Series#variantTable)**REQUEST A DEMO ([HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31](https://comm.toro.com/customerinquiry?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31))**

- Deliver a consistent, high quality cut and superior after cut appearance, while reducing maintenance.
- Placement of the center cutting unit gives the machine much higher hillside stability.
- Wheel layout and turning radius prevent accidentally dropping the rear wheel into a nearby sand bunker while turning.
- All components are conveniently located for servicing.

[Show More](#)

JUMP TO

REQUEST A DEMO ([HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31](https://comm.toro.com/customerinquiry?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31))

Related Products




Leak Detector
(/en/product/04497)

Model: 04497




Steel Roller Kit
(/en/product/04628)

Model: 04628

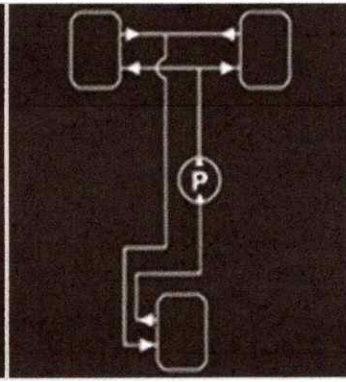

3-Wheel Drive Kit
(/en/product/04476)

Model: 04476

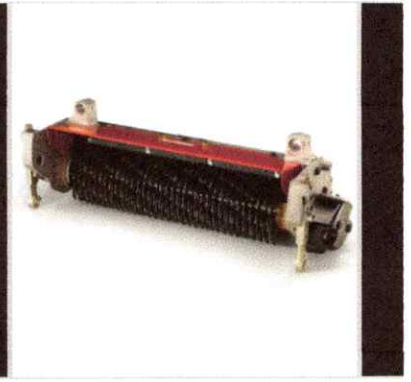

Thatching Reel Kit
(/en/product/04479)

Model: 04479

3-V
(/e

Mode

Overview

The Greensmaster 3250-D is distinguished for its field-proven performance and exceptional quality of cut. Equipped with patented DPA cutting units for a superior cut and minimal maintenance, convenient controls for easy operation, and ample power to handle any application—it's no wonder this classic model has been trusted over the years to deliver the performance golf courses demand with a putting surface that exceeds expectations.

Features



EdgeSeries™ Reels

Dual Precision Adjustment (DPA) cutting units – featuring Toro's EdgeSeries™ reels combine to deliver a consistent, high quality cut and superior after cut appearance, while reducing maintenance with improved reel edge retention.

JUMP TO Watch the Video (<https://play.vidyard.com/kt4SSB87Psnq1smxqn9di5>)

REQUEST A DEMO (<https://comm.toro.com/customerinquiry?rtid=sales%20call%20%2F%20product%20demo&cid=greensmaster&sid=31>)



Safe Operation

The placement of the center cutting unit, located between the the front traction wheels, along with the front center basket removal, allows a low mounting design of the transmission and engine. This lowers the center of gravity, giving the machine much higher hillside stability.



Perfect Triangle Wheel Stand Design

The Triangle Wheel Stand places the rear wheel track within the radius of the front wheel, which prevents accidentally dropping the rear wheel into a nearby sand bunker while making the turn for the next mowing path.

JUMP TO

REQUEST A DEMO ([HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMAS-TER&SID=31](https://comm.toro.com/customerinquiry?rtid=sales%20call%20%2f%20product%20demo&cid=greensmaster&sid=31))




Maintenance Ease

All components, especially those that require daily inspection and routine maintenance, are conveniently located for servicing. The Greensmaster® 3250 has fewer hydraulic lines and connectors. All hydraulic components are positioned for easy visual inspection.



Leak Detection

The dependable Turf Guardian™ leak detection technology alerts the operator if a leak occurs. Optional on the Greensmaster® 3250.



JUMP TO

REQUEST A DEMO ([HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31](https://comm.toro.com/customerinquiry?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31))
DPA Cutting Units

The most advanced cutting unit in the industry:

- Only two adjustments
- Superior height-of-cut retention
- No daily greasing (stainless steel bearings)
- Consistent cutting location edge regardless of reel wear (patented)
- Smallest bedknife increment adjustments .007inch (.178mm)



Simplified Controls

Simplified and convenient controls for easy operation.

Specifications

Battery

12V

Bedknife

Replaceable single edged EdgeMax™ Microcut Bedknife is standard.

Bedknife Adjustment

Dual screw, indexed "click" adjustment to the reel; detents corresponding positively to 0.0007" (0.018 mm) bedknife movement for each position.

Blade Style/Type

Reel

Blade Type (Description)

Reels are 5" (13 cm) in diameter, 21" (53.3 cm) in length. EdgeSeries™ Reels blades are welded to 5 stamped steel spiders, and heat treated. The reel is ground for diameter and concentricity, and relief ground. The reel weldment shaft is a 1.375" (35 mm) diameter tube with internally splined threaded insert. Two stainless steel ball bearings (30 mm inside diameter) slip fit onto reel shaft retained by internally splined threaded insert. Low drag seals/spiders for added protection with 5-pinny sealed motor and counterweight. Reel position maintained by a wave washer with no adjusting nut.

Clip Frequency/Backlapping

Adjustable up to 1950 RPM at 2760 engine RPM. Backlapping standard.

Controls

Raise/lower-mow lever. Functional control lever (neutral, mow, transport). Foot operated traction drive and brakes. Hand operated choke, throttle. Mechanical engine speed control.

Cutting Unit Accessories

8, 11, 14-Blade Cutting Unit, Roller Options, Groomer Options, Scraper Options, Bedknife and Bedbar Options, Thatching Reel Accessories, Tools and Maintenance Options.

Cutting Unit Type/Configuration

Cutting units are completely free-floating, each attaching to the tractor by direct pull links and lifted by a centered lift arm. Baskets are supported by carrier frames that are ground following. Cutting unit floatation is unaffected by basket content. Grass baskets are all interchangeable and accessible from the front of the machine. Double A-Arm Suspension utilizing sealed ball joints allows free cutting unit motion in pitch and yaw. Links system for the roll. The basket is directly mounted to the cutting unit displacing weight evenly over front and rear rollers. (patented)

Drivetrain

Diesel

Electrical System

Maintenance-free 12-volt battery with 530 minimum CCA at 0° F. 40 amp alternator, circuit fused at 40 amps. Seat switch. High temperature engine kill override switch. Harness terminals, fuse slot, and console switch location available for optional lights installation.

Engine Cooling

Liquid Cooled

Fuel / Power Source

Diesel

Fuel Capacity

6 U.S. gal. (22.7 L)

Gauges/Instrumentation

Hour meter and warning light cluster.

Grass Distribution

Non-adjustable front shield with adjustable cut-off bar to improve grass discharge from reel in wet conditions.

Ground Pressure

8 - 12 psi (.55 - .83 bar) average at recommended minimum tire pressures, with a 200 lb. operator and cutting units down.

Ground Speed - Forward

0 - 10 mph (0 - 16.1 km/h)

Height

77.5" (197 cm)

Height of Cut Range

Cutting height is adjusted on front roller by two vertical screws and held by two locking cap screws. Bench HOC range is 0.062" - 0.297" (1.6 - 7.5 mm). With high HOC kit, range is 0.297" - 1.0" (7.5 - 25.4 mm). Effective HOC may vary depending on turf conditions and bedknife installed.

Leak Detection

Optional Turf Guardian™ Leak Detection System. System sounds an alarm and turns on a warning light with the loss of 3-5 oz. of hydraulic fluid.

More Toro Demos ([HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31](https://comm.toro.com/customerinquiry?rtid=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31))

2 - 5 mph (3.2 - 8 km/h)

Number of Blades

11, 14, 8

Optional Accessories

3-Wheel Drive Kit, Thatching Reel (Set of 1), Traction Tires, Hydraulic Oil Cooler Kit, Light Kit, Spark Arrestor, Leak Detector, Front Wheel Weight Kit, 2WD Weight Kit, 3WD Weight Kit, Hose Adapter Kit, Radiator Screen Kit, Ground Follow Kit, Bimini Folding Shade, Utility Bag Kit, Seat Cover, RH Armrest, LH Armrest, Armrest Kit, Wireless Hour Meter

Overall Width

68" (173 cm)

Parking/Service Brakes

Foot activated 6" (15.2 cm) drum type mechanical with rack and pawl lock for parking.

Power Steering

Yes

Power Train (Engine Description)

Kubota® 902 tier 4i, 3-cylinder liquid-cooled diesel engine. 55.0 cu. in. (902 cc). Full pressure lubrication, oil filter. 24.8 hp (18.5 kW) @ 3600 rpm. Engine governed to 2760 rpm high idle, 1500 rpm low idle (no load).

Product Length

93.9" (238 cm) with baskets

Reel Diameter

5 in. (12.7cm)

Reel/Cylinder Drive

Hydraulic

Rollers

Front: Not included with cutting unit, purchased separately. Option between full, narrow-spaced and wide-spaced roller. Rear: Steel full, 2" (5.1 cm) diameter with sealed bearings and through-shaft.

Safety/Operator Safety

Roll Over Protection System standard. Sound level of 84 dBA at operator ear under normal conditions.

Seat

Contour seat with high backrest. 7" (17.8 cm) fore/aft slider adjustment with two mounting positions, allowing 9" (22.8 cm) total seat travel. Operator manual tube mounted on the seat back for easy access.

Starting

Key Start

Steering System Description

No-tool quick adjust steering arm position, with arm motion allowing a wide range of operator sizes. Steering cylinder has through shaft design for precise straight line tracking.

Tires - Front

19" x 10.5" - 8", 4-ply, Smooth Tread

Tires - Rear

19" x 10.5" - 8", 4-ply, Smooth Tread

Traction Drive**JUMP TO**
2WD**Traction Drive (System)**

REQUEST A DEMO (<https://comm.toro.com/customerinquiry?rtid=sales%20call%20%2F%20product%20demo&cid=greensmaster&sid=31>)
Hydraulic piston pump, closed loop system. 2WD Parallel Hydrostatic or optional 3WD Series Parallel piston pump closed loop system. Foot pedal forward and reverse; infinitely variable.

Transport Width

Outside at Tires: 61" (154.94 cm) Outside at Reels: 68" (173 cm)

Weight

1,216 lbs. (552 kg) with no fuel & no operator

Wheelbase

48.6" (123 cm)

Width of Cut

59" (150 cm)

Documents

GR_AntiBobblingRoller_Sell_Sheet_020723.pdf (https://cdn.thetorocompany.com/api/assetstorage/623_a057c8dd-c612-4bed-8530-088d5571a510)

PDF - Product Literature-en-us

GR3150_3250_Accessories_020723.pdf (https://cdn.thetorocompany.com/api/assetstorage/623_a087997c-a517-4be5-8b69-2836fbca15d1)

PDF - Brochure-en-us

GR3150_3250_Sell_Sheet_012424.pdf (https://cdn.thetorocompany.com/api/assetstorage/623_804f866d-01e7-45cf-9e45-7f463a44c5ed)

PDF - Sellsheet-en-us

Parts & Manuals

Select your model year from the options below to view parts & manuals.

04384 Serial #

418100000-999999999 (/en/parts/partdetails?id=57101)

416862858-418099999 (/en/parts/partdetails?id=56608)

414800659-416862857 (/en/parts/partdetails?id=55390)

414340968-414800658 (/en/parts/partdetails?id=55001)

413000000-414340967 (/en/parts/partdetails?id=54998)

411478301-412999999 (/en/parts/partdetails?id=53468)

410300000-411478300 (/en/parts/partdetails?id=53324)

409700000-410299999 (/en/parts/partdetails?id=52865)

409020000-409699999 (/en/parts/partdetails?id=52345)

408000000-409019999 (/en/parts/partdetails?id=51940)

JUMP TO

407100001-407999999 (/en/parts/partdetails?id=51414)

40426501-409000000 (/en/parts/partdetails?id=48632) <https://www.toro.com/customer-service/customer-support/submit-a-request?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMAS...>

403030001-403410000 (/en/parts/partdetails?id=48632)

- [401380001-403030000 \(/en/parts/partdetails?id=48096\)](/en/parts/partdetails?id=48096)
 - [400000000-401380000 \(/en/parts/partdetails?id=46631\)](/en/parts/partdetails?id=46631)
 - [316000001-316999999 \(/en/parts/partdetails?id=45139\)](/en/parts/partdetails?id=45139)
 - [315000501-315999999 \(/en/parts/partdetails?id=44196\)](/en/parts/partdetails?id=44196)
 - [315000001-315000500 \(/en/parts/partdetails?id=43617\)](/en/parts/partdetails?id=43617)
 - [314004001-314999999 \(/en/parts/partdetails?id=42969\)](/en/parts/partdetails?id=42969)
 - [314003001-314004000 \(/en/parts/partdetails?id=42581\)](/en/parts/partdetails?id=42581)
 - [314000001-314003000 \(/en/parts/partdetails?id=41946\)](/en/parts/partdetails?id=41946)
 - [313000001-313999999 \(/en/parts/partdetails?id=40730\)](/en/parts/partdetails?id=40730)
 - [312000601-312999999 \(/en/parts/partdetails?id=37955\)](/en/parts/partdetails?id=37955)
 - [312000201-312000600 \(/en/parts/partdetails?id=37575\)](/en/parts/partdetails?id=37575)
 - [312000001-312000200 \(/en/parts/partdetails?id=36652\)](/en/parts/partdetails?id=36652)
-

Warranty

2-Year Limited

04384 Product Warranty

CHOOSE LANGUAGE ▼

**See dealer for Warranty details.

Product Information

[Parts & Manuals \(/en/parts\)](/en/parts)

[Product Registration \(/en/customer-support/product-registration\)](/en/customer-support/product-registration)

[Homeowner Special Offers \(/en/homeowner/promos-res\)](/en/homeowner/promos-res)

[Professional Contractor Special Offers \(/en/professional-contractor/promos-lce\)](/en/professional-contractor/promos-lce)

[Financing \(https://www.toro.com/en/financing\)](https://www.toro.com/en/financing)

[Apparel & Merchandise \(https://gear.thetorocompany.com/\)](https://gear.thetorocompany.com/)

Customer Service

[Order Status \(https://shop.toro.com/OrderStatus\)](https://shop.toro.com/OrderStatus)

[Online Store Support \(/en/customer-support/online-store-support\)](/en/customer-support/online-store-support)

[Return Policy \(https://www.toro.com/en/policies/return-policy\)](https://www.toro.com/en/policies/return-policy)

JUMP TO

[Shipping & Tax Policies \(https://www.toro.com/en/policies/shipping-and-tax-policy\)](https://www.toro.com/en/policies/shipping-and-tax-policy)

[Where To Buy \(/en/locator\)](/en/locator)

REQUEST A DEMO (HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31
Dealer Login (https://shop.thetorocompany.com/)

[Customer Support \(/en/customer-support\)](/en/customer-support)

About Toro

Our Company (<https://www.thetorocompany.com/company-information>)

Sustainability (<https://www.thetorocompany.com/sustainability/sustainability-endures>)

Safety (</en/product-safety-information>)



Newsroom (<http://newsroom.toro.com>)

Investors (<https://thetorocompany.gcs-web.com/investor-overview>)

Careers (<http://www.thetorocompany.com/careers>)

YardCare.com (<http://www.yardcare.com/>)

Connect With Us

 (<https://www.facebook.com/Toro.Company>)  (<https://twitter.com/TheToroCompany>)

 (https://www.youtube.com/channel/UCQd20DNP_mT_PMUr-6z2E-g)

 (<http://instagram.com/thetorocompany>)

[Terms of Use \(/en/legal/terms-of-use\)](/en/legal/terms-of-use) [Privacy Policy \(/en/legal/privacy-policy\)](/en/legal/privacy-policy) [DMCA/Copyright Policy \(/en/legal/dmca-copyright-policy\)](/en/legal/dmca-copyright-policy)

Copyright © 2024 The Toro Company. All Rights Reserved.

JUMP TO

REQUEST A DEMO ([HTTPS://COMM.TORO.COM/CUSTOMERINQUIRY?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31](https://comm.toro.com/customerinquiry?RTID=SALES%20CALL%20%2F%20PRODUCT%20DEMO&CID=GREENSMASER&SID=31))