



Prepared For:

DAVID REEVES
CITY OF TEXAS CITY
301-6TH ST NORTH
TEXAS CITY, TX 77590
409-682-6784
DREEVES@TEXAS-CITY-TX.ORG

Sold & Serviced by:

Bobby Ford Tractor & Equipment, LLC
Chris Robertson
2498 N Highway 288
Angleton, TX 77515
Phone: 307-365-4453



September 5, 2025

DAVID REEVES, GIS SPECIALIST
Phone: 409-682-6784
DREEVES@TEXAS-CITY-TX.ORG
CITY OF TEXAS CITY
301-6TH ST NORTH
TEXAS CITY, TX 77590

Dear DAVID REEVES,

Bobby Ford Tractor & Equipment, LLC would like to thank you for this opportunity to provide a quote for the Ventrac equipment package designed to fit your needs. We are confident that Ventrac products will be an excellent solution for your unique application.

When you purchase your Ventrac from Bobby Ford Tractor & Equipment, LLC, you can be assured that our dedicated staff is available to help any way we can - your satisfaction is our priority.

Your customized quote is detailed on the following pages. We hope this will assist you in making the best decision possible. We appreciate the time you took in providing us with the information needed to customize the Ventrac package best suited for you.

As you review our proposal, please feel free to contact us if you have any questions. We would be happy to assist you any way we can.

It has been a privilege to provide this quote to you and we believe Ventrac is an excellent product that will exceed your expectations for years to come.

Thank you,

Chris Robertson
Sales
Bobby Ford Tractor & Equipment, LLC
Phone: 307-365-4453
crobertson@bobbyfordkubota.com



Shown with Turf Tires

SPECIFICATIONS

Stock Code

All Terrain 70.4067 (1 kit per tractor)

Turf 70.4068 (1 kit per tractor)

Bar 70.4069 (1 kit per tractor)

Weight 80 lbs (36.25 kg) (per axle)

Additional Tractor Width 24 inches (12 inches/tire) (61 cm)

All specifications subject to change without notice or obligation

Note:

(A) Do NOT use dual wheels when using the Ventrac VERSA-Loader.

(B) Engine manufacturers' maximum angle of operation is 25° for continuous use (all directions) and 30° intermittent use*. The 4500P Kawasaki DFI is rated for 30° continuous use.

(C) Do NOT use with Wheel Extensions

* Intermittent use is up to 10 minutes on the slope, then return to level ground before returning to the slope.

Dual Wheels are available for the 4000 series tractors. They are designed to increase stability, traction, and safety on slopes. Dual wheels are also great for reduction of soil compaction on delicate ground. Once the dual hubs have been installed on each wheel, the duals can be quickly mounted and dismounted.*

Duals are recommended for sandy soils or where a broad distribution of tractor weight is desired, including when driving sideways on slopes greater than 20 degrees (not to exceed 30 degrees).

Duals are only one of numerous considerations for safety on slopes; speed, terrain, irregularities, and stopping the unit are other serious factors to consider for safe operation of the tractor.

*Recommended tire pressure for dual wheels can be found in the 4500 operator manual and also on the sticker inside of the hood



Shown with Standard Tires

TRACTOR COMPATIBILITY KEY:



500 Venture Drive
Orrville, OH 44667
1.866.836.8722

Fax: 330.683.0000
www.ventrac.com
info@ventrac.com

CANOPY

70.4169



VENTRAC

CANOPY

Stock Code 70.4169

Dimensions

Weight	62 lbs (28 kg)
Width	42.6 inches (108.2 cm)
Length	56 inches (142.2 cm)
Overall Adjustable Height	1.5 in (3.8 cm)
Standard Height	16 in (40.6 cm) Above top of rollbar to top of canopy
Second Height Option	17.5 in (44.5 cm) Above top of rollbar to top of canopy

Optional Fan Specs

Stock Code	70.4170
Electric Fan	12 in (30.5 cm)
Max Air Flow	1000 CFM
Fan Speeds	3 Options

All specifications subject to change without notice or obligation



AVAILABLE KITS

- 70.4170 – Kit, Fan for Canopy
 - 5 Mounting Options Available
- 70.4171 – Kit, Strobe Light for Canopy
- 70.4172 – Kit, Front Work Light for Canopy
 - Requires 70.4173 -Kit, Work Light LED 4520/4500





4520 TRACTOR

4520 TRACTOR

Model Comparison	4520K VANGUARD Big Block	4520P KAWASAKI DFI	4520Y KUBOTA Diesel	4520N KUBOTA	4520Z KUBOTA
Stock Codes	39.51219	39.51216	39.51217	39.51225	39.51215
California Model Stock Code		39.51221		39.51227	
Accessory Kit: Front fenders, foot pegs, 4 rear weights, weight transfer	Optional	Standard	Standard	Standard	Standard

Engines

Engine	Vanguard M54	Kawasaki FD851D DFI	Kubota D902	Kubota WG972 EFI	Kubota WG972-GL
Max Operating Speed	3600 rpm	3600 rpm	3600 rpm	3600 rpm	3600 rpm
Horsepower	31	31	25	32.5	32.5
Peak Torque	47 ft lb (64 nm)	47 ft lb (64 nm)	42 ft lb (57 nm)	51 ft lb (69 nm)	51 ft lb (69 nm)
Displacement	896cc	824cc	898cc	962 cc	962cc
Cylinders	2	2	3	3	3
Engine Oil	Ventrac Full Synthetic 10W30				
Cooling	Air	Liquid	Liquid	Liquid	Liquid
Fuel Type	Gasoline	Gasoline	Diesel	Gasoline	Gasoline
Fuel Capacity	6 gal (22.7 L)	6 gal (22.7 L)	6 gal (22.7 L)	6 gal (22.7L)	6 gal (22.7 L)
Fuel Economy ^{^^}	1.6 gal/hr (6 L/hr)	1.2 gal/hr (4.5 L/hr)	1.1 gal/hr (4 L/hr)	1.2 gal/hr (4.5 L/hr)	1.5 gal/hr (5.7 L/hr)
Slope Rating (continuous/intermittent)	25°/30°	30°/30°	20°/30°	20°/30°	20°/30°
Alternator	50 Amp	30 Amp	60 Amp	60 Amp	60 Amp

Dimensions

Weight with standard hitch	*1385 lb (628 kg)	1620 lb (735 kg)	1705 lb (773 kg)	1700 lb (771 kg)	1690 lb (767 kg)
Weight with accessories kit	1610 lb (730 kg)	N/A	N/A	N/A	N/A
Weight with 3-point hitch	1690 lb (767 kg) w/ accr kit	1700 lb (771 kg)	1785 lb (810 kg)	1780 lb (807 kg)	1770 lb (803 kg)
Length with standard hitch (ROPS up)			81.5 inches (207 cm)		
Length with 3-point hitch			92 inches (234 cm)		
Width			48.5 inches (123 cm)		
Width with wheel extensions			54.5 inches (138.5 cm)		
Width with duals			73 inches (185.5 cm)		
Wheelbase (front axle to rear axle)			45 inches (114 cm)		
Height (ROPS up)			68 inches (173 cm)		
Height (ROPS down)			54 inches (137 cm)		
Turning Radius (single tires, standard position)			39 inches (99 cm)		
Turning Radius (position 2)			54 inches (137 cm)		
Turning Radius (position 3)			68 inches (173 cm)		
Oscillation amount (@ wheel)			7.5 inches (19 cm)		
Ground Clearance			5 inches (13 cm)		

^{^^} Fuel Economy tested with HM602 mower for comparison purposes.
Application conditions & attachment will affect fuel economy.

All specifications subject to change without notice or obligation



The Ventrac 4520 tractor was built with you in mind. From the advanced electrical system, redesigned frame, more safety and comfort features; the 4520 offers the reliable performance, astounding versatility and comfortable handling you have come to expect.

Like all Ventrac tractors, the 4520 utilizes All Wheel Drive and an articulating chassis with a low center of gravity to provide superior traction, braking, stability, and security on tough terrain and slopes without disturbing turf when turning.

Over 30 Ventrac Mount Attachments

Choose from over 30 professional grade Ventrac Mount attachments to transform your Ventrac into a productivity powerhouse. This incredibly rugged and dependable machine is a wise business investment for golf courses, schools and universities, parks, street maintenance departments, commercial mowing services, contractors, wineries, farms, property management associations, estate owners and anyone needing one machine to do it all.

STANDARD FEATURES

- Pre-Wired Plug & Play Wiring Harness
- Premium Comfort Seat
- Advanced Electronic Instrument Panel
- 6 Function Warning Gauge & Alarm
- Conveniently Located PTO Belt Tensioner
- On-board Diagnostic System
- Sealed Electrical System
- Thermostatically Controlled Oil Cooler
- Battery Disconnect Switch with Circuit Breaker
- Automotive Style Parking Brake
- Universal PTO Switch
- S.D.L.A. Operator Controls
- Weight Transfer System*
- *Optional on 4520K, standard on other 4520 Models
- USB Charger

Optional Accessories:

- Turf Tires, Chains
- Category 1 3-Point Hitch
- Cold Weather Cab
- Additional Lighting & Signaling Packages
- Electrical Power Outlets
- Digital Slope Indicator
- Dual Wheel or Wheel Extensions for Slope

Visit www.ventrac.com/accessories for full list.



4520 TRACTOR (cont.)

Electrical

Battery	475 CCA (Group 51R)
Voltage	12 volts
Battery Disconnect	Standard, with 150A System Circuit Breaker
Fuses	Sealed, Mini Fuse and J-Case styles

Drivetrain

Hydraulic Pump	Danfoss DDC-20
Pump Drive	Direct Drive (Double U-Joint Drive-shaft)
Hydraulic Motors	MPIM
Transaxles	Peerless 2600 series
Axles	Peerless 40mm (forged) with integrated forged hub
Hydraulic Oil Cooler	Aluminum w/ Thermostatically controlled Electric Fan
Hydraulic Oil Filter (Suction)	25 micron
Hydraulic Oil Filter (Pressurized)	10 micron

Hitch and PTO

Front Hitch	Ventrac Mount System
Electric PTO clutch with Brake	Ogura GT3.5 (250 ft lb) (339 nm)
Rear Hitch	2 inches Receiver
3-Point Hitch	Optional Category 1 3-Point Hitch

Tires

Standard (All Terrain)	22x12-8
Optional Turf	22x11-10

Travel Speed (F/R)

Low Range	5 mph (8 kph) forward / 4 mph (6 kph) reverse
High Range	10 mph (16 kph) forward / 8 mph (13 kph) reverse

Instruments, Gauges, and Alarm

Gauges	Tachometer, Speedometer, Hour Meter, Engine Temperature (liquid cooled engines only), Fuel Level, Volt Meter
Indicator Lights ^ Activates Audible Alarm	Parking Brake, Engine High-Temp^, Hydraulic Oil High Temp^, Low Voltage^, Low Oil Pressure^
Switches	Key, PTO, and Lights
Lights	
Head Lights	(4) LED 1000 Lumen
Tail Lights	(2) Red LED Lights

Controls

Forward Reverse	S.D.L.A. (Speed, Direction, Lift, and Auxiliary) Handle; Optional Foot Pedal
Attachment Lift	S.D.L.A. (Primary Handle)
Auxiliary Hydraulics	S.D.L.A. (Secondary Handle)
Throttle	Dash Mounted
Front Hitch Lock	Column Mounted (Accessible from Seat)
PTO Belt Tensioner	Front Mounted, Automatic Tension Controlled
Weight Transfer	5 position
High/Low Range	Single Lever, Column Mounted
3 Pt Controls (Optional)	Lift + 2 sets of Auxiliaries
Steering	Power Steering

Other Features

Tool Box	Optional
Cup Holder	Standard
Seat	Deluxe High Back Seat (arm rests and suspension seat optional)

ROPS

Folding ROPS	Standard
Heavy Duty Off-Road Seat Belt	Standard

All specifications subject to change without notice or obligation

Max Slope Rating (in any direction)

	Single Tires	Dual Wheels
4520* w/Front Attachment (unless specified otherwise below)	20°	30°
4520 w/Cab	10°	Not Recommended
4520 w/Spreader	10°	Not Recommended
4520 w/RV602	10°	15°
4520 w/KH500	5°	Not Recommended
4520 w/MA900	10°	18°

*Attachments, accessories, and tire configuration may reduce the 4520 power unit's maximum angle of operation. Refer to applicable operator manuals for maximum angle of operation of equipment.



Standard



Duals

ENGINE RATINGS

Model #	4520K	4520P	4520Y	4520N	4520Z
Engine	B&S Vanguard Model 54	Kawasaki FD851D	Kubota D902	Kubota WG972 EFI	Kubota WG972-GL
Fuel	Gas	Gas (DFI)	Diesel	Gas	Gas
Max Slope Intermittent Use***	30° (58%)^	30° (58%)	30° (58%)^	30° (58%)^	30° (58%)^
Max Slope Continuous Use***	25° (47%)	30° (58%)	20° (36%)	25° (47%)	20° (36%)

*** For slope operation over 20°, Wheel Extensions are required for up to 25° or Dual Wheels are required for up to 30°



Digital Slope Gauge
Recommended for operation on slopes.



Intermittent Use Defined

^ The engine may operate between 20° and 30° for up to 10 minutes. If 10 minutes is reached, the engine must be returned to 20° or less to assure proper oil lubrication. After returning to 20° or less, the intermittent cycle can be repeated. The 4520P Kawasaki DFI engine is rated for 30° continuous operation and does not have this requirement.

All specifications subject to change without notice or obligation





VENTRAC



 **VENTRAC**

TOUGH CUT
HQ682

TOUGH CUT

Model	HQ682
Stock Code	39.55118
Width of Cut	68 inches (173 cm)
Number of Blades/Type	3 blades, 5/16 x 2½ x 23 inches (79mm x 6.35cm x 58cm)
Cutting Height (with Swivel Wheels Removed)	3 – 4¼ inches
Cutting Height	3½ - 7 inches (89 to 178 mm)
Deck Construction	Multi Gauge, 5/16 inch (7.9 mm) at spindle mount
Spindles/Pulleys	Field Serviceable w/ Top Grease Fittings

Optional Accessory

Hydraulic Flip-Up Kit	70.8226
-----------------------	---------

Dimensions

Length	59 inches (150 cm)
Width	69 inches (175 cm)
Height	22 inches (56 cm)
Weight	475 lbs (215.5 kg)

All specifications subject to change without notice or obligation

STANDARD FEATURES

- Rear Adjustment for Deck Pitch
- Heavy Duty Blades
- Tilt-Up Deck
- Ventrac Mount System
- Front Caster Wheels

OPTIONAL ACCESSORIES

- Hydraulic Flip-Up Kit



The HQ682 **Tough Cut Mower** is the mower of choice for mowing high grass, thick weeds, and heavy brush. A large baffled front opening assists in directing materials into the deck and helps hinder debris from escaping. Three heavy-duty blades counter rotate to cut and deposit waste evenly without windrowing. Capable of tackling saplings and large thorn bushes, the Tough Cut makes short work out of overgrown thickets.

The HQ682 comes with front caster wheels as a standard feature. Four tie-down points have been added for secure trailering.

The Tough Cut has adjustable cutting height ranging from: 3" - 7". Easy servicing of belts and pulleys is provided by the hinged and removable cover. The manual tilt-up deck provides access under the deck. A hydraulic flip-up kit is available as an option for easier access to the underside of the deck for cleaning and blade replacement.





Rear mounted attachment on 3-N-1 Adapter shown with optional Hydraulic Top Link



TRACTOR COMPATIBILITY KEY:



The 3-N-1 Adapter is a useful accessory for all Ventrac's with a 3-Point Hitch. It allows the tractor to tow with a Reese® style receiver (not included), transport and use select Ventrac attachments on the rear of the tractor, and mount rear weights for front attachments that need extra weight to counter balance the load.

The 3-N-1 Adapter has a lock-in lever for locking on attachments and is able to operate non-PTO-powered attachments. This enables you to mount two attachments for use on the front and rear of the tractor at the same time.



Optional Weights (up to six 42lb weights)

STANDARD FEATURES

- Rear attachment mounting
- Towing capacity

OPTIONAL ACCESSORIES

- Rear Suitcase Weights
- Hydraulic Top Link

3-N-1 ADAPTER REQUIRED FOR:

- KH500 Loader (for tractors with a 3-Point Hitch)

SPECIFICATIONS

Stock Code	39.56114
Optional Weight Kit (2 weights/Kit)	70.0102
Optional Hydraulic Top Link	70.4038

All specifications subject to change without notice or obligation



500 Venture Drive
 Orrville, OH 44667
 1.866.836.8722

Fax: 330.683.0000
 www.ventrac.com
 info@ventrac.com



FINISH MOWERS

MS600, MS720, MT720, & MU720

FINISH MOWERS

	MS600	MS720	MT720	MU720
Stock Code	39.55110	39.55111	39.55112	39.55114
Discharge Type	Side	Side	Side, 6" Offset	Rear
Width of Cut	60 Inches (152 cm)	72 Inches (183 cm)	72 Inches (183 cm)	72 Inches (183 cm)
Number of blades/type	3 x 21 High-lift	3 x 25 High-lift	3 x 25 High-lift	3 x 25 Low-lift
Cutting Height Range	1-5 Inches (25-127 mm)	1-5 Inches (25-127 mm)	1-5 Inches (25-127 mm)	1-5 Inches (25-127 mm)
Cutting Height Increments	Positions 1-3 (1/8") (3 mm) Positions 4-18 (1/4") (6 mm)	Positions 1-3 (1/8") (3 mm) Positions 4-18 (1/4") (6 mm)	Positions 1-3 (1/8") (3 mm) Positions 4-18 (1/4") (6 mm)	Positions 1-3 (1/8") (3 mm) Positions 4-18 (1/4") (6 mm)
Deck Construction	High-strength steel	High-strength steel	High-strength steel	High-strength steel
Spindles/Pulleys	Field serviceable with bottom grease fittings	Field serviceable with bottom grease fittings	Field serviceable with bottom grease fittings	Field serviceable with bottom grease fittings
Anti Scalp Rollers	3 Front	3 Front	3 Front	3 Front

OPTIONAL ACCESSORIES

Mulch Kit	70.8165	70.8164	70.8164	70.8167
Flat Free Wheel (2 Required)	53.0148	53.0148	53.0148	53.0148
Hydraulic Flip Up Kit	70.8214	70.8214	70.8214	70.8214

DIMENSIONS

Length	62 5/8 inches (159 cm)	66 1/8 inches (168 cm)	66 1/8 inches (168 cm)	60 5/8 inches (154 cm)
Width	74 5/8 inches (190 cm)	86 1/2 inches (220 cm)	86 1/2 inches (220 cm)	72 7/8 inches (185 cm)
Height	18 1/4 Inches (46 cm)	18 1/4 Inches (46 cm)	18 1/4 Inches (46 cm)	18 1/4 Inches (46 cm)
Weight	490 lbs (222 kg)	550 lbs (249 kg)	550 lbs (249 kg)	540 lbs (245 kg)
Shipping Weight	660 lbs (299 kg)	720 lbs (327 kg)	720 lbs (327 kg)	710 lbs (322 kg)
Shipping Dimensions (LWH)	57 x 65.5 x 25.5 inches (26 x 30 x 12 cm)	60.5 x 77.75 x 25.5 inches (27.4 x 35 x 12 cm)	60.5 x 77.75 x 25.5 inches (27.4 x 35 x 12 cm)	60.5 x 77.75 x 25.5 inches (27.4 x 35 x 12 cm)

All specifications subject to change without notice or obligation


HYDRAULIC FLIP-UP KIT

The Hydraulic Flip-Up kit makes deck clean-up quick and effortless. Using the SDLA controls, you can flip your mower deck up from the seat!



FEATURES

5" deep deck shell increases airflow & performance, and made from high strength steel for exceptional abrasion and impact resistance. Check out these other game changing features:

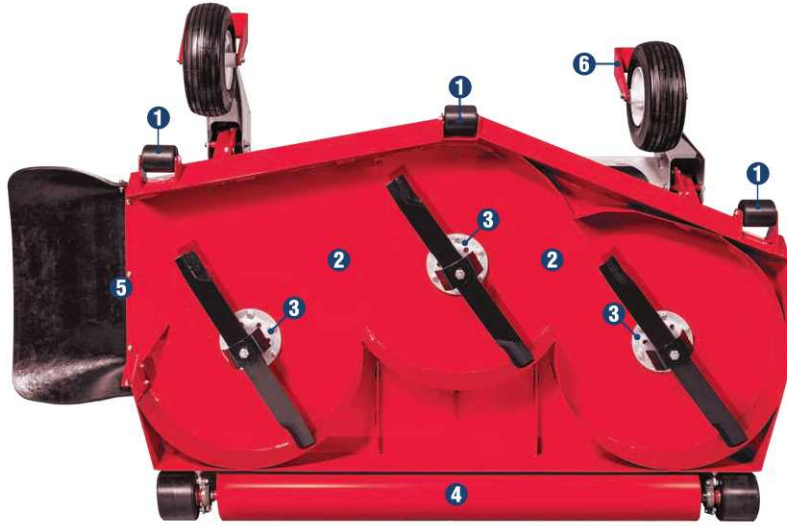

BOTTOM VIEW

1. Anti-Scalp Rollers

Anti-scalp rollers help protect the turf

2. Ultra Smooth Deck Shell

Cleaner, smoother deck shell, helps prevent grass buildup

3. Tougher Spindles

Ventrac's best spindle yet featuring 6 bolt mount, 5/8" retaining bolt, and double row angular contact bearings

4. Stripe Roller

Smoother ride, increased bearing life, and bolder more pronounced stripes

5. Larger Discharge Opening

Large discharge opening improves airflow and cut quality

6. Offset Trim Wheel

Improved quality of cut and better line of sight trimming

7. Low Profile Bearing Caps

Reach under bushes and pine trees without worry of losing the caps

8. Improved Carrier Frame

Strengthened carrier frame arms for increased durability

9. Rubber Discharge Chute

Easy on landscape, will not dent like steel**

10. Improved Casters

Tapered roller bearings and larger diameter pivot bolt provide smoother operation and longer life

11. Tool-Free Belt Tensioner

Our NEW tool-free belt tensioner makes maintenance quick and easy

12. Hydraulic Flip-Up

Optional Hydraulic Flip-Up makes deck clean up quick and effortless (Manual Flip-Up standard)

13. Heavier Roller Mounts

Reinforced rear roller mounts to help carry the load for the long haul

14. Ventrac Mount System

Allows for quick connection of the mower deck with no tools or heavy lifting

15. One Lever Height Adjustment

Broad range of height settings from 1"-5" in 1/4" increments



TOP VIEW

**MU720 does not have a discharge chute



VENTRAC





Pricing Quote

Quote #: 107047-1005
 Contract #: 112624-TTC

Date Quoted: September 5, 2025
 Quote Expires: October 5, 2025

Prepared For:

DAVID REEVES
 CITY OF TEXAS CITY
 301-6TH ST NORTH
 TEXAS CITY, TX 77590
 409-682-6784
 DREEVES@TEXAS-CITY-TX.ORG

Prepared By:

Bobby Ford Tractor & Equipment, LLC
 Chris Robertson
 2498 N Highway 288
 Angleton, TX 77515
 Phone: 307-365-4453

Customer's Sourcewell Membership ID:

Thank you for the opportunity to quote the following Ventrac product(s) for your review. I have added the items that we feel would best serve your needs. Please feel free to contact me with any questions.

QTY	Model #	Description	MSRP	Sourcewell	Total
1	70.4067	Accessory: DUAL WHEEL KIT Kit, Duals Field Trax Black	1,695.00	1,491.60	1,491.60
1	70.4140	Accessory: DIGITAL SLOPE GAUGE Kit, Slope Indicator	460.00	404.80	404.80
1	70.4169	Accessory: CANOPY Kit, Canopy	1,135.00	998.80	998.80
1	70.4170	Accessory: FAN FOR CANOPY Kit, Fan for Canopy	455.00	400.40	400.40
1	70.4171	Accessory: STROBE LIGHT FOR CANOPY Kit, Strobe Light for Canopy	515.00	453.20	453.20
1	4520P (39.51216)	Ventrac Tractor: KN, 4520P Kawasaki FD851D <i>Included Standard: Weight Transfer, SDLA Hand Controls, 4 Rear Weights, Front Fenders, Foot Pegs</i>	31,285.00	27,530.80	27,530.80
1	70.4160	Accessory: THREE-POINT HITCH Kit, 3 Point Hitch 4520	2,550.00	2,244.00	2,244.00
1	70.4167-99	Accessory: Kit, Heated Suspension Seat 4520	840.00	739.20	739.20
1	70.4200-99	Accessory: Kit, PRO KN4520	2,140.00	1,883.20	1,883.20
1	70.4185	Accessory: LARGE TOOLBOX KIT Kit, Toolbox Large	165.00	145.20	145.20
1	HQ682 (39.55118)	Attachment: MOWERS - TOUGH CUT HQ, HQ682 Mower, Tough Cut	5,330.00	4,690.40	4,690.40
1	70.8226	Accessory: Kit, Hydraulic Flip Up HQ682	580.00	510.40	510.40
1	39.56114	Accessory: THREE-N-ONE ADAPTER HH, 3PT 3-n-1 Hitch	560.00	492.80	492.80
1	MS720 (39.55111)	Attachment: MOWERS - FINISH MS, MS720 Mower SD	5,540.00	4,875.20	4,875.20
1	70.8214	Accessory: Kit, Hydraulic Flip Up MS/MT/MU	580.00	510.40	510.40
				Subtotal	47,370.40

CHARGES

Setup Charges (5%)	+2,368.52
Delivery (4%)	+1,894.82
TOTAL USD \$	51,633.74

SIGNATURE

DATE