

Article 27-300 Neighborhood Districts

SECTION 27-301 DISTRICTS ESTABLISHED

The neighborhood zoning districts are established in Table 27-300.1. When this zoning code refers to “neighborhood” zoning districts, it is referring to these districts.

TABLE 27-300.1 NEIGHBORHOOD DISTRICTS

Symbol	Neighborhood District Name
N1	First Neighborhood Residential
N2	Mid-Century Neighborhood Residential
N3	Suburban Neighborhood Residential
NX1	Mixed Residential 1
NX2	Mixed Residential 2
NX3	Mixed Residential 3
RMH	Residential Manufactured Home

SECTION 27-302 DISTRICT DESCRIPTIONS

Neighborhood districts are primarily intended to allow a mix of residential uses within appropriately scaled buildings to maintain and promote the desired physical character of neighborhoods within the city.

A. N1: FIRST NEIGHBORHOOD RESIDENTIAL

The N1 district is intended to continue the existing character of single-and two-family homes in the first residential neighborhoods developed in the early part of the twentieth century in the city. This district may also be used for new neighborhoods designed with similar characteristics of the first neighborhoods. These characteristics include parking/garages located in the rear of the lot, pitched roofs, and doors and windows on the front facades. Building and garage location are specified in the regulations, with basic parameters for front doors and windows.

B. N2: MID-CENTURY NEIGHBORHOOD RESIDENTIAL

The N2 district is intended to continue the existing character of the residential neighborhoods with single-and two-family homes developed during the middle of the twentieth century. This district may also be used for new neighborhoods designed with similar characteristics of the mid-century neighborhoods. These characteristics include homes wide on the lot, single garages located in the front facade though less than 35% of the facade, low pitched roofs, and doors and windows on the front facades. Building and garage location are specified in the regulations, with basic parameters for front doors and windows.

C. N3: SUBURBAN NEIGHBORHOOD RESIDENTIAL

The N3 district is intended for residential neighborhoods primarily with single-family homes. Characteristics include wide lots and attached garages typically located on the front building façade, often greater than 35% of the façade. Basic setback and height parameters apply.

D. NX1: MIXED RESIDENTIAL 1

The NX1 district is intended to continue the character of the first neighborhoods with single-family, two-family, and small-scale multiple-family homes with 3 to 4 units. Multiple-family homes are intended to match the scale of the neighborhood single-family homes with characteristics such as building width, parking and garages location, roof design, and doors and windows on the front facades.

E. NX2: MIXED RESIDENTIAL 2

The NX2 district is intended for small- and mid-scale multiple-family homes with 2 to 8 units, in small neighborhood nodes. The buildings are oriented to the streets in walkable blocks with doors and windows on front facades and parking/garages located behind the buildings.

F. NX3: MIXED RESIDENTIAL 3

The NX3 district is intended for large-scale multiple-family homes in larger neighborhood nodes. The buildings may include larger apartment buildings with more than eight units per structure. The development may have an internal private street system for access throughout the larger node with walkable blocks. Buildings are oriented to the street with doors and windows on front facades and parking/garages located behind the buildings. Covered parking may include rows of canopies or enclosed garages. Common open space, shared recreational facilities, or central gathering spaces are generally provided for residents.

G. RMH: RESIDENTIAL MANUFACTURED HOME

The RMH district is intended to provide stable environments for individual manufactured homes, manufactured home parks, and compatible accessory uses.

SECTION 27-303 REGULATIONS APPLICABLE TO ALL NEIGHBORHOOD DISTRICTS

All buildings must comply with the general regulations and the specific regulations per each district, unless otherwise expressly stated in this ordinance. See Article 27-1600. Nonconformities for existing buildings that do not fully conform to the district regulations.

A. ALLOWED USES

Allowed uses are provided in Article 27-1000.

B. EXISTING BUILDINGS

Existing buildings are not required to meet these regulations except as defined in Article 27-1500. Nonconformities.

C. SITE ACCESS FOR LOTS

Access to residences must be from any public or approved private street right-of-way. All lots shall have one lot line located fully on a public or private street right-of-way, except one of every four lots in the development may be located on a shared open space.

D. PERMANENT STRUCTURES

All buildings constructed in any neighborhood district, except the RMH district, must be of permanent construction without a chassis, hitch, or wheels, or other features that would make the structure mobile, unless otherwise expressly stated in this code. Modular construction that meets state adopted building code is allowed.

E. ACCESSORY STRUCTURE REGULATIONS

1. Accessory structures are subject to Article 27-1000 Uses, except as defined in the district site and structure regulations.
2. Façade siding on accessory structures over 200 square feet in footprint must match the façade material and design of the principal structure to the maximum extent practicable.

F. EXCEPTIONS AND EXEMPTIONS

The following exceptions and exemptions may apply to the district site and structure regulations. Use specific standards in Article 27-1000 are still applicable.

1. Utility Installations. The following structures are not required to comply with site and structure regulations applicable to a specific district.
 - (a) Wireless communications facilities and uses
 - (b) Public and private utility stations, substations, and associated utility station facilities
2. Civic and Institutional Uses. Civic and institutional uses allowed in the district are required to meet the district site and structure regulations, except the following applies:
 - (a) The minimum dimension of any build-to zone shall be treated as a minimum setback.

- (b) Minimum heights are not required. Heights above the maximum allowed may be approved through an Administrative Relief, based upon similar civic structures on similar lots in the surrounding neighborhood. See Article 27-1600 for Administrative Relief procedure.
- (c) Window, front door, and roof regulations are not required.

G. TRASH, RECYCLING, REFUSE LOCATIONS

For all buildings with five or more units, all trash, recycling, and other refuse areas must be located and treated as follows:

1. Trash, recycling, and other refuse areas must be located in the rear yard of the lot.
2. When no rear yard exists or when the rear yard is less than 10 feet in depth, trash, recycling, and other refuse areas may be located in the rear portion of an interior side yard.
3. Trash, recycling, and other refuse areas may be located inside the building with access doors off the rear or interior side facade. Access doors may be located off a non-primary frontage facade with a design exception per Article 27-1600. Access doors must be opaque, screening a minimum of 80 percent of the opening.
4. See Article 27-1200 for required screening of trash, recycling, and other refuse areas.

H. ALLOWED ENCROACHMENTS

The following encroachments are permitted within setbacks as defined in Table 27-300.2. Encroachments are not allowed where a build-to zone is required.

TABLE 27-300.2 TABLE OF ALLOWED ENCROACHMENTS

Type of Encroachment	Front Setback	Side Setback	Rear Setback	Street-Side Setback	Additional Info
Eaves, gutters, cornices, other arch features	2 feet	2 feet	2 feet	2 feet	Projections over 2 feet in any yard count as lot coverage
Fireplaces Bay Windows	2 feet	2 feet	2 feet	2 feet	
Open or Enclosed Porches, Stoops	8 feet (N3, RMH) All others not less than 5 feet to front P/L	None	2 feet	2 feet	
Open decks, Stairways & Landings	8 feet (N3 & RMH) All others not less than 5 feet to front P/L	2 feet	2 feet	2 feet	Ramps providing an accessible way are exempt from these requirements

I. YARD TREATMENT

Build-to zones, and front, side and rear yards shall be a minimum of 60 percent landscape area. Driveways are not permitted within the minimum side setbacks.

J. FRONT ENTRANCES

The following applies only when required by the site and structure regulations for the district. Front building entrances shall be emphasized, adding interest to the building façade, through one or more of the following design features:

1. **Roof or Canopy.** The entrance is covered by a roof or canopy differentiating it from the overall building roof type.
2. **Porch.** The entrance is through a porch.
3. **Sidelights and Transom.** Sidelights and/or transom windows are included abutting the entrance door.
4. **Recessed or Projecting Bay.** The entrance is located in a separate bay of the building that is either recessed or projected from the front façade.
5. **Other Design.** Other designs adding emphasis and drawing attention to the entrance on the facade may be approved with Administrative Relief (Art. 27-1600).

K. ARTERIAL SETBACKS

Minimum arterial setbacks as follows apply to all neighborhood districts:

1. No building or structure shall be erected or maintained within 50 feet of the centerline of an arterial street. In addition, no required parking area or portion thereof, including driving aisles, shall be constructed or located within 40 feet of the centerline of an arterial street. Any new construction that increases the number of required off-street parking spaces, must locate these additional required parking spaces in areas that comply with these locational standards.
2. Approved signs and public use controls and systems, trees trimmed up eight feet and canopies with at least eight feet clearance, shall be permitted in this setback area. For the purpose of this subsection, canopies shall be defined as covers that are solely attached to and supported by the structure on which it is attached to and which can be removed without destroying any part of that supporting structure. This shall only apply to canopies attached to the principal structure.
3. The designation of a street as an arterial shall be recommended by the city engineer, or in conformity with the most recent urban transportation plan.

SECTION 27-304 N1 DISTRICT

The following site and structure regulations apply to any lot in the N1 district. Refer to 27-303 for general regulations applicable to all districts and Table 27-300-3, below, for regulations specific to this district, keyed to illustrations in Figure 27-300(1). See Article 27-1800 for definitions and information on how to measure the following regulations.

TABLE 27-300.3 SITE AND STRUCTURE REGULATIONS

A. BUILDING SITING		REFERENCES
1	Minimum Lot Width (feet) per principal building Maximum Lot Width (feet) per principal building	20 80 See 27-304.D for 2-unit buildings. See Article 27-1500 existing lots of record.
2	Maximum Front Building Width (feet)	65 per principal building
3	Front Build-to Zone (feet)	8-20; match block face average
4	Street-Side Build-to Zone (feet)	5-15 See Article 27-1800 for block face averaging instructions.
5	Side Setback (feet) Space Between Principal Buildings on Lot (feet)	5 minimum 10 minimum See 27-304.D for side street lots
6	Rear Setback (feet)	5 minimum
7	Accessory Building Yard Location	Rear
8	Accessory Building: Min. Rear Setback (feet)	3, except 0 at alley
9	Maximum Building Coverage (%)	60
10	Permitted Driveway Access Location	Alley, side street if no alley
11	Attached Garage Entrance Location	Rear, side, or street-side façade; front façade allowed maximum 15 feet in width and no more than 30% of façade See Article 27-1305 for driveway access.
B. HEIGHT		
12	Principal Building: Maximum Height (stories) Maximum Height (feet)	2.5 34 See Article 27-1800 for instructions for measuring height
12	Accessory Building: Maximum Height (stories) Maximum Height (feet)	2; not taller than the principal structure 27 Accessory roof pitch shall match principal building
C. WINDOWS, FRONT DOOR, ROOF		
14	Minimum Window & Door Coverage: Front Façade (%)	15 measured per story of all full stories Measured per each full and half story. See Article 27-1800 for information on measuring front façade window & door coverage
15	Front Door Location Entrance Treatment	Front Façade See 27-303.J for Front Entrance See 27-304.D for 2-unit buildings.
16	Permitted Roof Types Minimum pitch, less than 2 stories Minimum pitch, 2 or more stories	Pitched, tower permitted 4:12 (rise:run) 3:12 (rise:run) See Article 27-1800 for definition of roof types and exception for other allowed roof types. See Article 27-1500 for existing buildings

SINGLE-UNIT OR TWO-UNIT HOME

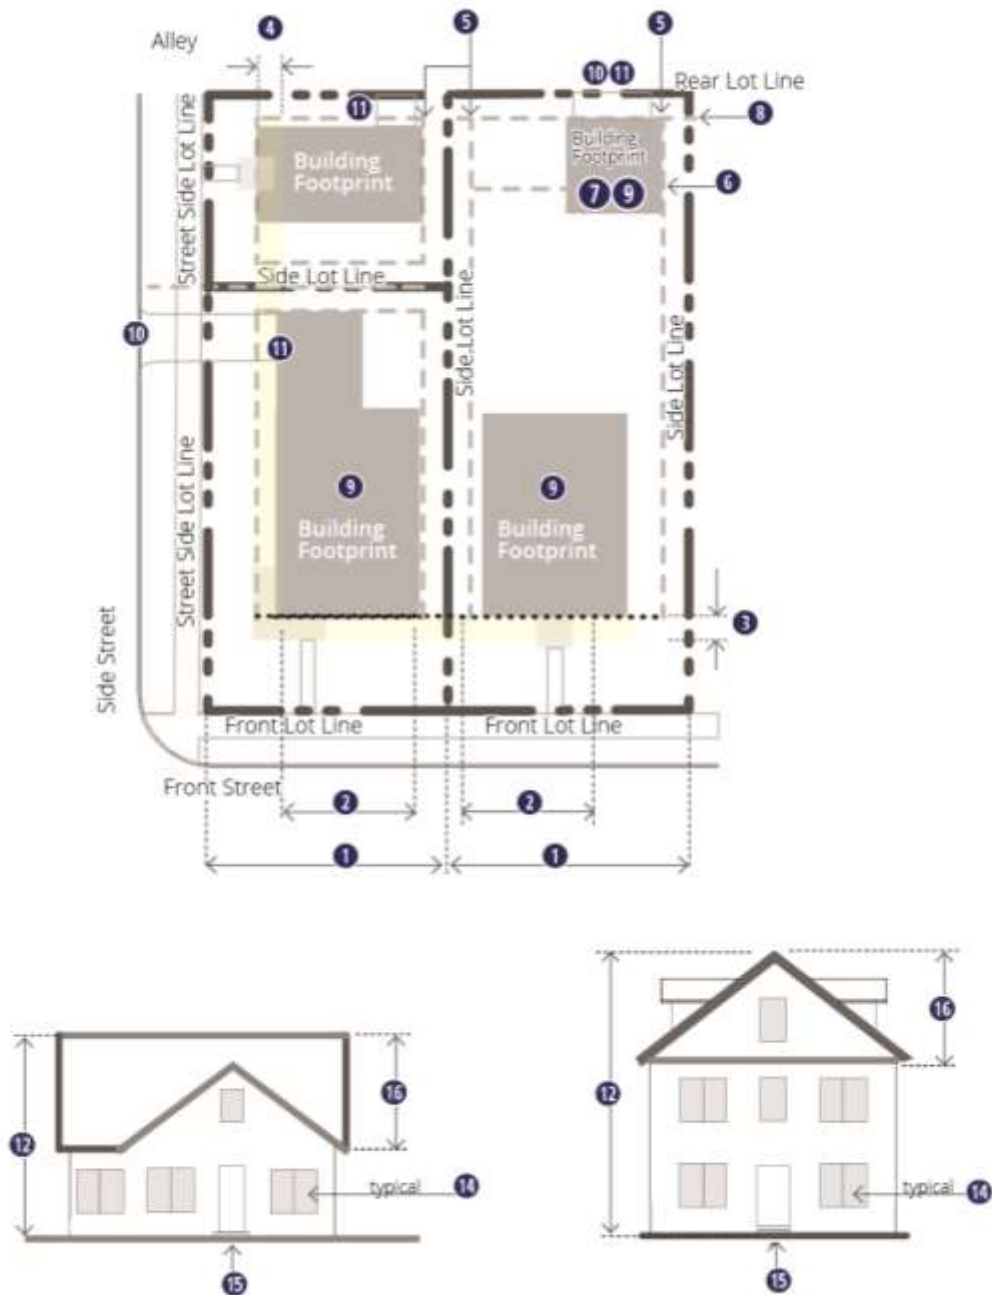


Figure 27-300(1). N1 district diagrammatic plans and elevations.

D. Supplemental Regulations

1. Side Street Lots. Side street lots are those lots located along the short end of blocks, where the front of the lot faces the side street and the depth of the lot is generally the width of most of the lots on the block. Lots with only side street frontage are allowed maximum building coverage of 80%.
2. The following applies to 2-unit buildings:

- (a) Configuration. Allowed configurations include the following: side-by-side units, stacked units, front and rear units, all located in the principal building; two principal buildings on one lot; or a principal building with an accessory building (see Article 27-1000). For side-by-side units, the lot may be split to allow a fee simple configuration with a zero side yard setback and shared wall between the two units.
- (b) Entrance. One entrance is permitted per street facade, except for side-by-side units on separate lots.

SECTION 27-305 N2 DISTRICT

The following site and structure regulations apply to any lot in the N2 district. Refer to 27-303 for general regulations applicable to all districts and Table 27-300-4, below, for regulations specific to this district, keyed to illustrations in Figure 27-300(2). See Article 27-1800 for definitions and information on how to measure the following regulations.

TABLE 27-300.4 SITE AND STRUCTURE REGULATIONS

A. BUILDING SITING		REFERENCES	
1	Minimum Lot Width(feet) per principal building	50	See 27-305.D for 2-unit buildings. See Article 27-1500 existing lots of record.
	Maximum Lot Width (feet) per principal building	120	
2	Maximum Front Building Width (feet)	80 per principal building	
3	Front Build-to Zone (feet)	10-20; match block face average	See Article 27-1800 for block face averaging instructions
4	Street-Side Build-to Zone (feet)	10-15	
5	Side Setback (feet)	5 minimum	
	Space Between Principal Buildings on Lot (feet)	10 minimum	
6	Rear Setback (feet)	5 minimum	See 27-305.D for side street lots
7	Accessory Building Yard Location	Rear	
8	Accessory Building: Rear Setback (feet)	3 minimum, except 0 at alley	
9	Maximum Total Building Coverage (%)	40	
10 1	Permitted Driveway Access Location	Any	See 27-1305 for driveway access exceptions
	Attached Garage Entrance Location	Any façade; front façade limited to no more than 35% of façade	
B. HEIGHT			
12	Principal Building: Maximum Height (stories).	1.5; 2 stories on maximum 60% of footprint	
	Maximum Height (feet)	27	
12	Accessory Building: Maximum Height (stories)	1.5 stories, no taller than the principal building	Accessory roof pitch shall match principal building
C. WINDOWS, FRONT DOOR, ROOF			
14	Minimum Window & Door Coverage: Front Façade (%)	15 per story	Measured per each full and half story. See Article 27-1800 for information on measuring window and door facade coverage
15	Front Door Location	Street Façade	See 27-305.D for 2-unit buildings.
16	Permitted Roof Types	Low pitched, flat	See Article 27-1800 for definition of roof types and exception for other allowed roof types.
	Minimum pitch	3:12 (rise:run)	
	Maximum pitch	6:12 (rise:run)	

SINGLE-UNIT OR TWO-UNIT HOME

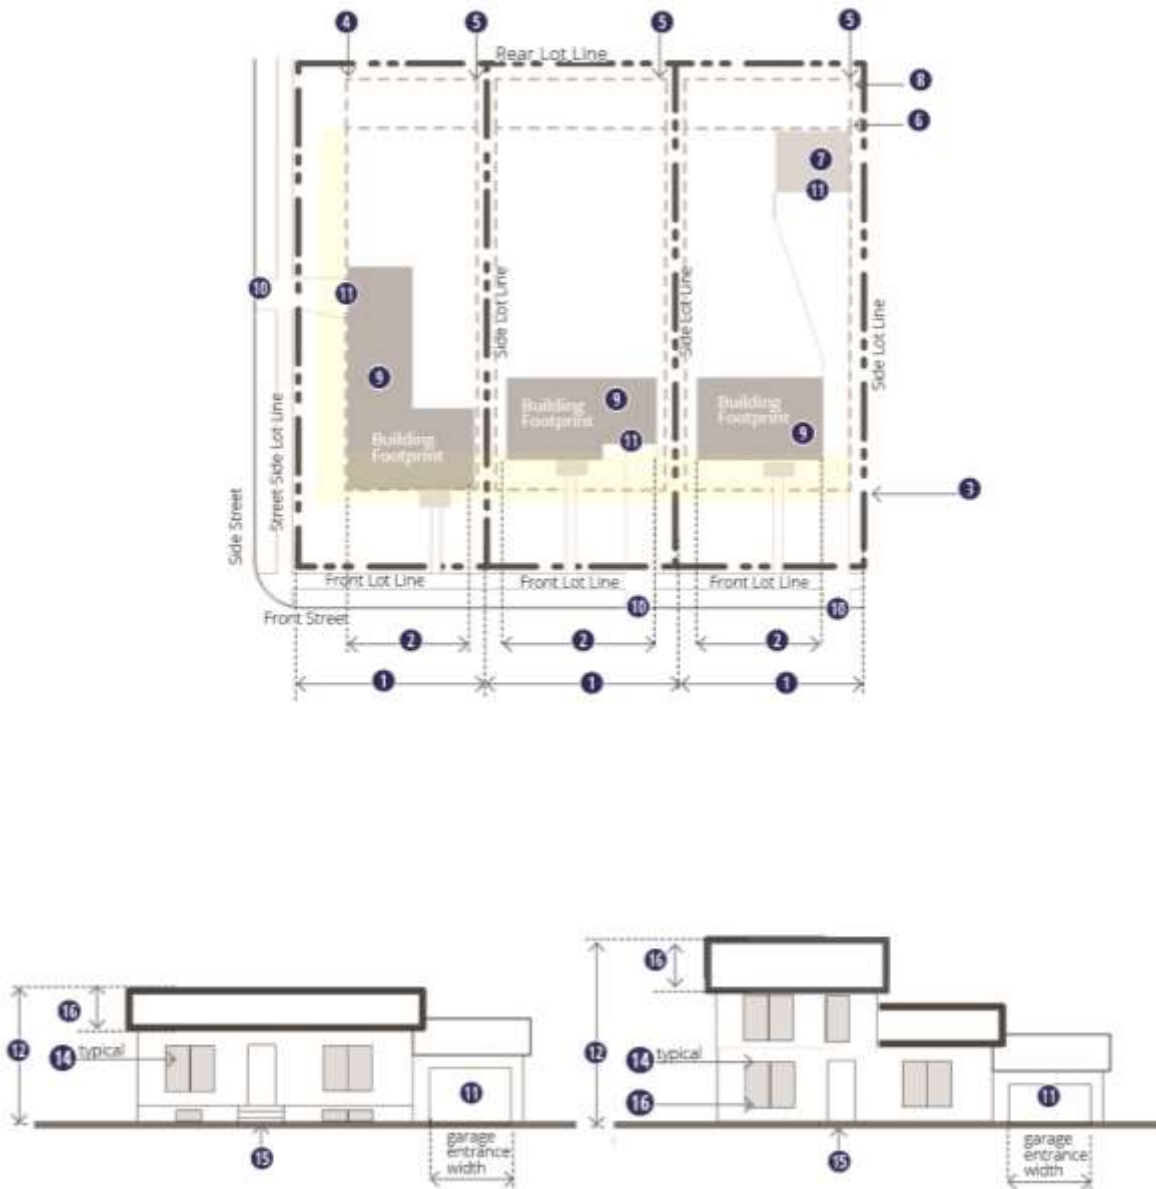


Figure 27-300(2). N2 district diagrammatic plans and elevations.

D. Supplemental Regulations

1. Side Street Lots. Side street lots are those lots that along the short end of blocks, where the front of the lot faces the side street and the depth of the lot is generally the width of most of the lots on the block. Lots with only side street frontage are allowed maximum building coverage of 80%.
2. The following applies to 2-unit buildings:

- (a) Configuration. Allowed configurations include the following: side-by-side per below, stacked units, front and rear units, all located in the principal building; two principal buildings on one lot; or a principal building with an accessory building (see Article 27-1000).
- (b) Side-by-side units in N2 shall be located perpendicular to the street in a U-shaped configuration with a courtyard or shared yard. The lot may be split to allow a fee simple configuration with a zero side yard setback and shared wall between the two units. Two units attached end to end are permitted with a maximum width along the street of 60 feet.
- (c) Entrance. One entrance is permitted on the street, except for side-by-side units on separate lots, the entrances may be located off the courtyard.

SECTION 27-306 N3 DISTRICT

The following site and structure regulations apply to any lot in the N3 district. Refer to 27-303 for general regulations applicable to all districts and Table 27-300-5, below, for regulations specific to this district, keyed to illustrations in Figure 27-300(3). See Article 27-1800 for definitions and information on how to measure the following regulations.

TABLE 27-300.5 SITE AND STRUCTURE REGULATIONS

A. BUILDING SITING		REFERENCES	
1	Minimum Lot Width (feet) per principal building	65	See Article 27-1500 existing lots of record. See 27-306.C for exemption from minimum lot widths.
	Minimum Lot Size (square feet) per principal building	none	
2	Maximum Building Width (feet)	None	
3	Front Setback (feet)	20 minimum	
4	Street-Side Setback (feet)	10 minimum	
5	Side Setback (feet)	5 minimum	
	Space Between Principal Buildings on Lot (feet)	10 minimum	
6	Rear Setback (feet)	5 minimum	
7	Accessory Building Yard Location	Rear	
8	Accessory Building: Rear Setback (feet)	5 minimum, except 0 at alley	
9	Maximum Total Building Coverage (%)	40	
10	Permitted Driveway Access Location	Any	
11	Attached Garage Entrance Location	Any façade; front façade limited to no more than 50% of façade	
B. Height			
Principal Building:	Maximum Height (stories)	3	See Article 27-1800 for instructions for measuring height.
	Maximum Height (feet)	34	
Accessory Building:	Maximum Height (stories)	1.5 stories, no taller than the principal building	Accessory roof pitch shall match principal building

SINGLE-UNIT HOME

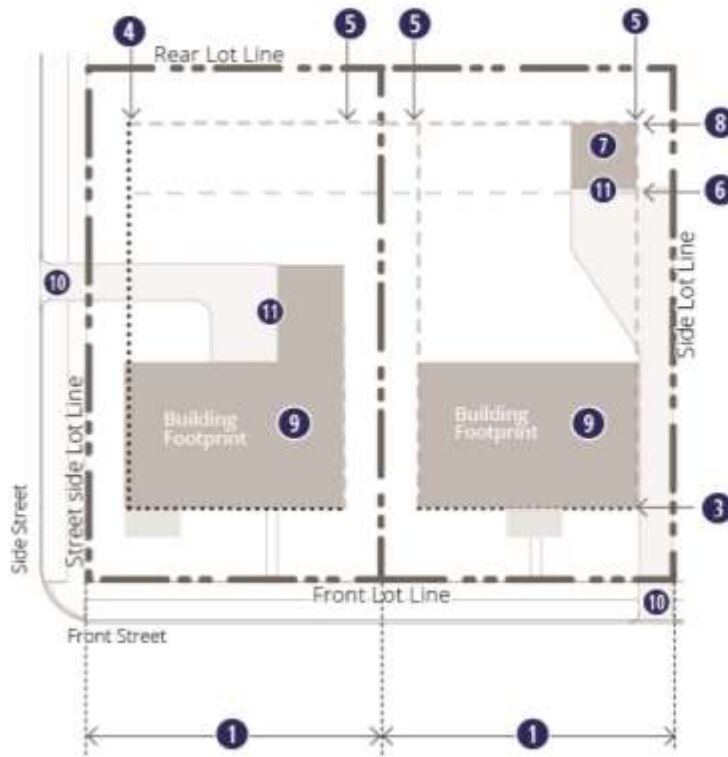


Figure 27-300(3). N3 district diagrammatic plan.

C. Supplemental Regulations

1. Lots on cul-de-sacs and flag lots are exempt from minimum lot width regulations. See also Article 27-1500 for existing lots of record.



SECTION 27-307 NX1 DISTRICT

The following site and structure regulations apply to any lot in the NX1 district. Refer to 27-303 for general regulations applicable to all districts and Table 27-300-6, below, for regulations specific to this district, keyed to illustrations in Figure 27-300(4). See Article 27-1800 for definitions and information on how to measure the following regulations.



TABLE 27-300.6 SITE AND STRUCTURE REGULATIONS

A. BUILDING SITING		Single or Multi-Unit Building	Side-by-Side Attached Units	REFERENCES
1	Minimum Lot Width (feet) per principal building	20 for 1 or 2 units; 50 for 3 or more units	50	See Article 27-1500 for existing lots of record. Side-by-side means units attached along front façade. See 27-307.D for fee simple side-by-side attached units.
2	Maximum Front Building Width (feet)	60	80, 4 units; 120, 4 units on side street	See 27-307.D for fee simple side-by-side attached units.
3	Front Build-to Zone (feet)	8-20; match block face average		See Article 27-1800 for block face averaging instructions. See definitions for front and street-side.
4	Street-Side Build-to Zone (feet)	8-15		See 27-307.D for through lots. Refer to 27-700 for visibility at intersections. See 27-303.K for arterial setback regulations.
5	Side Setback (feet) Space Between Principal Buildings on Lot (feet)	5 minimum 10 minimum		See 27-307.D for side street lots.
6	Rear Setback (feet)	5 minimum		See 27-307.D for side street lots.
7	Accessory Building Yard Location	Rear	Rear	See Article 27-1800 for explanation of yards.
8	Accessory Building: Rear Setback (feet)	5 minimum or 0 at alley		
9	Maximum Building Coverage (%)	60		See 27-307.D for side street lots.
10	Permitted Driveway Access Location	Alley, side street; front street if no side street is available		See 27-1305 for driveway access exceptions.
11	Attached Garage Location Allowed Garage Entrance	Rear half of the building; Rear or side adjacent to street façade only		
B. HEIGHT				
12	Principal Building: Maximum Height (stories) Maximum Height (feet)	2.5 27	2.5 27	See Article 27-1800 for definition half story.
12	Accessory Building: Maximum Height (stories)	1.5, no taller than the principal building		Accessory roof pitch shall match principal building
C. WINDOWS, FRONT DOORS, ROOF				
14	Minimum Window & Door Coverage: Front Façade (%)	15 per story	15 per story	Measured per each full and half story. See Article 27-1800 for information on measuring door & window coverage.
15	Front Door Façade Location & Number of Doors Entrance Treatment	1 on street façade per building	1 per unit on street facade	See 27-307.D for multiple buildings on a courtyard.
16	Permitted Roof Types	Parapet, pitched; tower permitted		See Article 27-1800 for definition of roof types and exception for other allowed roof types.

MULTI-UNIT BUILDING

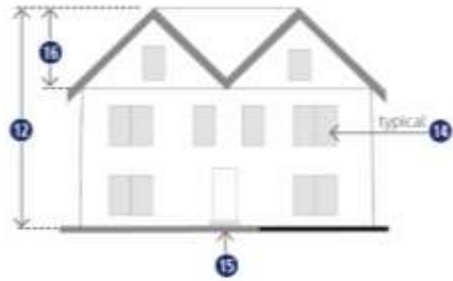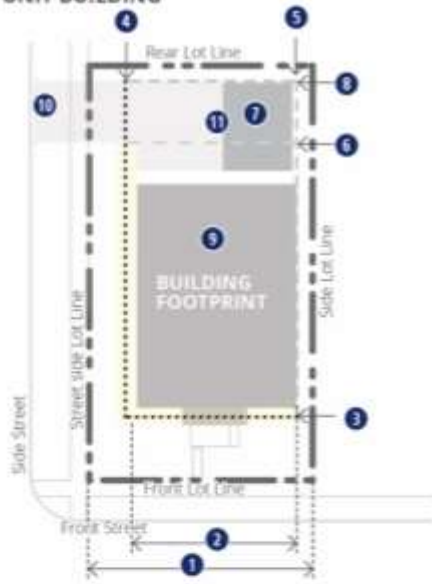

SIDE-BY-SIDE ATTACHED

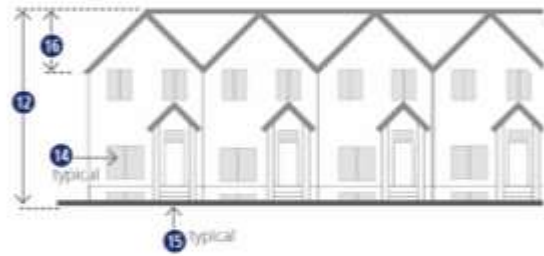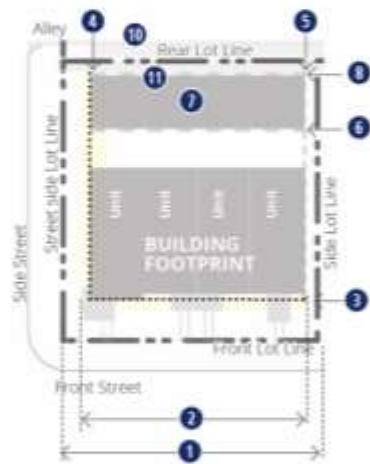

COTTAGE COURT



Figure 27-300(4). NX1 district diagrammatic plan.

D. Supplemental Regulations

1. Courtyard Configuration. For multiple buildings and side-by-side attached units with a courtyard, entrances may be located off the courtyard, except every unit abutting a street frontage must include the principal entrance on the street.
2. Through Lots. For developments on lots that extend through a block and addresses on two streets, buildings must front both streets and entrances provided on each street.
3. Fee Simple Side-by-Side Units. For fee simple side-by-side units, the lot width may be smaller; however, the building, comprised of multiple units, shall total meet the minimum regulations.
4. Side Street Frontage. For corner lots, all lot lines other than the front and street-side are side lot lines and, for parking and accessory buildings, the director shall determine where the rear of the lot is located.
5. Open Space. One of the following open space types must be provided for every three contiguous acres of NX1 district:
 - (a) Parklet. A parklet is a landscaped open space with a minimum 70% living plant material and a minimum of 20,000 square feet in area, with at least 100 feet of street frontage.
 - (b) Green. A green is a larger, landscaped space, a minimum of one acre in size, with at least 200 feet of street frontage.
 - (c) Natural Area. A natural area is a large area, a minimum two acres in size, defined to conserve a natural feature, such as a stream, wetland or woodland. At least 50 feet of street frontage is required for a natural area.

SECTION 27-308 NX2 AND NX3 DISTRICT



The following site and structure regulations apply to any lot in the NX2 and NX3 district. Refer to 27-303 for general regulations applicable to all districts and Table 27-300-7, below, for regulations specific to this district, keyed to illustrations in Figure 27-300(5). See Article 27-1800 for definitions and information on how to measure the following regulations.

TABLE 27-300.7 SITE AND STRUCTURE REGULATIONS


A. BUILDING SITING		Multi-Unit Building	Side-by-Side Units	REFERENCES	
1	Minimum Lot Width (feet) per principal building	20 for 2 units; 50 for 3 or more units	50	See Article 27-1500 for existing lots of record.	
	Minimum Lot Area (square feet)	7000; None for 2 units	None		
2	Maximum Building Width (feet)	16 ft per ground floor unit	8 units/172 feet on any frontage	See 27-307.D for fee simple row building units.	
3	Front Build-to Zone (feet)	10-20		See definitions for front and street-side. See 27-303.K for arterial setback regulations. See 27-307.D for through lots. Refer to 27-700 for visibility at intersections.	
4	Street-Side Build-to Zone (feet)	5-15			
5	Side Setback (feet)	5 minimum; 15 abutting N1, N2, N3, or RMH districts			
	Space Between Principal Buildings on Lot (feet)	10 minimum			
6	Rear Setback (feet)	10 minimum; 20 abutting N1, N2, N3, or RMH districts			
7	Accessory Building Yard Location	Rear		See Article 27-1800 for definition of yards.	
8	Accessory Building: Rear Setback (feet)	7.5			
9	Maximum Building Coverage (%)	60			
10	Permitted Driveway Access Location	Alley, side street; front street if no side street is available			
11	Attached Garage Location Allowed Garage Entrance	Rear half of the building; Rear or street-side façade only			
B. HEIGHT					
12	Principal Building:	Minimum Height (stories)	2	1.5 for NX2; 2 for NX3	See Article 27-1800 for definition of half story.
		Maximum Height (stories)	3 for NX2; 4 for NX3	2.5 for NX2; 3 for NX3	
12	Accessory Building:	Maximum Height (stories)	1.5	1.5	Accessory roof pitch shall ma principal building
		Maximum Height (feet)	27	27	
C. WINDOWS, FRONT DOOR, ROOF					
14	Minimum Window & Door Coverage: Front Façade (%)	15 per story	15 per story	Measured per each full and half story. See Article 27-1800 for information on measuring door & window coverage.	
15	Front Door Façade Location & Number of Doors	1 per building on street façade	1 per unit on street facade	See Article 27-1800 for multiple buildings on a courtyard	
	Entrance Treatment	See 27-303.J for Front Entrance			
16	Permitted Roof Types	Parapet, pitched, flat; tower permitted		See Article 27-1800 for definition of roof types and exception for other allowed roof types.	

2-4 UNIT BUILDING

MULTI-UNIT BUILDING

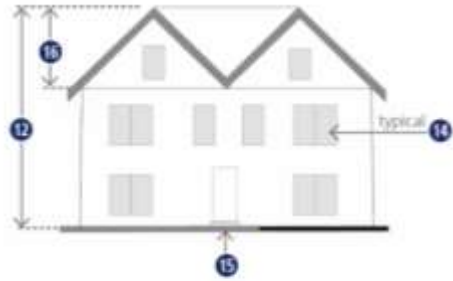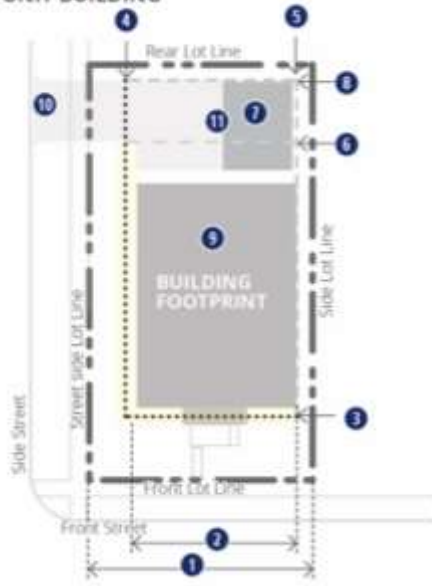

5+ UNIT BUILDING

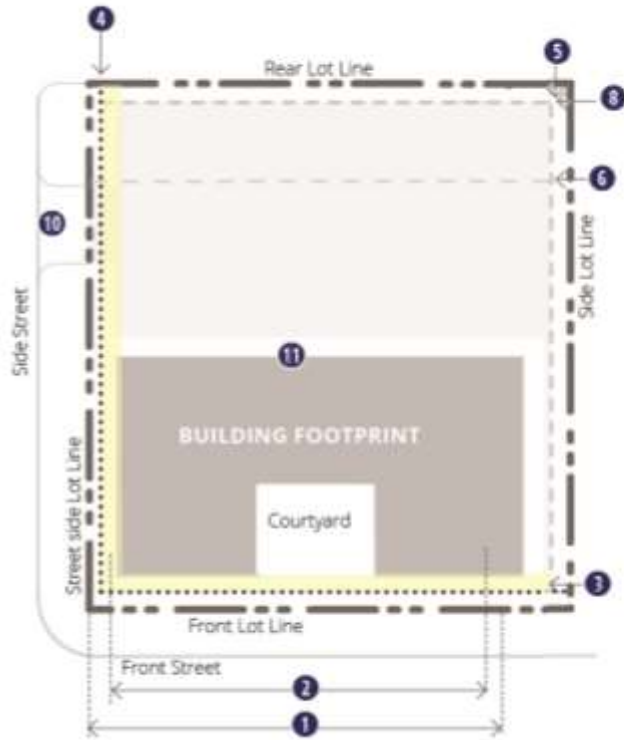

SIDE-BY-SIDE ATTACHED

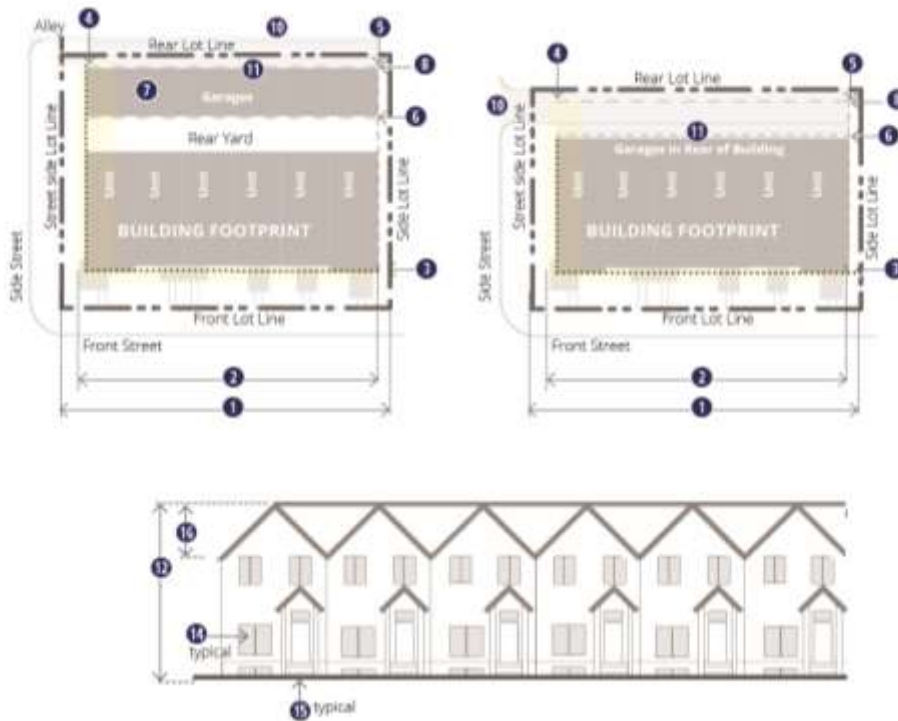


Figure 27-300(5). NX2 and NX3 district diagrammatic plans.

D. Supplemental Regulations

1. Courtyard Configuration. For multiple buildings and side-by-side attached units with courtyards, entrances may be located off a courtyard, except every unit abutting a street frontage must include the principal entrance on the street.
2. Through Lots. For developments on lots that extend through a block and addresses on two streets, buildings must front both streets and entrances provided on each street.
3. Fee Simple Side-by-Side Units. For fee simple side-by-side units, the lot width may be smaller; however, the building, comprised of multiple units, shall total meet the minimum regulations.
4. Side Street Frontage. For corner lots, all lot lines other than the front and street-side are side lot lines and, for parking and accessory buildings, the director shall determine where the rear of the lot is located.
5. Open Space. One of the following open space types must be provided for every three contiguous acres of NX2 district:
 - (a) Parklet. A parklet is a landscaped open space with a minimum 70% living plant material and a minimum of 20,000 square feet in area, with at least 100 feet of street frontage.
 - (b) Green. A green is a larger, landscaped space, a minimum of one acre in size, with at least 200 feet of street frontage.

- (c) Natural Area. A natural area is a large area, a minimum two acres in size, defined to conserve a natural feature, such as a stream, wetland or woodland. At least 50 feet of street frontage is required for a natural area.

SECTION 27-309 RMH DISTRICTS

The following site and structure regulations apply to any lot in the RMH district. Refer to 27-303 for general regulations applicable to all districts and Table 27-310-8, below, for regulations specific to this district. See Article 27-1800 for definitions and information on how to measure the following regulations.

TABLE 27-300.8 SITE AND STRUCTURE REGULATIONS

A. BUILDING SITING		REFERENCES
Minimum Lot Size (square feet)	3,000 per principal building	
Front Setback (feet)	20 minimum	
Street-Side Setback (feet)	10 minimum	
Side Setback (feet)	8 minimum	See 27-310.C for site built structures.
Rear Setback (feet)	8 minimum	
Accessory Building Yard Location	Rear and side yard	
Maximum Total Building Coverage (%)	50	
B. HEIGHT		
Principal Building: Maximum Height (feet)	34	See Article 27-1800 for instructions for measuring height
Accessory Building: Maximum Height (feet)	40 and no taller than principal building	Accessory Roof Pitch shall match Principal Building

C. Supplemental Regulations

1. Open Space. One of the following open space types must be provided for every 3 acres of RMH district:
 - (a) Parklet. A parklet is a landscaped open space with a minimum 70% living plant material and a minimum of 20,000 square feet in area, with at least 100 feet of street frontage.
 - (b) Green. A green is a larger, landscaped space, a minimum of one acre in size, with at least 200 feet of street frontage.
 - (c) Natural Area. A natural area is a large area, a minimum two acres in size, defined to conserve a natural feature, such as a stream, wetland or woodland. At least 50 feet of street frontage is required for a natural area.
2. Manufactured home, Type 1: A manufactured home that was certified on or after January 1, 1990, and that satisfies each of the following additional criteria:
 - (a) The pitch of the home's roof has a minimum vertical rise of three inches for each 12 inches of horizontal run (3:12), and the roof is finished with a type of shingle that is commonly used in standard residential construction;
 - (b) The exterior siding consists of wood, hardboard, aluminum or vinyl siding comparable in composition, appearance, and durability to the exterior siding commonly used in standard residential construction;

- (c) A continuous, permanent perimeter foundation is installed under the home; and
- 3. Manufactured home, Type 2: A manufactured home that does not satisfy the criteria necessary to qualify the house as a Type 1 manufactured home.
- 4. Site-Built Structure. A site-built structure complying with the State Building Code may be setback a minimum of 5 feet from the side lot line.