



**D. Pricing and Addendum**

Please bid net prices at which you will agree to furnish required goods or services.

TOTAL BID PRICE - Ninety One Thousand Two Hundred Thirty Six dollars  
(words)  
and Zero cents (\$ 91,236.00 )  
(words) (figures)


I/We acknowledge 0 addendum.  
#

Midland Implement Company  
Company Name

Montana  
State of Incorporation

Julien Pates  
Contact Name (please print)

Salesman  
Title

  
Signature of Contact Position

12/09/2024  
Date

By signing the above, I certify that I am authorized by the Company named above to respond to this request.



**E. Standard Terms and Conditions**

In case of default by the successful bidder or failure to deliver the goods or services within the time specified, the City Purchasing Agent, after written notice, may procure them from other sources and hold contractor responsible for excess costs occasioned thereby.

The specifications attached to the instructions to bidders establish a standard of quality desired by the City of Billings. Any bidder may submit quotations on any article which substantially complies with these specifications as to quality, workmanship and service. The City of Billings reserves the right to make its selections of materials or services purchased, based on its best judgment as to which articles substantially comply with the requirements of the specifications.

No alteration in any of the terms, conditions, delivery, quality, or specifications will be effective without prior written consent of the City of Billings.

No exception to delivery or service dates shall be allowed unless prior written approval is first obtained from the City of Billings.

The contractor warrants all articles supplied under this contract to conform to specifications, herein. The contractor will deliver a warranty stating that all articles supplied under the contract are fit and sufficient for the purpose manufactured, merchantable, and free from defects.

In the event the City is entitled to a prompt payment or cash discount, the period of computation shall commence on the date of delivery, or receipt of correctly completed invoices, whichever is later. If an adjustment of payment is necessary, the discount period shall commence on the date final approval for payment is authorized.

The contractor agrees not to discriminate against any client, employee or applicant for employment or for services, because of race, creed, color, national origin, sex or age with regard to, but not limited to, the following: employment upgrading; demotion or transfer; recruitment or recruitment advertising; layoffs and termination; rates of pay or other forms of compensation; selection for training; rendition of services. It is further understood that any contractor who is in violation of this shall be barred forthwith from receiving awards of any purchase order for the City unless a satisfactory showing is made that discriminatory practices have terminated and that a reoccurrence of such acts are unlikely.

The City reserves the right to cancel and terminate this contract forthwith upon giving 30 days written notice to the contractor. (This provision does not apply to the purchase of materials and equipment. A purchase order for materials and equipment is a binding contract.)



**C. Contract Requirements and Specifications**

Front Mount Mower:

Comply (Y/N):

- |  |            |
|--|------------|
| • Diesel Engine minimum 50hp   | <u>Yes</u> |
| • Engine cooling with variable speed fan   | <u>Yes</u> |
| • Fuel capacity minimum 20 gallons   | <u>Yes</u> |
| • Hydrostatic 4wd powertrain   | <u>Yes</u> |
| • Hydraulic system capacity minimum 8 gallons                                    | <u>Yes</u> |
| • Roll Over Protective Structure   | <u>Yes</u> |
| • Forward transport speed minimum 15 mph   | <u>Yes</u> |
| • 120" minimum cutting width   | <u>Yes</u> |
| • Front mount rear discharge rotary decks  | <u>Yes</u> |
| • Cutting height 1-5"  | <u>Yes</u> |
| • Blade spindles minimum shaft diameter 1 ¼"                                     | <u>Yes</u> |
| • Transport width maximum 75"  | <u>Yes</u> |
| • Minimum front tire size 26x12.00-12 6 ply                                      | <u>Yes</u> |
| • Minimum rear tire size 20x10-10 6 ply  | <u>Yes</u> |
| • Open cab with shade canopy   | <u>Yes</u> |
| • Air-ride suspension seat   | <u>Yes</u> |
| • LED headlights, tail, brake, and turn lights                                   | <u>Yes</u> |
| • LED beacon light   | <u>Yes</u> |
| • Ground clearance minimum 6"  | <u>Yes</u> |
| • Uncut turning circle diameter 0"   | <u>Yes</u> |
| • Maximum height ROPS up 90"   | <u>Yes</u> |
| • 2-Year warranty on all equipment   | <u>Yes</u> |
| • Local warranty support, parts, and service                                     | <u>Yes</u> |
| • Delivered to Billings Operation Center<br>4848 Midland Ave, Billings, MT 59101 | <u>Yes</u> |



has available or will make available. In determining the lowest responsible bidder, in addition to price, the following considerations may be addressed:

- a) The ability, capacity and skill of the bidder to perform the contract or provide the service required.
- b) The character, integrity, reputation, judgment, experience and efficiency of the bidder.
- c) Whether the bidder can perform the contract within time specified.
- d) The quality of performance of previous contracts, agreements and/or performance.
- e) Previous and/or existing compliance by the bidder with laws relating to the contract or services.
- f) Such other information which may be secured having a bearing on the decision to award the contract.



**F. Intent to Respond Form**

Email the following Intent to Respond form to within four (4) days of the Bid Opening date of December 17, 2024, even if your company chooses NOT to participate.

To: City of Billings – PRPL Department  
Attn: Cole McQuillan, Parks Superintendent  
Phone: 406-657-8367  
Email: mcquillanc@billingsmt.gov

From: Julien Pates Contact Name  
Midland Implement Co. Company Name  
402 Daniel Street Company Address  
Billings, Montana 59101  
jpates@midlandimplement.com Email Address  
406-248-7771 Phone Number  
406-252-5772 Fax Number


Please indicate whether or not you intend to submit a bid on: **Front Mount Mower** by checking Yes or No.

We intend to respond by the specified due date:

Yes X No       

Midland Implement Co. 12.09.2024  
Company Name Date

Julien Pates Salesman  
Contact Name (please print) Title

  
Signature of Contact Position

By signing the above, I certify that I am authorized by the Company named above to respond to this request.



Should either party employ an attorney or attorneys or utilize the services of in-house attorneys to enforce any of the provisions hereof or to protect its interest in any manner arising under this contract, the non-prevailing party in any action pursued in a court of competent jurisdiction agrees to pay to the prevailing party all reasonable costs, damages, expenses, and attorneys' fees, including fees for in-house attorneys, expended or incurred in connection therewith.

Where applicable, possible or required, bidder is required to submit descriptive literature, sample material, design sketches and detailed shop drawings. Failure to submit required items may result in rejection of the bid or termination of contract.

The successful bidder may not make any advertising or sale use of the fact that contract items are being used by purchaser and other approved agencies, under penalty of contract termination.

This Agreement shall be construed and enforced in accordance with the laws of the State of Montana. Venue for any suit between the parties arising out of this Agreement shall be the State of Montana Thirteenth Judicial District Court, Yellowstone County.

Regardless of FOB point, contractor agrees to bear all risks of loss, injury, or destruction of goods and materials ordered herein and such loss, injury, or destruction shall not release contractor from any obligation hereunder.

All materials submitted in response to this IFB become public records under Article II, Section 9 of the Montana Constitution and §§ 2-6-102 and 7-1-4144, MCA and may be distributed by written request pursuant to Montana's Constitutional Right to Know or Public Records Acts.

Information provided in response to this IFB will be held in confidence and will not be revealed or discussed with competitors prior to award of Contract by Council. However, one copy of each bid submitted shall be retained for the official files of the Department and will become public record after award of the Contract.

Records and materials that are constitutionally protected from disclosure are not subject to the provisions of this section.

# IMPORTANT - Please Read

Outstanding cashier's checks are subject to state or territorial unclaimed property laws.

If the cashier's check is lost, stolen, or destroyed, you may request a stop payment and reissuance. A stop payment and reissuance can only be completed within a branch location. As a condition of stop payment and reissuance, Wells Fargo Bank will require an indemnity agreement. In addition, for cashier's checks over \$1,000.00, the waiting period before the stop payment and reissuance of an outstanding cashier's check may be processed is 90 days (30 days in the state of Wisconsin and 91 days in the state of New York). The waiting period can be avoided with the purchase of an acceptable surety bond. This can be purchased through Wells Fargo's approved insurance carrier or through an insurance carrier of the customer's choice. The cost of a surety bond varies depending on the amount of the bond and the insurer used. Surety bonds are subject to the insurance carrier's underwriting requirements before issuance. If the surety bond is not provided, the waiting period applies.

## Purchaser Copy - Page 2 of 2

0004339      11-24  
Office AU #      1210(8)

Remitter: MIDLAND IMPLEMENT COMPANY  
Purchaser: RANDALL PATES  
Purchaser Account: xxxxxx3582  
Operator I.D.: k142069  
Funding Source: Paper Item(s)

PAY TO THE ORDER OF \*\*\*CITY OF BILLINGS\*\*\*

### CASHIER'S CHECK

SERIAL #: 0433908110  
ACCOUNT#: 4861-511871

December 12, 2024

**\*\*Nine Thousand One Hundred Twenty-Three and 60/100 -US Dollars \*\***

**\*\*\$9,123.60\*\***

Payee Address:  
Memo: FRONT MOUNT MOWER

WELLS FARGO BANK, N.A.  
2235 GRANT RD  
BILLINGS, MT 59102  
FOR AUTOMATED CHECK VERIFICATION  
CALL: (480) 394-3122

VOID IF OVER US \$ 9,123.60

**NON-NEGOTIABLE**

## Purchaser Copy - Page 1 of 2

FB004 (10/19) M4203 40053964

PRINTED ON LINEMARK PAPER - HOLD TO LIGHT TO VIEW. FOR ADDITIONAL SECURITY FEATURES SEE BACK.

0004339      11-24  
Office AU #      1210(8)

Remitter: MIDLAND IMPLEMENT COMPANY  
Operator I.D.: k142069

PAY TO THE ORDER OF \*\*\*CITY OF BILLINGS\*\*\*

### CASHIER'S CHECK

0433908110

December 12, 2024

**\*\*Nine Thousand One Hundred Twenty-Three and 60/100 -US Dollars \*\***

**\*\*\$9,123.60\*\***

Payee Address:  
Memo: FRONT MOUNT MOWER

WELLS FARGO BANK, N.A.  
2235 GRANT RD  
BILLINGS, MT 59102  
FOR AUTOMATED CHECK VERIFICATION  
CALL: (480) 394-3122

VOID IF OVER US \$ 9,123.60

*Mariana Plan*  
CONTROLLER

⑈0433908110⑈ ⑆12100024814861511871⑈

0282421566

X ENDORSE HERE



# Groundsmaster® 4100-D/4110-D

WIDE AREA ROTARY MOWERS

## FEATURES

- 55 hp (41 kW) Yanmar® turbo-diesel engine
- Smart Power® and HybridDrive™ cutting deck system - work together providing optimal power to the cutting blades
- Foldable ROPS
- 10.3' (3.15 m) width of cut
- Full-time 4WD forward and reverse
- All-time traction assist (optional)
- 0" uncut circle in turns
- SmartCool® auto-reversing cooling fan
- 4-way adjustable seat and Air Ride Suspension
- InfoCenter® displays simple operating info while monitoring machine health
- Integrated ControlHub® with fingertip electronic controls
- Top and rear air intake for increased cooling
- Climate-controlled safety cab with air conditioning and heat (4110-D)
- Isolated operator platform for greater comfort and smoother ride

## Operator-friendly and smart by design.

At a 10.3' (3.15 m) width of cut, the all out-front deck design on the Groundsmaster 4100-D and 4110-D lets you easily see what you are cutting. The Smart Power® technology coupled with the HybridDrive™ cutting deck system delivers optimal power to the cutting blades – efficiently cutting grass even in the toughest conditions. The SmartCool® auto-reversing fan system automatically blows chaff off the radiator intake screen making operation more productive. With their excellent trimming capability, and an ability to mow a 0" uncut circle, you'll maneuver around obstacles with ease. The parallel hydraulic drive system assures full-time 4-wheel drive, allowing you to mow with confidence, even on hills and wet grass.



Groundsmaster® 4110-D



Groundsmaster® 4100-D

SMART POWER

Call your Toro distributor at 800-803-8676



# Groundsmaster® 4100-D/4110-D Specifications


	GROUNDMASTER 4100-D, MODEL 30608	GROUNDMASTER 4110-D, MODEL 30644															
<b>ENGINE</b>	Yanmar® 4-cylinder, liquid-cooled, turbo-charged diesel. 127 cu. in. (2.1 liter) displacement. Engine rated at 55 hp (41 kW) net and 125 ft.-lbs. (169 Nm) torque at 2,000 rpm. 8 quart (7.6 liter) oil capacity. EPA Tier IV Final Compliant.																
<b>AIR CLEANER</b>	Dry, replaceable primary and safety elements.																
<b>RADIATOR</b>	Rear-mount, cross-flow. 6.3 fins per inch. 9 quart (8.5 liter) capacity.																
<b>FUEL CAPACITY</b>	21 gallons (79.5 liters) diesel fuel. Biodiesel-Ready for use up to B-20 (20% biodiesel and 80% petroleum blend)																
<b>TRACTION DRIVE</b>	Parallel hydrostatic, closed loop system with full-time 4WD. Forward/reverse in low (mow) and high (transport) range with full-time, automatic traction assist (forward only) optional on Groundsmaster 4100-D models. Variable displacement piston pump with electronic servo control powers dual speed displacement piston motor drive into double reduction planetary in front, and mechanical axle in rear. Smart Power® feature controls traction speed to maintain optimal cutting blade speed.																
<b>HYDRAULICS/COOLING</b>	8.75 gallon (33.1 liter) capacity with 10 micron remote spin-on filter. Single pass cooler, 6.3 fins per inch, SmartCool® variable speed radiator cooling fan with automatic (based on coolant and oil temps) and manual reversing capabilities.																
<b>DIAGNOSTICS</b>	Diagnostic pressure test ports: forward and reverse traction, left, center and right decks, reverse 4WD, lift, steering, charge and deck counterbalance circuits.																
<b>GROUND SPEED</b>	<b>Transport:</b> 0-16.2 mph (0-26.1 km/h) forward, 0-8.1 mph (0-13 km/h) reverse. <b>Mow:</b> 0-8.3 mph (0-13.4 km/h) forward, 0-4 mph (0-6.4 km/h) reverse.																
<b>TIRES</b>	Front: 26 x 12-12, 6-ply tubeless Multi-Trac. Rear: 20 x 10-10, 6-ply tubeless Multi-Trac.																
<b>MAIN FRAME</b>	All welded formed-steel frame with integral tie-down anchors.																
<b>BRAKES</b>	Mechanically actuated, internal wet disc brakes on input to each planetary drive. Individual foot-operated steering brake control of left and right wheel. Lock pedals together and latch to engage parking brake.																
<b>SEAT</b>	4-way adjustable, right armrest travels with seat and suspension.																
<b>STEERING</b>	Power steering with dedicated power source. Steering wheel tilts to desired operator position. Uncut circle: 0" diameter.																
<b>INSTRUMENTATION</b>	<b>InfoCenter™:</b> Onboard LCD display shows gauges, alerts/faults, service reminders, electrical system diagnostics. Indicates fuel level, coolant temp, intake temperature, low oil pressure, alternator, engine hours, engine rpm, hydraulic oil temperature, voltage.																
<b>CONTROLS</b>	Tilt steering, ignition switch, throttle switch, foot-operated traction pedal, lockable individual brake pedals, parking brake lock, mow/transport speed selector switch, 3, two position switches for individual deck lift/lower, counterbalance adjustment, tow valves, cup holder, toolbox, radio holder, fan switch and 12-volt power outlet.																
<b>CRUISE CONTROL</b>	Standard																
<b>ELECTRICAL</b>	12-volt, 690 cold cranking amps battery, 80 amp alternator. Overload protection with automotive type fuses.																
<b>INTERLOCKS</b>	Prevents engine from starting unless traction pedal is in neutral and deck is disengaged. If operator leaves seat while moving or deck is engaged, traction and/or deck stops, InfoCenter alarms and gives message. Mowing only permitted in low range. Traction not allowed if parking brake engaged and pedal moved out of neutral, InfoCenter alarms and gives message. Deck transport latches.																
<b>GROUND CLEARANCE</b>	6.5" (16.5 cm)																
<b>OVERALL DIMENSIONS</b>	<table border="1"> <thead> <tr> <th>Height</th> <th>Length</th> <th>Width</th> <th>Transport Width</th> <th>Wheelbase</th> </tr> </thead> <tbody> <tr> <td>85.3" (216.7 cm) w/ ROPS up</td> <td>144" (366 cm)</td> <td>127" (323 cm)</td> <td>71" (180 cm)</td> <td>55.5" (140 cm)</td> </tr> <tr> <td>93.3" (237 cm) w/ cab</td> <td>w/ decks down</td> <td>w/ decks down</td> <td>@ 2" (5 cm) HOC</td> <td></td> </tr> </tbody> </table>	Height	Length	Width	Transport Width	Wheelbase	85.3" (216.7 cm) w/ ROPS up	144" (366 cm)	127" (323 cm)	71" (180 cm)	55.5" (140 cm)	93.3" (237 cm) w/ cab	w/ decks down	w/ decks down	@ 2" (5 cm) HOC		
Height	Length	Width	Transport Width	Wheelbase													
85.3" (216.7 cm) w/ ROPS up	144" (366 cm)	127" (323 cm)	71" (180 cm)	55.5" (140 cm)													
93.3" (237 cm) w/ cab	w/ decks down	w/ decks down	@ 2" (5 cm) HOC														
<b>WEIGHT</b>	4237 lbs. (1922 kg) w/ full fluids (GM4100-D).	4890 lbs. (2218 kg) w/ full fluids (GM4110-D).															
<b>SAFETY CAB (4110)</b>	<b>MODEL 30644:</b> ROPS certified cab with heat, AC and the following standard features: climate system pressurized cab, heavy-duty pantograph front windshield wiper and washer, front windshield has 38" of visibility, interior mirror, fold away exterior side mirrors, molded front fenders, right and left doors and rear window have tinted (50%) glass, front and rear windows open, quick release window latches act as emergency exit, rubber sound isolator cab mounts and upholstered interior panels and headliner, textured neoprene floor mat, interior dome light.																
<b>SAFETY</b>	Complies with American National Standards Institute (ANSI B71.4-2012) and applicable ISO EN 5395 (CE) standards (machine directive 89/392, 91/368, 93/44, 84/538, 89/336) requirements; Optional lights. Meets ANSI/SAE 5279.12 (Lighting and Marking of Agricultural Equipment on Highways). Foldable ROPS, ISO 21299 certified.																
<b>WARRANTY</b>	Two-year limited warranty. Refer to operator's manual for further details.																
<b>ACCESSORIES</b>	Work light, LED road lights consisting of dual taillights, dual headlights, slow moving vehicle sign, turn signal, flasher and lights, sunshade, beacon, slope sensor																
<b>CUTTING DECK</b>																	
<b>WIDTH OF CUT</b>	Overall: 124" (315 cm), Center deck section: 54" (137.1 cm), Two 37" (93 cm) width of cut wings. 89" (226 cm) width of cut with one wing up.																
<b>MOWING RATE</b>	Mows up to 10.4 acres/hr (4.2 hectares/hr) at 8.3 mph (13.4 km/hr). Assumes no overlap or stops. **Assumes max mow speed and 100% efficiency. Actual mowing rates may vary depending on operator and conditions.																
<b>CONSTRUCTION</b>	Welded .100" (2.5 mm) high-strength steel with steel 7 and 10-gauge channel and plate reinforcements.																
<b>DECK DRIVE</b>	Direct mounted hydraulic motor into spindle. Remaining spindle(s) driven by individual B section Kevlar belt. Quick-release belt covers.																
<b>HEIGHT-OF-CUT</b>	1"-5" (25-127 mm) in .5" (13 mm) increments.																
<b>SPINDLES</b>	1.25" (3.17 cm) diameter spindle shafts, 9" (22.9 cm) diameter conical ductile iron housing, and 2 greaseable tapered roller bearings.																
<b>BLADES</b>	19" (48.3 cm) long, 2.5" (6.4 cm) wide, .25" (.64 cm) thick.																
<b>CASTER WHEELS</b>	8 x 3.50-4, 4-ply, smooth, pneumatic, sealed precision ball bearings.																
<b>GROUND FOLLOWING</b>	6" anti-scalp cups on each blade, adjustable skids, 3 anti-scalp rollers on front deck and 1 on each wing.																
<b>WING PROTECTION</b>	Impact absorption device on each wing deck.																
<b>MULCHING KIT</b>	Model 30419.																
<b>SKIDS</b>	Reversible polymeric.																

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.






# Groundsmaster® 4100-D & 4110-D Attachment Specifications

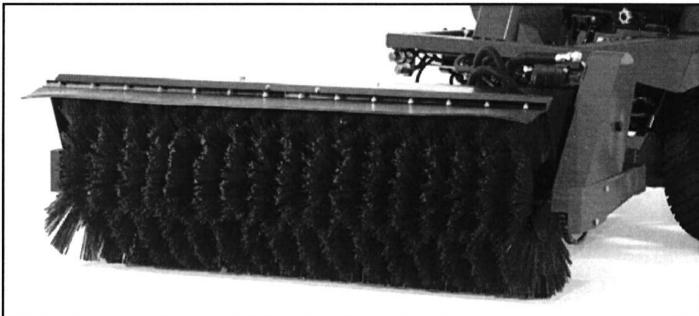

<b>ROTARY BROOM, MB MODEL HCT</b>	
<b>TYPE</b>	Windrow type, front mounted hydraulic broom with dual motors. Electric/hydraulic angling, 30° left and right.
<b>BROOM SIZE</b>	32" (81 cm) diameter x 60" (153 cm) wide.
<b>BRUSH</b>	Sectional brush with combination polypropylene/wire radial segments.
<b>WEIGHT</b>	460 lbs. (209 kg)
<b>OPTIONS</b>	Dirt Deflector, Storage Stands.

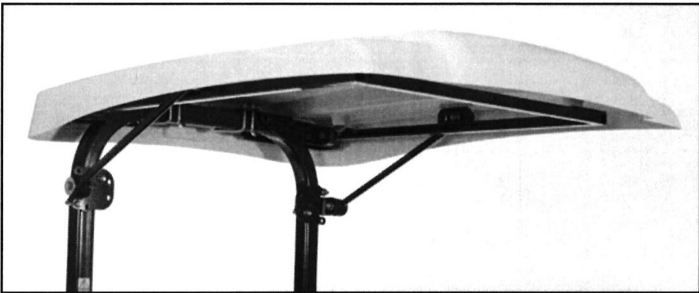

<b>SUNSHADE</b>	
<b>UNIVERSAL MOUNT SUNSHADE</b>	White, Model 30669 / Red, Model 30671



<b>SNOWTHROWER ERSKINE MODEL 2000</b>	
<b>STAGE</b>	2
<b>CLEARING WIDTH</b>	61" (155 cm)
<b>SNOW CUT DEPTH</b>	29" (74 cm)
<b>CUTTING EDGE</b>	3/8" x 3" (9.5 mm x 7.6 cm) bolt-on
<b>SKID SHOES</b>	Adjustable
<b>AUGER DIAMETER</b>	16" (41 cm) open flight
<b>FAN DIAMETER</b>	20" (51 cm) 4-blade
<b>CHUTE ROTATION</b>	Hydraulic 270°
<b>SHEAR PROTECTION</b>	Pressure relief
<b>THROWING DISTANCE</b>	Up to 30' (9.14 m)
<b>APPROXIMATE SHIPPING WT.</b>	850 lbs. (386 kg)
<b>HOSES</b>	Included

\*Specifications and design subject to change without notice.

Note: The Toro Company does not manufacture or sell the snowthrower or rotary broom, nor does Toro guarantee these accessories in any manner whatsoever.



## The Toro Promise

### A Limited Warranty

*The Toro Company promises to repair your TORO GROUNDMASTER® MOWER and its originally purchased cutting unit, if defective in materials or workmanship. The following time periods from the date of purchase apply (special warranty terms, on certain components, may be offered through The Toro Company by the component manufacturers):*

**Two Years or 1500 operational hours,  
whichever comes first**

*The cost of parts, labor and transportation are included.*

If you feel your TORO Product is defective and wish to rely on The Toro Promise, the following procedure is recommended:

1. Contact your Authorized TORO Distributor or Commercial Dealer (the Yellow Pages of your telephone directory is a good reference source).
2. The TORO Distributor or Commercial Dealer will advise you on the arrangements that can be made to inspect and repair your product.
3. The TORO Distributor or Commercial Dealer will inspect the product and advise you whether the product is defective and, if so, make all repairs necessary to correct the defect without an extra charge to you.

If for any reason you are dissatisfied with the distributor's analysis of the defect or the service performed, you may contact us.

Write:

TORO Commercial Products Service Department  
8111 Lyndale Avenue South  
Minneapolis, MN 55420-1196

The above remedy of product defects through repair by an Authorized TORO Distributor or Commercial Dealer is the purchaser's sole remedy for any defect.

**THERE IS NO OTHER EXPRESS WARRANTY. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE ARE LIMITED TO THE DURATION OF THE EXPRESS WARRANTY.**

Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

This Warranty applies only to parts or components which are defective and does not cover repairs necessary due to normal wear, misuse, accidents, or lack of proper maintenance. Regular, routine maintenance of the unit to keep it in proper operating condition is the responsibility of the owner.

All warranty repairs reimbursable under The Toro Promise must be performed by an Authorized Toro Commercial Dealer or Distributor using Toro approved replacement parts.

Repairs or attempted repairs by anyone other than an Authorized TORO Distributor or Commercial Dealer are not reimbursable under the TORO Promise. In addition, these unauthorized repair attempts may result in additional malfunctions, the correction of which is not covered by warranty.

**THE TORO COMPANY IS NOT LIABLE FOR INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE USE OF THE PRODUCT INCLUDING ANY COST OR EXPENSE OF PROVIDING SUBSTITUTE EQUIPMENT OR SERVICE DURING PERIODS OF MALFUNCTION OR NON-USE.**

Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

#### COUNTRIES OTHER THAN THE UNITED STATES OR CANADA

Customers who have purchased TORO products exported from the United States or Canada should contact their TORO Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the TORO importer. If all other remedies fail, you may contact us at The Toro Company.