



PROBUILD - FLAGSTAFF
 1200 E BUTLER AVENUE
 FLAGSTAFF, AZ 86002-5902




Quote Name:	Benton Remod	Quote Number:	SQPDIC000195_1
Customer:	Reitz Builders	Created Date:	3/31/2021
Payment Terms:		Modified Date:	4/5/2021
Sales Representative:	Paul Malis Mobile: paul.malis@bldr.com	PO Number:	
Weighted Average:	U-Factor: .29, SHGC: .29, VT: .54	Total Windows:	6
Comments:		Total Doors:	
		Total Sq Ft:	94.00
		Total Perim Ft:	100
		Est. Delivery:	_____

For warranty information please visit www.milgard.com/warranty/

Billing Information	Shipping Information
Name: Reitz Builders	Name:
Address:	Address:
Phone:	Phone:
Fax:	Fax:
Email:	Email:

Line: 1	Location: REAR/SIDE	
Quantity: 2	Ultra C650, 3210U, SH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54	
	1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating	
	Tariff	
	Model = Single Hung	Item Total:
	Size = Net Frame: 41 1/2" x 52 1/2"	Line Total:
	Dimensions = Sash Height: One Half	
	Glass = 1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating with Gray EdgeGardMAX Spacer	
	Glazing = Dual Glaze with Breather Tube	
	Hardware = Black, Positive Action Lock	
	Screen = Standard with Fiberglass Mesh	
	Ratings = STC: 28, OITC: 22, PG: LC30	
	Clear Opening = W 39 5/16" x H 22 5/8" Sq. Ft. 6.18	
	Other Ratings = CPD: MIL-A-157-06166-00001	

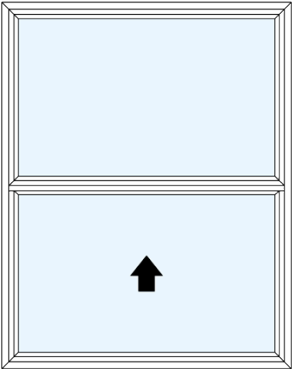


Viewed From Exterior

Customer Approval: _____

Line: 2 **Location:** FRONT
Quantity: 2 Ultra C650, 3210U, SH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54

1/8" SunCoat (Low-E) Tempered over 1/8" 4th Surface HP Coating Tempered
Tariff

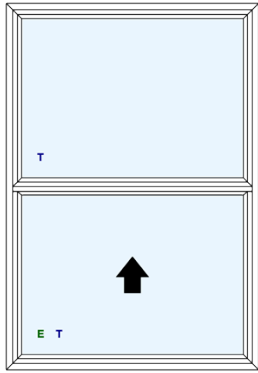

Viewed From Exterior


Model = Single Hung
Size = Net Frame: 39 1/4" x 57"
Dimensions = Sash Height: One Half
Glass = 1/8" SunCoat (Low-E) Tempered over 1/8" 4th Surface HP Coating Tempered with Gray EdgeGardMAX Spacer
Glazing = Dual Glaze with Breather Tube
Hardware = Black, Positive Action Lock
Screen = Standard with Fiberglass Mesh
Ratings = STC: 28, OITC: 22, PG: LC30
Clear Opening = W 37 1/16" x H 24 7/8" Sq. Ft. 6.4, Egress: Yes
Other Ratings = CPD: MIL-A-157-06166-00001

Item Total:
Line Total:

Customer Approval: _____

Line: 3 **Location:** FRONT
Quantity: 2 Ultra C650, 3210U, SH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54

1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating
Tariff

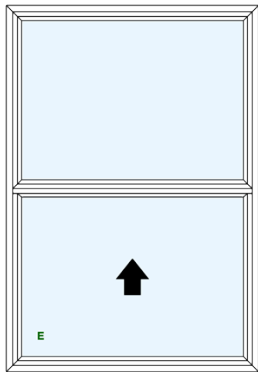

Viewed From Exterior

Model = Single Hung
Size = Net Frame: 39 1/4" x 57"
Dimensions = Sash Height: One Half
Glass = 1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating with Gray EdgeGardMAX Spacer
Glazing = Dual Glaze with Breather Tube
Hardware = Black, Positive Action Lock
Screen = Standard with Fiberglass Mesh
Ratings = STC: 28, OITC: 22, PG: LC30
Clear Opening = W 37 1/16" x H 24 7/8" Sq. Ft. 6.4, Egress: Yes
Other Ratings = CPD: MIL-A-157-06166-00001

Item Total:
Line Total:

Customer Approval: _____



PROBUILD - FLAGSTAFF
1200 E BUTLER AVENUE
FLAGSTAFF, AZ 86002-5902



Submitted By: _____

Accepted By: _____

Date: _____

For warranty information please visit www.milgard.com/warranty/

Please note that actual NFRC energy values may vary from those reported in CTB Quote Plus due to variations that may occur during the manufacturing process. In most cases variations will be minimal. Please contact your Milgard location with questions or concerns regarding this potential variation.

Painted Vinyl Note: For stucco applications, please follow the Milgard Stucco Tape Guidelines https://www.milgard.com/sites/default/files/u/u57666/stucco_taping_guidelines_0920.pdf.

Handing is viewed from outside looking in.

ADDITIONAL INFORMATION: