


Line: 1 **Location:** EAST SIDE
Quantity: 2 Ultra C650, 3210U, SH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54

1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating
 Tariff




Viewed From Exterior

Model = Single Hung
 Size = Net Frame: 39" x 48 3/4"
 Dimensions = Sash Height: One Half
 Glass = 1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating with Gray EdgeGardMAX Spacer
 Glazing = Dual Glaze with Breather Tube
 Hardware = Black, Positive Action Lock
 Screen = Standard with Fiberglass Mesh
 Ratings = STC: 28, OITC: 22, PG: LC30
 Clear Opening = W 36 13/16" x H 20 3/4" Sq. Ft. 5.3
 Other Ratings = CPD: MIL-A-157-06166-00001

Line: 2 **Location:** REAR
Quantity: 2 Ultra C650, 3210U, SH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54

1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating
 Tariff



Viewed From Exterior

Model = Single Hung
 Size = Net Frame: 40" x 49 3/4"
 Dimensions = Sash Height: One Half
 Glass = 1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating with Gray EdgeGardMAX Spacer
 Glazing = Dual Glaze with Breather Tube
 Hardware = Black, Positive Action Lock
 Screen = Standard with Fiberglass Mesh
 Ratings = STC: 28, OITC: 22, PG: LC30
 Clear Opening = W 37 13/16" x H 21 1/4" Sq. Ft. 5.58
 Other Ratings = CPD: MIL-A-157-06166-00001

Line: 3 **Location:** FRONT LEFT
Quantity: 1 Ultra C650, 3210U, DSH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54

Custom Glass Option
 Tariff




Viewed From Exterior

Model = Single Hung Two Wide
 Size = Net Frame: 83 1/2" x 55 1/4"
 Dimensions = Sash Height: One Half
 Composite Method = Vertical: MULL
 Glass = SH 1.1 Lower Left Vent, SH 1.1 Upper Left Fixed: 1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating with Gray EdgeGardMAX Spacer, SH 1.2 Lower Right Vent, SH 1.2 Upper Right Fixed: 1/8" SunCoat (Low-E) Tempered over 1/8" 4th Surface HP Coating Tempered with Gray EdgeGardMAX Spacer
 Glazing = Dual Glaze with Breather Tube
 Hardware = Black, Positive Action Lock
 Other Options = Low Profile Wood Mull Cap, Cut to Window Finish Size
 Screen = Standard with Fiberglass Mesh
 Ratings = STC: 28, OITC: 22, PG: LC30, Mull Bar: DP45
 Clear Opening = W 39 5/16" x H 24" Sq. Ft. 6.55, Egress: Yes
 Other Ratings = CPD: MIL-A-157-06166-00001

Line: 4
Quantity: 1

Location: FRONT RIGHT
Ultra C650, 3210U, DSH, No Fin (Block Frame), Ext Black Bean / Int Black Bean, U-Factor: .29, SHGC: .29, VT: .54

Custom Glass Option
Tariff

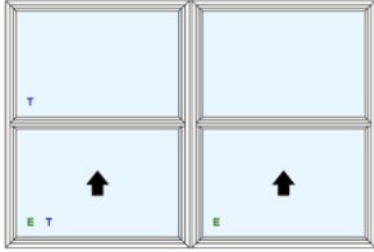

Viewed From Exterior

Model = Single Hung Two Wide
Size = Net Frame: 82 1/2" x 55 1/4"
Dimensions = Sash Height: One Half
Composite Method = Vertical: MULL
Glass = SH 1.1 Lower Left Vent, SH 1.1 Upper Left Fixed: 1/8" SunCoat (Low-E) Tempered over 1/8" 4th Surface HP Coating Tempered with Gray EdgeGardMAX Spacer, SH 1.2 Lower Right Vent, SH 1.2 Upper Right Fixed: 1/8" SunCoat (Low-E) over 1/8" 4th Surface HP Coating with Gray EdgeGardMAX Spacer
Glazing = Dual Glaze with Breather Tube
Hardware = Black, Positive Action Lock
Other Options = Low Profile Wood Mull Cap, Cut to Window Finish Size
Screen = Standard with Fiberglass Mesh
Ratings = STC: 28, OITC: 22, PG: LC30, Mull Bar: DP45
Clear Opening = W 38 13/16" x H 24" Sq. Ft. 6.47, Egress: Yes
Other Ratings = CPD: MIL-A-157-06166-00001

INTERIOR



White
with any exterior
color



Harmony
with Harmony
exterior only



Bark
with Bark
exterior only



Black Bean
with Black Bean
exterior only

EXTERIOR



Frost



Sand



Harmony




Bark



Cinnamon



Fern



Black Bean