

CCSJ #		0914-24-029	
AFA CSJs		0914-24-029	
District #		AFA ID	
Code Chart 64 #			
Project Name		RAILROAD REPLANKING, INSTALLATION OF SIGNS AND MARKINGS	

Attachment B SCOPE OF WORK (SOW)

- The Railroad or its Contractor shall remove the existing crossbucks and dispose of foundations.
- The Railroad or its Contractor shall install flashing lights with gates.
- The Railroad or its Contractor shall install climate-controlled signal cabin with constant warning technology.
- The Railroad or its Contractor shall install a new 24' concrete crossing surface.
- The Railroad or its Contractor shall furnish, install and maintain crossbuck (R15-1) signs, number of track (R15-2P) signs when needed, emergency notification (ENS, I-13) signs, and sign mounting brackets.
- The State or its Contractor will furnish, install and/or replace the appropriate pavement markings in accordance with the Texas Manual on Uniform Traffic Control Devices (TMUTCD) and the attached standard sheets.
- The State or its Contractor will furnish, install and/or replace the following signs in accordance with the TMUTCD and the Standard Highway Signs Design Manual (SHSD): (1) W10-1, (2) W10-3,(1) W10-11b.
- The State will provide traffic control in accordance with the guidelines in the TMUTCD and the attached standard sheets for the installation of signage and/or pavement markings.
- The State and the County agree maintain pavement markings and advance warning signs under their jurisdiction in accordance with the TMUTCD and as shown on the attached standard sheets.
- The State and the County agree to trim and maintain trees and vegetation along roadway approaches within their jurisdiction for adequate visibility of the crossing signals and advance warning signs as installed.


NOTES

The Railroad or its Contractor shall provide traffic control in accordance with the guidelines in the Texas Manual on Uniform Traffic Control Devices and the attached standard sheets for the installation or upgrade of railroad warning devices.

The Railroad or its Contractor shall provide traffic control in accordance with the guidelines in the Texas Manual on Uniform Traffic Control Devices (TMUTCD) and the attached standard sheets for the installation of the railroad crossing surface.

Page 2 of 5

CCSJ #	0914-24-029		
AFA CSJs	0914-24-029		
District #		AFA ID	
Code Chart 64 #			
Project Name	RAILROAD REPLANKING, INSTALLATION OF SIGNS AND MARKINGS		

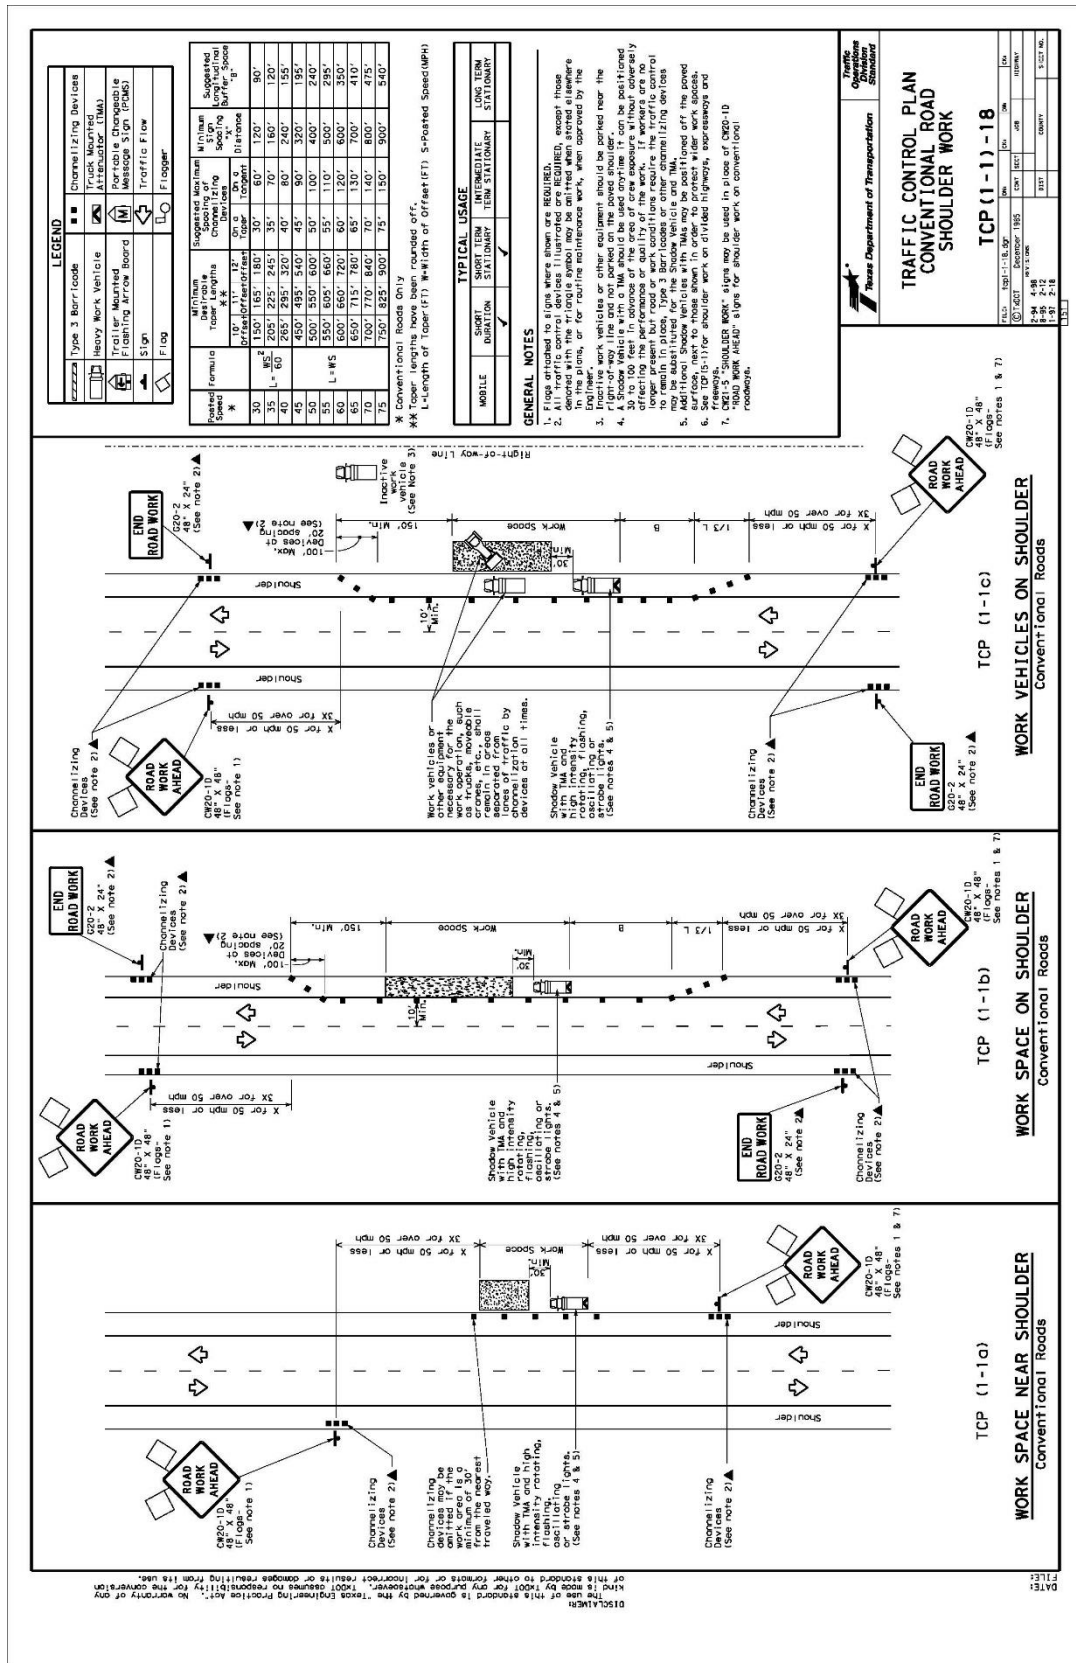

AFA
Section 130 Maintenance