












THIS DOCUMENT, TOGETHER WITH THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE OF AND IMPROPER RELIANCE ON THIS DOCUMENT WITHOUT WRITTEN AUTHORIZATION AND ADOPTION BY EDC, INC. SHALL BE WITHOUT LIABILITY TO EDC, INC.



**d<sup>series</sup>**

## D-Series Size 2 LED Area Luminaire

Catalog Number: \_\_\_\_\_  
Notes: \_\_\_\_\_  
Type: \_\_\_\_\_

**Specifications**


EPA: 1.1 ft<sup>2</sup> (0.10 m<sup>2</sup>)

Length: 40" (101.6 cm)

Width: 15" (38.1 cm)

Height: 7-1/4" (18.4 cm)

Weight (max): 36 lbs (16.3 kg)

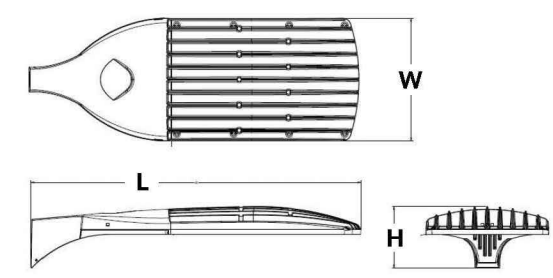

**A+ Capable Luminaire**

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a **shaded background**. DTL DLU equipped luminaires meet the A+ specification for luminaires to photocontrol interoperability1
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

- See ordering tree for details.
- A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately. [Link to Roam](#); [Link to DTL DLU](#)

**Ordering Information** EXAMPLE: DSX2 LED P7 T3M MVOLT SPA DDBXD

Series	LEDs	Color temperature	Distribution	Voltage	Mounting	Control Options
DSX2 LED	Forward optics	30K 3000K	T1S Type I Short	T5V5 Type V Very Short	MVOLT <sup>1</sup>	<b>Shipped included</b> SPA Square pole mounting RPA Round pole mounting NBA Not bracket SPINBA Square pole universal mounting adapter <sup>4</sup> RPINBA Round pole universal mounting adapter <sup>4</sup>
		40K 4000K	T2S Type II Short	T5S Type V Short	120V <sup>1</sup>	
		50K 5000K	T2M Type II Medium	T5M Type V Medium	208V <sup>1</sup>	
		AMBPC Amber phosphor converter <sup>2</sup>	T3S Type III Short	T5W Type V Wide	240V <sup>1</sup>	
		T3M Type III Medium	BLC Backlight control <sup>3</sup>	277V <sup>1</sup>		
		T4M Type IV Medium	LCCO Left corner cutoff <sup>3</sup>	347V <sup>1,2</sup>		
	Rotated optics <sup>1</sup>	T1M Type I Medium	LCCO Left corner cutoff <sup>3</sup>	347V <sup>1,2</sup>	<b>Shipped separately</b> KMA8 DDBXD II Right arm mounting bracket adapter (type II finish) <sup>5</sup>	
		P10 P13	T1M Forward Throw Medium	RCCO Right corner cutoff <sup>3</sup>		480V <sup>1,2</sup>
		P11 P14	T2M Type II Medium	RCCO Right corner cutoff <sup>3</sup>		480V <sup>1,2</sup>
		P12	T2M Type II Medium	RCCO Right corner cutoff <sup>3</sup>		480V <sup>1,2</sup>
			T3M Type III Medium	RCCO Right corner cutoff <sup>3</sup>		480V <sup>1,2</sup>
			T4M Type IV Medium	RCCO Right corner cutoff <sup>3</sup>		480V <sup>1,2</sup>

**Control options**

Shipped installed	Shipped separately	Other options	Finish
NUTAR2 r-light iLR generation 2 enabled <sup>6</sup>	PRHFCV Bi-level motion sensor, 15'-30" mounting height, ambient sensor enabled at 16" <sup>1,2</sup>	HS House-side shield <sup>8</sup>	DDBD Dark bronze
PER NEMA twist-lock receptacle only (no controls) <sup>10</sup>	BL30 Bi-level switched dimming, 30% <sup>10,11</sup>	DF Double fuse (238, 240, 480V) <sup>1</sup>	DBLD Black
PERS Five-wire receptacle only (no controls) <sup>10,11</sup>	BL30 Bi-level switched dimming, 50% <sup>10,11</sup>	LNB Left-hand optics <sup>1</sup>	DNAXD Natural aluminum
PER7 Seven-wire receptacle only (no controls) <sup>10,11</sup>	PRMTD50 Part right, dim 5 hrs <sup>1,2</sup>	DRD0D Textured dark bronze	DWHD White
DMG 0-10V dimming driver (not back of housing for external control) (no controls) <sup>10,11</sup>	PRMTD50 Part right, dim 5 hrs <sup>1,2</sup>	DRD5D Textured dark bronze	DBLD Black
DS Dual switching <sup>10,11</sup>	PRMTD50 Part right, dim 5 hrs <sup>1,2</sup>	RWB Right-hand optics <sup>1</sup>	DWHD White
PHH Bi-level motion/ambient sensor, 15-30" mounting height, ambient sensor enabled at 16" <sup>1,2</sup>	PRMTD50 Part right, dim 5 hrs <sup>1,2</sup>	DNAXD Textured natural aluminum	DWHD White
PHH Network Bi-Level motion/ambient sensor <sup>8</sup>	FAD Field Adjustable Output <sup>12</sup>	DNWGD Textured natural aluminum	DWHD White

**Other Options**


Shipped installed	Shipped separately	Field Installed
SF Single fuse (120, 277, 347V) <sup>1</sup>	BSW Bi-level dimmer spikes	DDBD Dark bronze
DF Double fuse (208, 240, 480V) <sup>1</sup>	WG Wire guard	DBLD Black
HS House-side shield <sup>8</sup>	WG Wire guard	DNAXD Natural aluminum
SPO Separate surge protection <sup>13</sup>	WG Wire guard	DWHD White
		DNWGD Textured natural aluminum

**Ordering Information** EXAMPLE: DSXW2 LED 30C 700 40K T3M MVOLT DDBTXD

Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW2 LED	20 LEDs (three engines)	350 350mA	30K 3000K	T2S Type II Short	MVOLT <sup>1</sup>	<b>Shipped included</b> (blank) Surface mounting bracket	<b>Shipped installed</b> PE Photoelectric cell, button type <sup>7</sup> PER NEMA twist-lock receptacle only (control ordered separately) <sup>10</sup> PERS Five-wire receptacle only (control ordered separately) <sup>10</sup> PER7 Seven-wire receptacle only (control ordered separately) <sup>10</sup> DMG 0-10V dimming driver (control ordered separately) <sup>10</sup> PHR 180° motion/ambient light sensor, <15' mtg ht. <sup>10,11</sup> PHH 180° motion/ambient light sensor, 15-30' mtg ht. <sup>10,11</sup> PHHFCV Motion/ambient sensor, 0-15' mounting height, ambient sensor enabled at 16" <sup>1,2</sup> PHHFCV Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 16" <sup>1,2</sup>
		530 530mA	40K 4000K	T2M Type II Medium	120V <sup>1</sup>		
		700 700mA	50K 5000K	T2S Type II Short	208V <sup>1</sup>		
		1000 1000mA (1 A)	AMBPC Amber phosphor converter <sup>2</sup>	T3M Type III Medium	240V <sup>1</sup>		
			T3M Type III Medium	BLC Backlight control <sup>3</sup>	277V <sup>1</sup>		
			T4M Type IV Medium	LCCO Left corner cutoff <sup>3</sup>	347V <sup>1,2</sup>		
	30 LEDs (three engines)	350 350mA	30K 3000K	T2S Type II Short	MVOLT <sup>1</sup>	<b>Shipped separately</b> BBW Surface-mounted back box (for control entry)	
		530 530mA	40K 4000K	T2M Type II Medium	120V <sup>1</sup>		
		700 700mA	50K 5000K	T2S Type II Short	208V <sup>1</sup>		
		1000 1000mA (1 A)	AMBPC Amber phosphor converter <sup>2</sup>	T3M Type III Medium	240V <sup>1</sup>		
			T3M Type III Medium	BLC Backlight control <sup>3</sup>	277V <sup>1</sup>		
			T4M Type IV Medium	LCCO Left corner cutoff <sup>3</sup>	347V <sup>1,2</sup>		

**Other Options**

Shipped installed	Shipped separately	Field Installed
SF Single fuse (120, 277, 347V) <sup>1</sup>	BSW Bi-level dimmer spikes	DDBD Dark bronze
DF Double fuse (208, 240, 480V) <sup>1</sup>	WG Wire guard	DBLD Black
HS House-side shield <sup>8</sup>	WG Wire guard	DNAXD Natural aluminum
SPO Separate surge protection <sup>13</sup>	WG Wire guard	DWHD White
		DNWGD Textured natural aluminum



**d<sup>series</sup>**

## D-Series Size 2 LED Wall Luminaire

Catalog Number: \_\_\_\_\_  
Notes: \_\_\_\_\_  
Type: \_\_\_\_\_


**Specifications**

Width: 18-1/2" (47.0 cm)

Weight: 21 lbs (9.5 kg)

Depth: 10" (25.4 cm)

Height: 7-5/8" (19.4 cm)

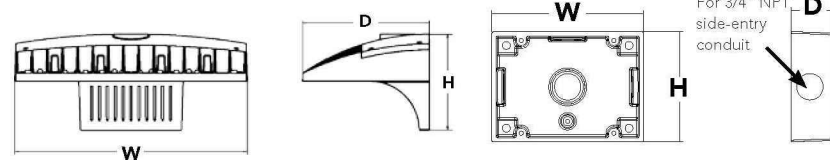

**A+ Capable Luminaire**

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a **shaded background**. DTL DLU equipped luminaires meet the A+ specification for luminaires to photocontrol interoperability1
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).


- See ordering tree for details.
- A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately. [Link to Roam](#); [Link to DTL DLU](#)

**Ordering Information** EXAMPLE: DSXW2 LED 30C 700 40K T3M MVOLT DDBTXD

Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW2 LED	20 LEDs (three engines)	350 350mA	30K 3000K	T2S Type II Short	MVOLT <sup>1</sup>	<b>Shipped included</b> (blank) Surface mounting bracket	<b>Shipped installed</b> PE Photoelectric cell, button type <sup>7</sup> PER NEMA twist-lock receptacle only (control ordered separately) <sup>10</sup> PERS Five-wire receptacle only (control ordered separately) <sup>10</sup> PER7 Seven-wire receptacle only (control ordered separately) <sup>10</sup> DMG 0-10V dimming driver (control ordered separately) <sup>10</sup> PHR 180° motion/ambient light sensor, <15' mtg ht. <sup>10,11</sup> PHH 180° motion/ambient light sensor, 15-30' mtg ht. <sup>10,11</sup> PHHFCV Motion/ambient sensor, 0-15' mounting height, ambient sensor enabled at 16" <sup>1,2</sup> PHHFCV Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 16" <sup>1,2</sup>
		530 530mA	40K 4000K	T2M Type II Medium	120V <sup>1</sup>		
		700 700mA	50K 5000K	T2S Type II Short	208V <sup>1</sup>		
		1000 1000mA (1 A)	AMBPC Amber phosphor converter <sup>2</sup>	T3M Type III Medium	240V <sup>1</sup>		
			T3M Type III Medium	BLC Backlight control <sup>3</sup>	277V <sup>1</sup>		
			T4M Type IV Medium	LCCO Left corner cutoff <sup>3</sup>	347V <sup>1,2</sup>		
	30 LEDs (three engines)	350 350mA	30K 3000K	T2S Type II Short	MVOLT <sup>1</sup>	<b>Shipped separately</b> BBW Surface-mounted back box (for control entry)	
		530 530mA	40K 4000K	T2M Type II Medium	120V <sup>1</sup>		
		700 700mA	50K 5000K	T2S Type II Short	208V <sup>1</sup>		
		1000 1000mA (1 A)	AMBPC Amber phosphor converter <sup>2</sup>	T3M Type III Medium	240V <sup>1</sup>		
			T3M Type III Medium	BLC Backlight control <sup>3</sup>	277V <sup>1</sup>		
			T4M Type IV Medium	LCCO Left corner cutoff <sup>3</sup>	347V <sup>1,2</sup>		

**Other Options**

Shipped installed	Shipped separately	Field Installed
SF Single fuse (120, 277, 347V) <sup>1</sup>	BSW Bi-level dimmer spikes	DDBD Dark bronze
DF Double fuse (208, 240, 480V) <sup>1</sup>	WG Wire guard	DBLD Black
HS House-side shield <sup>8</sup>	WG Wire guard	DNAXD Natural aluminum
SPO Separate surge protection <sup>13</sup>	WG Wire guard	DWHD White
		DNWGD Textured natural aluminum

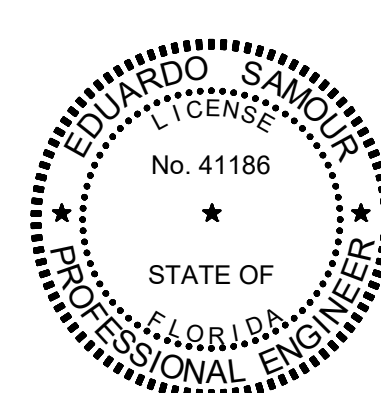

No. 41186

STATE OF FLORIDA  
PROFESSIONAL ENGINEER


**E & C Engineers, Inc.**

Cent. of Auth # 26558  
2755 Vista Parkway Suite 1-3  
West Palm Beach, FL 33411  
Tel: (561) 712-1149  
email: ed@ecengineers.com

THIS ITEM HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY EDUARDO SAMOUR, P.E. USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Eduardo (Ed) Samour, P.E.  
Registered Electrical Engineer  
P.E. # 41186  
date: 4.28.2018

E&C JOB# 18-3134

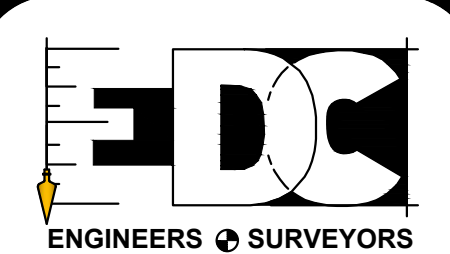

**ENGINEERS & SURVEYORS**

PORT SAINT LUCIE OFFICE  
10250 SW VILLAGE PARKWAY - SUITE 201  
PORT SAINT LUCIE, FL 34987  
772-462-2455  
www.edc-inc.com

F.B.P.E. CERTIFICATE OF AUTHORIZATION 8095  
L.B. CERTIFICATE OF AUTHORIZATION 8096

DESIGNED BY	VERIFIED	DRAWN BY	FILE NAME	PHMS	LAYOUT	SCALE	AS SHOWN	DATE

REVISION COMMENTS	
-------------------	--

**CAMPING WORLD**


**CONCEPTUAL**

**SITE PLAN**

FLORIDA

FORT PIERCE

R.J. KENNEDY, P.E. (DATE)  
#56218



10250 SW VILLAGE PARKWAY - SUITE 201  
PORT SAINT LUCIE, FL 34987  
772-462-2455

**PHM-6**

**6 OF 6**