

CITY OF CHANDLER
CHANGE ORDER NO. 1
DATE 11/9/2021

Change Order not valid until signed by both the City and the Contractor. Contractor's signature indicates agreement herewith, including any adjustments in the Contract Price or Contract Time.

Project Name: Airport Water Reclamation Facility Headworks Drain Piping
Project No.: WW2003.401
User Dept.: Public Works & Utilities NTP Date: July 13, 2021

TO: Garney Companies, Inc. 4435 E. Holmes Ave., Ste .102, Mesa AZ 85206
(CONTRACTOR) (Address)

Contractor must make the following changes to this contract: (Detail scope change (Exh. A) / cost breakdown (Exh. B), if needed)

This change order will replace two of the four 30 inch Ductile Iron Pipe running overhead between the Headworks Facility and the Pre-Stage Basin at the AWRP Reclamation Facility.

OWNER NAME & DATE APPROVAL: Paul Roy 11/8/2021

Changes result in the following revised contract amount and time:

Original contract amount:	\$391,070.00
Current contract amount, prior to this Change Order: (incl. previous Change Orders)	\$391,070.00
Net change resulting from this Change Order: (if over \$50,000 from contract amount previously approved by Council, Council approval is required)	\$636,059.26
Revised contract amount, including this Change Order:	\$244,989.26
Last contract amount approved by Council:	\$391,070.00
Change Order % of last contract amount approved by Council: (if over 10% of previous contract amount approved by Council, Council approval is required)	84%

Contract time or completion date prior to this Change Order: (incl. previous Change Orders)

180 or _____
Days Date

Net change resulting from this Change Order:

50
Days

Revised contract time OR completion date:

230 or _____
Days Date

SIGNATURE PAGE TO FOLLOW

THE ABOVE IS AGREED TO BY:

Garney Companies, Inc.
CONTRACTOR

al-h

Signature

11/17/2021
Date

awgreene@garney.com
Signer Email Address

Signer Email Address

For Change Orders of \$50,000 or more, or 10% or more of last contract amount approved by Council:

Approved by
Council on:

MAYOR

Date _____

Date _____

Recommended By:

Approved as to Form
(initials):

Andrew Goh, CIP City Engineer

Date _____

City Attorney by:

WMS

Attest: City Clerk:

Date _____

E-copy: Owner / Project Mgr. / Orig.- City Clerk

Exhibit A

Scope

Airport WRF Emergency Headworks Influent Pipe Replacement

1. JOC to perform the following project tasks:
 - a. Mobilize to site
 - b. Demo and disposal for 123' of existing 30" ductile iron pipe, including 6" vent lines.
 - i. Two (2) 30"x20" reducers and flowmeters can be salvaged and returned to the City of Chandler, upon request.
 - ii. Existing pipe straps will be salvaged and reinstalled.
 - iii. Proposal assumes use of owner supplied stop logs to isolate headworks influent lines as needed.
 - iv. OSHA safety standards require H2S to be at 5 PPM which is lower than current readings while working in the headworks. No additional costs were included should a supplemental venting system be needed.
 - c. Install new flanged 30" ductile iron pipe and 6" Sch80 PVC vent line.
 - i. Proposal includes 123' of 30" ductile iron pipe, all connections to be flanged.
 - ii. Proposal includes 40' of 6" Sch80 PVC pipe with fittings required for vent connections.
 - iii. Proposal includes a flexible coupler on each line.
 - iv. Proposal includes painting the exterior pipe as needed.
 - d. Repair any disturbed landscaping in the work area.
 - e. Test Pipe as necessary.
 - f. The conditions of the existing wall pipes are not known, no costs have been included for replacement of these, if needed.
2. Schedule is based on 3-weeks for procurement/delivery of material and 3-weeks for construction.
3. Specifically excluded from this proposal are: Building Permits, Engineering (including professional engineered design of pipe system and supports), remediation of contamination and hazardous material handling.
4. Garney has included an Owner's Allowance for \$25,000.
5. Table Bx – Subconsultants to include Murphy Painting for pipe coatings.



4435 E. Holmes Ave, Suite 102, Mesa AZ 85206

Phone: 602.470.0001

Fax: 602.470.0025

www.garney.com

EXHIBIT "B-1"
Job Order Cost Proposal
Summary Sheet

Chandler AWRP Headworks Emergency Influent Pipe Repair

Price of Subcontractor(s)		\$	16,950.00
Price of Subconsultant(s)		\$	-
General Conditions		\$	10,269.43
Construction Labor (if applicable)		\$	23,871.06
Construction Material and Equipment		\$	138,369.16
SUBTOTAL (NEGOTIATED PRICES):		\$	189,459.66
Overhead and Profit (Coefficient per Job Order Master Agreement)	0.08	\$	15,156.77
SUBTOTAL (NEGOTIATED PRICES + OVERHEAD AND PROFIT):		\$	204,616.43
Insurance, Bonds, & Taxes			
Sales Tax Percentage (Current Tax Rate)	5.07%	\$	10,374.05
General Liability Insurance Percentage (Actual Cost per Job Order)	1.35%	\$	2,762.32
Builder's Risk Insurance Percentage (Actual Cost per Job Order)	0.343%	\$	701.83
Payment Bond (Actual Cost per Job Order)	0.75%	\$	1,534.62
Performance Bond (Actual Cost per Job Order)	included	\$	-
SUBTOTAL (INSURANCE, BONDS, & TAXES):		\$	15,372.83
SUBTOTAL (NEGOTIATED PRICES + OVERHEAD AND PROFIT + INSURANCE, BONDS, & TAXES):		\$	219,989.26
City's Allowance	0.00%	\$	25,000.00
TOTAL JOB ORDER:		\$	244,989.26

Per the Job Order Master Agreement - This Fee Table includes all fees, costs, insurance and bond premiums, allowances, construction contingency, and taxes of any type necessary to fully, properly and timely perform and construct the Work. Also per the Job Order Master Agreement - For any portion of the Work which, either through this Contract, Change Order or otherwise, is performed and paid for on a cost, or time and materials basis, the costs may be reimbursed to JOC Contractor and chargeable against the Contract Price will be determined as set forth in MAG 109.5.

Comments (Spec/Dwg)	Description	Quantity	Unit	Total MH	MH/U	Labor		Matl		Subcontract		Equipment		Other		Total Cost
						Unit	Total	Unit	Total	Unit	Total	Unit	Total	Unit	Total	
CONSTRUCTION PROJECT MANAGER																
S	GENERAL SUPERINTENDENT	2.0	WKS	20.0	10,000											2,092
	TRUCK ON-HIGHWAY LIGHT DUTY 4X2 GAS	2.0	WKS	80.0	40,000											6,694
	SANITARY FACILITY	100.0	HRS				83.68		6,694							1,289
	DRINKING WATER	0.5	MOS	0.0			0.00		0				12.89		250.00	125
	SMALL TOOLS	1.0	LS	0.0			0.00		0				0		150.00	69
S	MISC. RENTAL	1.0	LS	0.0			0.00		0				0		0.00	0
	SAFETY/FIRST AID EQUIP	1.0	LS	0.0			0.00		0				0		0.00	0
DEMOLITION																
S	REMOVE EXISTING 30" PIPE	123.0	LF	153.8	1,250		44.60		5,486							5,486
	SAVE/AGE FLOW METER	2.0	EA	10.0	5,000		178.40		357							357
	ROLL-OFF DUMPSTER (30 CY)	3.0	EA	12.0	4,000		142.72		428						1,200.00	3,600
EQUIPMENT																
S	FORKLIFT, CATERPILLAR TL1055C	80.0	HRS										65.95		5,276	5,276
	BOOM LIFTS 60-80'	2.0	WK										1,206.00		2,412	2,412
PAINTINGS & COATINGS																
S		1.0	LS	0.0			0.00		0				16,950.00		16,950	16,950
																0

GENERAL PIPING REQUIREMENTS																
UNLOAD, STORE & INVENTORY - PIPING MATLS																
S	TEST PIPING	1.0	LS	12.0	12,000		523.16		523							523
	FLUSH & CLEAN PIPING	1.0	LS	8.0	8,000		348.77		349							349
S	SUPPLY & INSTALLATION OF BULKHEADS	4.0	EA	100.0	25,000		1,089.92		4,360							6,360

SUPPLY MATERIALS																
SUPPLY - DUCTILE IRON PIPING																
S		1.0	LS	0.0			0.00		0							121,653
	SUPPLY - PIPE SUPPORTS DESIGN SEISMIC	1.0	LS	0.0			0.00		0							5,000

ABOVE GRADE/INTERIOR PIPING:																
S	30" x 2" FLG x PE 401/PC	2.0	EA	25.3	12,630		550.63		1,101							1,101
	30" x 9" FLG x PE 401/PC 1-(6"RBO)	2.0	EA	27.9	13,950		608.17		1,216							1,216
S	30" x 17" 6" FLG x FLG 401/PC	4.0	EA	58.5	14,630		637.82		2,551							2,551
	30" x 15" 6" FLG x FLG 401/PC	2.0	EA	29.5	14,770		643.92		1,288							1,288
S	30" FLEX COUPLING, NON-REST, CS+HBE/NBR STD BO	2.0	EA	25.3	12,630		550.63		1,101							1,101
	30" FLG 3-HOLE HARNESS LUG	16.0	EA	0.0			0.00		0							0
S	30" FLG 3-HOLE HARNESS ROD	8.0	EA	0.0			0.00		0							0
	30" FLG HEX B/N SET (A307B-ZN) 28-1-1/4x7.5	6.0	EA	0.0			0.00		0							0
S	30" FLG HEX B/N SET (A307B-ZN) 28-1-1/4x6.5	10.0	EA	0.0			0.00		0							0
	30" FULL FACE FLANGE-TYPE GASKET (SBR)	4.0	EA	0.0			0.00		0							0
S	06" FLG HEX STUD/NUI SET (A307B-ZN) 8-3/4x3.50"	4.0	EA	0.0			0.00		0							0
	06" FULL FACE FLANGE-TYPE GASKET (SBR)	4.0	FT	0.0			0.00		0							0
S	PVC S80 06" X 20 FT PIPE PE	40.0	LF	7.2	0.180		7.85		314							1,034
	PVC S80 06" FLANGE VAN STONE STYLE	2.0	EA	4.3	2.150		93.73		187							490
S	PVC S80 06" 90 BEND SXS	1.0	QT	0.0			0.00		0							257
	PVC S80 PRIMER	1.0	QT	0.0			0.00		0							30
S	FREIGHT COST	1.0	EA	0.0			0.00		0						1,000.00	1,000



ADVANCING WATER

DESCRIPTION	STD RATE	OT RATE
SALARY: PROJECT MANAGER	\$ 104.60	\$ 156.90
SALARY: PROJECT ENGINEER	\$ 58.56	\$ 87.85
SALARY: SUPERINTENDENT	\$ 83.68	\$ 125.52
LEAD: FOREMAN / ASSISTANT SUPERINTENDENT	\$ 59.43	\$ 89.15
OPERATOR: TRACKHOE	\$ 44.38	\$ 66.57
OPERATOR: FRONT END LOADER	\$ 39.16	\$ 58.74
OPERATOR: BACKHOE	\$ 32.20	\$ 48.30
OPERATOR: CRANES	\$ 50.56	\$ 75.84
LABORER: PIPELAYER	\$ 39.16	\$ 58.74
LABORER: COMMON	\$ 32.20	\$ 48.30
CARPENTERS: FORM WORK	\$ 39.16	\$ 58.74
CARPENTERS: FINISH WORK	\$ 42.64	\$ 63.96
CARPENTERS: CEMENT FINISHER	\$ 35.68	\$ 53.52

*RATES ARE PER HOUR



ADVANCING WATER

DESCRIPTION	FHWA RATE	
EXCAVATOR: CATERPILLAR 390FL	\$	381.93
EXCAVATOR: CATERPILLAR 374DL	\$	297.96
EXCAVATOR: CATERPILLAR 349F	\$	241.86
EXCAVATOR: CATERPILLAR 336F	\$	173.30
EXCAVATOR: CATERPILLAR 335FLCR	\$	175.56
EXCAVATOR: CATERPILLAR 330FL	\$	136.91
EXCAVATOR: CATERPILLAR 325FL	\$	113.17
EXCAVATOR: CATERPILLAR 315FL	\$	100.14
EXCAVATOR: CATERPILLAR 308ECR	\$	56.36
WHEEL LOADER: DEERE 744KII	\$	117.72
WHEEL LOADER: DEERE 644K	\$	78.53
WHEEL LOADER: DEERE 624KII	\$	66.45
WHEEL LOADER: DEERE 544KII	\$	59.41
RUBBER TIRE BACKHOE: CATERPILLAR 420F2 IT	\$	47.35
RUBBER TIRE BACKHOE: DEERE 310K	\$	35.53
FORKLIFT: CATERPILLAR TL1055C	\$	65.95
SKID STEER LOADER: CATERPILLAR 299D2 XHP	\$	55.90
SKID STEER LOADER: CATERPILLAR 289D	\$	46.77
SKID STEER LOADER: CATERPILLAR 262D	\$	43.10
TRUCK: ON-HIGHWAY WATER TANKER	\$	49.52
TRUCK: ON-HIGHWAY LIGHT DUTY 4X4 DIESEL UTILITY	\$	26.37
TRUCK: ON-HIGHWAY LIGHT DUTY 4X2 GAS	\$	11.81
COMPACTOR: WACKER RT820	\$	38.88
COMPACTOR: MULTQUIP MVH158GH	\$	5.90
MISCELLANEOUS: PORTABLE LIGHT TOWERS	\$	9.89
MISCELLANEOUS: FXT50 400GAL VACUUM EXCAVATOR	\$	28.72

*RATES ARE PER HOUR



50-B West Hoover Avenue
Mesa, AZ 85210

Phone (480) 981-0185 - Fax (480) 981-1567

Safety - Pride - Integrity

November 9, 2021

Garney Construction, Inc.
4335 East Holmes, Suite 102
Mesa, AZ 85206

Attention: Alexander Greene, Project Manager/Estimator

Reference: Airport WRF, Piping Project
Chandler, AZ

Subject: Painting Proposal

The following is Murphy's scope of work and pricing for the Airport WRF,
Piping Project per the plans and specifications:

<u>Section</u>	<u>Description</u>
09900	Painting
Excludes:	1. shop applied coating 2. all buried pipes 3. contact with dissimilar metals coating

Scope:

- Painting 123' of 30" DIP Pipes and 20' of 6" PVC Pipes with valve, flanges etc.
- Painting to be performed after pipe installation

<u>Pricing:</u>	Labor:	\$9,635.00	(176 Man Hours)
	Material:	\$3,000.00	
	Equipment	<u>\$4,315.00</u>	(includes 40' manlift)
		\$16,950.00	

(Add 2.% if Performance/Payment Bonds are required)

Excluded from Scope of Work:

- Third Party Inspection
- Paint Mock-ups (project too small)
- Pipe I.D.
- Concrete painting or coating except as described above.
- Taxes on painting/coating material



50-B West Hoover Avenue

Mesa, AZ 85210

Phone (480) 981-0185 - Fax (480) 981-1567

Safety - Pride - Integrity

Page 02 of 02

Clarifications:

1. New Ferrous Metals to be shop primed "by others" and in accordance with Painting Section 09900.
2. Grinding of welds to the satisfaction of the inspector is by other.
3. Murphy is QP-1 and QP-2 Certified by SSPC The Society for Protective Coating

Addendums noted: n/a

Subcontractor Listed Information: AZ License No. 127921, Type L34 (Exp. 10-01-22)

Please call me if you have any questions regarding this proposal.

MURPHY INDUSTRIAL COATINGS, INC.

Gilles Bussieres

Gilles Bussieres

Southwest Operations Manager

gilles@murphy.ac

Alexander Greene

From: Jeff Cassano <JCassano@cbpiping.com>
Sent: Monday, November 8, 2021 2:35 PM
To: Alexander Greene; Jeff Cassano
Cc: Hunter Thomas
Subject: [EXTERNAL] PEND Release FW: Chandler AWRF Influent As-built Dimensions
Attachments: GAR DRWG Chandler Influent.pdf

Alex,

Math looks good, just will have to change up method of coupling harness from MJ Restraint Gland to 3-Hole Lugs and Rods, extra long to run span of 2' 0" and 8' 10 FLG X PE Spools

LINE	QUAN	UNIT	DESCRIPTION	COMMENTS
ALEX/GARNEY AZ CHANDLER AWRF TEMP				
10	2	EA	30"x 2' 0" FLG x PE 401/PC	
20	2	EA	30"x 9' 0" FLG x PE 401/PC 1- (6"FBO)	(1) 06" FBO @ 12:00" 36" FROM PE
30	4	EA	30"x 17' 6" FLG x FLG 401/PC	
40	2	EA	30"x 15' 6" FLG x FLG 401/PC	
50	2	EA	30" FLEX COUPLING; NON-REST, CS-FBE.NBR.STD BOLTS (32.00)	LEADTIME 2-3 WKS ARO, PPA
60	16	EA	30" FLG 3-HOLE HARNESS LUG,	LEADTIME 2-3 WKS ARO, PPA
70	8	EA	30" FLG 3-HOLE HARNESS ROD	(1) 1-1/4" X 12' ZINC (4) HVY HEX NUTS
80	4	EA	30" FLG HEX B/N SET (A307B-ZN) 28-1-1/4x7.5	FOR LUG
90	6	EA	30" FLG HEX B/N SET (A307B-ZN) 28-1-1/4x6.5	
100	10	EA	30" FULL FACE FLANGE-TYTE GASKET (SBR)	
110	2	EA	06" FLG HEX STUD/NUT SET (A307B-ZN) 8-3/4x3.50"	FOR PVC (8) FLAT WASHERS
120	2	EA	06" FLG HEX BOLT/NUT SET (A307B-ZN) 8-3/4x3.50"	FOR PVC (8) FLAT WASHERS
130	4	EA	06" FULL FACE FLANGE-TYTE GASKET (SBR)	
140				
150		EA	FREIGHT COST	
160				

Jeff Cassano | C&B Piping, Inc.
(602) 828-6742
jcassano@cbpiping.com

From: Alexander Greene <awgreene@garney.com>
Sent: Monday, November 8, 2021 1:37 PM
To: Jeff Cassano <JCassano@cbpiping.com>
Cc: Jim Symonds <jsymonds@garney.com>
Subject: RE: [EXTERNAL] PEND Release FW: Chandler AWRF Influent As-built Dimensions

Jeff,

I show that we would need spools in the following lengths:

- 2 Each 2'-0" FLxPE

- 2 Each 8'-10" FLxPE w/6" FBO
- 4 Each 17'-6" FLxFL
- 2 Each 15'-5 3/8" FLxFL
- 5/8" gap for gaskets, 1" gap at flexible coupling per run

If my math is correct, that runs us 1'-1" past the first column, 0'-9" past the second column for flanged connections and gives us an overall length of 61'-5". Let me know if you see any errors in my thoughts.

Thank you,

Alexander W. Greene

Project Manager

GARNEY CONSTRUCTION *Advancing Water*

CELL: 719.322.3308

ADDRESS: 4435 E. Holmes Avenue, Suite 102, Mesa AZ 85206 GARNEY.COM

From: Jeff Cassano <JCassano@cbpiping.com>

Sent: Monday, November 8, 2021 12:51 PM

To: Alexander Greene <awgreene@garney.com>; Jeff Cassano <JCassano@cbpiping.com>

Cc: Hunter Thomas <hthomas@cbpiping.com>

Subject: [EXTERNAL] PEND Release FW: Chandler AWRF Influent As-built Dimensions

Alex,

C&B has (7) 30" Pipe and plenty of Flanges, will have to order the FBO (Flange Boss Outlets) to complete *shipping from VA/PPA


I can have the (4) Spools complete in 2 WKS ARO, but will an additional week for the FBO, will have to wait until received to complete.

Qty-1 30" X FLG X FLG CL53, 401/PC

Qty-1 30" X FLG X FLG CL53, 401/PC

Qty-1 30" X FLG X FLG CL53, 401/PC

Qty-1 30" X FLG X FLG CL53, 401/PC

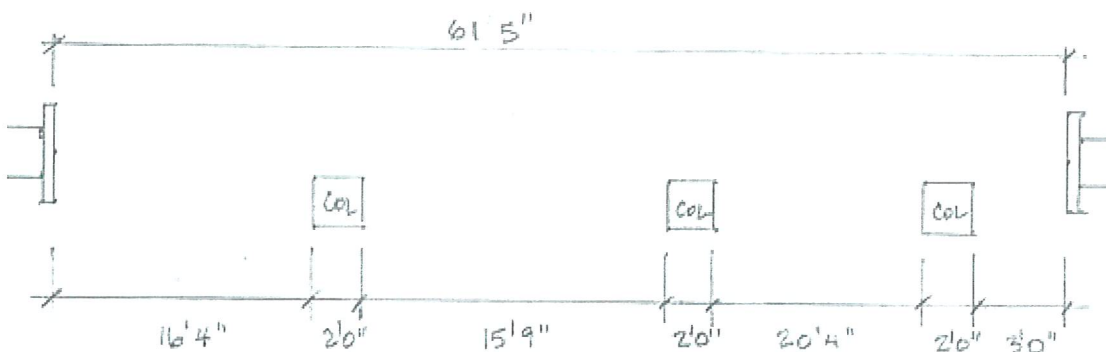

Hunter,

can you follow up on the 06" materials Alex is asking about noted below.

Cassano

From: Alexander Greene awgreene@garney.com
Sent: Monday, November 8, 2021 10:31 AM
To: Jeff Cassano JCassano@cbpiping.com
Subject: RE: [EXTERNAL] PEND Release FW: Chandler AWRF Influent As-built Dimensions

Jeff,

How are we sitting on this? Also, I would like to get a firm quantity for the Chandler 6" Ductile Iron as well.

Thank you,

Alexander W. Greene
Project Manager

GARNEY CONSTRUCTION *Advancing Water*

CELL: 719.322.3308

ADDRESS: 4435 E. Holmes Avenue, Suite 102, Mesa AZ 85206 GARNEY.COM

From: Alexander Greene <awgreene@garney.com>
Sent: Thursday, November 4, 2021 11:47 AM
To: Jeff Cassano <JCassano@cbpiping.com>
Subject: RE: [EXTERNAL] PEND Release FW: Chandler AWRF Influent As-built Dimensions

Jeff,

They are using strap on meters, there is no reduction...straight 30 across the span. We would need to line up joints around the support piers.

Thank you,

Alexander W. Greene
Project Manager

GARNEY CONSTRUCTION *Advancing Water*

CELL: 719.322.3308

ADDRESS: 4435 E. Holmes Avenue, Suite 102, Mesa AZ 85206 GARNEY.COM

From: Jeff Cassano <JCassano@cbpiping.com>
Sent: Thursday, November 4, 2021 10:45 AM
To: Alexander Greene <awgreene@garney.com>; Jeff Cassano <JCassano@cbpiping.com>
Subject: [EXTERNAL] PEND Release FW: Chandler AWRF Influent As-built Dimensions

External Message - Please be cautious when opening links or attachments in email

Alex,

Does the 30" Run 61' 5", include the Meter w/Reducers... or is pipe from end to end.
Definitely need to be cautious for spools lengths to avoid flanges hitting the existing columns.
I'm confirming Gilbert Stock now.

From: Alexander Greene <awgreene@garney.com>
Sent: Thursday, November 4, 2021 11:29 AM
To: Jeff Cassano <JCassano@cbpiping.com>
Cc: Jim Symonds <jsymonds@garney.com>
Subject: Chandler AWRF Influent As-built Dimensions

Jeff,

Here are the actual dimensions for the Chandler AWRF Influent Pipe, we would be replacing two of the lines. Based on the materials on hand, could we get one complete run in the near future and the other when available? We will also need a 6" flanged weld-o-let added to each line for the vent, this would be at the East end. Let me know, there is one line that is in worse shape than the other, if we could get enough pipe to replace that, it might buy Chandler some time. Feel free to contact me with any questions or concerns.

Thank you,

Alexander W. Greene

Project Manager

GARNEY CONSTRUCTION *Advancing Water*

CELL: 719.322.3308

ADDRESS: 4435 E. Holmes Avenue, Suite 102, Mesa AZ 85206 GARNEY.COM

This e-mail message is intended only for named recipients. It contains information that may be confidential, privileged, or otherwise exempt from disclosure under applicable law. If you have received this message in error, are not a named recipient, or are not the employee or agent responsible for delivering this message to a named recipient, be advised that any review, disclosure, use, dissemination, distribution, or reproduction of this message or its contents is strictly prohibited. Please notify us immediately that you have received this message in error, and delete the message. Thank you. Visit us on the web at <http://www.Garney.com>

This e-mail message is intended only for named recipients. It contains information that may be confidential, privileged, or otherwise exempt from disclosure under applicable law. If you have received this message in error, are not a named recipient, or are not the employee or agent responsible for delivering this message to a named recipient, be advised that any review, disclosure, use, dissemination, distribution, or reproduction of this message or its contents is strictly prohibited. Please notify us immediately that you have received this message in error, and delete the message. Thank you. Visit us on the web at <http://www.Garney.com>

This e-mail message is intended only for named recipients. It contains information that may be confidential, privileged, or otherwise exempt from disclosure under applicable law. If you have received this message in error, are not a named recipient, or are not the employee or agent responsible for delivering this message to a named recipient, be advised that any review, disclosure, use, dissemination, distribution, or reproduction of this message or its contents is strictly prohibited. Please notify us immediately that you have received this message in error, and delete the message. Thank you. Visit us on the web at <http://www.Garney.com>



BRANCH J90
215 EAST BASELINE ROAD
GILBERT AZ 85233
480-892-0033
480-507-7651 FAX

199487644

Job Site

CHANDLER AIRPORT
2380 S STINSON WAY
CHANDLER AZ 85286-1728

Office: 303-791-3600 Cell: 719-322-3308

GARNEY CONST WESTERN REGION
1333 NW VIVION RD
KANSAS CITY MO 64118-4554

Customer # : 382816
Quote Date : 10/21/21
Estimated Out : 10/22/21 07:00 AM
Estimated In : 11/19/21 07:00 AM
UR Job Loc : 2380 S STINSON WAY,
UR Job # : 2485
Customer Job ID:
P.O. # : QUOTE
Requested By : ALEXANDER GREENE
Approved By : EJ JILES
Salesperson : STEPHANIE DOHM

**This is not an invoice
Please do not pay from this document**

RENTAL ITEMS:

Qty	Equipment	Description	Minimum	Day	Week	Month	Estimated Amt.
1	3106526	BOOM 65-70' TELESCOPIC YOU HAVE RENTED A MOBILE ELEVATING WORK PLATFORM (MEWP). SOME OF OUR MEWPS HAVE BEEN EQUIPPED WITH ACCESSORIES THAT MAY REDUCE THE RISK OF ENTRAPMENT HAZARDS AND CRUSHING INJURIES. OTHERS CAN HAVE THESE ACCESSORIES ADDED. FEEL FREE TO DISCUSS THESE ACCESSORIES WITH YOUR LOCAL BRANCH AND EXPLORE WHETHER YOU WOULD LIKE TO RENT A UNIT EQUIPPED WITH THIS TECHNOLOGY FOR YOUR PARTICULAR PROJECT. FOR FURTHER INFORMATION ON MEWP SAFETY, PLEASE WATCH THE FOLLOWING VIDEO: HTTP://UNITEDRENTALS.COM/MEWPS-SAFETY	498.00	513.00	1,206.00	2,423.00	2,423.00
1	3108026	BOOM 76-80' TELESCOPIC YOU HAVE RENTED A MOBILE ELEVATING WORK PLATFORM (MEWP). SOME OF OUR MEWPS HAVE BEEN EQUIPPED WITH ACCESSORIES THAT MAY REDUCE THE RISK OF ENTRAPMENT HAZARDS AND CRUSHING INJURIES. OTHERS CAN HAVE THESE ACCESSORIES ADDED. FEEL FREE TO DISCUSS THESE ACCESSORIES WITH YOUR LOCAL BRANCH AND EXPLORE WHETHER YOU WOULD LIKE TO RENT A UNIT EQUIPPED WITH THIS TECHNOLOGY FOR YOUR PARTICULAR PROJECT. FOR FURTHER INFORMATION ON MEWP SAFETY, PLEASE WATCH THE FOLLOWING VIDEO: HTTP://UNITEDRENTALS.COM/MEWPS-SAFETY	775.00	798.00	1,795.00	4,009.00	4,009.00

Rental Subtotal: 6,432.00

SALES/MISCELLANEOUS ITEMS:

Qty	Item	Price	Unit of Measure	Extended Amt.
1	PROPERTY TAX SURCHARGE [DRSURAZ/MCI]	96.480	EACH	96.48
1	DELIVERY CHARGE	85.000	EACH	85.00
1	PICKUP CHARGE	85.000	EACH	85.00
Sales/Misc Subtotal:				266.48
Agreement Subtotal:				6,698.48
Tax:				522.48
Estimated Total:				7,220.96

COMMENTS/NOTES:

CONTACT: ALEXANDER GREENE
CELL#: 719-322-3308

TO SCHEDULE EQUIPMENT FOR PICKUP, CALL 800-UR-RENTS (800-877-3687)
WE ARE AVAILABLE 24/7 TO SUPPLY YOU WITH A CONFIRMATION #
IN ORDER TO CLOSE THIS CONTRACT

This proposal may be withdrawn if not accepted within 30 days. The above referenced Rental Protection Plan, environmental, and tax charges are estimates and are subject to change.

NOTICE: This is not a rental agreement. The rental of equipment and any items listed above is subject to availability and subject to the terms and conditions of the Rental and Service Agreement, which are available at <https://www.unitedrentals.com/legal/rental-service-terms-US> and which are incorporated herein by reference. A COPY OF THE RENTAL AND SERVICE AGREEMENT TERMS ARE AVAILABLE IN PAPER FORM UPON REQUEST.