


SR 202L – I-10 to SR 101L (MP 50.0 - MP 57.0)

**Ron Szwiec - TYP
SA**
August 19, 2026

Project Overview

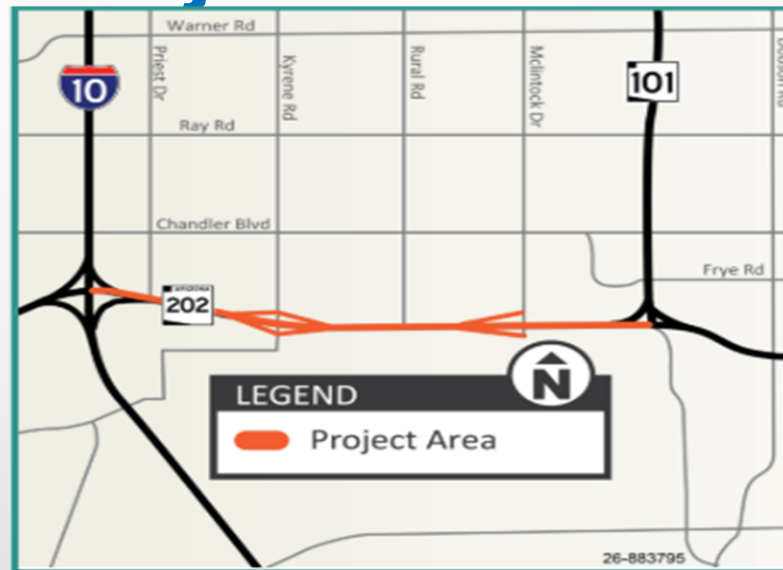

- Add one GPL in each direction from I-10 to SR101L
- Widen exit ramps from one to two lanes

SR 202 San Tan Widening

- **Westbound - I-10 to Kyrene Road and McClintock Drive to SR 101L**- 1 HOV Lane, 4 GPLs and 1 Aux Lane
- **Westbound - Kyrene Road to McClintock Drive** - 1 HOV Lane and 4 GPLs
- **Eastbound - I-10 to Kyrene Road** - 2 HOV Lane, 4 GPLs and 1 Aux Lane
- **Eastbound - Kyrene Road to SR 101L** - 1 HOV Lane, 4 GPLs and 1 Aux Lane

56th Street Overpasses

Widen EB SR 202L OP 12 feet

Widen I-10 Ramp S-E OP



Traffic Interchanges

Kyrene Road

Add WB exit lane



Traffic Interchanges


McClintock Drive

Add EB exit lane



ADA Improvements

- Reconstruct Curb Ramps, Gutter, and Islands
- Extend Sidewalk to Pedestrian Push Button(s)
- Install Detectable Warnings
- Replace Pedestrian Push Button(s), and Install New Pedestrian Push Button(s)
- Reconstruct Sidewalk

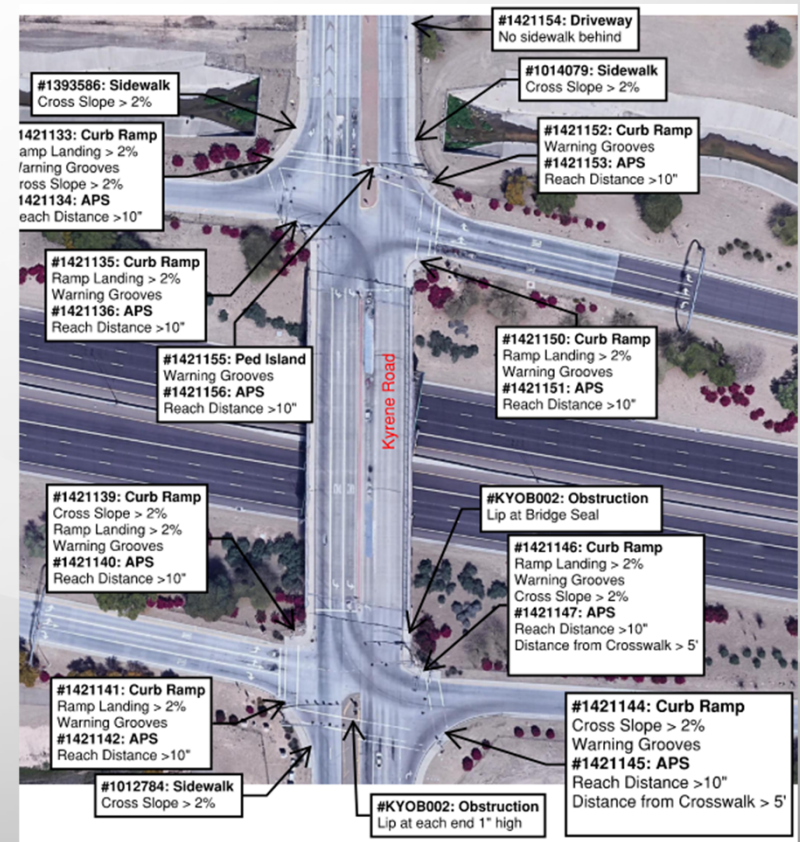

Retaining Walls Existing Sound Barriers



Traffic

Signing and Striping

Lighting

Freeway Management System

Maintenance of Traffic

Landscape, Irrigation & Aesthetics


- Match Existing Features
- Existing Retaining and Soundwalls to be repainted
- City of Chandler may fund painting of aesthetic accents varying from ADOT Standards

Final Design Schedule

**Stage III (60%)
Submittal**

**Stage IV (95%)
Submittal**

Construction Start

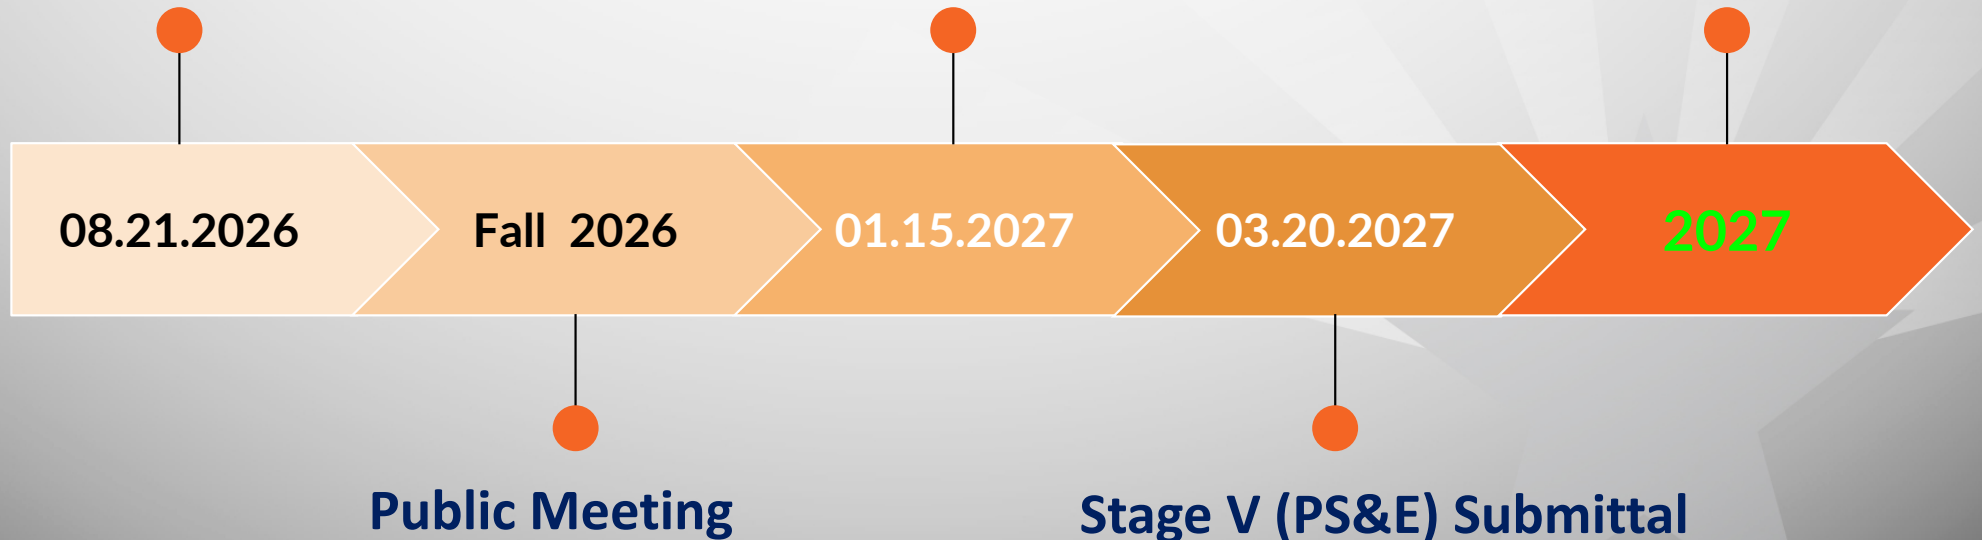

Construction Costs

Updated DCR Estimate at \$113.5M

Programmed for \$120.8 M in Fiscal Year 2027