


BARRIENTES RESIDENCE

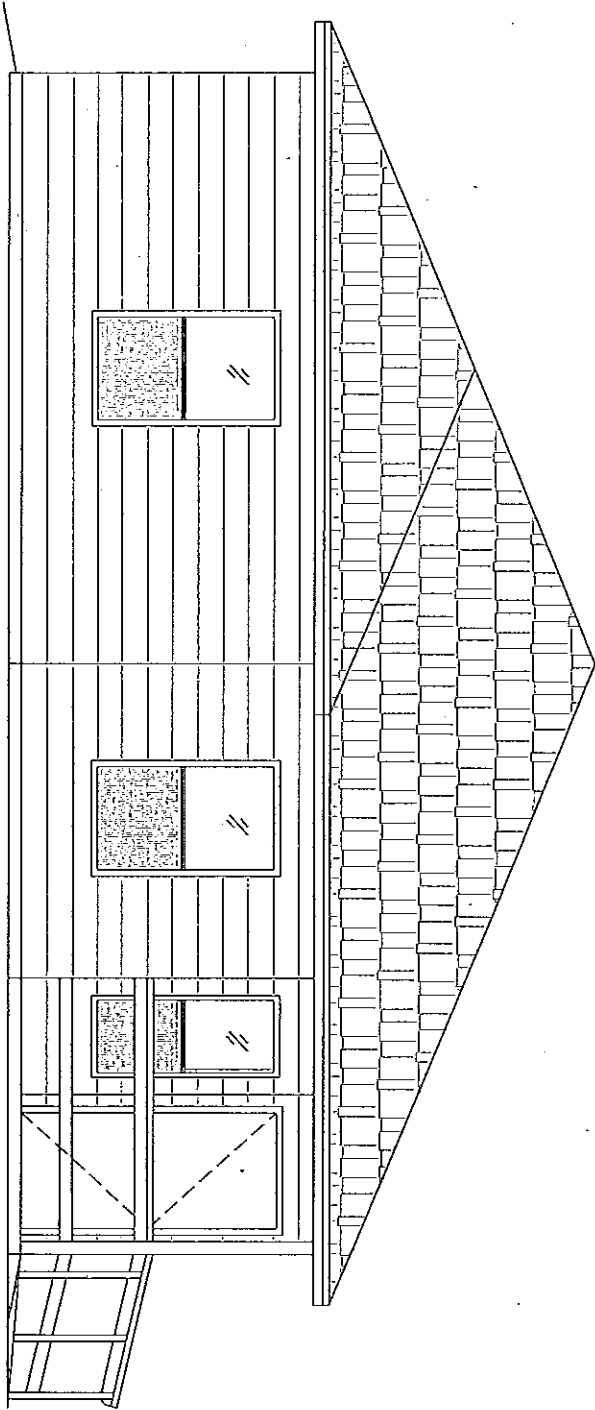

DANIEL BARRIENTES
912 N. WASHINGTON - MERCEDES
956-351-9628


URBAN COUNTY PROGRAM
427 E. DURANTA STE 107 - ALAMO
(956) 787-8127

URBAN COUNTY PROGRAM
OWNER OCCUPIED HOUSING REHABILITATION PROGRAM

DANIEL BARRIENTES
912 N. WASHINGTON AVE - MERCEDES

TOTAL AREA
990 SQ. FT.

GARDEN PARK LOT 12 BLOCK 5

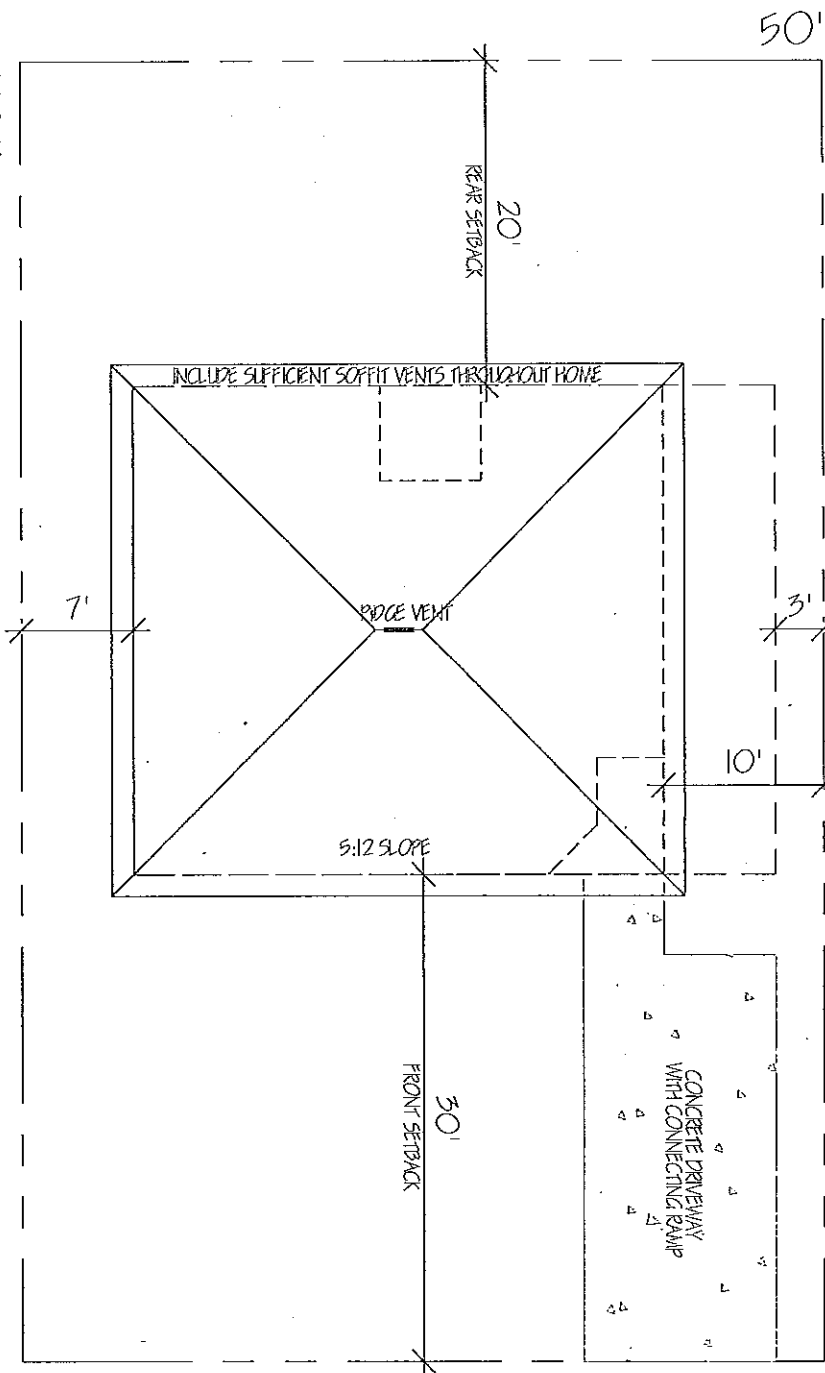

NOTE:

Please verify with city/ county on setbacks and for any requirements regarding sidewalk, driveway, landscaping, and any other obligations as per city regulations/ ordinances. It is the responsibility of the Contractor to locate the rods and staking the property. To avoid any problems it is now required and the responsibility of the Contractor to order a property survey by professional engineer.

Also, any house that is made for handicap accessibility WILL ALWAYS require driveway with connecting sidewalk to ramp.
Remember to provide 6" of landscape dirt around house with sufficient grass seed up to 10' of perimeter.
In addition, remember to replace septic tank if more than 10 yrs old.

1



ROOF / PLOT PLAN

SCALE: N.T.S.


URBAN COUNTY PROGRAM
OWNER OCCUPIED HOUSING REHABILITATION PROGRAM

DANIEL BARRIENTES
912 N. WASHINGTON ST - MERCEDES

LIVING AREA
990 SQ. FT.

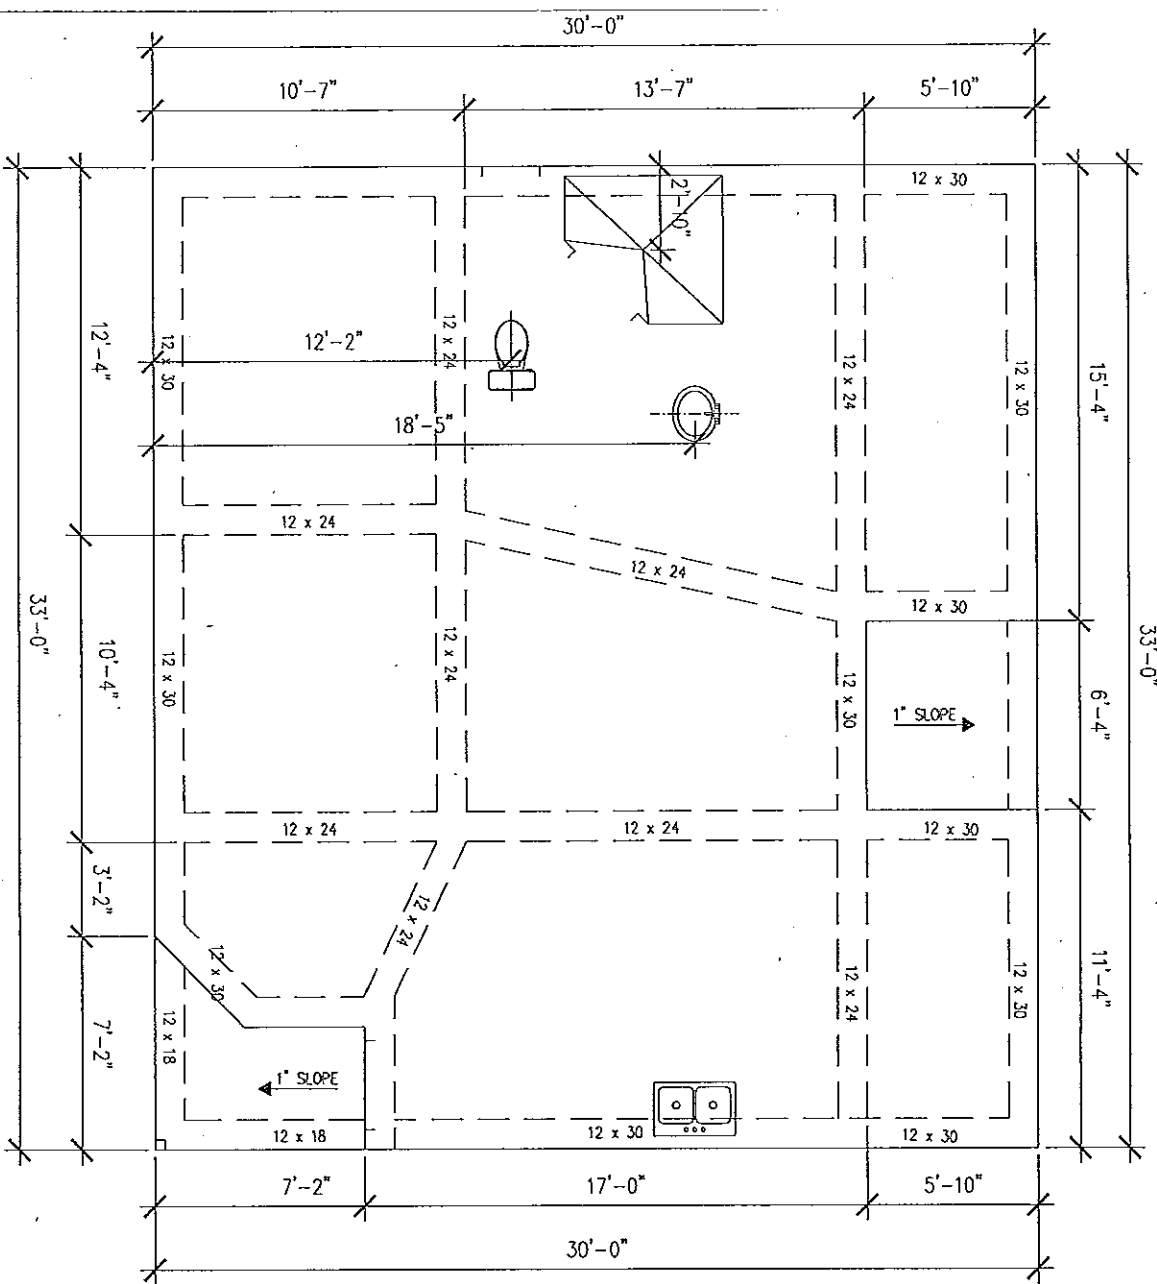

A-EXTERIOR BEAM
 -EXTERIOR BEAMS TO BE 12"x30" WITH 4 #5 BARS CONT. TOP & BOTTOM WITH #3 STIRRUPS AT 24" O.C. AND A MIN. OF 6" IN DEPTH TO UNDISTURBED SOIL.



B-INTERIOR BEAM
 -INTERIOR BEAMS TO BE 12"x24" WITH 4 #5 BARS CONT. TOP & BOTTOM WITH #3 STIRRUPS AT 24" O.C. AND A MIN. OF 6" IN DEPTH TO UNDISTURBED SOIL.


GENERAL NOTES

- 4" THICK SLAB ON GRADE W/ #3 BARS @ 16" O.C. EACH WAY AT MIN. DEPTH OF SLAB OVER 5 MIL VISQUEEN OVER APPROVED COMPACTED FILL
- EXTERIOR BEAMS TO BE 12"x30" WITH 4 #5 BARS CONT. TOP & BOTTOM WITH #3 STIRRUPS AT 24" O.C. AND A MIN. OF 6" IN DEPTH TO UNDISTURBED SOIL.
- INTERIOR BEAMS TO BE 12"x24" WITH 4 #5 BARS CONT. TOP & BOTTOM WITH #3 STIRRUPS AT 24" O.C. AND A MIN. OF 6" IN DEPTH TO UNDISTURBED SOIL.
- CORNER BARS: AT ALL CORNERS & INTERSECTIONS 2"x2" #5
- INSTALL ANCHOR BOLTS AT PERIMETER AT 4' O.C.
- USE ONLY COMPACTED SELECTED FILL DIRT FINISH FLOOR TO BE 18" FROM TOP OF CURB, UNLESS OTHERWISE NOTED.

URBAN COUNTY PROGRAM
 OWNER OCCUPIED HOUSING REHABILITATION PROGRAM

DANIEL BARRIENTES
 912 N. WASHINGTON - MERCEDES TX

TOTAL AREA
 990 SQ. FT.

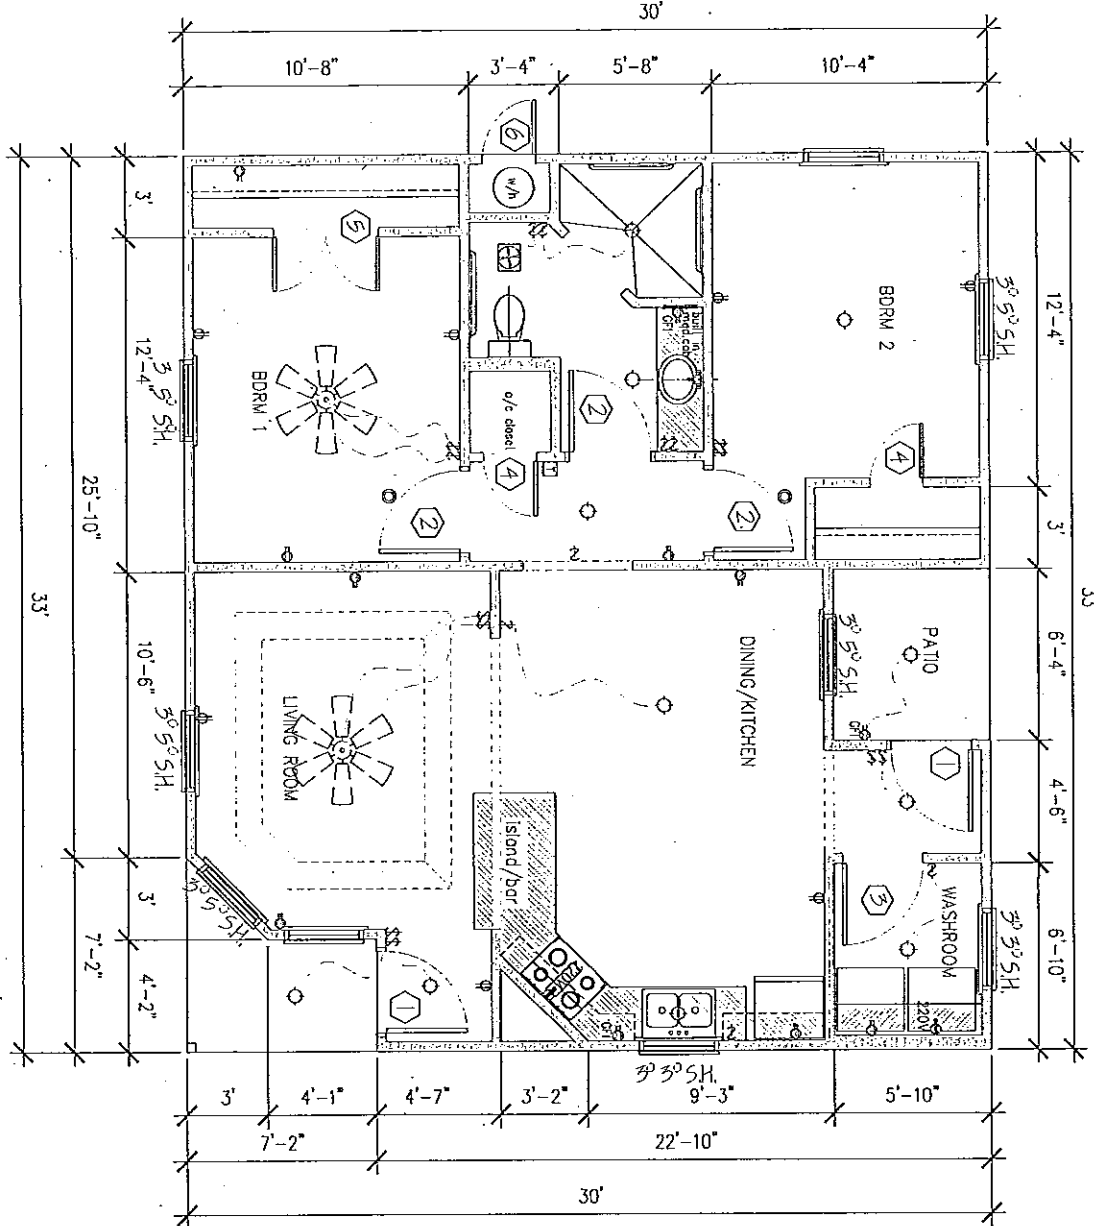

SQUARE FOOTAGE

LIVING AREA	919
PORCH/PATIO	71
TOTAL SQ. FT.	990

ELECTRICAL LEGEND

(WH)	WATER HEATER	(L)	LIGHT FIXTURE
(D)	DUPLEX ELECTRICAL RECEPT.	(S)	LIGHT SWITCH
(220V)	220V DUPLEX ELECTRICAL RECEPTACLE	(T)	THERMOSTAT
(GF)	GROUND FAULT CIRCUIT INTERRUPTER	(SD)	SMOKE DETECTOR
(B)	BATHROOM EXHAUST FAN		

DOOR SCHEDULE

DR#	TASK	SIZE	TYPE	LOCKS
1	INSTALL NEW UNIT W/ DUAL PEEP HOLES	3'0"	METAL W/ LOW PROFILE THRESHOLD	LEVER TYPE ENTRY LOCK W/ DEADBOLT
2	INSTALL NEW UNIT	3'0"	HOLLOW CORE	LEVER TYPE PRIVACY
3	INSTALL NEW UNIT	3'0"	HOLLOW CORE	PASSAGE
4	INSTALL NEW UNIT	2'0"	HOLLOW CORE	PASSAGE
5	INSTALL NEW UNIT	(2) 2'	HOLLOW CORE	PASSAGE
6	INSTALL NEW UNIT	2'0"	HOLLOW METAL	LOCK W/ DEADBOLT

GENERAL NOTES

- 5/12 SLOPE WITH 16" OVERHANG
- SUPPLY RIDGE/SOFTFIT VENTS WHERE NEEDED
- INSTALL PORCH RAILING WHERE FINISH GRADE IS LOWER THAN 1" FROM PORCH FLOOR.
- INSTALL PORCH STEPS WHERE FINISH GRADE IS LOWER THAN 6" FROM PORCH FLOOR.
- AGENT IS REQUESTING CONNECTIONS FOR A (GAS) ELECTRIC STOVE.
- INSTALL A MIN. OF TWO PHONE JACKS & CABLE CONNECTIONS AS PER OWNERS REQUEST.





INTERIOR COLOR CHOICES TO BE OR MATCH:
 White
 Tan
 White
 Tan

I HAVE READ AND FULLY AGREE WITH THE WRITE-UP AND PLANS AS PRESENTED TO ME THIS 5 DAY OF Sept 2014
Daniel Barrientes

**URBAN COUNTY PROGRAM
 OWNER OCCUPIED HOUSING REHABILITATION PROGRAM**

DANIEL BARRIENTES
 912 N. WASHINGTON - MERCEDES TX

TOTAL AREA
 990 SQ. FT.

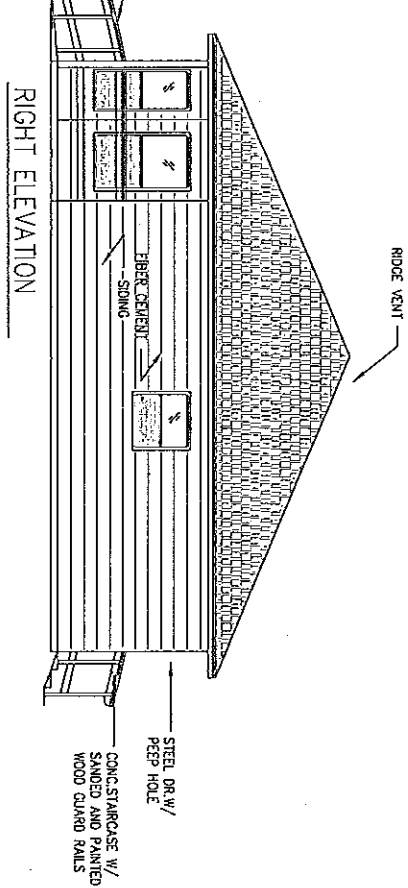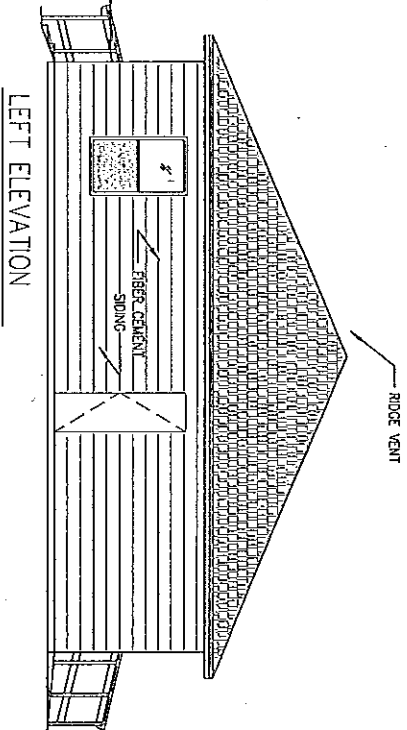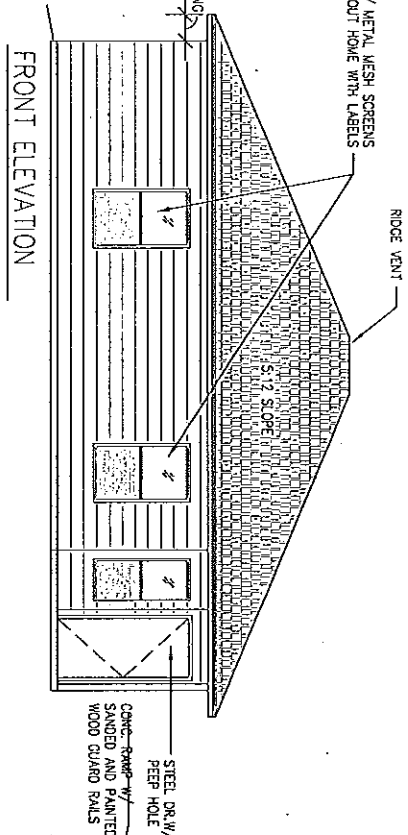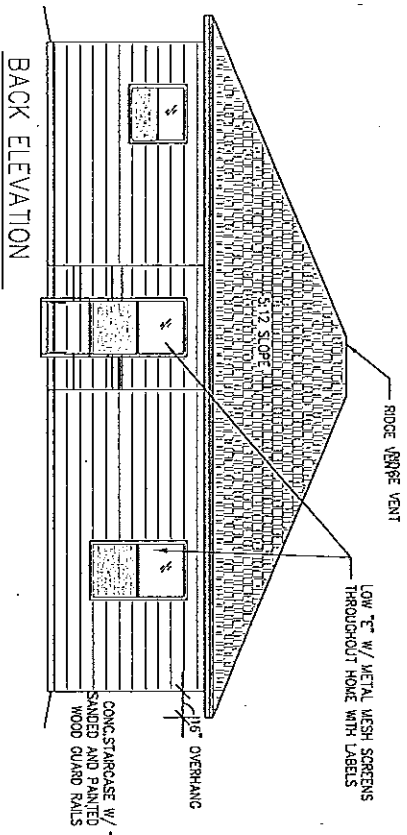

URBAN COUNTY PROGRAM
OWNER OCCUPIED HOUSING REHABILITATION PROGRAM

DANIEL BARRIENTES
912 N. WASHINGTON - MERCEDES TX

TOTAL AREA
990 SQ. FT.

SPECIFICATIONS

ALL SPECIFICATIONS SHALL ASSUME THE USE OF CONTRACTOR'S MINIMUM GENERAL SPECIFICATIONS MANUAL
OWNER (S) Daniel Barrientes CASE NO. ME-50-1402 DATE: 8-28-14 ADDRESS: 912 N. Washington Ave - Mercedes, PHONE: 956-787-8122 BY: Mo Guerra

1. FOUNDATION WORK:

BUILD A NEW CONCRETE FOUNDATION TO COMPLY WITH PLANS, SPECS CITY AND /COUNTY REQUIREMENTS. CIV PROJECTS TO BE 18" ABOVE CENTER LINE OF STREET OR 12" ABOVE NATURAL GROUND. MINOR CHANGES ARE PERMITTED. PROVIDE CONCRETE SLAB FOR AC UNIT & 12 X 25 CONC. DRIVEWAY THAT MUST HAVE ACCESS TO STREET.

2. PLUMBING GENERAL: (SEE SPECS)

- ALL PLUMBING ROUGH SHALL BE AS FOLLOWS:
- WATER SUPPLY TO HOUSE SHALL HAVE A 3/4" CUTOFF VALVE BEFORE ENTRY TO HOUSE.
- INTERIOR WATER SUPPLY LINES FOR HOUSE SHALL BE ALL NEW PER OF APPROPRIATE DIAMETER
- NEW PER PRESS AND FITTINGS:
- OF 1" MINIMUM DIAMETER FOR ALL EXTERIOR WATER SUPPLY LINES BELOW GROUND.
- OF APPROPRIATE DIAMETER FOR DWV (DRAIN, WASTE, AND VENTS).
- SEWER CONNECTION SHALL HAVE (1) PLASTIC PVC SEWER CLEAN OUT.

ALL PLUMBING FINISH SHALL BE AS FOLLOWS:

- RELATED PLUMBING ITEMS:
- (2) EXTERIOR HOSE BRASS 90 FAUCETS:
- 3/4" CUTOFF VALVES WITH ESCUTCHEONS FOR ALL FIXTURES, FIXTURES:
- PLUMBING SEALANT FOR ALL DRAINS, AND SINK PERIMETERS
- ALL OTHER RELATED PLUMBING (SEE SPECS)
- FIXTURES: (SEE SPECS)
- KITCHEN SINK W/ RELATED PLUMBING & FAUCETS
- VANITY SINK W/ RELATED PLUMBING & FAUCETS
- TOILET OF MATCHING COLOR
- ONE PIECE FIBER GLASS HANDICAP ACCESSIBLE SHOWER WITH FAUCETS, GRAB BARS & REMOVABLE SHOWER HEAD
- FIBER GLASS TUB/SHOWER FOR 2ND BATHROOMS UNLESS OTHERWISE NOTED.
- MEDICINE CABINETS/TOWEL RACKS/T.P. DISPENSER/ TOOTHBRUSH & SOAP HOLDER, & SHOWER ROD (SEE SPECS)
- WATER HEATER INSTALLED AS PER SPECS. (GAS OR ELECTRIC AS PER OWNER REQUEST)

OTHER RELATED ITEMS

- RANGE CONNECTIONS AS PER OWNERS REQUEST (SEE SECTION 23).
- 4" DRYER EXHAUST VENT.
- IN WALL WASHING MACHINE BOX WITH BRASS FAUCETS & RELATED PLUMBING.
- HOOK UP ALL DRAINAGE LINES TO CITY SEWER SYSTEM IF AVAILABLE. SEE CITY FOR INFORMATION/TEST SEPTIC SYSTEM IF EXISTING FOR INTEGRITY AND REPLACE IF NECESSARY AND MORE THAN 10 YEARS OF AGE

3. INTERIOR/EXTERIOR WALLS & CEILINGS:

- ALL INTERIOR AND EXTERIOR WALL FRAMING:
- 2x4" (OR BETTER) FOR USE IN: SOLE PLATES (TREATED LUMBER)
- DOUBLE TOP PLATES
- 92 S&P PRE-CUT STUDS @ 16" O.C.
- WINDOW JOISTS
- CEILING JOIST CHAIN BLOCKING @ 48" O.C.
- 2x6" (OR BETTER) FOR USE IN:
- WINDOW & DOOR HEADERS WITH 1" X 7"

- SPACER
- CEILING JOIST @ 24" O.C. FOR CLEARANCES LARGER THAN 12' CEILING JOIST SHALL BE @ 18" O.C.
- INSTALL BOOT TIES IN EVERY CORNER OF THE HOUSE ALONG WITH METAL ANCHORS ON BOTH BOTTOM AND TOP PLATES OF HOME

ALL EXTERIOR CEILING COVERINGS:

- 3/8" CD EXTERIOR PLYWOOD FOR PORCH CEILINGS.
- ALL INTERIOR WALL & CEILING COVERINGS:
- 1/2" SHEETROCK FINISHED AS PER SPECS.
- 1/2" DAMP RESISTANT SHEETROCK FOR BATH AREAS.
- ALL INTERIOR CEILINGS SHALL HAVE ORANGE PEEL TEXTURE
- ALL INTERIOR WALL SURFACES SHALL HAVE ORANGE PEEL TEXTURE
- ALL EXTERIOR TRIMMINGS SHOULD CONSIST OF CEDAR WOOD.

4. ROOF: (SLOPE=5/12)

- ROOF SHALL HAVE:
- A HIPGABLE STYLE ROOF WITH 16" OVERHANGS.
- A HIPGABLE STYLE FRONT PORCH AS PER PLANS.
- PORCH COLUMNS MUST BE FASTENED TO CONCRETE.
- AN ADEQUATE COMBINATION OF RIDGE & SOFFIT VENTS WITH AIR CHUTES.
- ADEQUATE RAIN GUTTERS WITH DOWN SPOUTS FOR THE ROOF AREA THAT MAY AFFECT OWNERS.
- SHINGLES TO BE OF LIGHT COLOR (no black shingles)

5. PORCH & CANOPY FLOORS:

- THE HOUSE SHALL HAVE PORCH FLOORS AS FOLLOWS:
- A FRONT PORCH FLOOR
- A SIDEBACK PORCH FLOOR
- PROVIDE RAMP & (2) HANDRAILS TO EACH FRONT AND/OR SIDE PORCH STEPS

6. INSULATION:

- ALL LIVING AREA CEILINGS WITH BLOWN IN INSULATION TO AN R-49 FACTOR. (need a combined R-30 & R-19 to meet requirement)
- INFILTRATION FOAM SHALL BE USED AROUND ALL WINDOWS, WARES, PLUMBING, ELECTRICAL, BOTTOM FLOORS, AND ALL PENETRATED AREAS.
- ALL PENETRATED WALLS WITH R-15 R.G. BATT.
- ALL EXTERIOR PIPES EXPOSED TO WEATHER.

7. INTERIOR FINISH:

- ALL TRIM SHALL BE INSTALLED AS PER SPECS.
- ALL PAINT SHALL BE APPLIED AS PER SPECS (2 COATS) WITH PAINT COMPARABLE IN QUALITY TO SHERWIN WILLIAMS. ALLOW A VARIETY OF DIFFERENT COLORS FOR CLIENT TO CHOOSE FROM. (2 COLOR CHOICE MAX).

8. EXTERIOR FINISH:

- PAINT ENTIRE HOUSE AS PER SPECS WITH PAINT COMPARABLE IN QUALITY TO SHERWIN WILLIAMS. PRIMER TO BE OIL BASED & PAINT MUST BE EQUIVALENT TO A-100. (2 COLOR CHOICE MAX).

9. SIDING:

THE SIDING SHALL BE 5/8" FIBER CEMENT WITH ALL CEDAR TRIM TO ENTIRE HOUSE.

10. WINDOWS:

SHALL BE NEW LOW-E DOUBLE PANE INSULATED ALUMINUM WINDOWS, SIZE AS PER PLAN.

11. CABINET'S GENERAL:

- BUILD AND/OR INSTALL NEW KITCHEN CABINETS TO INCLUDE:
- A RANGE CABINET.
- A KITCHEN BATHROOM FORMICA COUNTER TOP OF MATCHING COLOR.
- BUILD AND/OR INSTALL A NEW VANITY CABINET FOR BATHROOM WITH FORMICA TO MATCH LAVATORY, SINK, AND WALLS.
- ALL CABINETRY PIECES SHOULD BE NEW AND COMPLETE AND BUILT TO PROFESSIONAL STANDARDS.

12. FLOOR, SUBFLOOR, & FINISH FLOORING:

APPLY VCT FLOOR TILE TO ALL LIVING AREA HOUSE FLOORS.

13. ELECTRICAL GENERAL

- ALL ELECTRICAL INSTALLATIONS & WORK AS PER ELECTRICAL CODE WITH THE FOLLOWING CONDITIONS:
- PROVIDE RANGE OUTLET AS PER OWNERS REQUEST.
- PROVIDE APPROPRIATE WASHER & DRYER CONNECTION.
- (2) 50' CEILING FANS (GELING HUGGER STYLE) COMPARABLE IN QUALITY TO THE "HANTER" BRAND. THE CONTRACTOR SHALL ALLOW \$120.00 FOR MATERIAL & LABOR. LOCATION AS PER OWNER REQUEST.
- INSTALL GFI OUTLETS IN BATHROOMS, KITCHEN, AND EXTERIOR WALLS.
- EACH ELECTRICAL PANEL OR BREAKERBOX, LIGHT SWITCH, & THERMOSTAT NO HIGHER THAN 48" ABOVE FLOOR.
- EACH ELECTRICAL PLUG TO BE 15' ABOVE THE FLOOR.
- ANY OUTLETS WITHIN 8' FROM KITCHEN OR BATHROOM SINKS MUST BE GFCI.

14. RANGE HOOD:

INSTALL A RANGE TOP FIT OWNERS RANGE SIZE (30" OR 36").

15. BATHROOM ACCESSORIES:

ALL ACCESSORIES & BUILT IN MEDICINE CABINETS AS PER SPECS INCLUDE CURTAIN ROD & PLASTIC THRESHOLD TO HELP PREVENT ESCAPING WATER FROM SHOWER. INSTALL SINK AND CABINET ABOVE TOILET WHEN INDICATED. (ALSO INCLUDE TOILET PAPER, TOOTHBRUSH, AND SOAP HOLDER).

16. ACCESS FOR PHYSICAL DISABILITIES:

INSTALL ONE CONC. RAMP AS PER OWNERS REQUEST THAT CONNECTS WITH 12 X 20-25 DRIVEWAY AND STEPS WITH HANDRAILS. BATHROOM SHOULD ACCOMMODATE GRAB BARS WHERE INDICATED IN PLANS.

17. HEATING & A/C:

PROVIDE & INSTALL A 16 SEER CENTRAL AIR CONDITIONING COMPARABLE IN QUALITY TO A CARRIER BRAND UNIT FOR THE ENTIRE HOUSE INCLUDE DIGITAL THERMOSTAT.

18. SMOKE DETECTORS:

INSTALL A SMOKE DETECTOR INSIDE EACH SLEEPING ROOM, OUTSIDE SLEEPING ROOMS. ALL WIRED IN SERIES.

19. GENERAL NOTES.

- CONTRACTOR IS RESPONSIBLE FOR:
- YOUR BID TO INCLUDE ANY COST RELATED TO REQUIREMENTS FROM CITY, CHANGE ORDERS FOR THIS PARTICULAR PURPOSE WILL NOT BE ACCEPTED OR PROCESSED TO CORRECT THE ABOVE MENTIONED.
- YOUR BID TO INCLUDE ANY COST RELATED TO RES-CHECK & ENERGY COMPLIANCE REQUIREMENTS & SURVEYS.
- THE DEMOLISH AND DISPOSAL EXISTING STRUCTURE.
- THE COMPLETION OF ALL THE REQUIRED BUILDING ELEVATIONS.
- PROVIDE & OF LANDSCAPE DIRT AROUND THE HOUSE ALONG WITH SUFFICIENT GRASS SEEDS UP TO 10' OF PERIMETER.
- PROVIDING THE APPROPRIATE ELECTRICAL AND/OR GAS CONNECTIONS FOR RANGE AS PER APPLICANT'S REQUEST AND ACCORDING TO APPLICABLE PLUMBING/ELECTRICAL CODE.
- PROVIDE PHONE JACKS & CABLE CONNECTIONS IN EVERY BEDRM & LIVING SPACE. KITCHEN PHONE IF REQUESTED.
- PROVIDE TREATMENT PRE-TREATMENT TO ENTIRE HOUSE OBTAINING, DISPLAYING, AND SUBMITTING ALL PROPER PERMITS & INSPECTIONS.
- ALL CONTRACTORS WILL BE RESPONSIBLE FOR ANY ADDITIONAL PLANS, SPECIFICATIONS AND/OR DETAILS THAT ARE REQUIRED BY CITIES OR COUNTY AT THE TIME OF ATTAINING PERMITS. (WINDSTORM, SURFERS)
- MINIMUM 12x24x24 CONC. DRIVEWAY WITH CONNECTING SIDEWALK TO RAMP FOR HANDICAP APPLICANTS.
- ALL THE GENERAL INFORMATION CONTAINED WITHIN SECTION 23. GENERAL NOTES OF THE CONTRACTORS GENERAL SPECIFICATIONS MANUAL.
- PROVIDE AND INSTALL PRODUCTS SIGNS AT EACH CONSTRUCTION SITE.
- CONTRACTOR IS RESPONSIBLE FOR SUPPLYING PORT A POTT THROUGHOUT CONSTRUCTION PROCESS.
- SHOWER ENTRANCES TO BE 36" WIDE.
- ALL UCP HOMES MUST COMPLY WITH TEXAS GOVERNMENT CODE §2306.514(TXAS) & INTERNATIONAL BUILDING CODES 2012.
- THE HOMEOWNER SHALL BE RESPONSIBLE FOR REMOVE AND DISPOSE OF ALL DEBRIS ON SITE BEFORE THE BEGINNING OF CONSTRUCTION, INCLUDING BUT NOT LIMITED TO TIES, ABANDONED/HELDS OLD LUMBER, ETC.
- MAKING NECESSARY DISPOSES FOR ANY UTILITIES TO BE CONNECTED TO THE NEW DWELLING.

I HAVE READ AND FULLY AGREE WITH THE WRITE-UP AND PLANS AS PRESENTED TO ME.

NAME OF APPLICANT

Daniel Barrientes