295HFSA6
WHELEN®
200 WATT ELECTRONIC SIREN AMPLIFIER
INPUT VOLTAGE: 12.8 VDC ±20%
INPUT CURRENT @ 15 VDC
@ 100 WATTS: 8 AMPS (TYP)
@ 200 WATTS: 15 AMPS (TYP)
SPEAKER IMPEDANCE: 11 OHMS
MFG. DATE: 08/07
WARNING: ALL CUSTOMER SUPPLIED WIRES THAT CONNECT TO THE POSITIVE TERMINAL OF THE BATTERY MUST BE SIZED TO SUPPLY AT LEAST 125% OF THE MAXIMUM OPERATING CURRENT & BE FUSED "AT THE BATTERY" TO CARRY THAT LOAD.
P/N 01-0864480-000
S/N
HEAVY DUTY
HDP
PROFESSIONAL

WHELEN
PWR
RAD
PA
MAN
HF
WAIL
YELP
T3
HORN
MAN
FLASHER
GRILLE STROBE
GUN LOCK

295HFSA6
WHELEN®
200 WATT ELECTRONIC SIREN AMPLIFIER
INPUT VOLTAGE: 12.8 VDC ±20%
INPUT CURRENT @ 15 VDC
@ 100 WATTS: 8 AMPS (TYP)
@ 200 WATTS: 15 AMPS (TYP)
SPEAKER IMPEDANCE: 11 OHMS
MFG. DATE: 11/06
WARNING: ALL CUSTOMER SUPPLIED WIRES THAT CONNECT TO THE POSITIVE TERMINAL OF THE BATTERY MUST BE SIZED TO SUPPLY AT LEAST 125% OF THE MAXIMUM OPERATING CURRENT & BE FUSED "AT THE BATTERY" TO CARRY THAT LOAD.
P/N 01-0864480-000
S/N
HEAVY DUTY
HDP
PROFESSIONAL

WHELEN
PWR
RAD
PA
MAN
HF
WAIL
YELP
T3
HORN
MAN
LEFT ALLEY
TAKE DOWN
RIGHT ALLEY
FLASHER
GUN LOCK

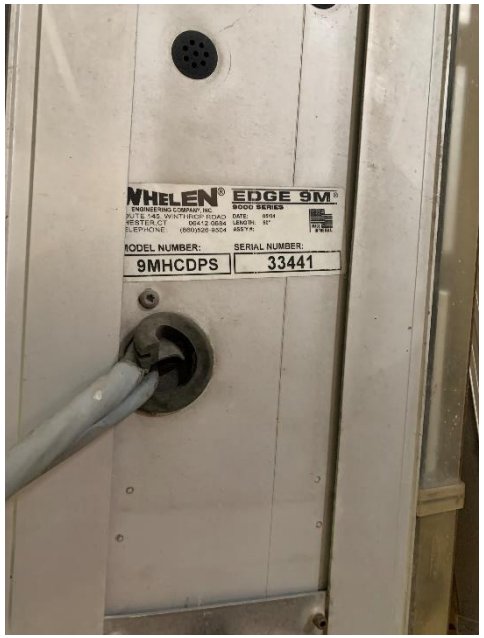
WHELEN®
ENGINEERING COMPANY INC.
EDGE 9M®
9000 SERIES
MODEL NUMBER:
9MHCDPS
SERIAL NUMBER:
33441

WHELEN®
LFL Liberty SERIES
MODEL NUMBER:
SX2BBRR
SERIAL NUMBER:
93278

WHELEN®
ENGINEERING COMPANY INC.
LFL Liberty SERIES
MODEL NUMBER:
SX8BBRR
SERIAL NUMBER:
103516

WHELEN
TRAFFIC ADVISOR
DIRECTION INDICATOR
LEFT
RIGHT
FLASH
FUNCTION
HIGH
OFF
LOW
POWER

SHO-ME®

WHELEN ENGINEERING COMPANY INC.
CHESTER CONNECTICUT 06412-0684
TRAFFIC ADVISOR ASSY
MODEL TAM85
P/N:06838771
S/N:C0792437
RB
All our products are designed and manufactured in the U.S.A.

LIGHT POWER

WHELEN ENGINEERING COMPANY INC.
CHESTER CONNECTICUT 06412-0684
TRAFFIC ADVISOR ASSY
MODEL TAM85
P/N:06838771
S/N:C0366492
RB
All our products are designed and manufactured in the U.S.A.

PROPERTY OF
HIDALGO COUNTY, TEXAS
43100

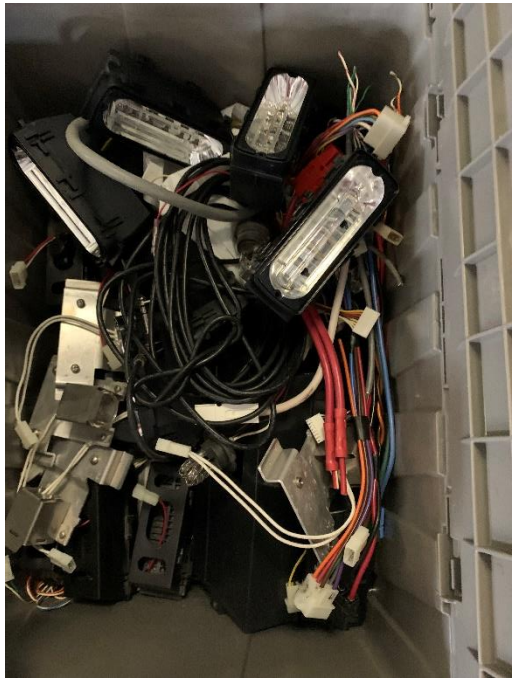

POWER
FUNCTION
HIGH
OFF
LOW
LEFT
RIGHT
SPLIT
FLASH
WHELEN
TRAFFIC ADVISOR
DIRECTION INDICATOR

COMPETITION SERIES PLUS
MODEL CSP-650
WHELEN
INPUT VOLTAGE: 12.8 VDC ±20%
INPUT VOLTAGE: 25.6 VDC ±20%
INPUT CURRENT: 6 AMPS @ 12.8 VDC
INPUT CURRENT: 3.2 AMPS @ 25.6 VDC
POWER RATING: 60 WATTS @ 6 LAMPS
US PATENTS: 5,013,973-5,016,139
D318,425-RE 38,795
WARNING!
WAIT 5 MINUTES AFTER SHUTTING OFF POWER SUPPLY BEFORE REMOVING FLASH TUBES
ALL CABLES CONNECT TO THE POSITIVE SIDE OF THE BATTERY MUST BE SIZED TO SUPPLY AT LEAST 125% OF THE MAX. OPERATING CURRENT AND FUSED AT THE BATTERY TO CARRY THAT LOAD
P/N: 01-0662320-00E
S/N: N03327
MFG DATE: 0310
IF SERVICE IS NECESSARY RETURN PRODUCT TO
WHELEN ENGINEERING COMPANY, INC.
ROUTE 145 WOODSTOCK, CT
ATTN: SERVICE DEPT.
CALL 1-800-221-0445
FOR TECH SUPPORT 800/825-9434
MADE IN THE USA
WHELEN
STROBE POWER SUPPLY