

Cost for County to Disassemble	QTY		Total
AirGas			
Acetylene and Oxygen delivered	3	173.12	\$ 519.36
County Employees wage per hour	\$12.00		
Projected Time to dismantle(hours)	24	\$288.00	
Employees needed	4	1,152.00	
			\$ 1,152.00
			<u>\$ 1,671.36</u>

Galbeath Trash Compactor 40cu yds	40cu yds	38 cu yds
weight (lbs.)	11,000	10,500
Recycling price/lbs.	0.1	0.1
	<u>\$ 1,100.00</u>	<u>\$ 1,050.00</u>
	1,671.36	1,671.36
	(\$571.36)	(\$621.36)

SELF-CONTAINED COMPACTORS


FEATURES

STANDARD

- Precision guided ram system
- Guardian Control System
- Automatic Maintenance Scheduler (AMS)
- NEMA 4 enclosure
- Controls in panel face
- 5-year structural warranty
- 33-second cycle time
- Full container light
- Low temperature oil
- Multi-cycle timer
- Operational and service manual
- Primed and painted in several colors

OPTIONS

- Advance warning light
- Pressure gauge - color coded
- Controls on remote pendant in lieu of mounting in panel face
- Guide rails with stops
- Oil heater
- Photo electric eye
- Odor control system
- Container lifter
- HT (Hinged Tailgate) models

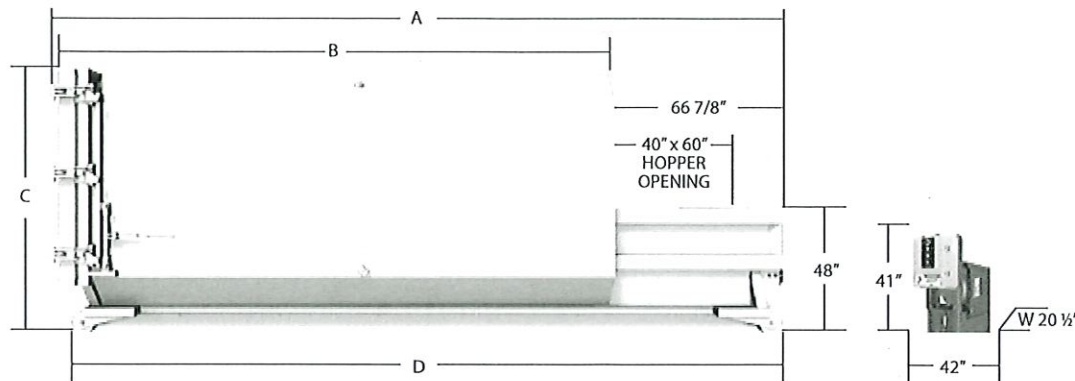

Compactor Models	265XP model (cu. yds.)	Overall length (A) (in.)	Container length (B) (in.)	Overall height (C) (in.)	Floor length (D) (in.)*	Width (in.)	Weight (lbs.)
	20	188	121-1/8	100	187	102	8,500
	25	218	148-1/8		217		8,850
	30	248	178-1/8		246		9,450
	35	278	208-1/8		277		10,000
	38	299	229-1/8		298		10,500

* Bullnose to bullnose



Replacement parts available online at www.gotoparts.com.

SPECIFICATIONS

Charge Box

- Wastequip rating - 2.00 cubic yards
- Wastec rating - 1.48 cubic yards
- Clear top opening - 40" Length x 60" Width

Ram

- 1/4" steel construction with engineered structural reinforcements and precision guided ram system

Compactor Head

- Floor - 3/8" with two 5" channel supports
- Sides - 3/16" side plates with 6" x 3" formed steel stiffener
- Top rail - 6" x 3" formed steel stiffener
- Breaker bar - 6" x 6" x 1/2" angle steel
- Sump - 12" height

NOTE: XPE models include 1/2" ram and compactor head floor, 1/4" container floor, 3/8" push plate, stainless steel cylinder pins, hydraulic hose guards and fully welded (inside/outside) container sidewalls

Electrical

- Electric motor - 10 hp TEFC (Totally Enclosed Fan Cooled)
- Voltage - 208/230/460, 3 phase, 60 HZ (optional 575V)
- Power box - NEMA 4 rated, UL listed
- Automated cycle operation - turn key switch-ram extends, retracts and stops automatically

Hydraulic Specifications

- Pump - 11.7 gpm
- Ram penetration - 7"
- Cycle time - 33 seconds
- Hydraulic cylinder - (2), cylinder bore - 4"
- Cylinder rod - 2.5"
- Hydraulic oil tank - 20 gallon reservoir
- Power unit location - remote

Hydraulic Performance

- Ram face pressure**
 - Normal - 39,800 lbs
 - Maximum - 49,500 lbs
- Ram psi**
 - Normal - 25.00 psi
 - Maximum - 31.73 psi
- Operating pressure**
 - Normal - 1,850 psi
 - Maximum - 2,300 psi

Container

- 7 gauge floor with 3" channel crossmember
- 6" x 2" x 1/4" tube rails, 36-1/2" I.D. between rails
- Solid steel bullnose and hook at both ends
- 4" diameter rollers, 4-1/2" long
- Length, Width and Height - see chart above

Standard Color Choices*



Colors shown are as accurate as printing allows. The actual color is subject to variation from the printed color sample. Color choices vary by plant location. Please contact your local sales representative for available colors. Custom colors are available upon request and are subject to an additional charge.



Tel: 877.468.9278 | sales@wastequip.com | www.wastequip.com

Wastequip is the leading North American manufacturer of waste and recycling equipment for collecting, processing and transporting recyclables and solid or liquid waste. April 2017 © Wastequip, all rights reserved. Specifications subject to improvement without notice. Equipment displayed should be operated by properly trained personnel. Operators should become familiar with OSHA, ANSI and any other applicable standards or laws for using this equipment. Improper use, misuse, or lack of maintenance could cause injury to people and/or property. Photos used in the literature are illustrative only. We assume no liability or responsibility for proper training/operation of equipment not manufactured by Wastequip. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at time of printing.