


**HIDALGO COUNTY
Professional Engineering Services
Agreement #C-17-182-06-13**

WORK AUTHORIZATION NO. 2

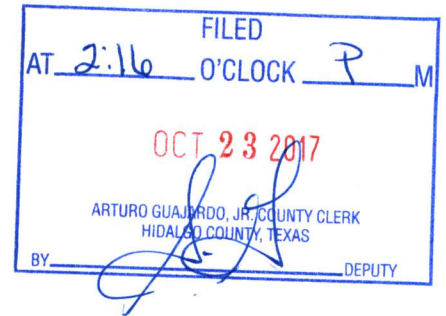

THIS WORK AUTHORIZATION is made pursuant to the terms and conditions of Article 7 of the Agreement made by and between **HIDALGO COUNTY**, action herein by and through the **Commissioner's Court**, hereinafter called the "**Owner**," and, **B2Z ENGINEERING LLC**, professional engineers of Mission, Texas, hereinafter called "**Engineer**".

PART 1. SCOPE OF WORK

The purpose of this Work Authorization is for the PS&E (including Pavement, Traffic Signal, and Bridge Design) and Utility Coordination for the "Military Hwy Road Extension" project from 10th St. East to Jackson Rd.

The scope of services to be provided by the **Owner** is identified in **EXHIBIT "A" – Scope of Services to be provided by the Owner** attached hereto.

The scope of services to be provided by the **Engineer** is identified in **EXHIBIT "B" – Scope of Services to be provided by the Engineer** attached hereto.

PART 2. ESTIMATED COST

The estimated cost for services under this Work Authorization is **\$249,932.04**. This amount is based upon the costs outlined in the Estimated **Cost Proposal** attached hereto as **EXHIBIT "D"**.

PART 3. PAYMENT

Compensation and payment to the Engineer for the services established under this Work Authorization shall be made in accordance with Articles 5 and 6 of the Agreement.

PART 4. FUNDING

This Work Authorization No. 2 shall be funded through funding source:

Account No. _ _ _ _ _

Requisition Number _____ **(MUST BE INCLUDED AFTER CC APPROVAL)**

PART 5. PERIOD OF SERVICE

This Work Authorization shall become effective on the date of final acceptance of the parties hereto, and terminate **upon completion of scopes of the work authorization.**

PART 6. RESPONSIBILITIES AND OBLIGATIONS

This Authorization does not waive the parties' responsibilities and obligations provided under the **Agreement**.

PART 7. ACKNOWLEDGEMENT AND CONFIRMATION

Acknowledgement and Confirmation by Hidalgo County Precinct No.2, Commissioner, Eduardo Cantu, as to content and detail of this **Work Authorization No. 2**.

**HIDALGO COUNTY
COMMISSIONER PRECINCT No. 2:**


BY: _____

PART 8. ACCEPTANCE AND APPROVAL

This Work Authorization is hereby accepted, approved by Hidalgo County Commissioners' Court on _____ as indicated below and effective as of _____ day of _____, 201__.


**THE ENGINEER:
B2Z ENGINEERING**

**THE OWNER:
HIDALGO COUNTY**


By: Nicholas Muñoz, RPC ~ Vice President


By: Ramon Garcia, County Judge

ATTEST:


By: Arturo Guajardo Jr., County Clerk



APPROVED BY
COMMISSIONERS' COURT
ON: 10/17/12 

EXHIBIT "A"
SCOPE OF SERVICES TO BE PROVIDED BY THE OWNER

The following provides an outline of the services to be provided by the **Owner** in the development of the proposed improvements to Whalen Road located within Hidalgo County hereinafter denoted as the **Project**.

GENERAL:

The **Owner** will provide to the **Engineer** the following:

- 1) Provide the authorization to proceed with services through coordination with the project consulting and design Engineer.
- 2) Payment for work performed by the **Engineer** and accepted by the **Owner** in accordance with Article 5 of the Agreement.
- 3) Assistance to the **Engineer**, as necessary, to obtain the required data and information from other local, regional, State and Federal agencies the **Engineer** cannot easily obtain.
- 4) Provide any available relevant data the **Owner** may have on file concerning the **Project**.
- 5) Provide timely review and decisions in response to the **Engineer's** request for information and/or required submittals and deliverables, in order for the **Engineer** to maintain the agreed upon work schedule prepared in accordance with Exhibit "C" attached to this Work Authorization.
- 6) Attend and participate in progress meetings as required and as coordinated and conducted by **Engineer**.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 1-PROJECT DESCRIPTION

The services designated herein as "Services provided by the ENGINEER" shall include the performance of all engineering services for the following described facility:

COUNTY/CITY: HIDALGO COUNTY

CONTROL: _____

PROJECT/DESCRIPTION: New location and 2 lane rural overlay

LENGTH: 1.7 miles

HIGHWAY: Military Highway Extension Project

LIMITS: From intersection of FM 1016 & SH 336 East to FM 2061

PROJECT CLASSIFICATION

(Place an "X" in only one Project Classification)

- Surface Treatment
- Overlay
- Rehabilitation Existing Road (Scarify & Reshape)
- Convert Non-Freeway to Freeway
- Widen Freeway
- Widen Non-Freeway
- New Location Toll Freeway
- New Location Non-Freeway
- Interchange (New or Reconstruct)
- Bridge Widening or Rehabilitation
- Bridge Replacement
- Upgrade to Standards - Freeway
- Upgrade to Standards - Non-Freeway
- Miscellaneous Studies (Use Function Code 110 for All Tasks)

ENGINEER shall mean B2Z Engineering.

STATE shall mean Texas Department of Transportation.

COUNTY shall mean Hidalgo County.

LPA shall mean Hidalgo County.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 7 - ROADWAY DESIGN CONTROLS

(Function Code 160)

Services
Provided By:
ENGINEER LPA

NO NO
NO NO

1. Geometric Design
 - a. Horizontal and Vertical Alignment (Preliminary based on office surveys)
 - b. Schematic Layout
 - (1) The location of interchanges, main lanes, grade separations, frontage roads and ramps.
 - (2) Develop vertical and horizontal alignment of main lanes, ramps and cross roads at proposed interchanges or grade separations. Frontage road alignment data need not be shown on the schematic; however, it should be developed in sufficient detail to determine ROW needs. The degree of horizontal curves and vertical curve data, including "K" values, shall also be shown for ease of checking.
 - (3) For freeways, show the location and text of the proposed main lane guide signs. Lane lines and/or arrows indicating the number of lanes shall also be shown.
 - (4) A complete explanation of the sequence and methods of stage construction, if proposed, including the initial and ultimate proposed treatment of crossovers and ramps.
 - (5) The tentative ROW limits.
 - (a) Provide a roadway Design System (RDS) or (GEOPAK) computer tape of the preliminary earthwork to verify ROW requirements.
 - (b) Provide a graphics file containing the approved schematic.
 - (6) The geometric (pavement cross slopes, lane and shoulder widths, slope rates for fills and cuts) of the typical sections of proposed highway main lanes, ramps, frontage roads, and cross roads.
 - (7) The current and projected traffic volumes as provided by the TxDOT (20 year traffic projection, unless otherwise determined by the District Engineer).
 - (8) The control of access lines if Interstate or designated under House Bill 179.
 - (9) Direction of traffic flow on all roadways.
 - (10) Location and width of median openings for highway without access control.
 - (11) The geometric of speed change (acceleration, deceleration, climbing) lanes.

NO NO

2. General Guidelines for Project Development
 - a. Prior to preparing detailed plans for a proposed project, a preliminary schematic layout shall be prepared which indicates the general geometric features and location requirements peculiar to the project. An uncontrolled aerial mosaic will be provided for this use. Four copies of the schematic layout shall be submitted through the district to the Design Division for approval and subsequent coordination with the Federal Highway Administration (FHWA) where applicable. The layout shall be submitted for two-lane arterial highway projects on new locations and for all multi-lane highway projects. **No geometric design is to be performed until the COUNTY has given the engineer written approval of the preliminary schematic layout.**
 - b. All geometric design shall be in conformance with the State's Design Division, Operations and Procedures Manual, except where variances are permitted in writing by the STATE.
 - c. The schematic layout shall include basic information which is necessary for the proper review and evaluation including the items listed above in the checklist for schematic layout.
 - d. Handling of traffic during construction shall be a consideration in the development of preliminary designs.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
 Provided By:
ENGINEER LPA

- | | | |
|------------|-----------|---|
| <u>NO</u> | <u>NO</u> | 2. General Guidelines for Project Development (<i>continued</i>) <ul style="list-style-type: none"> e. Upon approval of the schematic layout by Design Division (FHWA on Federal-aid projects), it shall be the basis for an exhibit at any required public hearing prior to final development of the project. If there are any changes to the schematic after the Design Division and FHWA approval and before the public hearing, four copies of the revised schematic, as displayed at the hearing, shall be submitted either prior to or accompanying the public hearing data. If there are no changes in the schematic as displayed at the hearing, only photographs of the schematic and other displays shall be submitted with the public hearing data. f. For all freeway construction projects, these schematics shall show the location and text of the proposed main lane guide signs. A schematic layout shall be submitted through the district to the Traffic Operations Division, Traffic Safety Section for approval and subsequent coordination with the FHWA. All signing shall be in conformance with the Texas MUTCD. g. On complex projects, informal contact through the district with the Design Division and FHWA personnel is encouraged with regard to development of preliminary design prior to official schematic submission. h. The engineer shall furnish a project tape that is compatible with the STATE's computer system, a project listing, and a cross section plot showing the original design sections containing the earthwork input and original cross sections for the project. Accuracy of the earthwork design is of utmost importance since it is the basis for contractor payments and construction staking. |
| <u>NO</u> | <u>NO</u> | 3. Exhibit for Airway/Highway Clearance Permits |
| <u>YES</u> | <u>NO</u> | 4. Grading Design <ul style="list-style-type: none"> a. Refine the horizontal and vertical alignment of main lanes, frontage roads, ramps, cross roads and direct connectors based upon the approved schematic layout. Determine vertical clearances at grade separations and overpasses, taking into account the appropriate super elevation rate. b. Typical Sections c. Design Cross Sections d. Determine Cut and Fill Quantities e. Slope Stability Analysis f. Embankment Foundation Stability Analysis g. Embankment Settlement Analysis |
| <u>YES</u> | <u>NO</u> | 5. Pavement Design <ul style="list-style-type: none"> a. Prior to initiating detailed plan preparations for a project, a preliminary investigation shall be made to determine the approximate section and pavement type to be used for the pavement structure. The Flexible Pavement Design Manual for flexible pavement, "Appendix F" of the Design Division, Operations and Procedures Manual, and the current AASHTO Guide for the Design of Pavement Structures, may be used for this purpose. b. The typical section shall also reflect proposed geometric including pavement cross slopes, lane and shoulder widths, and slope rates whenever this data have not been previously shown on a schematic submission. c. Embankment and Subgrade <ul style="list-style-type: none"> (1) Soil Core Holes (Show cost estimate with Function Code 110) <ul style="list-style-type: none"> (a) Along center line (b) Along center line of each roadway The location and minimum number of soil core holes required for this project are as follows: (To be determined when schematic is being completed) |
| <u>YES</u> | <u>NO</u> | |
| <u>NO</u> | <u>NO</u> | |

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
Provided By:
ENGINEER LPA

- | | |
|---|--|
| <u>YES</u> <u>NO</u>

<u>NO</u> <u>NO</u>
<u>YES</u> <u>NO</u>
<u>NO</u> <u>NO</u>
<u>YES</u> <u>NO</u>
<u>YES</u> <u>NO</u>
<u>NO</u> <u>NO</u>
<u>YES</u> <u>NO</u> | <p>5. Pavement Design (<i>continued</i>)</p> <p>c. Embankment and Subgrade (<i>continued</i>)</p> <p style="padding-left: 20px;">(2) Identify, interpret and summarize geologic features that affect engineering design (PI, Sulfate content, % of lime)</p> <p>d. Traffic Data for Pavement Design by STATE</p> <p>e. Basic Design Criteria</p> <p>f. Life Cycle Cost Analysis(es)</p> <p>g. Cost Data</p> <p>h. Pavement Material Properties</p> <p>i. Rehabilitation Investigations</p> <p style="padding-left: 20px;">(1) Core Hole Survey (Show cost estimate with Function Code 110)</p> <p style="padding-left: 40px;">(a) Determine type and depth of existing material, pavement, etc. The Engineer will determine whether to salvage ACP and FLEXBASE as well as their properties and provide this information to TxDOT.</p> |
|---|--|

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 9 - SIGNING, MARKINGS AND SIGNALIZATION
(Function Code 162)

Services
Provided By:
ENGINEER LPA

- | <u>YES</u> | <u>NO</u> | |
|------------|-----------|---|
| | | 1. Signing and Markings Layout |
| | | a. Requirements (Separate Layout) |
| | | (1) Roadway layout |
| | | (2) Center line with station numbering |
| | | (3) ROW lines |
| | | (4) Culverts and other structures that present a hazard to traffic |
| | | (5) Location of utilities, if not shown on plan and profile |
| | | (6) Existing signs to remain, to be removed, to be relocated |
| | | (7) Proposed signs (illustrated and numbered) |
| | | (8) Existing overhead sign bridges to remain, to be revised, removed or relocated |
| | | (9) Proposed overhead sign bridges indicating location by plan layout (electrical details need not be shown on this layout) |
| | | (10) Proposed markings (illustrated and quantified) which include pavement markings, object markings and delineation |
| | | (12) Quantities of existing pavement markings to be removed |
| | | (13) Proposed delineators and object markers |
| | | b. For projects involving freeway to freeway or other types of directional interchanges, projects including left-hand ramps or connections, the following information must be provided: |
| | | (1) The location of interchanges, main lanes, grade separations, frontage roads and ramps |
| | | (2) complete explanation of the sequence and methods of stage construction, where applicable, which would include the initial and ultimate proposed treatment of crossovers and ramps |
| | | (3) The number of lanes in each section of proposed highway and the location of changes in numbers of lanes |
| | | (4) The projected traffic volumes as provided by the STATE (20 year traffic projection, unless otherwise determined by the District Engineer) |
| | | (5) Tentative ROW limits |
| | | (6) Direction of traffic flow on all roadways |
| | | (7) Main lane, ramp, frontage road, and necessary cross road profiles at proposed interchanges or grade separations |
| <u>YES</u> | <u>NO</u> | 2. Summary of Small Signs Tabulation |
| <u>NO</u> | <u>NO</u> | 3. Summary of Large Signs Tabulation including all Guide Signs |
| <u>YES</u> | <u>NO</u> | 4. Sign Detail Sheets |
| | | a. All signs except route markers |
| | | b. Design details for large guide signs |
| | | c. Dimensions of letters, shields, borders, corner radii etc. |
| | | d. Designation of shields attached to guide signs |
| | | e. Designation of arrow used on exit direction signs |

EXHIBIT “B”
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
 Provided By:
ENGINEER LPA

- | | |
|---|--|
| <p><u>YES</u> <u>NO</u></p> <p><u>YES</u> <u>NO</u></p> <p><u>YES</u> <u>NO</u></p> <p><u>N/A</u> <u>NO</u></p> <p><u>N/A</u> <u>NO</u></p> <p><u>YES</u> <u>NO</u></p> <p><u>N/A</u> <u>NO</u></p> <p><u>YES</u> <u>NO</u></p> <p><u>YES</u> <u>NO</u></p> <p><u>YES</u> <u>NO</u></p> | <p>5. Traffic Signals</p> <p>a. Development of Justification (Warrant) Data</p> <p>(1) Location Map
 Relationship of proposed installation to other traffic signals, highways, business areas and traffic generators</p> <p>(2) Photographs as appropriate</p> <p>(3) Accident data as appropriate</p> <p>(4) Vehicle volumes (provided by TxDOT)</p> <p style="padding-left: 20px;">(a) Existing</p> <p style="padding-left: 20px;">(b) Estimated</p> <p style="padding-left: 20px;">(c) Projected</p> <p style="padding-left: 20px;">(d) Pedestrian</p> <p>(5) Traffic Survey - Count Analysis</p> <p>(6) Recommendation based on above data</p> <p>b. Layout</p> <p>(1) Title Sheet (when applicable)</p> <p style="padding-left: 20px;">(a) Describe the location</p> <p style="padding-left: 20px;">(b) Type of installation</p> <p style="padding-left: 20px;">(c) Area map with project limits for each location</p> <p style="padding-left: 20px;">(d) Index of sheets</p> <p style="padding-left: 20px;">(e) Space for official signatures</p> <p>(2) Estimate and quantity sheet (when applicable)</p> <p style="padding-left: 20px;">(a) List of all bid items</p> <p style="padding-left: 20px;">(b) Bid item quantities</p> <p style="padding-left: 20px;">(c) Specification item number</p> <p style="padding-left: 20px;">(d) Paid item description and unit of measure</p> <p>(3) Basis of estimate sheet (list of materials)</p> <p>(4) General notes and specification data sheet</p> <p>(5) Condition diagram</p> <p style="padding-left: 20px;">(a) Highway and intersection design features</p> <p style="padding-left: 20px;">(b) Roadside development</p> <p style="padding-left: 20px;">(c) Traffic control including illumination</p> <p>(6) Plan sheet(s)</p> <p style="padding-left: 20px;">(a) Existing traffic control that will remain (signs and markings)</p> <p style="padding-left: 20px;">(b) Existing utilities</p> <p style="padding-left: 20px;">(c) Proposed highway improvements</p> <p style="padding-left: 20px;">(d) Proposed installation</p> <p style="padding-left: 20px;">(e) Proposed additional traffic controls</p> <p style="padding-left: 20px;">(f) When applicable, proposed conduit for Railroad interconnect with standard details for runs under tracks.</p> <p style="padding-left: 20px;">(g) Proposed illumination attached to signal poles.</p> <p>(7) Notes for plan layout</p> <p>(8) Elevation sheet(s) (span wire design)</p> <p>(9) Phase sequence diagram(s)</p> <p style="padding-left: 20px;">(a) Signal locations</p> <p style="padding-left: 20px;">(b) Signal indications</p> <p style="padding-left: 20px;">(c) Phase diagram</p> <p style="padding-left: 20px;">(d) Signal sequence table</p> <p style="padding-left: 20px;">(e) Flashing operation (normal and emergency)</p> <p style="padding-left: 20px;">(f) Preemption operation (when applicable)</p> <p style="padding-left: 20px;">(g) Interval timing, cycle length and offset</p> |
|---|--|

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
Provided By:
ENGINEER LPA

- | | | |
|------------|-----------|---|
| <u>YES</u> | <u>NO</u> | 5. Traffic Signals (<i>continued</i>) |
| | | b. Layout (<i>continued</i>) |
| | | (10) Construction detail sheets(s) |
| | | (a) Poles (TxDOT standard sheets) |
| | | (b) Detectors |
| | | (c) Pull Box and conduit layout |
| | | (d) Controller Foundation standard sheet |
| | | (11) Marking details (when applicable) |
| | | (12) Barricade and warning sign standard sheet and any special details for work zone traffic control for special conditions |
| | | (13) Aerial or underground interconnect details (when applicable) |
| | | c. General Requirements |
| | | (1) Contact local utility company |
| <u>YES</u> | <u>NO</u> | (a) Confirm power source |
| <u>YES</u> | <u>NO</u> | (b) Discuss route of aerial or underground interconnect cable (when applicable) |
| <u>YES</u> | <u>NO</u> | (c) Adjustment of overhead utility lines |
| <u>YES</u> | <u>NO</u> | (2) Prepare governing specifications and special provisions list |
| <u>YES</u> | <u>NO</u> | (3) Prepare project estimate |
| <u>YES</u> | <u>NO</u> | d. Summary of Quantities |

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 10 - MISCELLANEOUS (ROADWAY)

(Function Code 163)

Services
Provided By:
ENGINEER LPA

- | | | |
|-----------|-----------|---|
| | | 1. Retaining Walls |
| | | a. Structural Details |
| <u>NO</u> | <u>NO</u> | (1) Cast-in-Place Cantilever at _____ locations. (TxDOT Standard Retaining Wall)* |
| <u>NO</u> | <u>NO</u> | (2) Tiedback Retaining Wall at _____ location. (TxDOT standard retaining wall) |
| <u>NO</u> | <u>NO</u> | (3) Specialized Retaining Wall at _____ locations (Unique Design).* |
| | | b. Alternate Patented Retaining Walls at all locations. (Layouts Only)** |
| <u>NO</u> | <u>NO</u> | (1) Mechanically Stabilized Earth |
| <u>NO</u> | <u>NO</u> | (2) Concrete Block Wall Systems |
| <u>NO</u> | <u>NO</u> | c. Retaining Wall Layout (PLAN) |
| | | (1) Designation of reference line |
| | | (2) Beginning and ending retaining wall stations |
| | | (3) Station of each retaining wall joint*** |
| | | (4) Offset from reference line |
| | | (5) Horizontal curve data |
| | | (6) Number of retaining wall panels and lengths*** |
| | | (7) Total length of wall |
| | | (8) Indicate face of wall |
| | | (9) All wall dimensions and alignment relations (alignment data as necessary) |
| | | (10) Soil core hole locations |
| <u>NO</u> | <u>NO</u> | d. Retaining Wall Layout (ELEVATION) |
| | | (1) Top of wall elevations at each joint or intervals*** |
| | | (2) Existing and finished ground line elevations |
| | | (3) Height of stem at each joint*** |
| | | (4) Wall panel designations*** |
| | | (5) Top of footing elevations*** |
| | | (6) Limits of measurement for payment**** |
| | | (7) Type, limits and anchorage details of railing (If applicable) |
| | | (8) Top and bottom of wall profiles and soil core hole data plotted at correct station and elevation. The plot shall be at the same scale as the wall profile. Ground water elevations and the observation date shall be shown. |
| <u>NO</u> | <u>NO</u> | e. Foundation Studies (Show cost estimate with Function Code 110) |
| <u>NO</u> | <u>NO</u> | (1) The soil core holes shall be obtained at approximately 200 foot intervals along retaining wall alignments. The core holes shall extend 25 feet below the footing elevation. |
| <u>NO</u> | <u>NO</u> | f. Stability Analysis (the ENGINEER shall estimate this task as part of his bid to complete the work). |
| <u>NO</u> | <u>NO</u> | g. Estimate |
| <u>NO</u> | <u>NO</u> | h. Summary of Quantities |
| <u>NO</u> | <u>NO</u> | i. Typical X-section. |
| <u>NO</u> | <u>NO</u> | j. General Guidelines for Retaining Walls |
| | | (1) The ENGINEER shall make final design calculations and final detail drawings in accordance with standard requirements of the Texas Department of Transportation. The designer and checker shall check all calculations and initial each page. |
| | | (2) The ground water level should be observed at the water strike. |
| | | (3) For purposes of uniformity statewide, soil core hole data shall be shown on layouts as illustrated in the Bridges and Structures Foundation Exploration and Design Manual. |
| | | (4) Foundation exploration shall conform to the requirements set forth in Administrative Circular No. 25-84, Administrative Circular 33-87 and Administrative Circular No. 25-92. |

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services Provided By:		
<u>ENGINEER</u>	<u>LPA</u>	
<u>YES</u>	<u>NO</u>	
		2. Traffic Control Plan, Detours and Sequence of Construction
		Traffic Control Plans (TCP) are required for all projects. A detailed TCP shall be developed when traffic handling during construction involves complications for which a feasible solution is not covered by the Texas MUTCD or the current Barricade and Construction (BC) Standards. The following items are required on all Traffic Control Plan Layouts:
		a. The sequence of construction and method of handling traffic during each phase.
		b. The existing and proposed traffic control devices that will be used to handle traffic during each construction sequence. Include signals, regulatory signs, warning signs, construction warning signs, guide signs, route markers, construction pavement markings, channelizing devices, portable changeable message signs, flashing arrow boards, barricades, barriers, etc.
		c. The proposed traffic control devices (stop signs, signals, flag person, etc.) at grade intersections during each construction sequence.
		d. Where detours are provided, typical cross sections shall be shown.
		e. Road construction work hours shall be developed after an investigation of the traffic volumes has been performed.
		3. Illumination
<u>NO</u>	<u>NO</u>	a. Preliminary Roadway Illumination Layout and Circuit Layout
		(1) For projects involving freeway to freeway or other types of directional interchanges and projects including left-hand ramps or connections, provide the following:
		(a) The location of interchanges, main lanes, grade separations, frontage roads and ramps
		(b) A complete explanation of the sequence and methods of stage construction, where applicable, which would include the initial and ultimate proposed treatment of crossovers and ramps
		(c) The number of lanes in each section of proposed highway and the location of changes in the number of lanes
		(d) The projected traffic volumes as provided by the STATE (20 year traffic projection unless otherwise determined by the district engineer)
		(e) Tentative ROW limits
		(f) Direction of traffic flow on all roadways
		(g) Main lane, ramp, frontage road, and necessary cross road profiles at proposed interchanges or grade separations
<u>NO</u>	<u>NO</u>	b. Final Roadway Illumination and Electrical Circuit Layouts
		(1) Roadway layout showing pavement edges, shoulders, curbs, retaining walls, etc.
		(2) Center line with station numbering.
		(3) ROW lines.
		(4) Symbol legend. Use department standard symbols for lighting and electrical.
		(5) Culverts and other structures that present a hazard to traffic.
		(6) Location of underground utilities, if not shown on plan profile.
		(7) Location of overhead electrical lines, both crossing and parallel to ROW.
		(8) Existing sign lighting circuits and roadway illumination to remain, to be removed, to be relocated.
		(9) Existing service poles, electrical circuits, ground boxes, etc.
		(10) Contact electric utility for service pole locations, voltage characteristics.
		(11) Location of proposed sign lighting circuits and roadway illumination.
		(12) Proposed electrical circuits.
		(13) Tabulation of all quantities including proposed, existing to be relocated, existing to be removed. The layout sheet quantities and lighting summary shall be shown. Tabulations to include estimated quantity with a column for final quantities.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services		
Provided By:		
<u>ENGINEER</u>	<u>LPA</u>	
<u>NO</u>	<u>NO</u>	3. Illumination (<i>continued</i>)
		c. General Guidelines for Illumination (If applicable)
		The ENGINEER shall submit to the COUNTY, well in advance of PS&E due date, the roadway illumination and electrical circuit layout sheets for review by the STATE. Two copies of the layout sheets are to be submitted. One copy will be returned to the Engineer showing corrections that are to be made by the ENGINEER. When final plan submission is made, the ENGINEER shall provide a written statement regarding completion of the corrections.
<u>YES</u>	<u>NO</u>	4. Miscellaneous Drafting/Standards
<u>NO</u>	<u>NO</u>	a. Erosion Control
		b. Landscape Development
<u>YES</u>	<u>NO</u>	5. Compute and Tabulate Quantities
<u>YES</u>	<u>NO</u>	6. Special Utility Details (Irrigation lines)
		7. Miscellaneous Structures
		a. Type of Structure*
		(1) Overhead Sign Bridges (O.S.B.)
		Modifications or special O.S.B. designs shall be prepared using the same design assumptions that are used for the standard O.S.B. structures.
<u>NO</u>	<u>NO</u>	(a) New O.S.B. structure(s)
<u>NO</u>	<u>NO</u>	(b) Structural evaluation of existing O.S.B. structure(s) that are to remain in place or to be relocated.
<u>NO</u>	<u>NO</u>	(2) High Mast Illumination Poles (HMIP)
<u>YES</u>	<u>NO</u>	(3) Traffic Signal Supports
<u>NO</u>	<u>NO</u>	(4) Conventional Illumination Poles
<u>NO</u>	<u>NO</u>	(5) Sound Barrier Walls
<u>NO</u>	<u>NO</u>	b. Checklist for Layouts
		(1) Reference appropriate O.S.B. standard
		(2) Drilled shaft size and length
		(3) Soil strength used for design {indicate basis and boring(s) used}
		(4) Design height
		(5) Tower heights
		(6) Leg spacings
		(7) Design wind speed
<u>NO</u>	<u>NO</u>	c. Foundation Studies (Show cost estimate with Function Code 110)
		The soils exploration requirements for miscellaneous structures on this project are as follows: (To be provided by the Engineer on an as-needed basis)
		8. Agreements
<u>YES</u>	<u>NO</u>	a. Utility Agreements
<u>YES</u>	<u>NO</u>	b. Exhibits for Utility Agreements
<u>NO</u>	<u>NO</u>	c. Railroad Agreements
		d. Railroad Exhibits
<u>NO</u>	<u>NO</u>	(1) Railroad Underpasses
<u>NO</u>	<u>NO</u>	(2) Railroad Overpasses
<u>NO</u>	<u>NO</u>	(3) Railroad Grade Crossing (Replanking)
<u>NO</u>	<u>NO</u>	(4) Railroad Grade Crossing Warning Systems (Signals)
<u>NO</u>	<u>NO</u>	(5) Other Miscellaneous Sketches for Railroads
<u>NO</u>	<u>NO</u>	e. Traffic Signal Agreements
<u>NO</u>	<u>NO</u>	f. Exhibits for Traffic Signal Agreements
<u>YES</u>	<u>NO</u>	9. Estimate
<u>YES</u>	<u>NO</u>	10. Specifications and General Notes

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 11 - BRIDGE DESIGN

(Function Code 170)

Services
 Provided By:
ENGINEER LPA

			<u>NUMBER REQUIRED</u>
		1. Preparation of Structural Details	
		a. New Structure(s)	
<u>NO</u>	<u>NO</u>	(1) Underpass(es)	_____
<u>NO</u>	<u>NO</u>	(2) Overpass(es)	_____
<u>NO</u>	<u>NO</u>	(3) Main Lanes	_____
<u>NO</u>	<u>NO</u>	(4) Direct Connector(s)	_____
<u>NO</u>	<u>NO</u>	(5) Ramp Bridge(s)	_____
<u>YES</u>	<u>NO</u>	(6) Waterway Structure(s)**	<u> 1 </u>
<u>NO</u>	<u>NO</u>	(7) Pedestrian Structure(s)	_____
<u>NO</u>	<u>NO</u>	(8) Utility Structure(s)	_____
<u>NO</u>	<u>NO</u>	(9) Railroad Underpass(es)	_____
<u>NO</u>	<u>NO</u>	(10) Railroad Overpass(es)	_____
<u>NO</u>	<u>NO</u>	(11) Bridge Classification Culvert(s)**	_____
<u>NO</u>	<u>NO</u>	(11) Alternate Structural Designs	_____
<u>NO</u>	<u>NO</u>	(12) Alternate Foundation Design	_____
		Total New Structures =	
		b. Existing Structure(s)	
<u>NO</u>	<u>NO</u>	(1) Bridge Widening, Rehabilitation and/or Modification of Existing Structure(s)	_____
<u>NO</u>	<u>NO</u>	(2) Bridge Replacement	_____
<u>NO</u>	<u>NO</u>	(3) Raising Bridge Elevation	_____
<u>NO</u>	<u>NO</u>	(4) Bridge Classification Culvert(s) Widening and/or Modification of Existing Structures(s)	_____
<u>NO</u>	<u>NO</u>	(5) Railroad Overpass(es)	_____
<u>NO</u>	<u>NO</u>	(6) Railroad Underpass(es)	_____
		Total Existing Structures =	<u> 1 </u>

* Countour plots of bridge gores are required for projects involving ramps within the main bridge in order to ensure project transition. The Template data and vertical alignment necessary to generate the contour plots are also required.

** In the early stages of a project, it sometimes cannot be determined whether a Waterway Bridge Structure or a Bridge Classification Culvert (20' minimum length) will be required. Therefore, the ENGINEER should be aware that either of these two types of bridges may be reclassified later in the project for the other type when more information is known that would dictate a change in structure classification.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
Provided By:
ENGINEER LPA

- | <u>YES</u> | <u>NO</u> | |
|------------|-----------|--|
| | | 2. Preparation of Bridge Layouts (each bridge) |
| | | a. Bridge Layouts (PLAN) |
| | | (1) Horizontal curve information or bearing of centerline. |
| | | (2) Including horizontal, vertical, and template information of all roadways or railroads crossed. |
| | | (3) Bearing of center line or reference line. |
| | | (4) Skew angle(s). |
| | | (5) Slope for header banks and approach fills. |
| | | (6) Control stations at beginning and ending of bridge (with deck elevation), intersections, etc. |
| | | (7) Approach pavement and crown width. |
| | | (8) Bridge roadway width and curbs, face of rail, shoulders, or sidewalks. |
| | | (9) Approach slab and curb returns. |
| | | (10) Limits and type of riprap. |
| | | (11) Proposed features under structure. |
| | | (12) Location of profile grade line. |
| | | (13) North arrow. |
| | | (14) Typical bridge roadway section including preliminary proposed beam types and spacings. |
| | | (15) Cross slope and super elevation data. |
| | | (16) Minimum horizontal clearances when applicable. |
| | | (a) Dimensions to features that control clearances. (Calculate and indicate points of minimum vertical and horizontal clearances. |
| | | (17) Location of soil core holes (station and offset), shown on layout. |
| | | (18) Bent stations and bearings. |
| | | (19) Retaining wall locations. |
| | | (20) Traffic flow directional arrows. |
| | | (21) Railing types shown. |
| | | (22) Joint types and seal size, if used. |
| | | (23) Beam line numbers consistent with span details. |
| | | (24) Critical horizontal clearances (location of railroad tracks, nearby structures and utilities). |
| | | (25) Bearings of utilities. |
| | | b. Bridge Layouts (ELEVATION) |
| | | (1) Type of foundation. |
| | | (2) Finished grade elevations at beginning and end of bridge. |
| | | (3) Overall length of structure. |
| | | (4) Length, type of spans and units. |
| | | (5) Type of railing. |
| | | (6) Minimum calculated vertical clearance(s). |
| | | (7) Existing and proposed ground lines clearly marked. |
| | | (8) Grid elevations and stations. |
| | | (9) Bent numbers encircled. |
| | | (10) Stationing of bridge compatible with grid stations. |
| | | (11) Standard title. |
| | | (12) Profile grade data. |
| | | (13) Type of riprap. |
| | | (14) Soil Core Hole information with penetrometer test data shall be shown on the bridge layout at correct station, elevation and scale. |
| | | (15) Fixed/expansion condition of all bents. |
| | | (16) Column "H" heights. |
| | | (17) Number, size and length of foundations. |

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
 Provided By:
ENGINEER LPA

- | | |
|--|---|
| <u>YES</u> <u>NO</u> | 2. Preparation of Bridge Layouts (each bridge) <i>(continued)</i>
c. Additional layout requirements for waterway structures and bridge classification culverts.
(1) Design and 100-year peak discharges.
(2) Design and 100-year high water (HW) (Recorded HW and date if available)
(3) Natural and through-bridge velocities for design and 100-year floods.
(4) Calculated backwater for design and 100-year floods.
(5) Direction of flow for waterway crossings.
(6) Contours for water crossing. |
| <u>NO</u> <u>NO</u>
<u>YES</u> <u>NO</u> | 3. Bridge Classification Culvert, Estimate, Quantities, and Specifications (each bridge)
4. Foundation Studies (Show cost estimate with Function Code 110)
The minimum number of soil core holes shall be obtained in accordance with Section 1-301 of the Bridges and Structures Foundation Exploration and Design Manual. Soil core holes shall be obtained at approximately (300 foot) intervals along bridge alignments. Texas cone penetrometer (TCP) tests shall be conducted in all soil types encountered at a maximum of (10 foot) intervals. If single column bents with single drilled shafts are planned, TCP values should be taken at close intervals in the upper (15 feet). |
| <u>YES</u> <u>NO</u>
<u>YES</u> <u>NO</u>
<u>YES</u> <u>NO</u> | 5. Bridge Total Quantities and Cost Estimates (each bridge)
6. Bridge Special Provisions and Specifications (each bridge)
7. Bearing seat elevations for each beam or girder. Top of cap elevations for non-beam type structures. |
| <u>YES</u> <u>NO</u> | 8. General Guidelines for Bridge Design
a. The ENGINEER shall prepare a bridge layout of each bridge structure for Company's review and approval. The bridge layout shall be in conformance with the Bridges and Structures, Operation and Planning Manual and the Bridges and Structures, Detailing Manual. Soil core hole data is not required for submission of the preliminary bridge layout. No bridge design work is to be performed until the COUNTY has given the engineer written approval of the preliminary bridge layout. |

Several months may be required, after the preliminary bridge layout is submitted, for the district to obtain approval and/or permits from the following:

- TxDOT Design Division, when applicable:
 - Railroad Companies
 - FHWA
 - U.S. Army Corps of Engineers
 - U.S. Coast Guard
 - Bureau of Reclamation
 - Texas Parks and Wildlife
 - Others

Therefore, the bridge layout should be submitted at the earliest possible date and the ENGINEER's design schedule should reflect this.

- b. All bridge superstructure and substructure design will be reviewed by the Design Division for purposes of verifying structural integrity and optimization of design.
- c. The final bridge layout shall be in conformance with the Bridges and Structures, Operation and Planning Manual and the Bridges and Structures Detailing Manual.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
Provided By:
ENGINEER LPA

8. General Guidelines for Bridge Design (*continued*)

- d. The ENGINEER shall make final design calculations and final detail drawings in accordance with standard requirements of the Texas Department of Transportation. All bridge design shall be in conformance with the Texas Department of Transportation Bridges and Structures Operation and Planning Manual, the current American Association of State Highway and Transportation Officials or American Railway Engineers Association Specifications for railway structures, Standard Specifications for Highway Bridges, including applicable interim specifications, and the Bridges and Structures, Foundation Exploration and Design Manual. The ENGINEER shall furnish design calculations to the Design Division. **The designer and checker shall check all calculations and initial each page.**
- e. Structural steel or prestressed concrete shop drawings, form work drawings and false work drawings are not part of the design requirements. However, contract plans shall be in sufficient detail to permit the preparation of complete shop details for fabrication and erection.
- f. Elements of the bridge (abutments, bents, slabs, etc.) shall be detailed to a metric scale of 1:20 (1/2 inch equals one foot architect scale) or 1:50 (1/4 inch equals one foot architect scale) to provide clear legible drawings when the drawings are reduced. Lettering shall be a minimum size of 4 millimeters (5/32 inch) height for hand lettering and 140 for lettering by computer-aided design and drafting (CADD).
- g. Standard drawings for beams, diaframs, railings, armor joints, riprap, etc., shall be furnished to the ENGINEER upon request. These standards shall not be redrawn by the ENGINEER nor shall his title block be transferred to the standard drawings. Modifications to the standards, if necessary, shall be clearly identified and designated by "MOD" in the standard title. Specific special drawings prepared by the ENGINEER shall not be identified as standards.
- h. Bridge layout sheets shall have the same vertical and horizontal scale. Usually a metric scale of 1:100 (1 inch = 10 feet) or 1:200 (1 inch = 20 feet) is used. Sections of existing and proposed structures usually have a metric scale of 1:50 (1 inch = 5 feet). Soil core holes shall be positioned and labeled on the bridge layout plan view. The core hole data shall be plotted at the correct station, at the same vertical scale, and at the proper elevation unless otherwise approved by the Design Division.
- i. APPENDIX C, "GENERAL PLAN CHECKLIST", on pages C-1 thru C-5, more specifically relates various sheet types, details, summaries, standards, etc.
- j. For purposes of uniformity statewide, soil core hole data shall be shown on layouts as illustrated in the Bridges and Structures Foundation Exploration and Design Manual.
- k. Geometry and structural design errors found after acceptance of bridge plans shall be promptly corrected by the consultant at no cost to the Company.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

ADDITIONAL RESONSIBILITIES

Easements, Letters of Permission, Etc.

The ENGINEER shall be responsible for delineating easements. The ENGINEER will be responsible for securing the necessary legal instruments.

Coordination of Utilities

The ENGINEER shall furnish the LPA prints of a project layout which will be distributed by ENGINEER to various utility companies to determine which utilities are in the limits of the project. These shall be preliminary layouts. Upon completion of the preliminary drainage plans and U&D sheets, the ENGINEER shall distribute to the various utility companies and request return. Upon return of these prints, the ENGINEER will schedule a meeting with the various utility companies to discuss potential conflicts and conformance with the State's Utility Accommodation Policy. The ENGINEER is responsible for coordination with the various utility companies for exposing potential conflicts and field ties to uncover utilities in potential conflict areas.

Meetings

Meetings will be held with the FHWA, State Officials, local governments, property owners, utility owners, railroad companies, other consulting firms, etc., as needed or required by the LPA. The ENGINEER shall coordinate through the LPA for the development of this project with any local entity having jurisdiction or interest in the project (i.e., city, county, etc).

Specifications, Special Provisions, Special Specifications

Use the State's standard specifications or previously approved special provisions and/or special specifications. If a special provision and/or special specification is developed for this project, it shall be in the State's format and incorporate references to approved State test procedures.

Project Manager/Engineer Communication

The ENGINEER shall designate one Texas Registered Professional Engineer to be responsible throughout the project for project management and all communications, including billing, with the LPA's Director. Any replacements to the ENGINEER's designated Project Manager/Engineer must be approved by the LPA.

Engineering documents produced for the department's engineering projects shall be signed, sealed and dated or CADD sealed in accordance with Administrative Order No. 5-89 and Administrative Circular No. 26-91.

Design Responsibilities

The ENGINEER is responsible for design errors and/or omissions that become evident before, during or after construction of the project. The ENGINEER's responsibility for all questions arising from design errors and/or omissions will be determined by the LPA and all decisions shall be final and binding. This would include, but not necessarily be limited to:

1. All design errors and/or omissions resulting in additional design work to correct the errors and/or omissions.
2. Preparation of design documents and detail drawings necessary for a field change due to design errors and/or omissions.
3. Revision of original tracings to the extent required for a field change due to design errors and/or omissions.

The ENGINEER shall promptly make necessary revisions or corrections resulting from the ENGINEER's errors, omissions or negligent acts without additional compensation. Acceptance of the work by the LPA will not relieve the ENGINEER of the responsibility for subsequent correction of any such errors or omissions or for clarification of any ambiguities.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Document and Information Exchange

Data, Plan Sheets, General Notes and/or Specifications provided to the LPA shall be furnished on 8GB USB flash drives. Each 8 GB flash drive shall have a file titled Table of Contents. The Table of Contents shall indicate the locations of files within the directory structure of the documentation.

General Notes and specifications shall be provided in MS Office 2007 format. Plan sheets shall be provided in Microstation DGN or GEOPAK GPK format. PDF copies of plan sheets shall also be provided.

Two copies of the documentation shall be provided to the LPA.

If required, the ENGINEER shall provide to the LPA, a CD that contains all the plan sheets for the project. The graphics tape shall be compatible with the LPA's computer system.

CD Tape Required (YES or NO): YES

Proposal Time

The time indicated in the proposal and the contract shall include time necessary for reviews, approval, etc.

Office Location

The ENGINEER will perform the services to be provided under this agreement out of their office or offices listed below:

Service
PS&E

Office Location
Mission Office

The work effort will be managed out of the Mission
(City)
office located at 900 S. Stewart Rd, Suite 4,
(Address)
Mission, Texas.
(City) (State)

EXHIBIT "C"
PROJECT SCHEDULE
MILITARY HIGHWAY EXTENSION PROJECT
From Intersection of FM 1016 SH 336 East to FM 2061

TASK AND DESCRIPTION	2017							2018						
	JUL	AUG	SEPT	OCT	NOV	DEC	JAN	FEB	MARCH	APRIL	MAY	JUN	JUL	AUG
WA #1: Phase I - EA, Limited Public Involvement & Schematic														
Notice to Proceed														
Limited Public Involvement with Project Stakeholders														
Phase I Environmental Site Assessment														
Schematic Design & Hydrologic Mapping														
Field Surveys for Design & Construction														
WA #2: Phase II - PS&E and Construction Oversight														
PS&E Design (Including Bridge & Traffic Signals)														
Permitted Utility Adjustment Coordination														
Local Letting Procedures for Bridge & Signal Work														
Let Project														
Construction Inspection for Bridge & Signal Work														
WA #3: Phase III - ROW Mapping														
Complete ROW Map														
ROW Acquisition														

 B2Z Engineering
 Hidalgo County



EXHIBIT "D"
FEE PROPOSAL

Military Highway Extension Project - Contract # 17-182-06-13
Precinct #2

TASKS	MANHOURS						Total Line Item Cost
	Senior Project Manager	Project Engineer	Senior Engineer Tech	Admin/Clerical	B2Z Total Hours		
1	8	22	32	8	70	\$8,353.46	
2	150	500	776		1426	\$176,511.16	
3	20	54	64		138	\$17,957.14	
4	30	90	168		288	\$35,136.78	
5	10	40	30	22	102	\$11,973.50	
	218	706	1070	30	1994		
Labor Hours	218	706	1070	30	1994		
Hourly Base Rates	\$ 68.00	\$ 45.00	\$ 31.00	\$ 20.00			
Contract Rate FY2017	\$ 211.48	\$ 139.95	\$ 96.41	\$ 62.20			
Total Labor Costs	\$ 46,102.64	\$ 98,804.70	\$ 103,158.70	\$ 1,866.00		\$249,932.04	

B2Z Engineering Total Cost

\$249,932.04

AI-62105**Purchasing Department 22. C. 2.****CC - REGULAR****Prct. 2****Meeting Date:** 10/17/2017**Submitted For:** Eddie Cantu, COMM. PCT. #2 **Submitted By:** Erika Zamora, COMM. PCT. #2**Department:** COMM. PCT. #2**Information****CAPTION**

Requesting approval of Work Authorization No. 2 (with an estimated cost of \$249,932.04) as submitted by project engineer, B2Z Engineering LLC, to provide PS&E (including pavement, traffic signal, bridge design, and utility coordination) for Precinct 2 Military Hwy Ext Project, through Contract #C-17-182-06-13.

BACKGROUND**Fiscal Impact****CALENDAR YEAR:** 2017**ACCT. #:** 7-1350-431-00-122-139-0-721/841**FUNDS AVAILABLE Y/N?:** Y/Pending**MATCHING FUNDS Y/N?:** N**BUDGETARY IMPACT:**

Funding pending approval of AI#62104 CC 10/17/17.

AttachmentsWork Auth#2**Form Review**

Inbox	Reviewed By	Date
Purchasing - Internal	Marty Salazar	10/13/2017 12:59 PM
Budget & Management	Veronica Ortiz	10/13/2017 01:36 PM
Final Approval	Monica Salinas	10/13/2017 05:19 PM
Form Started By: Erika Zamora		Started On: 10/13/2017 12:26 PM
Final Approval Date: 10/13/2017		