




1. Standard Reflectance of 80/50/20 unless noted otherwise
2. Not a Construction Document, for Design purposes only
3. Standard indoor calc points @ 30" A.F.F. unless noted otherwise
4. Standard outdoor calc points @ Grade unless noted otherwise
5. Egress calc points @ 0" A.F.F.
6. Mlazgar Associates assumes no responsibility for installed light levels due to field conditions, etc.

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
CalcPts_2	Illuminance	Fc	0.63	18.7	0.0	N.A.	N.A.

Luminaire Schedule								
Symbol	Qty	Label	Manufacturer	Description	Arrangement	Lum. Lumens	Lum. Watts	LLF
	6	OA		131-9640_us	Single	3325	55	0.900
	2	OB		131-9635_us	Single	1936	27	0.900
	3	OC		EX2R-300-80-35-SO-20'	GROUP	N.A.	N.A.	0.900
	2	SP1		PRV-PA2B-740-U-T3	Single	19667	151	0.900
	1	SP2		PRV-PA2B-740-U-5WQ	Back-Back	20332	151	0.900

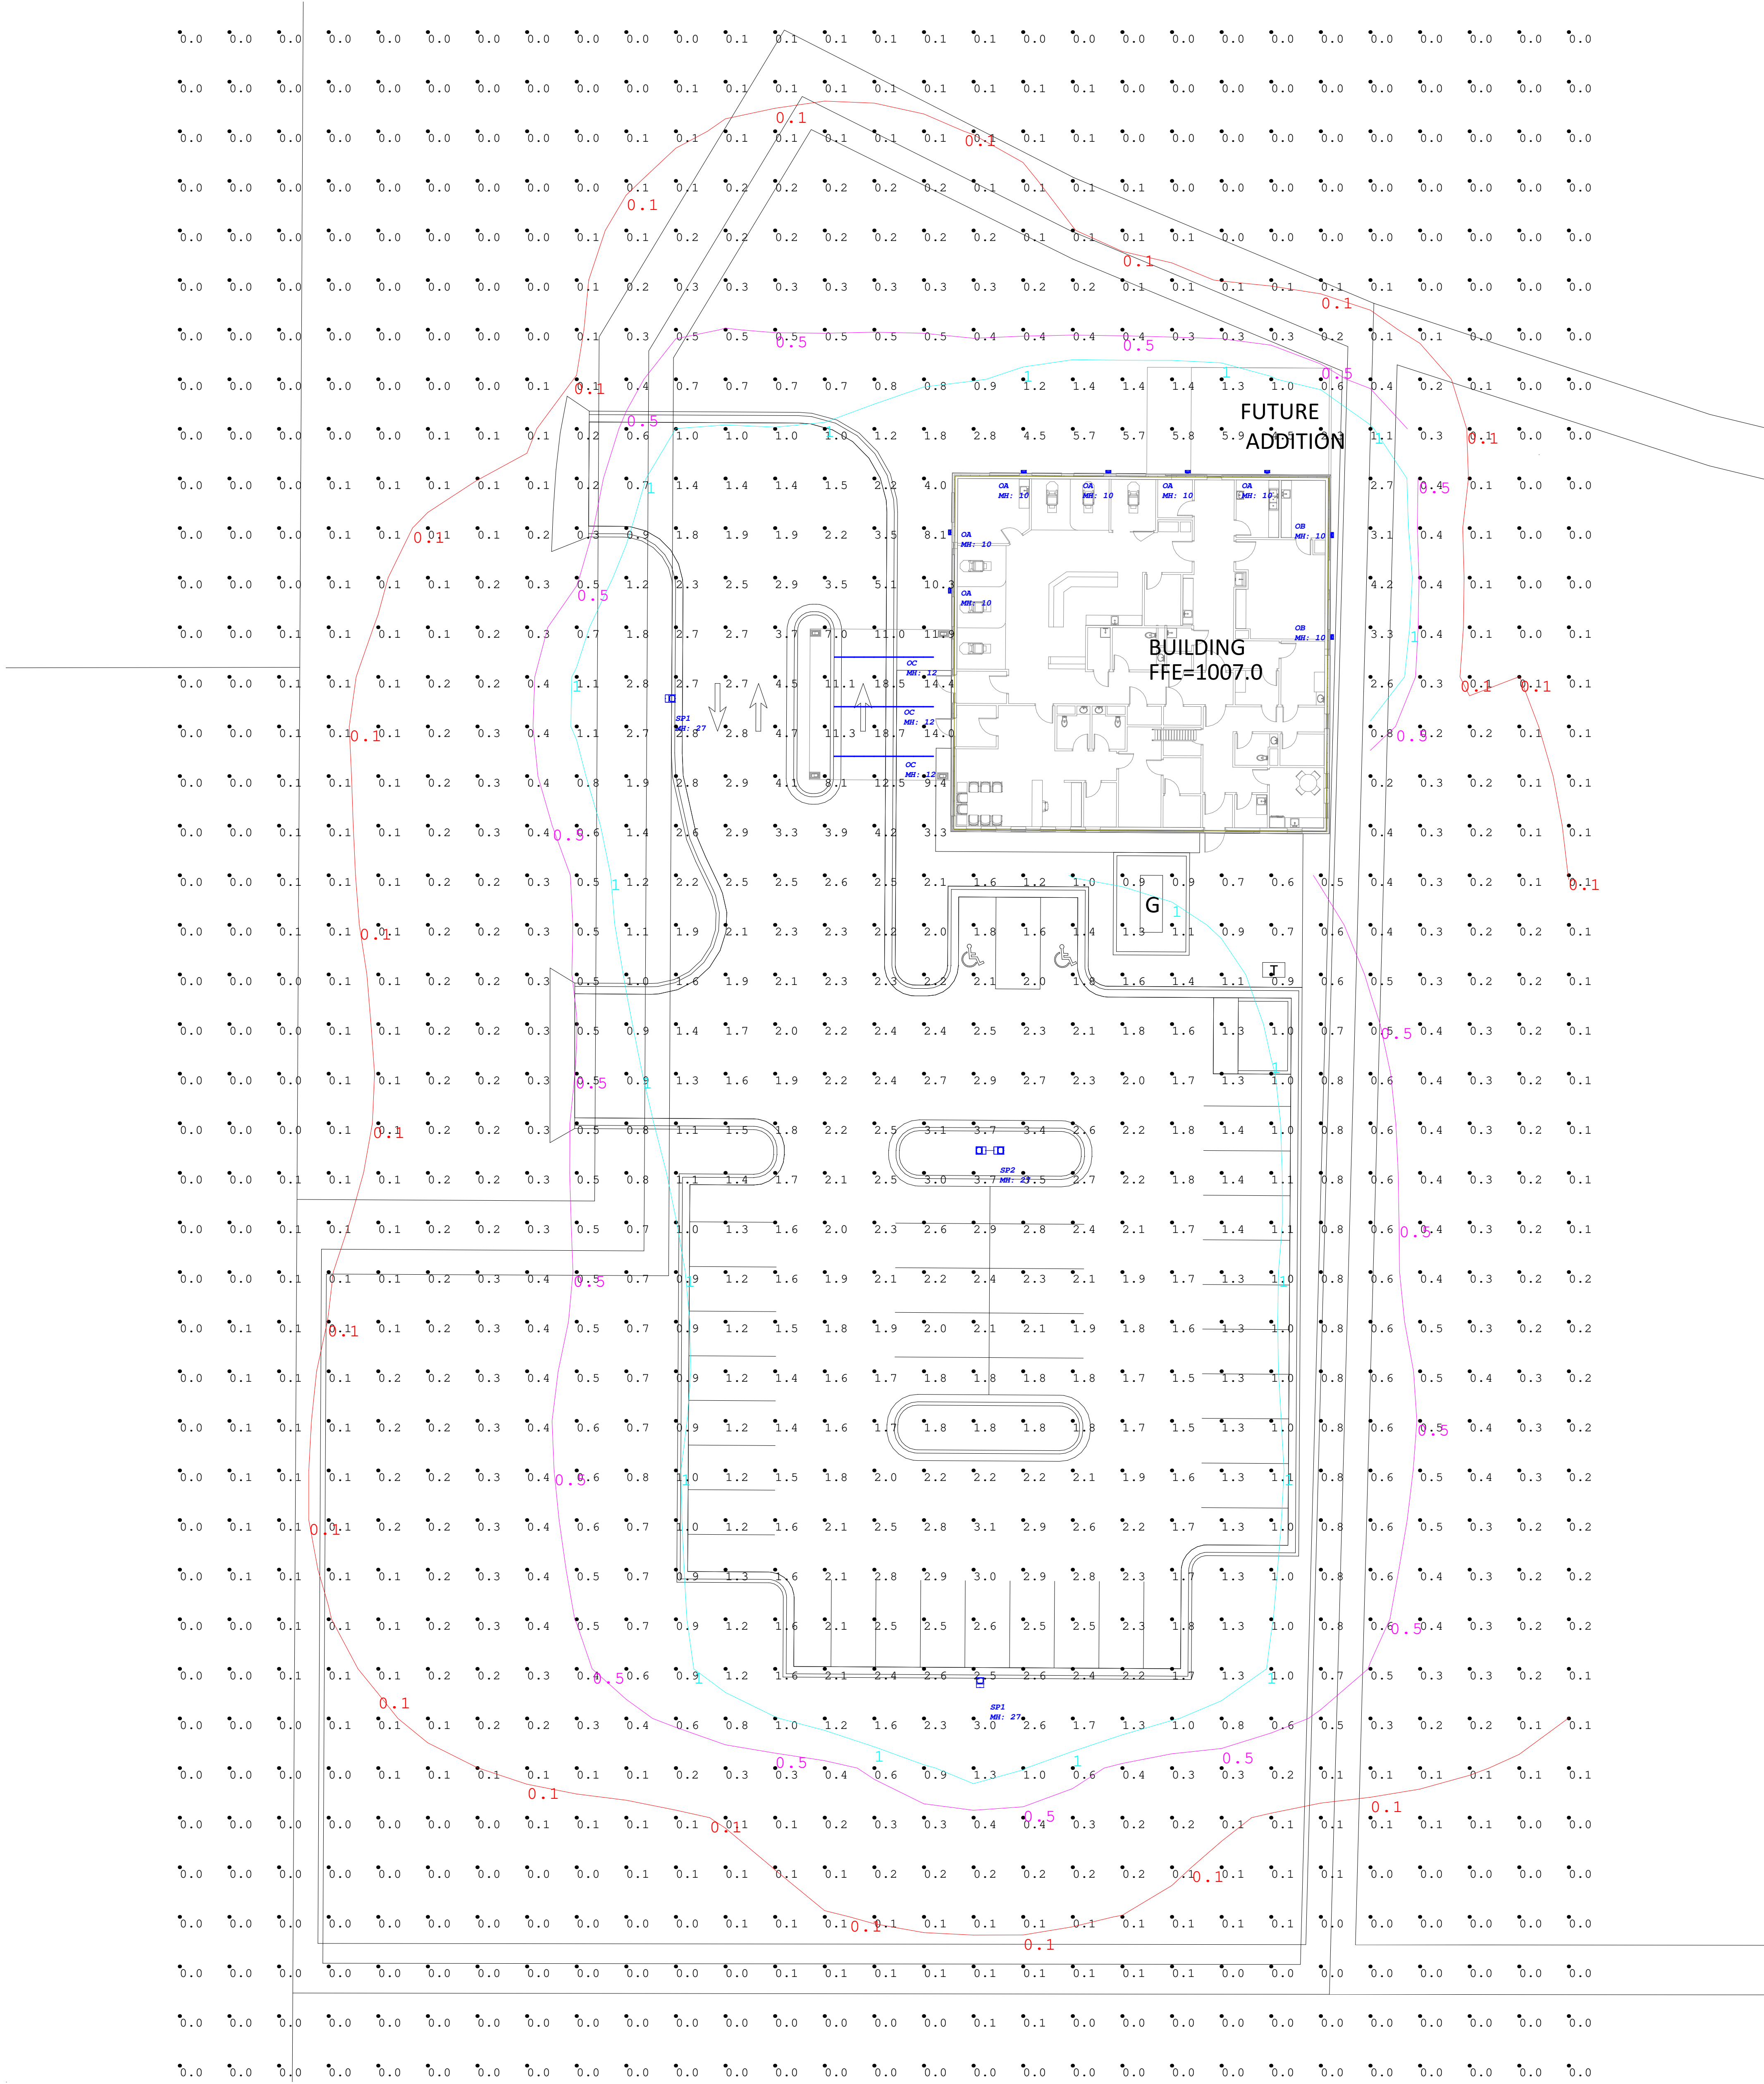


#	Date	Comments
Revisions		



Project

Type

Notes

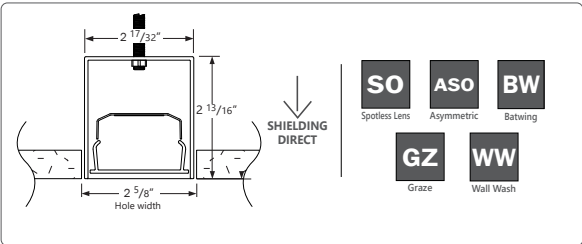

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY	SHIELDING
1000 lm/ft	9.8 W/ft	101 lm/W	SO
750 lm/ft	7.2 W/ft	103 lm/W	GZ
750 lm/ft	7.4 W/ft	101 lm/W	ASO
1000 lm/ft	9.7 W/ft	102 lm/W	BW
750 lm/ft	7.4 W/ft	101 lm/W	WW

*Please consult factory for custom lumen output and wattage.

Ordering Guide



EX2R									
PRODUCT ID		NOM. LUM/FT		CRI		COLOR TEMP. (choose one)		SHIELDING DIRECT	
EX2R	Extend 2 Recessed	300	300 lm/ft - min	80	80 CRI	27	2700 K	SO	spotless lens
		750	750 lm/ft - max for GZ, WW, ASO*	90	90 CRI	30	3000 K	GZ	graze
						35	3500 K	WW	wallwash
		1000	1000 lm/ft - max			40	4000 K	ASO	asymmetric
						50	5000 K	BW	batwing
Ships with 7/8" hole standard for power connection by others if no optional power feed is specified, see page 3 for details.		Outputs between listed min and max are available. * 750 lm/ft max. only for GZ, WW and ASO. Consult factory for outputs outside of the listed range.						Choose only one of the options above;	

LENGTH (FT)		FINISH		VOLTAGE		DRIVER		CIRCUITS		MOUNTING	
2	2'	AP	aluminum paint	120	120 V	DP	dimming (0-10V) 1%	1	1 circuit	DF	flange
3	3'	W	white	277	277 V	DPX	dimming (0-10V) 1%, extended	2	2 circuits	D	flangeless
4	4'	BLK	black	347	347 V*		temp. range (-40°C - +50°C)	+E(#)	emergency circuit*	DS	drywall spackle flange
5	5'	C	custom	UNV	universal	LT(#)	Lutron*	+NL(#)	night light circuit*		
6	6'					BI	bi-level dimming	+GTD(#)	generator transfer		
7	7'					O(#)	other*		device* **		
8	8'										
12	12'										
S(L) System Run											
Lengths are nominal. Exact lengths can be specified, please consult factory.				*Remote surge protection device only		*Please consult factory; see page 2.		*Specify quantity. Minimum 3ft fixture length. ** 120V and 277V only. Please specify.			

BATTERY (OPTIONAL)	OTHER (OPTIONAL)	CUSTOM (OPTIONAL)
B(#) battery pack (integral)* BR(#) battery pack (remote)**	+TF top feed* +EF end feed* +N natatorium finish	C custom
*Minimum 3ft; **Dry/Damp location only. Please consult factory.	7/8" diameter top power feed hole provided standard. See page 3 for more details. *Comes with liquid tight connector and 10ft of plenum rated power cable. Not available for 347 V.	Please specify

CONSTRUCTION

Housing	Extruded aluminum (0.08" nominal) Up to 70% recycled content
End Cap	Cast aluminum
Interior Brackets	Die formed sheet steel (18 gauge)
Gaskets	Silicone rubber
Lens Gaskets	Extruded elastomer
Lens	Extruded acrylic
Fasteners	All external fasteners are tamper proof TORX T20

OPTICS




SO	Spotless lens;
ASO	Asymmetric Spotless lens;
WW	Wallwash;
BW	Batwing;
GZ	Graze.

Impact modified PMMA lens used for all shielding options.

SYSTEM (S(L))

Lengths of 2'-12' standalone are available. Runs of EXTEND2 that are greater than 12' in length are designated as systems (S(L)). System runs are comprised of a combination of 4' to 8' sections to be assembled on site using our joining system which includes a 1" sealed joiner plate. For more information on systems and joining, please refer to the EXTEND2 installation sheets available for download at www.axislighting.com.

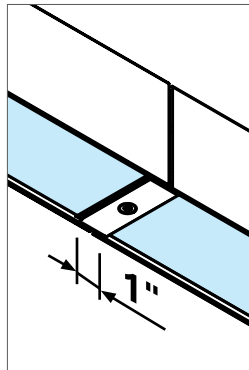

WEIGHT

Recessed 4ft	9 lbs / 4.1 kg
Recessed 8ft	18 lbs / 8.2 kg
Recessed 12ft	27 lbs / 12.3 kg

FINISHES

Powder coated and custom finishes are also available.

OTHER MOUNTING OPTIONS

EXTEND 2 is also available with pendant, surface and wall mounted options.

- Specification sheets and installation sheets for all mountings for EXTEND 2 luminaires are available for download at www.axislighting.com

ELECTRICAL

DP	0-10V dimming driver. Ambient operating temperature -30°C - +40°C
DPX	0-10V dimming driver with extended temperature range (-40°C - +50°C)
Lutron driver	LDE1 - Hi-lume 1% EcoSystem with Soft-on, Fade-to-Black (min ambient operating temperature - 0°C (32°F).
Other drivers	DALI* - Digital Addressable Lighting Interface DMX* - Digital Multiplex Xitanium SR* - For wireless sensor
Choose driver from available options. * Ambient operating range: -20°C - +40°C	

Emergency	B(#) Integral Emergency Battery pack, 3ft minimum. Operating temperature (-20° to 50°C) for 120V to 277V; (0°C to 50°C) for 347V BR(#) Remote emergency battery pack operating temperature range (-20°C- +50°C) for 120V to 277V; (0°C - +50°C) for 347V.
------------------	--

Input Voltage 120V, 277V, 347V, UNV.

Surge Protection Extend comes standard with surge protection device.

- Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

LED SYSTEM

CRI	Minimum 80 or 90 color rendering index.
CCT Single Color	Choice of 2700K, 3000K, 3500K, 4000K and 5000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	Dry and wet location rated IP66 for outdoor or indoor use. Impact resistant rated IK10.


APPROVALS

Certified wet locations to UL and CUL standards. IP66 and IK10 rated.


WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.


● CEILING MOUNTING OPTIONS



D FLANGELESS WITH 1/4-20 STUD MOUNTING




DF VISIBLE FLANGES WITH 1/4-20 STUD MOUNTING




DS SPACKLE FLANGES

● POWER FEED



7/8" Diameter opening provided. Conduit and electrical connection by others.


STANDARD



TF TOP FEED

OPTIONAL

Liquid tight connector and 10ft of plenum rated power cable provided.



EF END FEED

OPTIONAL

Liquid tight connector and 10ft of plenum rated power cable provided.


● PHOTOMETRIC DATA

SO - Spotless lens

1000 lm/ft



PHOTOMETRIC CURVE



Lumen/ft: 1000 lm/ft
Total Lumens: 3982 lm (for 4ft)
Input Watts: 39.5 W
Efficacy: 101 lm/W
 IES FILE: EX2R-1000-80-35-SO-4.IES

TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1639	1639	1639	1639	1639
5	1626	1621	1622	1620	1626
15	1539	1533	1532	1527	1526
25	1377	1370	1366	1355	1354
35	1165	1159	1150	1134	1134
45	928	923	916	898	897
55	687	682	677	658	657
65	451	445	440	425	421
75	224	221	216	203	203
85	44	43	39	33	33
90	3	3	3	3	3

ZONAL LUMENS

Zone	Lumens
0	
0-10	154
10-20	432
20-30	630
30-40	722
40-50	709
50-60	608
60-70	439
70-80	233
80-90	54
90	

LUMINANCE DATA (cd/m²)


Vertical Angle	Horizontal Angles		
	0	45	90
45	37100	36644	35884
55	33888	33389	32377
65	30182	29417	28191
75	24519	23546	22127
85	14416	12814	10812

GZ Graze

750 lm/ft



PHOTOMETRIC CURVE



Lumen/ft 750 lm/ft
Total Lumens: 2971 lm (for 4ft)
Input Watts: 28.8 W
Efficacy: 103 lm/W
 IES FILE: EX2R-750-80-35-GZ-4.IES

TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	2105	2105	2105	2105	2105
5	2092	2304	2435	2492	2508
15	1961	2361	2115	1824	1745
25	1688	1903	1381	1116	1062
35	1294	1295	869	749	738
45	849	786	585	571	583
55	510	462	401	424	438
65	280	263	250	272	276
75	126	122	121	123	117
85	26	27	27	25	25
90	3	3	2	2	2

ZONAL LUMENS

Zone	Lumens
0	
0-10	190
10-20	453
20-30	544
30-40	534
40-50	468
50-60	371
60-70	254
70-80	128
80-90	30
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	16868	11615	11585
55	12499	9831	10726
65	9313	8296	9160
75	6836	6554	6362
85	4196	4398	4033

i All IES files are available for download at: www.axislighting.com


● PHOTOMETRIC DATA

WW Walwash



750 lm/ft

PHOTOMETRIC CURVE



Lumen/ft: 750 lm/ft
Total Lumens: 2987 lm (for 4ft)
Input Watts: 29.6 W
Efficacy: 101 lm/W

IES FILE: EX2R-750-80-35-WW-4.IES

TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION

	Horizontal Angles				
Vertical Angle	0	22.5	45	67.5	90
0	1232	1232	1232	1232	1232
5	1222	1149	1097	1057	1052
15	1134	948	852	807	797
25	965	752	693	686	690
35	751	584	578	611	634
45	535	440	471	535	570
55	362	313	356	437	477
65	224	203	235	312	343
75	113	103	120	156	162
85	24	23	26	22	21
90	3	4	4	3	3

ZONAL LUMENS

Zone	Lumens
0	
0-10	117
10-20	342
20-30	541
30-40	610
40-50	527
50-60	404
60-70	274
70-80	139
80-90	33
90	

LUMINANCE DATA (cd/m²)


	Horizontal Angles		
Vertical Angle	0	45	90
45	10630	9359	11321
55	8858	8728	11689
65	7462	7806	11399
75	6114	6524	8813
85	3919	4146	3429

ASO Asymmetric



750 lm/ft

PHOTOMETRIC CURVE



Lumen/ft: 750 lm/ft
Total Lumens: 2987 lm (for 4ft)
Input Watts: 29.6 W
Efficacy: 101 lm/W

IES FILE: EX2R-750-80-35-ASO-4.IES

TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION

	Horizontal Angles				
Vertical Angle	0	22.5	45	67.5	90
0	1232	1232	1232	1232	1232
5	1222	1149	1097	1057	1052
15	1134	948	852	807	797
25	965	752	693	686	690
35	751	584	578	611	634
45	535	440	471	535	570
55	362	313	356	437	477
65	224	203	235	312	343
75	113	103	120	156	162
85	24	23	26	22	21
90	3	4	4	3	3

ZONAL LUMENS

Zone	Lumens
0	
0-10	117
10-20	342
20-30	541
30-40	610
40-50	527
50-60	404
60-70	274
70-80	139
80-90	33
90	

LUMINANCE DATA (cd/m²)

	Horizontal Angles		
Vertical Angle	0	45	90
45	10630	9359	11321
55	8858	8728	11689
65	7462	7806	11399
75	6114	6524	8813
85	3919	4146	3429

i All IES files for other lamping are available for download at: www.axislighting.com


● PHOTOMETRIC DATA

BW Batwing



1000 lm/ft

PHOTOMETRIC CURVE

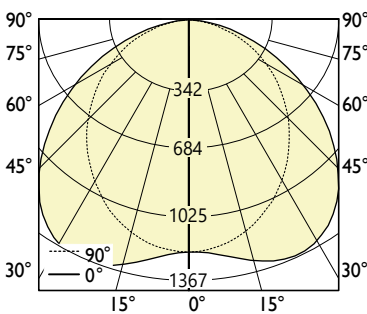

Lumen/ft 1000 lm/ft
Luminaire Lumens: 3990 lm
Input Watts: 39.1 W
Efficacy: 102 lm/W
IES FILE: EX2R-1000-80-35-BW-4.IES
TESTED ACCORDING TO IES LM-79-2019

CANDELA DISTRIBUTION					
Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1191	1191	1191	1191	1191
5	1184	1187	1194	1201	1204
15	1128	1150	1207	1263	1285
25	1024	1076	1200	1314	1357
35	885	961	1139	1279	1329
45	727	809	1003	1128	1163
55	555	626	796	877	895
65	376	422	539	576	575
75	191	212	265	262	258
85	39	43	46	37	38
90	4	4	4	5	5

ZONAL LUMENS	
Zone	Lumens
0	
0-10	114
10-20	342
20-30	553
30-40	705
40-50	755
50-60	684
60-70	508
70-80	268
80-90	60
90	

LUMINANCE DATA (cd/m²)			
Vertical Angle	Horizontal Angles		
	0	45	90
45	14449	19916	23111
55	13600	19496	21913
65	12488	17902	19111
75	10375	14386	14000
85	6255	7386	6081

i All IES files for other lamping are available for download at: www.axislighting.com

Project		Catalog #		Type	
Prepared by		Notes		Date	



Lumark

Prevail Discrete LED

Area / Site Luminaire

Product Features



Product Certifications



Interactive Menu

- Ordering Information [page 2](#)
- Mounting Details [page 3, 4](#)
- Optical Configurations [page 5](#)
- Product Specifications [page 5](#)
- Energy and Performance Data [page 6](#)
- Control Options [page 8](#)


Quick Facts

- Direct-mounted discrete light engine for improved optical uniformity and visual comfort
- Lumen packages range from 4,300 - 68,000 nominal lumens (30W - 550W)
- Replaces 70W up to 1,000W HID equivalents
- Efficacies up to 157 lumens per watt
- Standard universal quick mount arm with universal drill pattern

Connected Systems

- WaveLinx PRO Wireless
- WaveLinx LITE Wireless

Dimensional Details

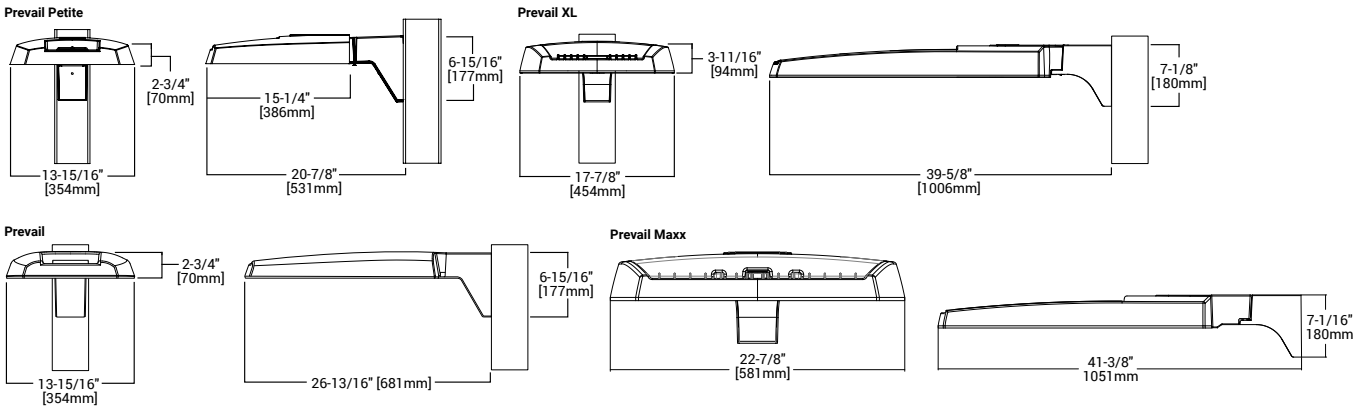

NOTES:
1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
2. IDA Certified for 3000K CCT and warmer only.

Ordering Information

SAMPLE NUMBER: **PRV-XL-PA4B-740-U-T4W-BZ**


Product Family ^{1, 2}	Light Engine		Color Temperature	Voltage	Distribution	Mounting (Included)	Finish
	Configuration	Drive Current ⁴					
PRV-P =Prevail Petite BAA-PRV-P =Prevail Petite BAA Buy American Act Compliant ³ TAA-PRV-P =Prevail Petite TAA Trade Agreements Act Compliant ³	PA1 =1 Panel, 24 LED Rectangle	A =400mA Nominal B =700mA Nominal C =950mA Nominal D =1200mA Nominal	740 =70CRI, 4000K 730 =70CRI, 3000K 750 =70CRI, 5000K 8540 =85CRI, 4000K	U =Universal, 120-277V H =High Voltage, 347-480V 1=120V 2=208V 3=240V 4=277V 8=480V ⁵ 9=347V DV =DuraVolt, 277-480V ^{5, 6}	T2R =Type II Roadway T2U =Type II Urban T3 =Type III T4W =Type IV Wide 5WQ =Type V Square Wide	SA =QM Standard Versatile Arm MA =QM Mast Arm FMA =Fixed Mast Arm ²⁷ WM =QM Wall Mount Arm ADJA-WM = Adjustable Arm – Wall Mount ²⁹ ADJA =Adjustable Arm – Pole Mount ²⁹ ADJS =Adjustable Arm – Slipfitter, 3” vertical tenon ²⁹ SP2 =Adjustable Arm – Slipfitter, 2 3/8” vertical tenon ^{27, 29}	AP =Grey BZ =Bronze BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White
PRV =Prevail BAA-PRV =Prevail BAA Buy American Act Compliant ³ TAA-PRV =Prevail TAA Trade Agreements Act Compliant ³	PA1 =1 Panel, 24 LED Rectangle PA2 =2 Panels, 48 LED Rectangles	A =700mA Nominal B =950mA Nominal					
PRV-XL =PRV XL BAA-PRV-XL =Prevail XL BAA Buy American Act Compliant ³ TAA-PRV-XL =Prevail XL TAA Trade Agreements Act Compliant ³	PA3 =3 Panels, 72 LED Rectangles PA4 =4 Panels, 96 LED Rectangles	A =750mA Nominal B =950mA Nominal					
PRV-M =Prevail Maxx BAA-PRV-M =Prevail Maxx BAA Buy American Act Compliant ³ TAA-PRV-M =Prevail Maxx TAA Trade Agreements Act Compliant ³	PA6 = 6 Panels, 144 LED Rectangles	A =600mA Nominal B =800mA Nominal C =1000mA Nominal D =1200mA Nominal					
Options (Add as Suffix)				Accessories (Order Separately) ^{20, 21}			
10K =10kV UL 1449 Fused Surge Protective Device 20MSP =20kV MOV Surge Protective Device 20K =20kV UL 1449 Fused Surge Protective Device F =Single Fuse (Used with Voltages 120, 277 or 347V) FF =Double Fuse (Used with Voltages 208, 240 or 480V) FADC =Field Adjustable Dimming Controller ³⁰ L90 =Optics Rotated 90° Left R90 =Optics Rotated 90° Right CC =Coastal Construction finish ⁹ HSS =House Side Shield (Factory Installed) ⁷ HA =50°C High Ambient Temperature ⁸ PR =NEMA 3-PIN Twistlock Photocontrol Receptacle ¹⁰ PR7 =NEMA 7-PIN Twistlock Photocontrol Receptacle ¹⁰ MS/DIM-L08 =Motion Sensor for Dimming Operation, Up to 8’ Mounting Height ^{11, 12, 13} MS/DIM-L20 =Motion Sensor for Dimming Operation, 9’ - 20’ Mounting Height ^{11, 12, 13} MS/DIM-L40 =Motion Sensor for Dimming Operation, 21’ - 40’ Mounting Height ^{11, 12, 13} SPB1 =Motion Sensor for Dimming Operation, BLE Interface, Up to 8’ Mounting Height ^{11, 14} SPB2 =Motion Sensor for Dimming Operation, BLE Interface, 8’ - 20’ Mounting Height ^{11, 14, 27, 28} SPB4 =Motion Sensor for Dimming Operation, BLE Interface, 21’ - 40’ Mounting Height ^{11, 14, 28}		WPS2XX =Wavelinx Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7’ - 15’ Mounting Height ^{11, 12, 15, 16, 17} WPS4XX =Wavelinx Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15’ - 40’ Mounting Height ^{11, 12, 15, 16, 17} WLS2XX =WaveLinx Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 7’ - 15’ Mounting Height ^{11, 12, 15, 16, 17} WLS4XX =WaveLinx Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15’ - 40’ Mounting Height ^{11, 12, 15, 16, 17} (See Table Below) =LumenSafe Integrated Network Security Camera ^{18, 19}		PRVSA-XX =Standard Arm Mounting Kit ²² PRVMA-XX =Mast Arm Mounting Kit ²² PRVWM-XX =Wall Mount Kit ²² PRV-ADJA-XX =Adjustable Arm - Pole Mount Kit ²² PRV-ADJS-XX =Adjustable Arm - Slipfitter Kit ²² PRV-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²² PRVXLSA-XX =Standard Arm Mounting Kit ²⁸ PRVXLMA-XX =Mast Arm Mounting Kit ²⁸ PRVXLWM-XX =Wall Mount Kit ²⁸ PRV-XL-ADJA-XX =Adjustable Arm - Pole Mount Kit ²⁸ PRV-XL-ADJA-WM-XX = Adjustable Arm - Wall Mount Kit ²⁸ PRV-XL-ADJS-XX = Adjustable Arm - Slipfitter Kit ²⁸ PRV-M-ADJA-XX =Adjustable Arm - Pole Mount Kit ²⁷ PRV-M-ADJS-XX =Adjustable Arm - Slipfitter Kit ²⁷ PRV-M-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²⁷ MA1010-XX =Single Tenon Adapter for 3-1/2” O.D. Tenon MA1011-XX =2@180° Tenon Adapter for 3-1/2” O.D. Tenon		MA1017-XX =Single Tenon Adapter for 2-3/8” O.D. Tenon MA1018-XX =2@180° Tenon Adapter for 2-3/8” O.D. Tenon SRA238 =Tenon Adapter from 3” to 2-3/8” PRV/DIS-FDV =Full Drop Visor ²³ PRVXL/DIS-FDV =Full Drop Visor ¹⁸ HSS-VP =House Side Shield Kit, Vertical Panel ^{7, 24} HSS-HP =House Side Shield Kit, Horizontal Panel ^{7, 24} VGS-ARCH = Panel Drop Shield, Short VGL-ARCH = Panel Drop Shield, Long OA/RA1013 =Photocontrol Shorting Cap OA/RA1014 =NEMA Photocontrol - 120V OA/RA1016 =NEMA Photocontrol - Multi-Tap 105-285V OA/RA1201 =NEMA Photocontrol - 347V OA/RA1027 =NEMA Photocontrol - 480V FSIR-100 =Wireless Configuration Tool for Occupancy Sensor ²⁵ WOLC-7P-10A =WaveLinx Outdoor Control Module (7-PIN) ²⁶	
NOTES: 1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. 2. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications. Refer to installation instructions and pole white paper WP513001EN for additional support information. 3. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC.PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 4. Nominal drive currents shown here. For actual drive current by configuration, refer to Power and Lumens tables. 5. 480V not to be used with ungrounded or impedance grounded systems. 6. DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit www.signify.com/duravolt for more information. 7. House Side Shield not for use with 5WQ distribution. 8. Not available with PATD light engine in Petite housing (PRV-P). 9. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. 10. If High Voltage (H) or DuraVolt (DV) is specified, use a photocontrol that matches the input voltage used. 11. Controls system is not available in combination with a photocontrol receptacle (PR or PR7) or another controls system (MS SPB). 12. Option not available with High Voltage (H) or DuraVolt (DV). Must specify Universal (U), 347V (9), or 480V (8) voltage. 13. Utilizes the Wattstopper sensor FSP-211. Sensor color white unless specified otherwise via PDR. To field-configure, order FSIR-100 accessory separately. 14. Utilizes the Wattstopper sensor FSP-3XX series. Sensor color determined by product finish. See Sensor Color Reference Table. Field-configures via mobile application. See Controls section for details. 15. Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F).							
16. In order for the device to be field-configurable, requires WAC Gateway components WAC-PoE and WPOE-120 in appropriate quantities. Only compatible with WaveLinx system and software and requires system components to be installed for operation. See website for more Wavelinx application information. 17. Replace XX with sensor color (WH, BZ or BK). 18. Only available in PRV-XL configurations. 19. Not available with High Voltage (H, DV, 8 or 9) or HA options. Consult LumenSafe system product pages for additional details and compatibility information. 20. Replace XX with paint color. 21. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. 22. Not for use with PRV-XL or PRV-M configurations. 23. Only for use with PRV. Not applicable to PRV-M, PRV-XL, or PRV-P. 24. Must order one per optic/LED when ordering as a field-installable accessory (1, 2, 3, 4, or 6). Refer to House Side Shield reference table for details. 25. This tool enables adjustment to Motion Sensor (MS) parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative for more information. 26. Requires 7-PIN NEMA twistlock photocontrol receptacle (PR7) option. The WOLC-7 cannot be used in conjunction with other controls systems (MS or LWR). Only for use at 120-347V. 27. Only available for PRV-M configurations. 28. Only for use with PRV-XL. 29. Fixed for PRV-M 30. Cannot be used with PR7 or other motion response control options.							

LumenSafe Integrated Network Security Camera Technology Options (Add as Suffix)


Product Family	Camera Type	Data Backhaul	
L =LumenSafe Technology 	H =Dome Camera, High Res Z =Dome Camera, Remote PTZ	C =Cellular, Customer Installed SIM Card A =Cellular, Factory Installed AT&T SIM Card V =Cellular, Factory Installed Verizon SIM Card	S =Cellular, Factory Installed Sprint SIM Card E =Ethernet Networking

Mounting Details


SA=QM Pole Mount Arm (PRV & PRV-P)

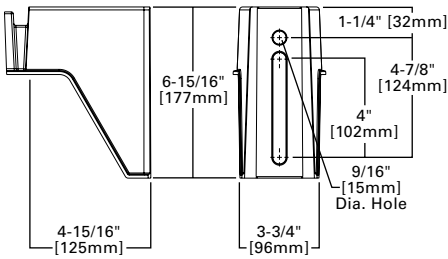


SA=QM Pole Mount Arm (PRV-XL)

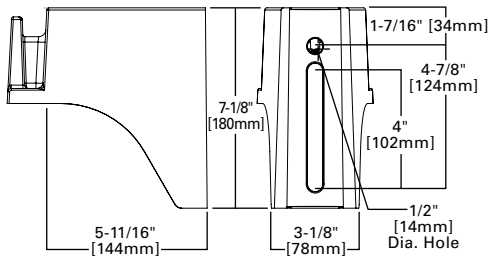


WM=QM Wall Mount Arm (PRV & PRV-P)

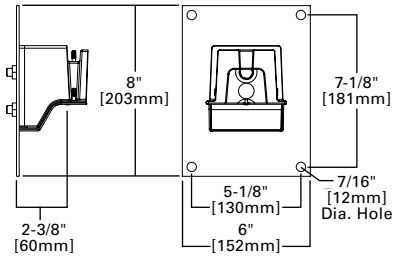


WM=QM Wall Mount Arm (PRV-XL)

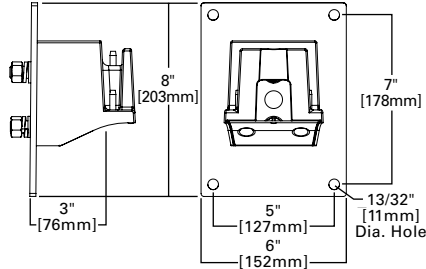


MA=QM Mast Arm (PRV & PRV-P)

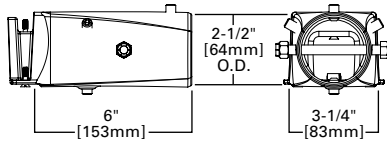


MA=QM Mast Arm (PRV-XL)

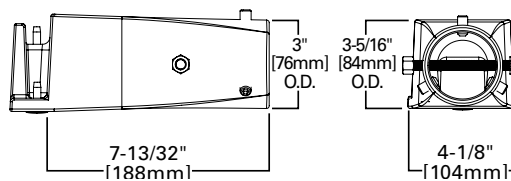


ADJA=Adjustable Arm Pole Mount (PRV & PRV-P)

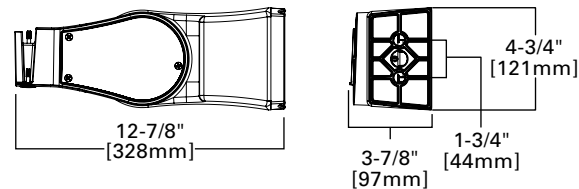


ADJA=Adjustable Arm Pole Mount (PRV-XL)

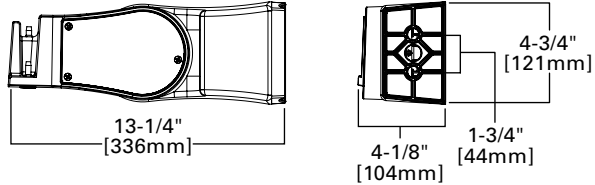


ADJA-WM=Adjustable Arm Wall Mount (PRV & PRV-P)

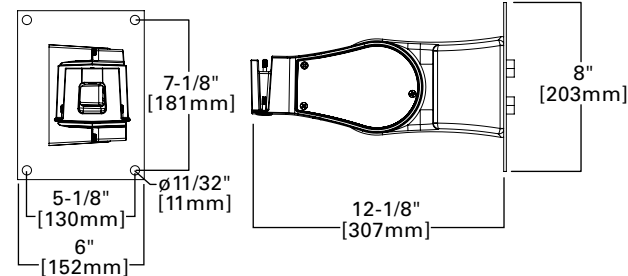


ADJA-WM=Adjustable Arm Wall Mount (PRV-XL)

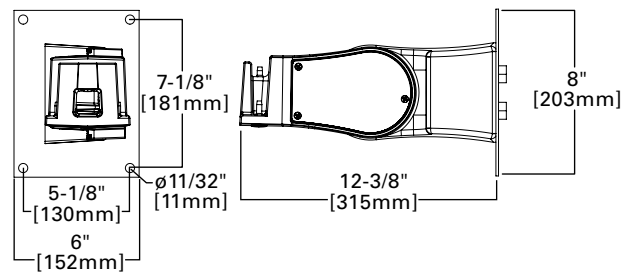

ADJS=Adjustable Slipfitter 3 (PRV & PRV-P)

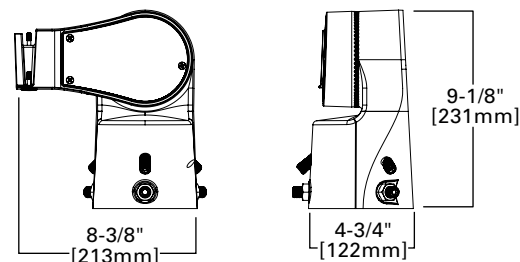


ADJS=Adjustable Slipfitter 3 (PRV-XL)

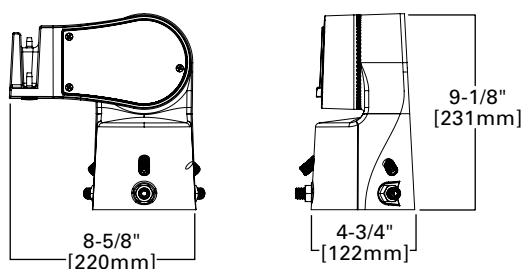


Mounting Details


SA=QM Pole Mount Arm (PRV-M)

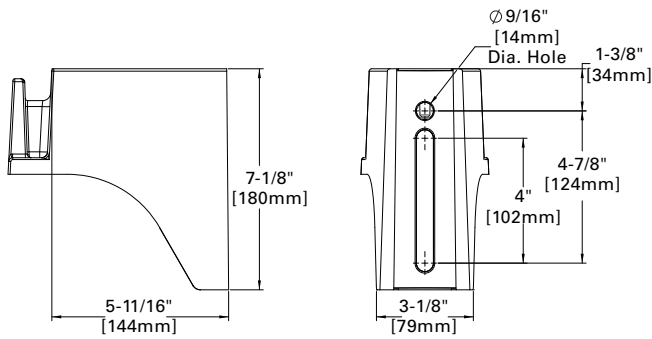


WM=QM Wall Mount Arm (PRV-M)

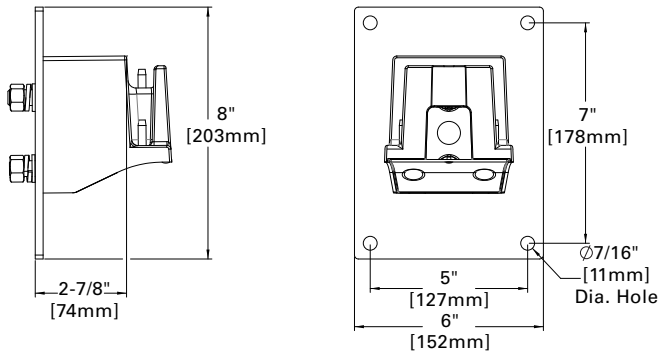


MA=QM Mast Arm (PRV-M)

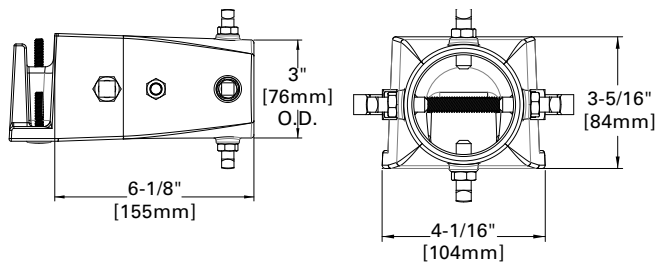


FMA=Fixed Mast Arm (PRV-M)

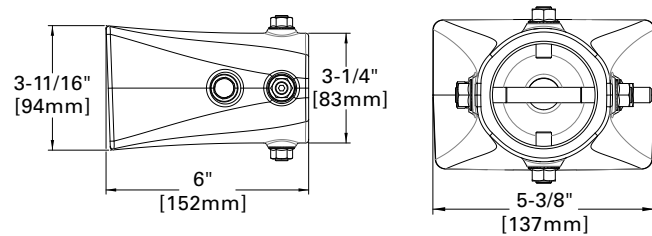


ADJA=Adjustable Pole Mount Arm (PRV-M)

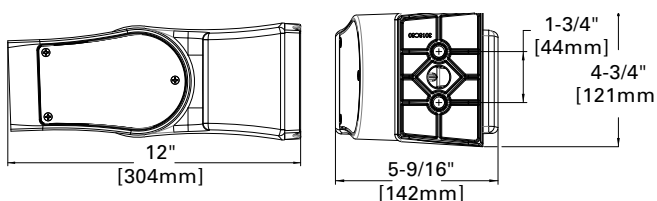


Versatile Mount System

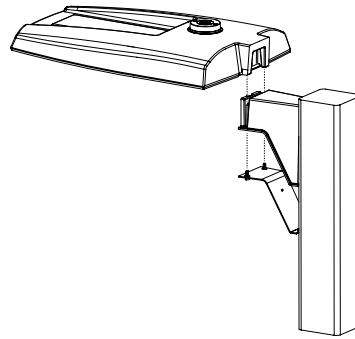

ADJS=Adjustable Slipfitter (PRV-M)

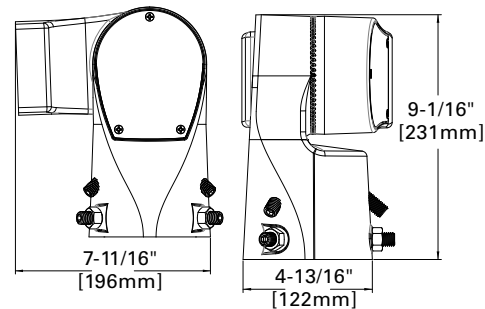





SP2=Adjustable Slipfitter 2-3/8\" (PRV-M)

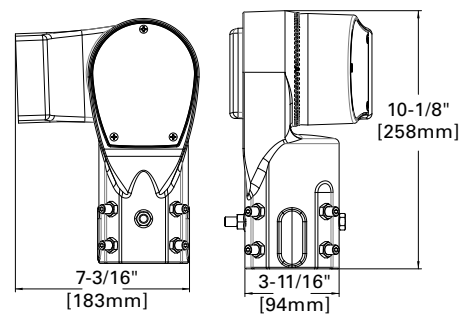

Mounting Details


Mounting Configurations and EPAs

NOTE: For 2 PRV's mounted at 90°, requires minimum 3" square or 4" round pole for fixture clearance. For 2 PRV-XL's mounted at 90°, requires minimum 4" square or round pole for fixture clearance. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications


						
Housing Size	Tilt Angle (Degrees)	Arm Mount Single	Arm Mount 2 @ 180°	Arm Mount 2 @ 90°	Arm Mount 3 @ 90°	Arm Mount 4 @ 90°
Prevail Petite	0°	0.54	1.08	0.84	1.38	1.38
	60°	1.68	1.85	2.42	3.15	3.30
Prevail	0°	0.92	1.35	1.42	1.63	1.63
	60°	2.20	2.40	3.05	3.88	4.07
	60° + Full Drop Visor	2.20	2.40	3.25	4.28	4.47
Prevail XL	0°	1.12	2.25	2.13	2.52	2.52
	60°	3.99	4.30	5.26	6.51	6.79
	60° + Full Drop Visor	3.99	4.30	5.59	7.17	7.49
Prevail Maxx	0°	1.28	2.56	1.7	2.69	2.69
	60°	5.09	5.52	6.34	7.49	7.81

Optical Configurations


PRV-P-PA1X




PRV-PA1X




PRV-PA2X




PRV-XL-PA3X



PRV-XL-PA4X




PRV-M-PA6X



Optical Distributions


T2R

(Type II Roadway)




T2U

(Type II Urban)




T3

(Type III)




T4W

(Type IV Wide)



5WQ

(Type V Square Wide)



■ = Distribution with House Side Shield (HSS)
□ = Optical Distribution

Product Specifications

Construction

- Single-piece die-cast aluminum housing
- Tethered die-cast aluminum door

Optics

- Dark Sky Approved (3000K CCT and warmer only)
- Precision molded polycarbonate optics

Electrical

- 40°C minimum operating temperature
- 40°C maximum operating temperature
- >.9 power factor
- <20% total harmonic distortion
- Class 1 electronic drivers have expected life of 100,000 hours with <1% failure rate
- 0-10V dimming driver is standard with leads external to the fixture
- Standard MOV surge protective device designed to withstand 10kV of transient line surge

- Luminaire available with the field adjustable dimming controller (FADC) to manually adjust wattage and reduce the total lumen output and light levels; Comes pre-set to the highest position at the lumen output selected

Mounting

- Versatile, patented, standard mount arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8" (Type M drilling recommended for new installations)
- A knock-out on the standard mounting arm enables round pole mounting
- Adjustable pole and wall mount arms adjust in 5° increments from 0° to 60°; Downward facing orientation only (Type N drilling required for ADJA mount)
- Adjustable slipfitter arm adjusts in 5° increments from -5° to 85°; Downward facing orientation only
- Prevail and Prevail Petite: 3G vibration rated (all arms)
- Prevail XL Mast Arm: 3G vibration rated

- Prevail XL Standard Arm: 1.5G vibration rated
- Adjustable Arms: 1.5G vibration rated

Finish

- Five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Finish is compliant to 3,000 hour salt spray standard (per ASTM B117)

Typical Applications

- Parking lots, Walkways, Roadways and Building Areas

Shipping Data

- Prevail Petite: 18 lbs. (7.94 kgs.)
- Prevail: 20 lbs. (9.09 kgs.)
- Prevail XL: 45 lbs. (20.41 kgs.)
- Prevail Maxx: 49 lbs. (22.23 kgs.)

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Energy and Performance Data

Power and Lumens



View PRV-P IES files



View PRV IES files



View PRV-XL IES files

Product Family		Prevail Petite				Prevail				Prevail XL				Prevail Maxx			
Light Engine		PA1A	PA1B	PA1C	PA1D	PA1A	PA1B	PA2A	PA2B	PA3A	PA3B	PA4A	PA4B	PA6A	PA6B	PA6C	PA6D
Power (Watts)		31	53	72	93	54	74	113	151	172	234	245	303	274	366	457	544
Drive Current (mA)		375	670	930	1200	670	930	720	970	750	980	785	970	600	800	1000	1200
Input Current @ 120V (A)		0.26	0.44	0.60	0.78	0.45	0.62	0.93	1.26	1.44	1.95	2.04	2.53	2.30	3.05	3.83	4.54
Input Current @ 277V (A)		0.12	0.20	0.28	0.35	0.21	0.28	0.41	0.55	0.62	0.85	0.93	1.12	0.99	1.30	1.62	1.94
Input Current @ 347V (A)		0.10	0.17	0.23	0.29	0.17	0.23	0.33	0.45	0.52	0.70	0.74	0.90	0.78	1.05	1.32	1.60
Input Current @ 480V (A)		0.07	0.13	0.17	0.22	0.12	0.17	0.24	0.33	0.39	0.52	0.53	0.65	0.58	0.76	0.95	1.14
Distribution																	
Type II Roadway	4000K/5000K Lumens	4,505	7,362	9,495	11,300	7,605	9,896	15,811	19,745	24,718	30,648	34,067	39,689	41,611	52,596	61,921	67,899
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	147	139	132	121	141	134	141	131	144	131	139	131	152	144	135	125
	3000K Lumens ¹	4,103	6,705	8,647	10,291	6,926	9,012	14,399	17,982	22,511	27,912	31,025	36,145	37,896	47,900	56,392	61,837
Type II Roadway w/ HSS	4000K/5000K Lumens	3,727	6,091	7,855	9,349	6,006	7,815	12,487	15,594	19,521	24,204	26,094	31,334	32,874	41,553	48,919	53,642
	BUG Rating	B0-U0-G1	B0-U0-G2	B0-U0-G2	B1-U0-G2	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B1-U0-G4	B1-U0-G4	B2-U0-G4	B2-U0-G4	B2-U0-G5	B2-U0-G5
	Lumens per Watt	121	115	109	100	111	106	111	103	113	103	107	103	120	114	107	99
	3000K Lumens ¹	3,394	5,547	7,154	8,514	5,470	7,117	11,372	14,201	17,778	22,043	24,502	28,545	29,939	37,843	44,552	48,853
Type II Urban	4000K/5000K Lumens	4,496	7,347	9,476	11,277	7,597	9,886	15,795	19,724	24,692	30,616	34,031	39,647	41,372	52,294	61,565	67,509
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	146	139	131	121	141	134	141	131	144	131	139	131	151	143	135	124
	3000K Lumens ¹	4,095	6,691	8,630	10,271	6,919	9,003	14,384	17,963	22,488	27,882	30,992	36,107	37,678	47,625	56,068	61,481
Type II Urban w/ HSS	4000K/5000K Lumens	3,253	5,316	6,856	8,160	5,297	6,893	11,013	13,753	17,217	21,347	23,728	27,644	28,951	36,594	43,082	47,241
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5
	Lumens per Watt	106	101	95	87	98	93	97	91	100	91	97	91	106	100	94	87
	3000K Lumens ¹	2,963	4,841	6,244	7,431	4,824	6,277	10,029	12,525	15,680	19,441	21,609	25,176	26,366	33,327	39,235	43,023
Type III	4000K/5000K Lumens	4,443	7,261	9,364	11,145	7,575	9,857	15,749	19,667	24,621	30,527	33,932	39,532	41,155	52,020	61,242	67,155
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	145	138	130	119	140	133	141	130	143	130	138	130	150	142	134	123
	3000K Lumens ¹	4,046	6,612	8,528	10,150	6,899	8,977	14,343	17,911	22,423	27,802	30,903	36,002	37,480	47,375	55,774	61,159
Type III w/ HSS	4000K/5000K Lumens	3,406	5,566	7,179	8,543	5,592	7,277	11,626	14,519	18,176	22,536	25,049	29,183	30,159	38,121	44,879	49,212
	BUG Rating	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G4	B2-U0-G4	B2-U0-G5	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	111	105	100	91	104	98	103	96	106	96	102	96	110	104	98	90
	3000K Lumens ¹	3,102	5,069	6,538	7,781	5,093	6,627	10,588	13,222	16,553	20,524	22,813	26,578	27,466	34,717	40,872	44,818
Type IV Wide	4000K/5000K Lumens	4,348	7,106	9,164	10,906	7,484	9,738	15,560	19,431	24,325	30,161	33,525	39,057	41,207	52,086	61,320	67,240
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	142	135	127	117	139	132	139	129	141	129	137	129	151	142	134	124
	3000K Lumens ¹	3,960	6,471	8,346	9,932	6,816	8,869	14,170	17,696	22,153	27,468	30,531	35,570	37,528	47,435	55,845	61,236
Type IV Wide w/ HSS	4000K/5000K Lumens	3,318	5,422	6,993	8,323	5,420	7,053	11,268	14,072	17,617	24,843	24,279	28,286	30,005	37,926	44,650	48,961
	BUG Rating	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B1-U0-G4	B2-U0-G4	B2-U0-G4	B2-U0-G5	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	108	103	97	89	100	95	100	93	102	106	99	93	110	104	98	90
	3000K Lumens ¹	3,022	4,938	6,369	7,580	4,936	6,423	10,262	12,816	16,044	19,892	22,111	25,760	27,326	34,540	40,664	44,589
Type V Square Wide	4000K/5000K Lumens	4,497	7,349	9,478	11,280	7,831	10,190	16,281	20,332	25,453	31,559	35,079	40,868	42,947	54,285	63,909	70,079
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B3-U0-G2	B4-U0-G3	B4-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	146	139	131	121	145	138	145	135	148	135	143	135	157	143	136	129
	3000K Lumens ¹	4,095	6,693	8,632	10,273	7,132	9,280	14,827	18,517	23,180	28,741	31,947	37,219	39,112	49,438	58,203	63,822

NOTES:

1. For 3000K or HSS BUG Ratings, refer to published IES files

Energy and Performance Data

House Side Shield Reference Table

Product Family		Prevail	Prevail		Prevail XL		Prevail Maxx
Light Engine		PA1	PA1	PA2	PA3	PA4	PA6
Rotated Optics	Standard	HSS-HP (Qty 1)	HSS-VP (Qty 1)	HSS-HP (Qty 2)	HSS-HP (Qty 3)	HSS-VP (Qty 4)	HSS-HP (qty 6)
	L90 or R90 option	HSS-VP (Qty 1)	HSS-HP (Qty 1)	HSS-VP (Qty 2)	HSS-VP (Qty 3)	HSS-HP (Qty 4)	HSS-VP (qty 6)

Sensor Color Reference Table (SPBx)

Housing Finish	Sensor Color
AP=Grey	Grey
BZ=Bronze	Bronze
BK=Black	Black
DP=Dark Platinum	Grey
GM=Graphite Metallic	Black
WH=White	White

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97

FADC Settings

FADC Postion	Percent of Typical Lumen Output
1	25%
2	48%
3	55%
4	62%
5	72%
6	77%
7	82%
8	85%
9	90%
10	100%

Note: +/-5% typical value

Lumen Maintenance




Ambient Temperature	TM-21 Lumen Maintenance (78,000 Hours)	Theoretical L70 (Hours)
Up to 50°C	96.76%	> 896,000

Control Options

0-10V This fixture provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (PR and PR7) Photocontrol receptacles provide a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels. Advanced control systems compatible with NEMA 7-PIN standards can be utilized with the PR7 receptacle.


Dimming Occupancy Sensor (SPB, MS/DIM-LXX) These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the luminaire will dim down after five minutes of no activity detected. When activity is detected, the luminaire returns to full light output. These occupancy sensors include an integral photocell for "dusk-to-dawn" control or "daylight harvesting." Factory default is enabled for the MS sensors and disabled for the SPB. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes.

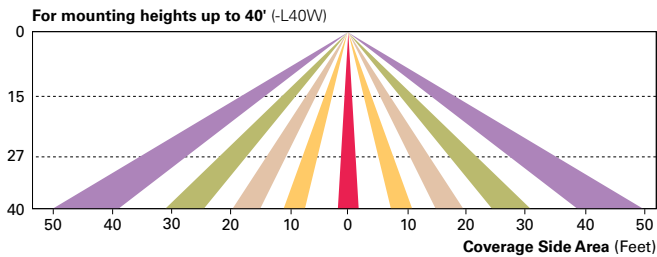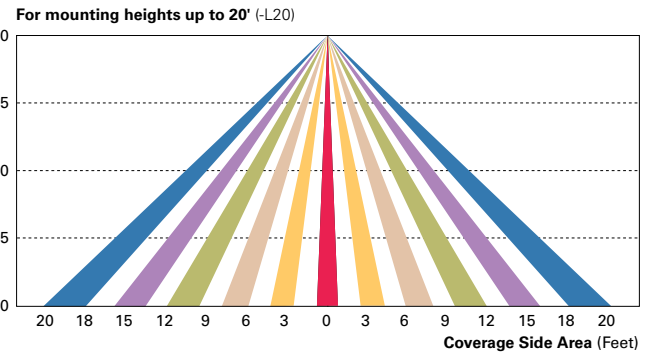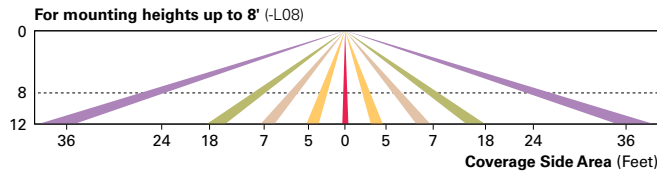


WaveLinx Wireless Control and Monitoring System Available in 7-PIN or 4-PIN configurations, the WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets).

WaveLinx Outdoor Control Module (WOLC-7P-10A) A photocontrol that enables astronomic or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn.

WaveLinx PRO Wireless Sensor (WPS2 and WPS4) These outdoor sensors offer passive infrared (PIR) occupancy sensing and a photocell for closed-loop daylight sensing. These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected, and the photocell for "dusk-to-dawn" control is default enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-40'.

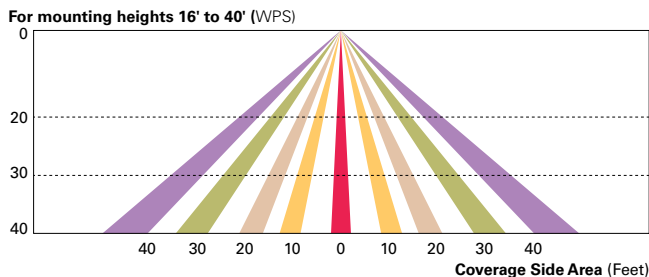

LumenSafe (LD) The LumenSafe integrated network camera is a streamlined, outdoor-ready camera that provides high definition video surveillance. This IP camera solution is optimally designed to integrate into virtually any video management system or security software platform of choice. No additional wiring is needed beyond providing line power to the luminaire. LumenSafe features factory-installed power and networking gear in a variety of networking options allowing security integrators to design the optimal solution for active surveillance.

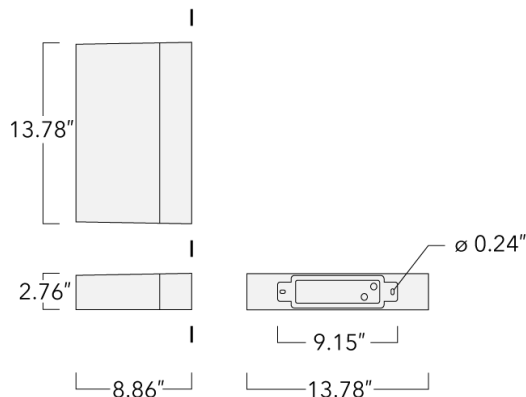

Description

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. CAD-optimized optics for superior illumination and glare control. Integral driver. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Luminaire can be mounted for up or down lighting.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Surface Mounted Wall Luminaires

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.

Additional information


Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

PLS430 LED



Surface Mounted Wall Luminaires



Options

Light distribution	Color temperature	Nominal Watt
 symmetric, medium beam [M]	 3000 K	0 W
 symmetric, narrow beam [N]	 4000 K	
 [S70] Type II Short	 2700 K	
 [A60] Type IV Very Short		
 [R65] Type IV Medium		

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/08/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	131-9644	LED-12/24W / 700 mA - 2700 K	2601.4	27 W	80	11.46
	131-9645	LED-12/36W / 1050 mA - 2700 K	3889.7	41 W	80	11.46
	131-9646	LED-12/52W / 1400 mA - 2700 K	4933.2	55 W	80	11.46
	131-9671	LED-12/24W / 700 mA - 3000 K	2794.1	27 W	80	11.46
	131-9672	LED-12/24W / 700 mA - 4000 K	2986.8	27 W	80	11.46
	131-9673	LED-12/36W / 1050 mA - 3000 K	4079.4	41 W	80	11.46
	131-9674	LED-12/36W / 1050 mA - 4000 K	4269.2	41 W	80	11.46
	131-9675	LED-12/52W / 1400 mA - 3000 K	5217.9	55 W	80	11.46
	131-9676	LED-12/52W / 1400 mA - 4000 K	5455	55 W	80	11.46
symmetric, narrow beam [N] 	131-9647	LED-12/24W / 700 mA - 2700 K	2446.4	27 W	80	11.46
	131-9648	LED-12/36W / 1050 mA - 2700 K	3944.6	41 W	80	11.46
	131-9649	LED-12/52W / 1400 mA - 2700 K	5003	55 W	80	11.46
	131-9677	LED-12/24W / 700 mA - 3000 K	2627.6	27 W	80	11.46
	131-9678	LED-12/24W / 700 mA - 4000 K	2808.8	27 W	80	11.46
	131-9679	LED-12/36W / 1050 mA - 3000 K	4137.1	41 W	80	11.46
	131-9680	LED-12/36W / 1050 mA - 4000 K	4329.5	41 W	80	11.46
	131-9681	LED-12/52W / 1400 mA - 3000 K	5291.6	55 W	80	11.46
	131-9682	LED-12/52W / 1400 mA - 4000 K	5532.1	55 W	80	11.46
[S70] Type II Short 	131-9635	LED-12/24W / 700 mA - 2700 K	1936.3	27 W	80	11.46
	131-9636	LED-12/36W / 1050 mA - 2700 K	2860.3	41 W	80	11.46
	131-9637	LED-12/52W / 1400 mA - 2700 K	3627.7	55 W	80	11.46
	131-9652	LED-12/24W / 700 mA - 3000 K	2079.8	27 W	80	11.46
	131-9654	LED-12/24W / 700 mA - 4000 K	2223.2	27 W	80	11.46
	131-9655	LED-12/36W / 1050 mA - 3000 K	2999.9	41 W	80	11.46
	131-9656	LED-12/36W / 1050 mA - 4000 K	3139.4	41 W	80	11.46
	131-9657	LED-12/52W / 1400 mA - 3000 K	3837	55 W	80	11.46
	131-9658	LED-12/52W / 1400 mA - 4000 K	4011.5	55 W	80	11.46
[A60] Type IV Very Short 	131-9641	LED-12/24W / 700 mA - 2700 K	1880.5	27 W	80	11.46
	131-9642	LED-12/36W / 1050 mA - 2700 K	2696.1	41 W	80	11.46
	131-9643	LED-12/52W / 1400 mA - 2700 K	3419.5	55 W	80	11.46
	131-9665	LED-12/24W / 700 mA - 3000 K	2019.8	27 W	80	11.46
	131-9666	LED-12/24W / 700 mA - 4000 K	2159.1	27 W	80	11.46

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/08/2024

PLS430 LED

we-ef

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	131-9667	LED-12/36W / 1050 mA - 3000 K	2827.6	41 W	80	11.46
	131-9668	LED-12/36W / 1050 mA - 4000 K	2959.2	41 W	80	11.46
	131-9669	LED-12/52W / 1400 mA - 3000 K	3616.7	55 W	80	11.46
	131-9670	LED-12/52W / 1400 mA - 4000 K	3781.1	55 W	80	11.46
	131-9638	LED-12/24W / 700 mA - 2700 K	1760.2	27 W	80	11.46
	131-9639	LED-12/36W / 1050 mA - 2700 K	2622	41 W	80	11.46
	131-9640	LED-12/52W / 1400 mA - 2700 K	3325.4	55 W	80	11.46
	131-9659	LED-12/24W / 700 mA - 3000 K	1890.6	27 W	80	11.46
	131-9660	LED-12/24W / 700 mA - 4000 K	2021	27 W	80	11.46
	131-9661	LED-12/36W / 1050 mA - 3000 K	2749.9	41 W	80	11.46
[R65] Type IV Medium	131-9662	LED-12/36W / 1050 mA - 4000 K	2877.8	41 W	80	11.46
	131-9663	LED-12/52W / 1400 mA - 3000 K	3517.3	55 W	80	11.46
	131-9664	LED-12/52W / 1400 mA - 4000 K	3677.2	55 W	80	11.46

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/08/2024

Optical Accessories

Colour correction filter


Description	Part ID
IF-3000K > 2400K	131-9685



Honeycomb louvre

Surface Mounted Wall Luminaires

Description	Part ID	C1	H1
Honeycomb louvre IW	131-9684	12.13	2.80

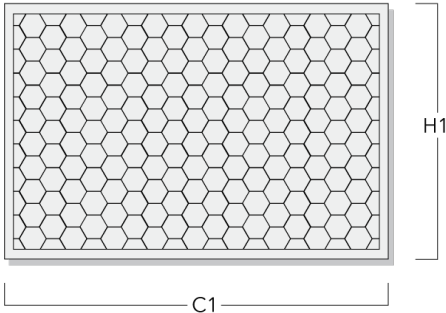


Light shield

Description	Part ID	Additional information
LS180-[A60]	430-0038	Light shield LS180 to greatly reduce or eliminate light pollution. PA injection moulded component, black matt. Suitable for asymmetric light distribution [A60].
LS180	430-0029	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering.

Mounting Accessories

Bird deterrent

Description	Part ID
Bird deterrent BD	131-9688



Surface Collar

Description	Part ID	D1
PLS430 Surface Conduit Kit	131-6904	1/2

Electrical Accessories

Emergency Lighting Package

Description	Part ID	Additional information
_LS420/430 LED Emergency Lighting Package	131-6900	Emergency battery backup operating for a minimum 90 minutes when power is lost.

PLS430 LED



Surface Mounted Wall Luminaires

Control

Photocell

Description	Part ID
PLS430 Button Photocell Kit	131-6902

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/08/2024

PLS430 LED
Surface Mounted Wall Luminaires

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086
Phone: +1 724 742 0030

customersupport.usa@we-ef.com
<https://we-ef.com/us>

Subject to technical changes and errors.
Generated on 08/08/2024