



- A. REFER TO SHEET S004 FOR OUTSHEETS.
- B. LIGHTING LEVELS ARE MAINTAINED. LIGHT LOSS FACTOR OF .80 WAS USED TO ACCOUNT FOR DIRT AND LUMEN DEPRECIATION.
- C. WALL SPACE MOUNTING HEIGHTS SHOWN ARE TO BOTTOM OF FIXTURE.
- D. SEE LIGHT POLE FOUNDATION DETAIL ON SHEET E000 FOR LIGHT POLE FOUNDATIONS.

[illegible]


Calculator Summary							
Label	Chicletype	Unit	AVG	Max	Min	Avg/Max	Max/Min
East_Frog_Lane	Fluoranthene	FC	0.35	3.4	0.4	N/A	N/A
North_Frog_Lane	Fluoranthene	FC	0.30	3.0	0.4	N/A	N/A
South_Frog_Lane	Fluoranthene	FC	0.30	3.0	0.4	N/A	N/A
South_Frog_Lane	Fluoranthene	FC	0.30	3.0	0.4	N/A	N/A
West_Frog_Lane	Fluoranthene	FC	0.30	3.0	0.4	N/A	N/A

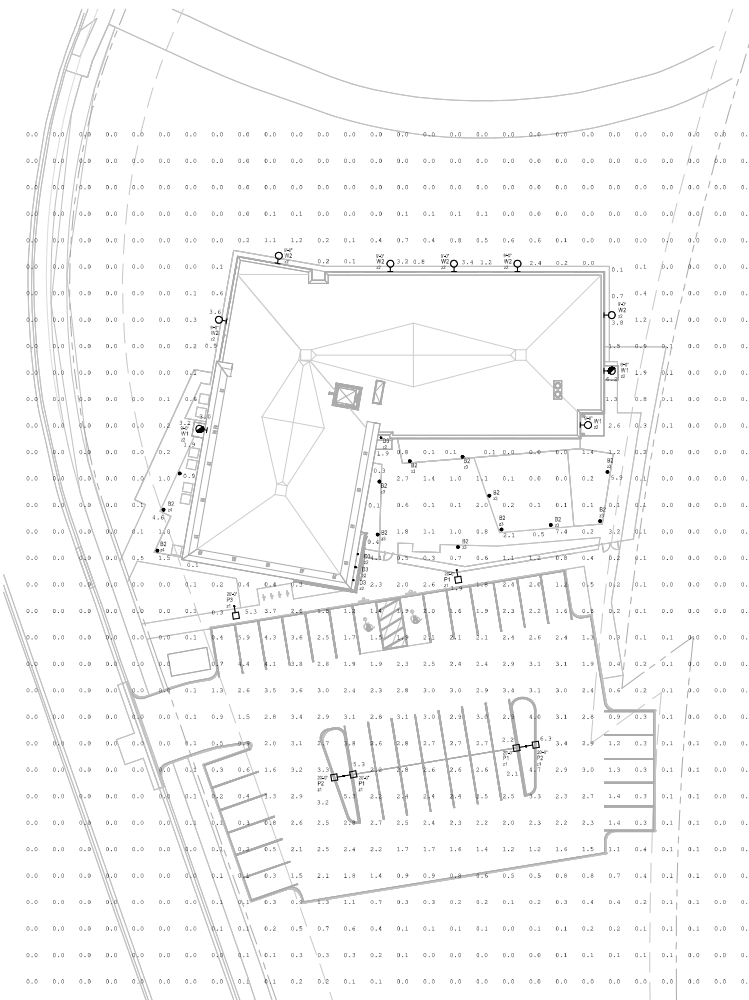

1 ELECTRICAL SITE PHOTOMETRIC PLAN
SCALE: 1" = 20'-0"

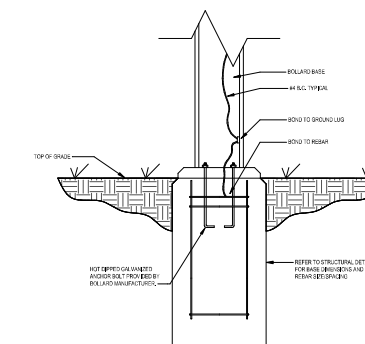

2 BOLLARD BASE DETAIL R6
NO SCALE



③ POLE BASE DETAIL B1
NO SCALE

Project


Catalog #

Type

Prepared by

Notes

Date



McGraw-Edison BRT6 Bollard

Round LED Pedestrian Luminaire

Interactive Menu

- Ordering Information [page 1](#)
- Product Specifications [page 1](#)
- Optical Distributions [page 1](#)
- Energy and Performance Data [page 1](#)

Product Certifications







Quick Facts

- 4 Optical Distributions
- Available in 30", 36", and 42"
- Lumen packages range from 560 - 4400 (SW - 4W)
- Efficiency up to 122 lumens per watt
- Zero uplight on all configurations

Dimensional Details

Side View



DTI and USB Options



SMI Option



Top View



CSP Option



Height	Weight
30"	12.5 lbs (5.7 kg)
36"	8 lbs (3.6 kg)
42"	10.5 lbs (4.8 kg)

Not shown without option in circles

1 FXTURE TYPE B1
NO SCALE

Project


Catalog #

Type

Prepared by

Notes

Date



McGraw-Edison BRT6 Bollard

Round LED Pedestrian Luminaire

Interactive Menu

- Ordering Information [page 1](#)
- Product Specifications [page 1](#)
- Optical Distributions [page 1](#)
- Energy and Performance Data [page 1](#)

Product Certifications








Quick Facts


- 4 Optical Distributions
- Available in 30", 36", and 42"
- Lumen packages range from 560 - 4400 (SW - 4W)
- Efficiency up to 122 lumens per watt
- Zero uplight on all configurations

Dimensional Details


Side View



DTI and USB Options



SMI Option



Top View



CSP Option



Height	Weight
30"	12.5 lbs (5.7 kg)
36"	8 lbs (3.6 kg)
42"	10.5 lbs (4.8 kg)

Not shown without option in circles

2 FXTURE TYPE D3
NO SCALE

Project

Catalog #

Type

Prepared by

Notes

Date



McGraw-Edison GALN Galleon II

Area / Site Luminaire

Interactive Menu

- Ordering Information [page 1](#)
- Product Specifications [page 1](#)
- Optical Distributions [page 1](#)
- Energy and Performance Data [page 1](#)
- Control Options [page 1](#)

Product Certifications







Quick Facts

- Lumen packages range from 3,330 - 102,700 (33W - 155W)
- 17 optical distributions
- Efficiency up to 73.1 LPW

Dimensional Details

Standard Pole Mount Arm



Pole Mount Pattern



Number of Light Fixtures	Width "V"	Height Length "V"	Height with Standard 40' Pole "V"	Height with Standard 40' Pole "V"
1-4	10"	27"	29.5"	6.95'
5-9	27"	27"	29.5"	6.95'
10-18	27"	27"	29.5"	6.95'

NOTE: For complete ordering and additional details, see the following data sheets.

3 FXTURE TYPE P1, P2 AND P3
NO SCALE

Project

Catalog #

Type

Prepared by

Notes

Date



McGraw-Edison GALN Galleon II

Area / Site Luminaire

Interactive Menu

- Ordering Information [page 1](#)
- Product Specifications [page 1](#)
- Optical Distributions [page 1](#)
- Energy and Performance Data [page 1](#)
- Control Options [page 1](#)

Product Certifications







Quick Facts

- Lumen packages range from 3,330 - 102,700 (33W - 155W)
- 17 optical distributions
- Efficiency up to 73.1 LPW

Dimensional Details

Standard Pole Mount Arm



Pole Mount Pattern



Number of Light Fixtures	Width "V"	Height Length "V"	Height with Standard 40' Pole "V"	Height with Standard 40' Pole "V"
1-4	10"	27"	29.5"	6.95'
5-9	27"	27"	29.5"	6.95'
10-18	27"	27"	29.5"	6.95'

NOTE: For complete ordering and additional details, see the following data sheets.

Project

Catalog #

Type

Prepared by

Notes

Date



WEDGE1 LED Architectural Wall Scope

Specifications

Depth (D1): 1.5"
 Depth (D2): 1.5"
 Height: 8"
 Width: 6"
 Weight: 1.0 lbs (0.45 kg)

Introduction

The WEDGE1 LED family is designed to meet specifiers' every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The design features a design comes in four sizes with lumen packages ranging from 1,000 to 2,500 lumens, providing that the wide solution.

WEDGE1 delivers up to 2,500 lumens with a soft, non-pointed light source, creating a visually comfortable environment. The compact size of WEDGE1, with its integrated emergency battery backup option, makes it an ideal over-the-door wall-mounted lighting solution.

Ordering Information

EXAMPLE: WEDGE1 LED P2 40K 80CRI PV MOLT SM PED DBK8

WEDGE1 LED P2 40K 80CRI PV MOLT SM PED DBK8

Options

[X] Emergency battery backup (DBK8) (P2 40K 80CRI PV MOLT SM PED DBK8)

4 FXTURE TYPE W1 AND W2
NO SCALE

Project


Catalog #

Type

Prepared by

Notes

Date



LITEISTRY LTR-4RD

LITEISTRY 4" ROUND DOWNLIGHT

Interactive Menu

- Ordering Information [page 1](#)
- Product Specifications [page 1](#)
- Optical Distributions [page 1](#)
- Energy and Performance Data [page 1](#)

Product Certifications







Quick Facts

- 4 Optical Distributions
- Available in 30", 36", and 42"
- Lumen packages range from 560 - 4400 (SW - 4W)
- Efficiency up to 122 lumens per watt
- Zero uplight on all configurations

Dimensional Details

Side View



DTI and USB Options



SMI Option



Top View



CSP Option



Height	Weight
30"	12.5 lbs (5.7 kg)
36"	8 lbs (3.6 kg)
42"	10.5 lbs (4.8 kg)

Not shown without option in circles

5 FXTURE TYPE W1 AND W2
NO SCALE

Project

Catalog #

Type

Prepared by

Notes

Date



LITEISTRY LTR-4RD

LITEISTRY 4" ROUND DOWNLIGHT

Interactive Menu

- Ordering Information [page 1](#)
- Product Specifications [page 1](#)
- Optical Distributions [page 1](#)
- Energy and Performance Data [page 1](#)

Product Certifications






Quick Facts


- 4 Optical Distributions
- Available in 30", 36", and 42"
- Lumen packages range from 560 - 4400 (SW - 4W)
- Efficiency up to 122 lumens per watt
- Zero uplight on all configurations

Dimensional Details

Side View



DTI and USB Options



SMI Option

Top View



CSP Option



Height	Weight
30"	12.5 lbs (5.7 kg)
36"	8 lbs (3.6 kg)
42"	10.5 lbs (4.8 kg)

Not shown without option in circles

6 FXTURE TYPE W1 AND W2
NO SCALE

7 FXTURE TYPE W1 AND W2
NO SCALE

8 FXTURE TYPE W1 AND W2
NO SCALE