


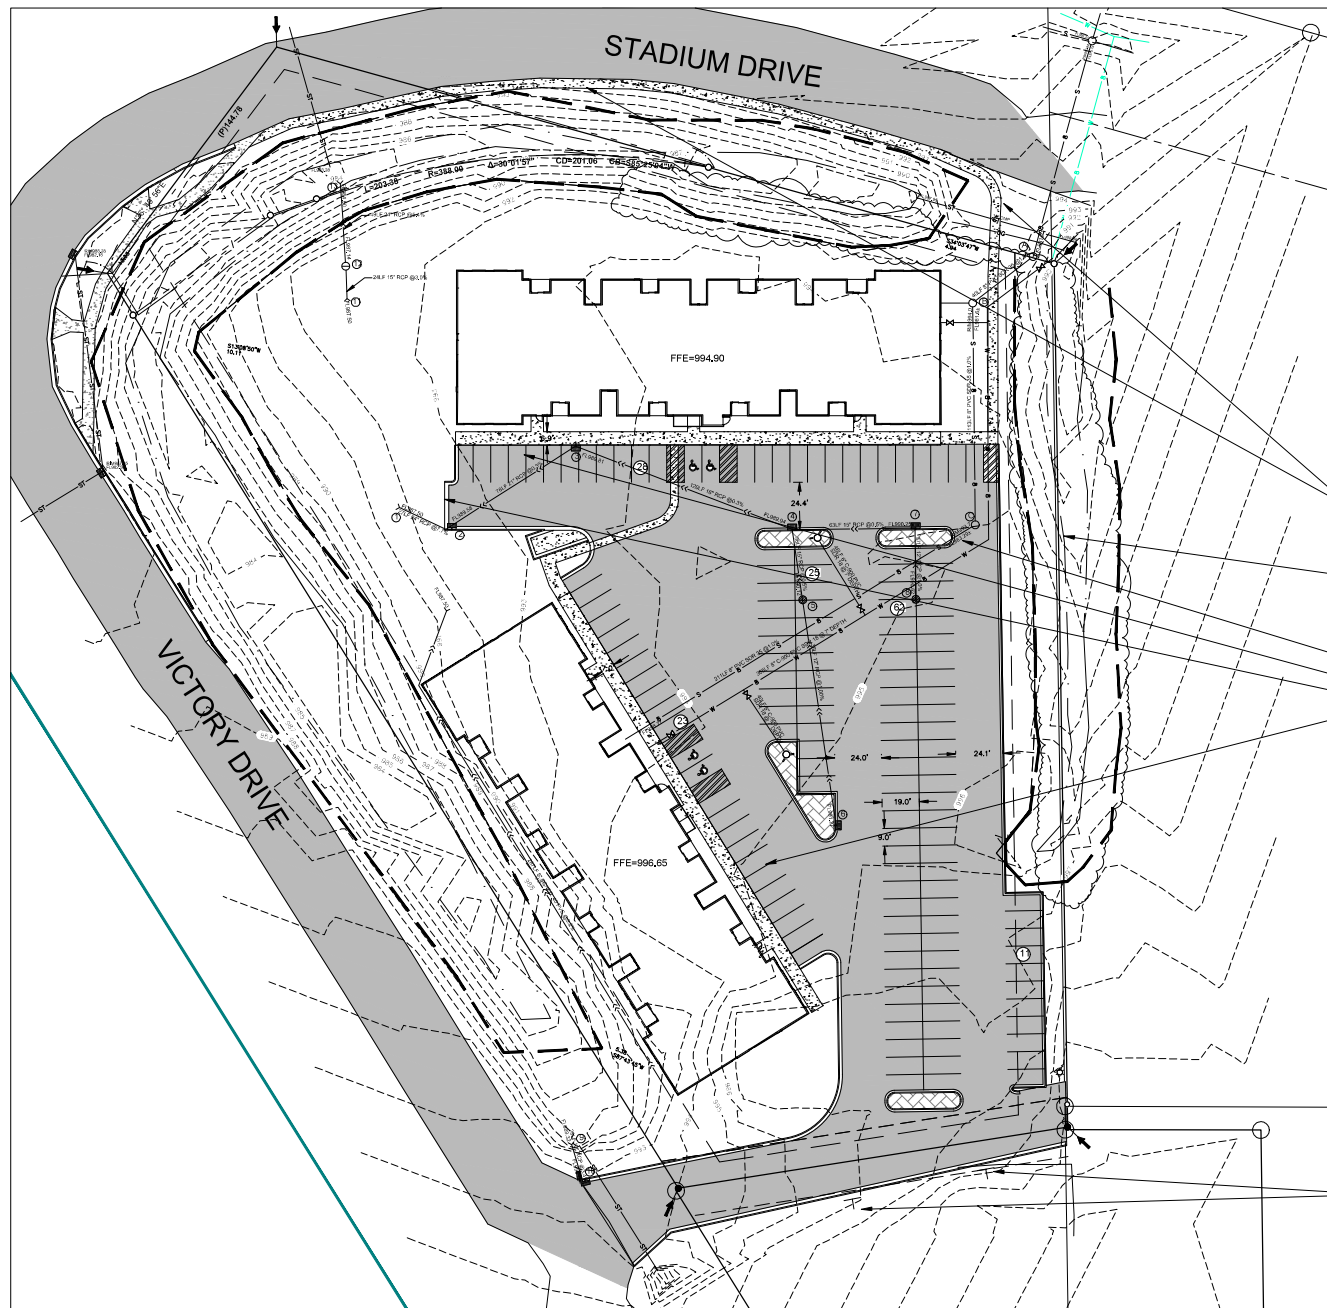

F&I NEW 5' WIDE X 4" THICK CONCRETE WALK FROM PARKING LOT TO EXISTING SIDEWALK AT EXISTING ROUNDABOUT. INSTALL AT 2% SLOPE AWAY FROM STADIUM DRIVE BITUMINOUS, F&I THICKENED EDGE WALK ON DOWNSTREAM SIDE OF WALK AS NEEDED TO AVOID DISTURBING WETLAND/EASEMENT F&I WOOD RAIL FENCE WHEREVER SLOPE IS 4:1 OR GREATER ALONG SIDEWALK-SEE DETAIL

NEW CONCRETE B618 CURB & GUTTER TYP.


F&I LATEX PAVEMENT STRIPING/MESSAGES TYP.

F&I CONCRETE PAVEMENT SECTION WITHIN TRASH ENCLOSURE TYP.
F&I CURB CUT FOR POND MAINTENANCE ACCESS

F&I THICKENED EDGE WALK ALONG BUILDING EXCEPT AT ADA STALLS TYP.
SEE THICKENED EDGE WALK DETAIL AND RAISED PAVEMENT DETAIL



F&I (2) R3-2 NO LEFT TURN SIGNS
PER MUTCD MANUAL



MANKATO APARTMENTS

Project No.	90000000
Drawn by	HJ
Checked by	
Project Manager	
Project Status	CD
Sheet No.	
Sheet Title	HARDSCAPE PLAN



