

STEEL P LLARS





TRACKING SYSTEM SCHEMATIC



AESTHETICS

To limit reflection, solar PV panels are constructed of dark, light-absorbing materials. Today's panels reflect as little as two percent of the incoming sunlight depending on the angle of the sun and assuming use of anti-reflective coatings. No reflector type system will be used, so glare is not a concern from that standpoint. A glare study has been completed and is included in the application materials. The airport glare study is not necessary as the airport is more than 2 miles away from the array:

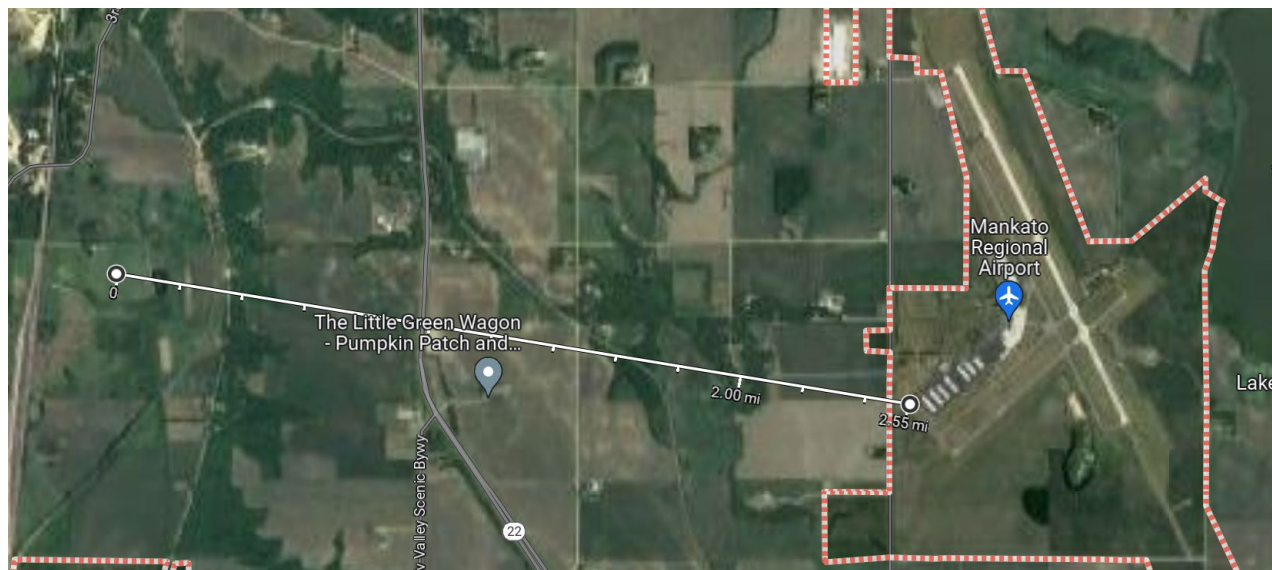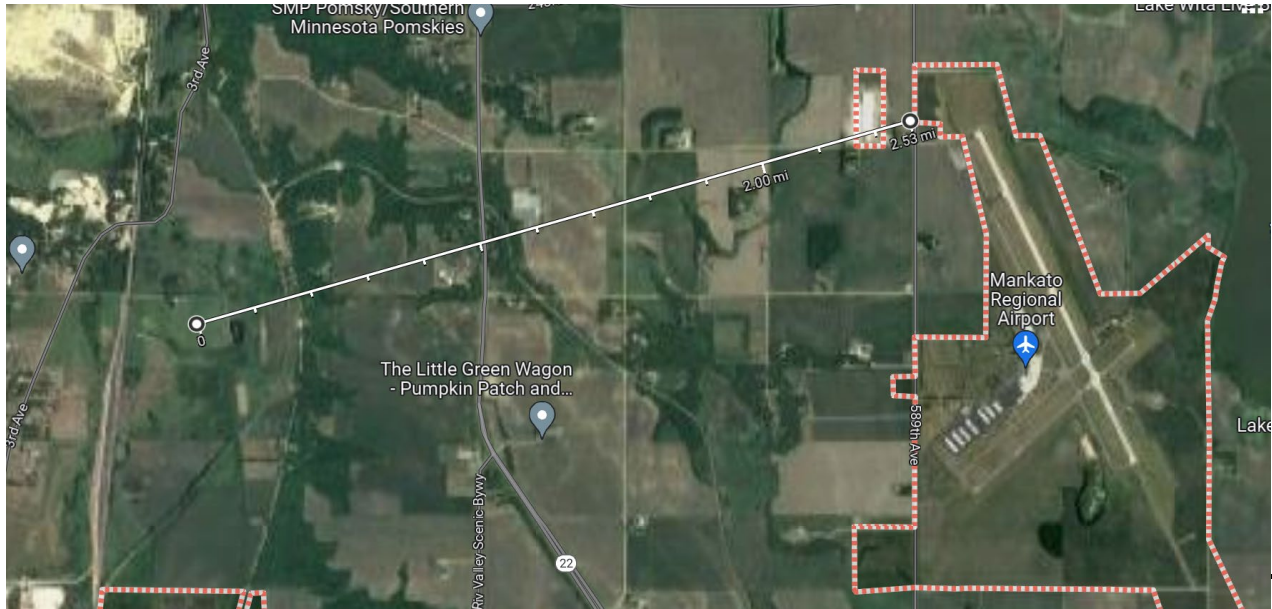

The use of a tracking system will limit the height of the project to less than 10 feet.