





PRELIMINARY NOT FOR CONSTRUCTION

NOTES:

1. PERIMETER FENCE SHALL BE SECURED AT ALL TIMES. THE FENCE IS CONSIDERED SECURE WHEN IT IS IN ITS FULL UPRIGHT POSITION INCLUDING BARBED WIRE.
2. FENCE SHALL BE GROUNDED IN ACCORDANCE TO STANDARD SPECIFICATIONS, AND AT ALL LOCATIONS WHERE THE FENCE CROSSES TO ENERGIZED POWER LINES.
3. CONTRACTOR IS REQUIRED TO LOCATE ALL UTILITIES INCLUDING PRIVATE UTILITIES, CROSSING WHERE THE PROPOSED FENCE LIES.
4. EXCAVATED MATERIALS TO BE DEPOSED ON SITE ARE TO BE SPREAD TO THE FENCE LINE.
5. DETAILS SHOWN ARE TO CLARIFY REQUIREMENTS AND ARE NOT INTENDED TO LIMIT OTHER TYPES OF FENCE SECTIONS AND METHODS OF INSTALLATION THAT COMPLY WITH THE SPECIFICATIONS.
6. WHEN TIES SHALL POSTS AND BRACES SHALL BE CONSTRUCTED ON THE SECURE SIDE OF THE FENCE ALIGNMENT. CHAIN-LINK FABRIC SHALL BE PLACED ON THE REB OPPOSITE THE SECURE AREA.
7. UNLESS SPECIFICALLY SHOWN OR SPECIFIED, ALL FENCE SHALL HAVE A SPREAD EXTENDED OUTWARD FROM THE AREA BEING PROTECTED.
8. GATEPOST SHALL BE INSTALLED SO THAT THE VOID INSIDE THE POST IS COMPLETELY FILLED WITH CONCRETE UP TO THE TOP OF THE FOUNDATION.
9. ALL CORNER, END, PULL, AND LINE POSTS SHALL BE SET AND ORIENTED BY FENCE SUPPLIER USING THE WIND LOAD CRITERIA LISTED BELOW. WIND SPEED SHALL NOT BE EXCEEDED FOR ANY COVERINGS OR PERMANENTLY PLACED, PERMANENT CALCULATED FOR A 100-MPH WIND TO REMAIN STATIONARY.
10. ALL MAIN GATES SHALL HAVE GRASS-BASED HARDWARE INSTALLED ON THE INTERIOR SIDE OF THE GATE.
11. FENCE SHALL HAVE FABRIC PIN STAKE BETWEEN POSTS.
12. MATCH EXISTING ADJACENT FENCE IN ALL ASPECTS.

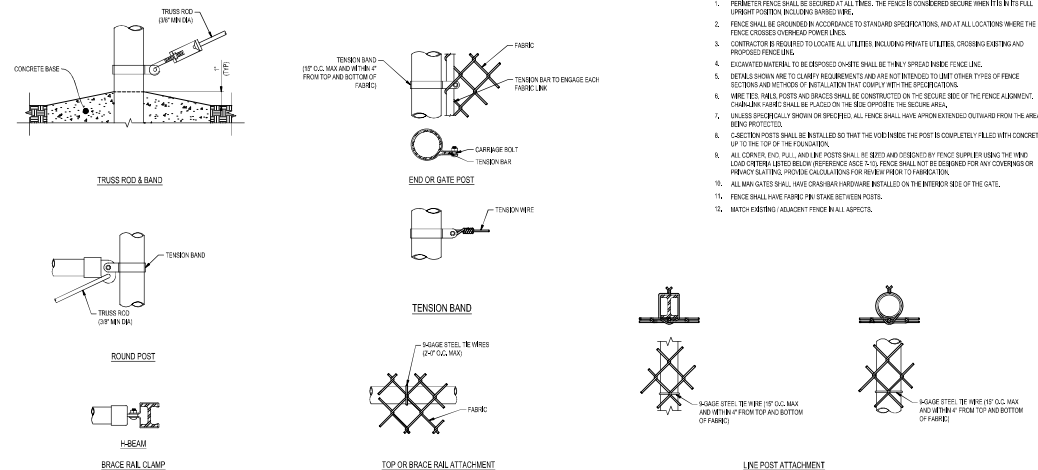


CHAIN-LINK FENCE FASTENING DETAILS

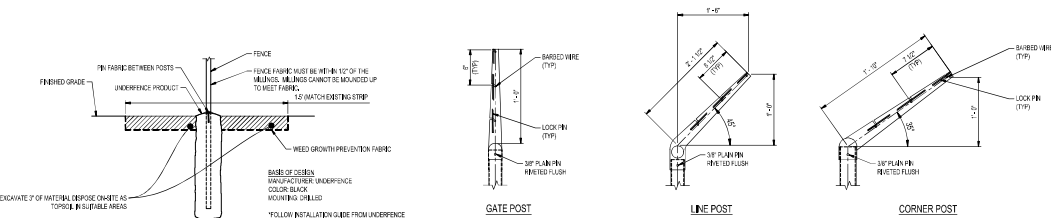

MAINTENANCE STRIP DETAIL

EXTENSION ARM DETAILS

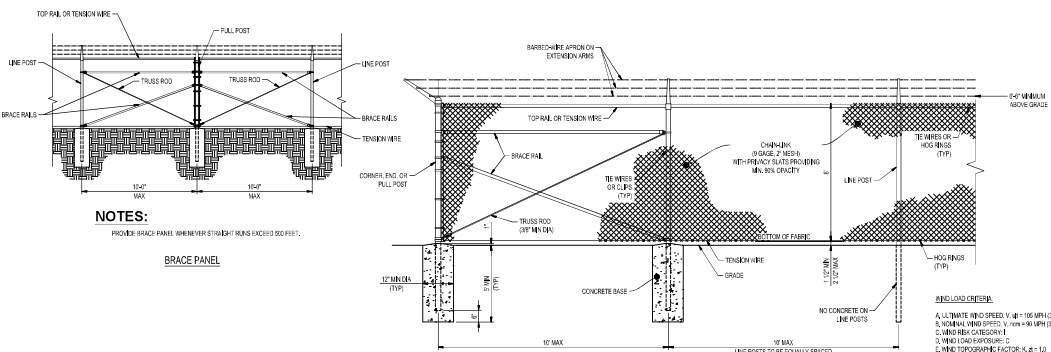

NOTES:

PROVIDE BRACE PANEL WHENEVER STRAIGHT RUNS EXCEED 50 FEET.

BRACE PANEL


NOTES:

ALL GATE AND CORNER POSTS SHALL BE SET IN CONCRETE.
PROVIDE IMPACT SLATS FOR ALL FENCE EXCEPT IN AREAS IDENTIFIED AS HAVING NO SLATS ON THE PLANS.


BARBED WIRE CHAIN-LINK FENCE NTS

NOTE:

1. GATE OPENING WIDTH REQUIREMENT WITH MANUFACTURER'S RECOMMENDATIONS.

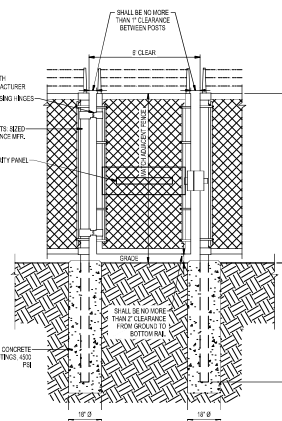

MAIN GATE NTS

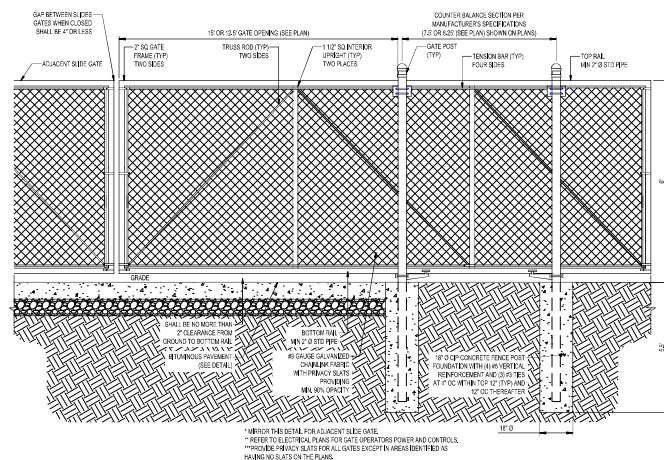

15' OR 12.5' (SEE PLAN) AUTOMATED SLIDING GATE NTS

I HEREBY CERTIFY THAT THE PLANS, SPECIFICATIONS OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A QUALIFIED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

BRYAN M. PETZEL

DATE: 10/10/2024 I.E. NO.: 53394

I HEREBY CERTIFY THAT THE PLANS, SPECIFICATIONS OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A QUALIFIED PROFESSIONAL ARCHITECT UNDER THE LAWS OF THE STATE OF MINNESOTA.

BRETT A. HARRIS

DATE: 10/10/2024 I.E. NO.: 60637

SHEET NOT VALID UNLESS THIS TEXT IS COLOR.

THIS DOCUMENT IS THE PROPERTY OF I & S GROUP, INC. AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT. © 2024 I & S GROUP, INC.

PROJECT:

**ROLLS ROYCE
SOLUTIONS
AMERICA, INC**

LUNDIN LPR

MANKATO MINNESOTA

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1

DATE: 10/10/2024

REVISION: 1

DESCRIPTION: 1