





Dimensions

	Standard wattage	Weight		Length		EPA	
		lb.	kg.	in.	mm.	sq. ft.	sq. m.
RVS	55W32LED	23	10.4	21.38	543	0.53	0.049
	80W48LED	23	10.4	21.38	543	0.53	0.049
	110W64LED	26	11.8	25.25	641	0.60	0.056
	135W80LED	26	11.8	25.25	641	0.60	0.056
RVM	160W96LED	34	15.4	31.25	794	0.71	0.066
	190W112LED	34	15.4	31.25	794	0.71	0.066
	215W128LED	34	15.4	31.25	794	0.71	0.066
	245W144LED	37	16.8	35.25	895	0.78	0.072
	270W160LED	37	16.8	35.25	895	0.78	0.072



21.38" (543mm) min. – 25.25" (641mm) max.

31.25" (794mm) min. – 35.25" (895mm) max.

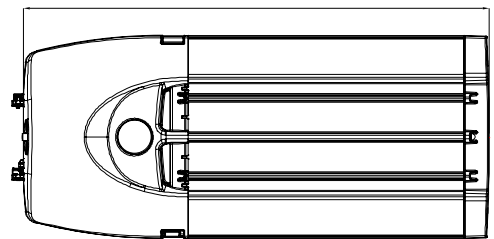

RVS

Weight: 23 to 26 lbs
(10.4 to 11.8 kg)

RVM

Weight: 34 to 37 lbs
(15.4 to 16.8 kg)

Product features

- Competitive high value performance luminaire
- Highly efficient optics improve illuminance uniformity
- Versatile and expandable LED boards
- Expanded flexibility in choosing the right wattage for the application
- Tool free access to electrical compartment
- Easy to install and maintain
- Innovative thermal management provides longer LED lifetime
- Designed to accommodate the latest in street lighting control technology
- Tool-less 360 degree rotatable twist-lock photocell receptacle
- 3G tested per ANSI C136.31
- Up to 100,000 hour rated life
- Highly efficient IP66 optics
- Modular design
- Protective lens