



3' MIN. VERTICAL CLEARANCE UP TO; ADDITIONAL STORAGE FOR 1/2" MIN. ACCESSIBLE PARKING MUST BE PROVIDED FOR SPACE W/ REQ'D. VERT. CLEARANCE-SEE PLANS FOR LOCATION




FINISH GRADE - SEE SITE PLAN

- NOTE:
1. SIGNS SHOULD BE PROPERLY CENTERED ON PARKING STALLS.
 2. SIGN FACE SHOULD BE LOCATED NO FURTHER THAN 5'-0" FROM THE FRONT OF SA. PARKING STALL W/ MIN. 4'-0" CLEAR.
 3. MOUNT SIGN ON COLUMNS OR WALL AT LOCATIONS WHERE STEEL TUBES INTERFERE W/ BUILDING.
 4. WHERE SIGN IS PLACED IN PAVED AREAS ON PARKING LOTS, PROVIDE PRECAST CONCRETE STOPPS.
 5. ONE 1/2" MIN. ACCESSIBLE PARKING SPACE SHL. A MIN. VERT. CLEARANCE OF 10'-0" MUST BE PROVIDED FOR EACH TYPE OF PARKING PROVIDED.

3 ACCESSIBLE PARKING SIGN
SCALE: N.T.S.

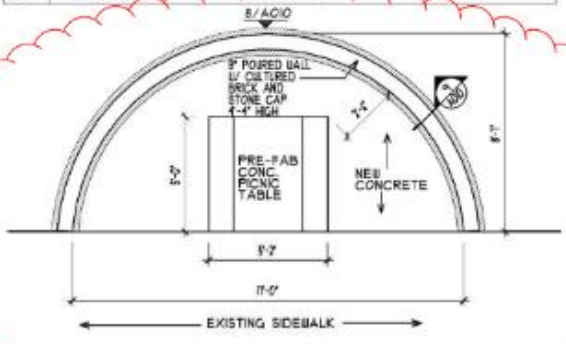


7 BENCH DETAIL
SCALE: 1/4" = 1'-0"

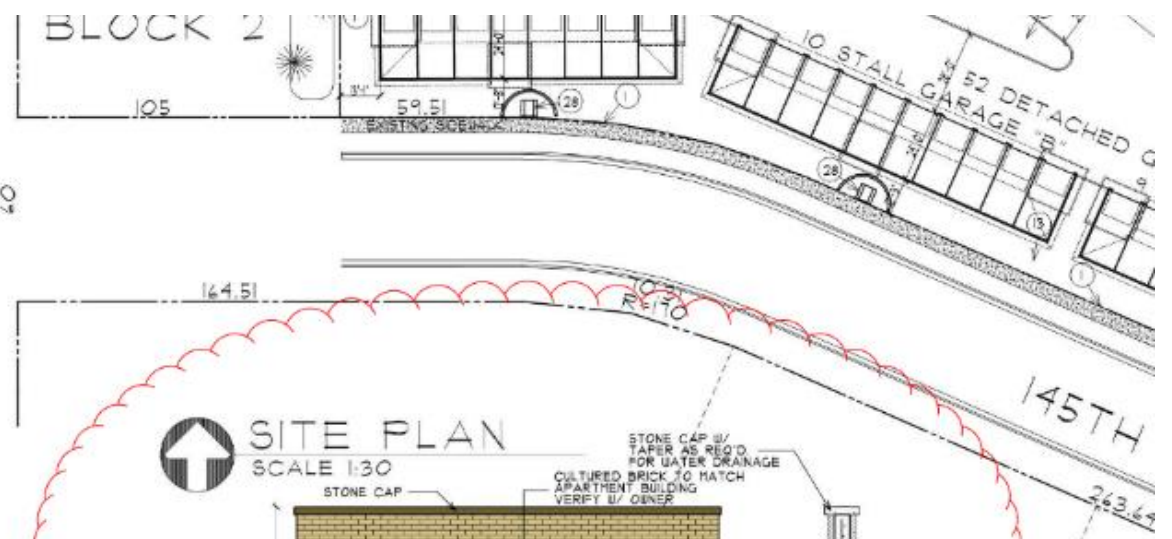

SITE PLAN

SCALE: 1:30

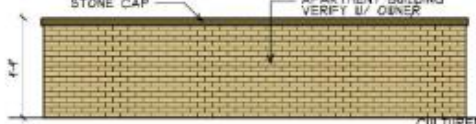

8 WALL ELEVATION
SCALE: 1/4" = 1'-0"

9 WALL SECTION
SCALE: 1/4" = 1'-0"

STONE CAP W/ TAPER AS REQ'D FOR WATER DRAINAGE

CULTURED BRICK TO MATCH APARTMENT BUILDING VERIFY W/ OWNER

CULTURED BRICK VENEER

8" POURED WALL W/ 24" O.C. VERT. & HORIZ.

T.O. FTG. ELEV. 42'-0"

2'x10" CONC. FTG. W/ 1#5' CONT.