



Rush Truck Center, Yuma AZ

3382 E. Gila Ridge Rd.
Yuma, AZ 85365
928-726-9818

Customer Proposal Letter

City of San Luis
1090 E. Union Street
San Luis, AZ 85349
(928) 341-8589

Salvador Sandoval, thank you for the opportunity to earn your business. We look forward to working with you on your business needs. Please accept the following proposal.

VEHICLE

Make Peterbilt Model 348 Year 2019 Stock Number To Be Determined
Additional Vehicle and Accessories Description _____ To be delivered on or about _____

Arizona State Contract #ADSP014-063234
Specs Per Attached

Quantity	1	Total
Truck Price per Unit	<u>\$367,562.00</u>	<u>\$367,562.00</u>
F.E.T. (Factory & Dealer Paid)	<u>\$0.00</u>	<u>\$0.00</u>
Net Sales Price	<u>\$367,562.00</u>	<u>\$367,562.00</u>
Optional Extended Warranty(ies)		
State Sales Tax	<u>\$30,919.32</u>	<u>\$30,919.32</u>
Documentary Fee	<u>\$250.00</u>	<u>\$250.00</u>
Administration Fee		
Vehicle Inventory Tax		
Additional Taxes		
Tire Recycling Program	<u>\$20.00</u>	<u>\$20.00</u>
Battery Disposal Fee		
Out of State Vehicle Fee		
Rebate(s)		
Total Sales Price (Including Rebate(s))	<u>\$398,751.32</u>	<u>\$398,751.32</u>
Trade Allowance (see DISCLAIMER Below)		<u>\$0.00</u>

Sales Representative _____

Byron Haught

Purchaser _____

signature

printed name

signature

printed name

Accepted by Sales Manager or
General Manager _____

title

date

signature

printed name

Quote good until **7/31/2018**

Note: The above Customer Proposal is a quotation only. Sale terms subject to approval of Sales Manager of Dealer.

DISCLAIMER: Any order based on this Proposal subject to Customer executing Dealer's standard form Retail Purchase Order incorporating above terms. Any documentary fees, state tax, title, registration and license fees subject to adjustment and change. Actual F.E.T. to be paid by Dealer, subject to adjustment. Any F.E.T. variance will be responsibility of Dealer. Manufacturer has reserved the right to change the price to Dealer of any vehicle not currently in Dealer's stock, without notice to Dealer. If Quoted Vehicle(s) not currently in Dealer's stock, Dealer reserves right to change Quotation Total to reflect any price increases from Manufacturer. This Proposal is based upon Dealer's current and expected inventory, which is subject to change. Dealer not obligated to retain any specific vehicles in stock, nor maintain any specific inventory level. Dealer shall not be obligated to fulfill Proposal in event quoted vehicle(s) not in stock or available within requested delivery schedule at time Proposal accepted. Dealer shall not be liable for any delay in providing or inability to provide Quoted Vehicle(s), where such inability or delay is due, in whole or in part, to any cause beyond the reasonable control of Dealer or is without the gross negligence or intended misconduct of Dealer. Above listed Trade Value based upon current appraisal of Trade Vehicle(s). Dealer may adjust Trade Value of Trade Vehicle(s) to reflect changes in condition and/or mileage of Trade Vehicle(s) between date of current appraisal and acceptance of this Proposal by Customer.



Rush Peterbilt Truck Center, Y C642

City of San Luis
1090 E Union St.

, United States

San Luis, Arizona United States 85349

Phone:

Phone: (928) 341-8577

Fax:

Fax: (928) 341-8599

Email: haughtb@rushenterprises.com

Contact Email: mrojas@cityofsanluis.org

Prepared for: Manuel Rojas

Vehicle Summary

	Unit		Chassis	
Model:		Model 348	Fr Axle Load (lbs):	20000
Type:		Full Truck	Rr Axle Load (lbs)	46000
Description:		Vactor	G.C.W. (lbs):	66000
	Application		Road Conditions:	
Intended Serv.:		Tanker, Liquid Bulk	Class A (Highway)	100
Commodity:		Hazardous Waste	Class B (Hwy/Mtn)	0
	Body		Class C (Off-Hwy)	0
Type:		Tank	Class D (Off-Road)	0
Length (ft):		20	Maximum Grade:	6
Height (ft):		13.5	Wheelbase (in):	266
Max Laden Weight (lbs):		1000	Overhang (in):	71
	Trailer		Fr Axle to BOC (in):	72.2
No. of Trailer Axles:		0	Cab to Axle (in):	193.8
Type:			Cab to EOF (in):	264.8
Length (ft):		0	Overall Comb. Length (in):	375
Height (ft):		0.0		
Kingpin Inset (in):		0	Special Req.	
Corner Radius (in):		0	United States Registry	
	Restrictions			
Length (ft):		65		
Width (in):		102		
Height (ft):		13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 3/28/2018 8:36:59 AM
Effective Date: Jan 1, 2018
Prepared by: Byron Haught

Complete

Model Number: Model 348
Quote/DTPO/CO: Q13564580
Version Number: 36.10



Rush Peterbilt Truck Center, Y C642

City of San Luis
1090 E Union St.

United States

Phone:

Fax:

Email:

haughtb@rushenterprises.com

San Luis, Arizona United States 85349

Phone: (928) 341-8577

Fax: (928) 341-8599

Contact Email: mrojas@cityofsanluis.org

Prepared for: Manuel Rojas

Data	Code	Description	\$ List	Weight
Base Model				
0003481	O	Model 348	104,420	10,610
0091240	O	Hazardous Waste	0	0
0093020	O	Tanker, Liquid Bulk General freight (linehaul) service using a liquid bulk tanker body or tanker trailer.	0	0
0095150	O	Tank	0	0
0098170	O	United States Registry	0	0
Configuration				
0200700	O	Not Applicable Secondary Manufacturer	0	0
Frame & Equipment				
0514020	O	10-3/4in Steel Rails 355-384in 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair	712	619
0601500	O	Full Steel Inner Liner	1,236	701
0612230	O	Custom Wheelbase or Overhang Engineering approval may be required.	365	0
0613090	S	Three-Piece Crossmembers	0	0
0633405	O	Additional Frame Drilling N06300 Ref VIN 409329	376	0
0644090	S	EOF Square without Xmbr For use with body builder installed crossmember.	0	0
0651090	S	Omit Rear Mudflaps and Hangers	0	0
Front Axle & Equipment				
1011360	O	Dana Spicer D2000F 20,000 lb, 3.5 in. Drop Factory front axle alignment to improve handling & reduce tire wear. Zerk fittings on tie rod ends, king pins, & draglink ball joints for ease of maintenance & help extend service life of components. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	1,455	152
1114030	O	Taper Leaf Springs, Shocks 20,000 lb Standard with Heavy Resistance Shocks. N11100 Customer Requires 70MM	1,313	189

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

3/28/2018 8:36:59 AM

Complete

Model Number:

Model 348

Effective Date:

Jan 1, 2018

Quote/DTPO/CO:

Q13564580



Data	Code	Description	\$ List	Weight
		N11110 Spacer Blocks in Front Springs		
1233110	O	Power Steering TRW THP60 Dual For use with 16,000 to 20,000 lb. axle ratings. Glidekote splines on steering shaft extend service life of components.	925	54
1250250	O	Power Steering Reservoir Frame Mounted w/Cooler	154	2
1353540	O	PHP10 Aluminum PreSet PLUS Hubs	233	0
1380270	O	Bendix Air Cam Front Drum Brakes 16.5x6 Includes automatic slack adjusters & outboard mounted brake drums.	102	0
1391410	O	Gusseted Cam Brackets, Steer Axle	24	0

Rear Axle & Equipment

1523340	O	Dana Spicer D46-170 46,000 lb Interaxle diff lock air rocker occupies space of one gauge. Laser factory axle alignment to improve handling & reduce tire wear. Magnetic rear axle oil drain plug captures & holds any metal fragments in drive axle lube to extend service life. Parking brakes on all drive axles for optimal performance. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	10,185	2,485
1616290	O	PHP10 Aluminum PreSet PLUS Hubs	351	0
1631310	S	Standard Stroke Parking Brakes Drive Axle(s). Not for use on U.S. or Canada Tractors, other than Car Carriers.	0	0
1680470	O	Lube Pump, Drive Axle(s)	256	36
1680490	O	Gusseted Cam Brackets, Drive Axle(s)	24	2
1680500	S	SBM Valve Full trucks require a spring brake modulation (SBM) system for emergency braking application. This system requires an SBM valve and a relay valve with spring brakes on the rear axles. The SBM valve allows the foot valve to operate the rear axle spring brakes if a failure exists in the rear air system.	0	0
1680950	S	Stability System Not Selected or Not Available	0	0
1682430	S	Anti-Lock Braking System (ABS) 4S4M ABS-6. Includes air braking system.	0	0
1684200	S	Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0	0
1687010	S	Bendix Air Cam Rear Drum Brakes 16.5x7 Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums.	0	0
1687348	O	Tandem Drive Axle (Model 348)	0	0
1705380	O	Ratio 5.38 Rear Axle	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

3/28/2018 8:36:59 AM

Complete

Model Number:

Model 348

Effective Date:

Jan 1, 2018

Quote/DTPO/CO:

Q13564580



Data	Code	Description	\$ List	Weight
1821640	U	Peterbilt Air Trac 46,000 lbs, 54in Axle Spacing	4,437	712
1922260	O	Dash Mtd Dump Switch With Indicator Light For suspension	34	2

Engine & Equipment

2074507	O	PACCAR PX-9 370@1900 GOV@2100 1250@1400 Performance (2017 Emissions)	9,057	0
		N21320 N205 120..Standard Maximum Speed Limit [LSL]		
		N21330 N207 0...Expiration Distance		
		N21340 P005 120..Hard Maximum Speed Limit		
		N21350 P001 72...Maximum Accelerator Pedal Vehicle Speed		
		N21370 P059 72...Maximum Cruise Speed		
		N21400 N203 252..Reserve Speed Function Reset Distance		
		N21410 N202 0...Maximum Cycle Distance		
		N21420 N206 10...Maximum Active Distance		
		N21430 N201 0...Reserve Speed Limit Offset		
		N21440 P015 YES..Engine Protection Shutdown		
		N21450 P026 NO...Gear Down Protection		
		N21460 P046 1400..Max PTO Speed		
		N21470 P062 NO...Cruise Control Auto Resume		
		N21480 P068 NO...Auto Engine Brake in Cruise		
		N21500 N209 0...Expiration Distance		
		N21510 P520 YES..Enable Idle Shutdown Park Brake Set		
		N21520 P030 5...Timer Setting		
		N21530 P233 YES..Enable Impending Shutdown Warning		
		N21540 P234 60...Timer For Impending Shutdown Warning		
		N21550 P516 35...Engine Load Threshold		
		N21570 P031 NO...Idle Shutdown Manual Override		
		N21590 P230 YES..Enable Hot Ambient Automatic Override		
		N21610 P172 40...Low Ambient Temperature Threshold		
		N21620 P173 60...Intermediate Ambient Temperature Threshold		
		N21630 P171 80...High Ambient Temperature Threshold		
2091310	O	Engine Idle Shutdown Timer Disabled	0	0
2091315	O	Enable EIST Ambient Temp Override	0	0
2091372	O	Eff EIST NA Expiration Miles	0	0
2091640	O	Effective VSL Setting NA	0	0
2140150	O	Remote PTO And Throttle Provision	17	0
2140200	O	CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins ISL, ISM and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0	0
2513060	S	PACCAR 160 Amp Alternator, Brushed	0	0
2521090	O	Immersion Type Block Heater 110-120V Standard location is center left hand under cab and includes a weather-proof cover that protects the receptacle. This pre-heater keeps the coolant in the engine block from freezing when the engine is not running.	81	2
2522050	S	PACCAR 12V Starter	0	0
2538040	O	3 PACCAR Premium 12V Dual Purpose Batt 2190 CCA Threaded stud type terminal. Stranded copper battery cables are double bight (00) or larger to reduce resistance.	256	62

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	3/28/2018 8:36:59 AM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q13564580



Data	Code	Description	\$ List	Weight
2539410	O	Battery Jumper Terminal Mounted Under Hood LH Frame Rail. Not available with PX-7 engines.	98	4
2621000	O	2-Speed Fan Clutch For Frequent Start/Stops	370	0
2723210	S	18.7 CFM Air Compressor N/A X15. Furnished on engine. Teflon lined stainless steel braided compressor discharge line.	0	0
2812210	O	VGT Exhaust Brake (Variable Geometry Turbo). Provides approximately 90-100 HP of retardation and is part of the turbocharger.	316	0
2921160	S	Spin-On Fuel/Water Separator	0	0
2921210	S	No Fluid Heat Option for Fuel Filter	0	0
2921320	O	12V Heat for Fuel Filter	58	0
3010400	O	Engine Protection Shutdown Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	4	0
3114270	S	High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. ClimaTech extended life coolant extends maintenance intervals which reduces maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 587: 1330 sq in, 579/367 FEPTO: 1325 sq in, 567/365/367: 1440 sq in, 384/386: 1301 sq in, 365 FEPTO: 1184 sq in, 389/367 HH: 1669 sq in, 348: 1000 sq in, 320: 1242 sq in.	0	0
3211120	S	Radial Seal, Dry Type Air Cleaner, Frontal Air Intake. Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake.	0	0
3365270	O	Exhaust Single RH Side Of Cab DPF/SCR RH Under Cab (2017).	346	29
3381770	O	Curved Tip Standpipe(s)	43	0
3387610	O	18in Ht, 5in Dia Chrome, Clear Coat Standpipe(s)	359	-2

Transmission & Equipment

4052110	O	Allison 3000 RDS-P Transmission, Gen 5 Rugged Duty Series. Includes Rear Transmission Support except on MX engines, TranSynd Automatic Transmission Fluid, and Water Oil Heat Exchange. Also includes features that monitor the transmission fluid, filter and clutch condition. Will display percent life remaining for the transmission fluid, filter and clutches on the shift selector. This information may be displayed using the Mode and Up and Down buttons. A wrench icon will also be included to indicate when the transmission fluid, filter or clutches need servicing. (Suited for vehicles operating on/off highway and/or requiring PTO operation) Forward Ratios: 1st-3.49, 2nd-1.86, 3rd-1.41, 4th-1.00, 5th-0.75, 6th-0.65 / Reverse Ratios: DR-(5.03)	9,833	110
4210330	O	1760 HD Driveline, 2 Midship Bearings	716	80
4250500	U	Allison 5th Gen RDS, Pkg 172	223	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 3/28/2018 8:36:59 AM **Complete** Model Number: Model 348
Effective Date: Jan 1, 2018 Quote/DTPO/CO: Q13564580



Data	Code	Description	\$ List	Weight
4250720	O	Allison FuelSense Not Desired	0	0
4256471	U	ALLISON 4th Gear Lockup AJ	298	0
4256640	O	Allison 6-Speed Configuration, Close Ratio Gears 3000 Series Transmissions	0	0
4256920	O	Dash Mounted Push Button Shifter Available with Allison Transmissions.	619	0

Air & Trailer Equipment

4510320	S	Bendix AD-IS Air Dryer W/Heater And Coalescing Filter	0	0
4520420	O	Pull Cords All Air Tanks	6	0
4540420	S	Nylon Chassis Hose	0	0
4543320	S	Steel Painted Air Tanks All air tanks are steel with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	0	0
4611930	O	Body Connections 5ft BOC Junction Box contains light and power circuits for Body Connections located 5ft from BOC.	132	4

Tires & Wheels

5069660	O	FF: BR 20ply 425/65R22.5 M854 Diameter = 44.8 inches; SLR = 20.7 inches	846	148
5169430	O	RR: BR 14ply 11R22.5 M710 Ecopia Diameter = 41.8 inches; SLR = 19.5 inches	424	48
5190008	O	Code-rear Tire Qty 08	0	0
5220090	O	FF: Alcoa 823627 22.5X12.25 Clean Buff Finish Aluminum	707	-10
5310610	O	RR: Accur Steel Armor 50344PK 22.5X8.25 Heavy Duty, 5 Hand Holes	324	112
5390008	O	Code-rear Rim Qty 08	0	0

Fuel Tanks

5554160	O	26 in Aluminum 90 Gallon Fuel Tank LH U/C Includes steps for cab access. Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	271	14
5602090	O	Location LH U/C 90 Gallon	0	0
5652890	O	DEF Tank Mounted LH BOC Models 210, 220 and 320 mounted LH cab fender.	0	0
5652990	O	Standard DEF To Fuel Ratio 2:1 Or Greater	0	0
5655019	S	DEF Tank Small	0	0

Battery Box & Bumper

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	3/28/2018 8:36:59 AM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q13564580



Data	Code	Description	\$ List	Weight
6010800	O	Install Batteries On Temp Plywood Support BOC Includes maximum length battery cables allowable per engine manufacture requirements. Recommend three or more batteries for Class 8.	15	-97
6040550	S	Aftertreatment RH U/C ALUMINUM Non-Slip Cab Entry Step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box will be aerodynamic.	0	0
6113050	O	Aluminum Channel Bumper Stainless Steel Clad 2 Tow pins	613	-4
Cab & Equipment				
6515640	O	Alum Cab 110in BBC Metton Hood With bright finish crown. Includes view window RH door and convex mirror over RH door.	790	0
6540120	O	Severe Service Cab Package #1 Includes Aluminum side skins, aluminum rear skin, steel windshield mask, steel firewall, and steel front floor sheet on all cabs, and additional reinforcement structure on the back wall of the day cab.	129	39
6540160	O	Thermal Insulation Package in Cab Includes thick, closed-cell foam in floor, special mylar-faced foam in walls and roof structure.	19	2
6800360	O	Rubber Fender Lips 2 Inch Wide	95	8
6911700	S	Peterbilt UltraRide Driver Seat	0	0
6921700	S	Peterbilt UltraRide Passenger Seat	0	0
6930580	O	Drivers Armrests - LH & RH Required in Model 587 with Evolution LX seats, optional with Evolution ST and Roltek Seats.	69	4
6930590	O	Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats.	35	2
6930800	O	Black Seat Color ipo Standard Color	0	0
6939400	S	Air Ride Driver	0	0
6939420	S	High Back Driver	0	0
6939480	O	Mordura Driver	52	0
6939500	O	Air Ride Passenger	199	43
6939520	S	High Back Passenger	0	0
6939580	O	Mordura Passenger	52	0
7001520	O	Adjustable Steering Column - Tilt/Telescope	113	11
7001620	S	Steering Wheel with Peterbilt Logo Steering Wheel with embossed Peterbilt logo over horn button.	0	0
7036120	S	Interior Grey/Black Includes rugged charcoal instrument panels, glare-resistant gray dash, black bezels on gauges, (2) power ports, monochromatic molded door pads with durable in-mold color, gray molded back wall, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, power lift passenger window, extruded rubber floor covering, header-mounted dome light, foot well lighting, integrated "dead pedal", (4) inside entry grab handles, (2) inside sunvisors, (2) coat hooks, (2) cup holders and map bin in dash.	0	0

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:

3/28/2018 8:36:59 AM

Complete

Model Number:

Model 348



Data	Code	Description	\$ List	Weight
7210430	O	Extended Rear Window ipo Std Window-Day Cab The extended rear window protrudes two inches more than the standard conventional rear cab window. Take this into consideration when determining your loadspace.	68	0
7210540	S	Day Cab Rear Window	0	0
7230060	S	One Piece Curved Windshield	0	0
7322010	S	Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	0	0
7410040	O	Outside Sunvisor - Stainless Steel Not available with 2.1M high roof sleeper or furnished by owner sleeper.	191	4
7511010	O	Stainless Steel Mirrors 7x16 with Heat Element Right Click on Option to see Picture in Product Portfolio.	70	2
7560850	O	(2) Convex 8 Inch SS Mirrors Center mounted under mirror bracket. If rear view mirrors are heated, the convex mirrors will be heated. Option includes dual door stops.	239	4
7565180	O	Polished Lower Mirror Bracket Covers	16	0
7610020	O	(1) Air Horn 15in Painted Mounted under cab.	169	8
7725710	O	Standard Speaker Package For Cab (2) Speakers	118	4
7725715	O	ConcertClass Without CD, Includes BT Phone and Audio, AM/FM, WB, USB and MP3.	323	10
7782230	O	Radio Antenna Mounted Logger Style Antenna Mounted LH on BOC In Place of Center Roof position on Conventional Models. Models 579 and 567 Antenna Mounted LH Roof in Place Of Center Roof position.	23	0
7850210	O	Plug-In Auto Reset Circuit Breaker in place of fuses in junction box.	40	0
7851480	S	Peterbilt Electric Windshield Wipers With Intermittent Feature.	0	0
7900090	O	Triangle Reflector Kit Shipped Loose	17	13
7900270	O	Fire Extinguisher; Cab Mounted Hazmat approved UL listed/rated ABC.	85	8
7901130	O	Backup Alarm (107dB)	56	3
8011400	O	Main Transmission Oil Temperature Gauge Located in Driver Information Display	12	0
8021380	S	Air Restriction Indicator Mounted on air cleaner,intake piping, or firewall.	0	0
8071340	O	Bright Bezel Gauges	86	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.



Data	Code	Description	\$ List	Weight
8071870	S	Main Instrumentation Panel, Graphics Display Includes speedometer with trip odometer, tachometer with hourmeter and outside air temperature display, voltmeter, engine oil pressure, engine coolant temperature, fuel level, primary and secondary air pressure gauges. Includes standard warning light package: high water temperature, low oil pressure, and low air pressure warning lights w/audible alarms, high beam, turn signal, low fuel, parking brake, and ice warning indicators; seat belt reminder; rocker switches with long-life LED indicators; multi-function turn stalk with flash-to-pass feature (night mode flashes headlights and marker lights; day mode flashes headlights only), intermittent windshield wiper and headlamp beam control. Hydraulic braked trucks do not include air pressure gauges.	0	0
8111110	S	Headlights Composite Fender Mounted Integral Park, Turn, and Side Marker	0	0
8120980	S	(5) Marker Lights, Aero LED Light Emitting Diodes	0	0
8133960	O	Daytime Running Lights (Required on Canadian units)	66	0
8140080	O	LED Stop/Turn/Tail/Backup Bracket mounted LH/RH EOF	155	2
8140850	O	Moveable EOF Xmbr For Mounting Taillights Square EOF with or without EOF xmbr.	2	10
Paint				
8500710	O	Standard Paint Color Selection	-200	0
8530770	S	(1) Color Axalta Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A - L0006EY WHITE N85400 HOOD TOP L0006EY WHITE N85500 CAB ROOF L0006EY WHITE N85200 FRAME N0001EA BLACK N85300 FENDER L0006EY WHITE	0	0
Shipping Destination				
8999990	O	Shipping Destination Other Than Dealer (Specify by narrative) N89900 Vactor N89910 TBD N89920 TBD, TB TBD N89930 TBD TBD N89940 TBD	0	0
Options Not Subject To Discount				
9400091	S	Peterbilt Class 7 Standard Coverage 1 year/Unlimited Miles/km	0	0
9400094	S	PACCAR PX-9 Standard Coverage 2 yrs/250,000 mi (402,336 km)/6,250 hrs	0	0
9408982	O	Vehicle Layout Option is not subject to discount. Fleets will be split prior to build so that the charge is applied to only one unit. Quotes will not reflect this. N94000 TBD N94010 TBD N94020 TBD	1,250	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.



Data	Code	Description	\$ List	Weight
Miscellaneous				
9409800	O	2017 EPA Emissions Engine Warranty Only	0	0

Total Adjusted Price (W/O Freight & Warranty & Surcharges)	\$155,723
Freight Charge	\$2,200
Options Not Subject to Discount	\$1,250
Surcharges Not subject to Discount	\$0
Total Weight	16241


Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
 Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.



Presents a Proposal Summary

of the

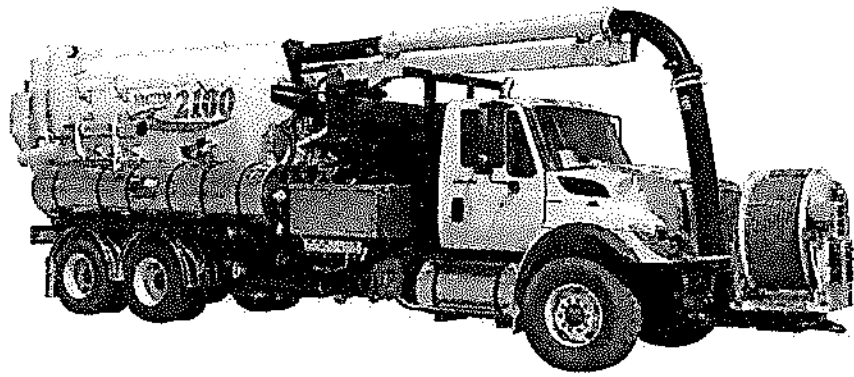

2100 Plus

Combination Single Engine Sewer Cleaner with Positive Displacement Vacuum System Mounted on a Heavy Duty Truck Chassis

for

City of San Luis

1090 E Union St. PO Box 3750

San Luis, AZ 85349

Order Qty	Part Number	Description
1	2112P-16	2100i PD, 16" Vacuum, 12 yrd Debris, Combo
1	2018P	Additional Water, 1500 Gal Total (12 yrd)
1	5002PA	80 GPM/2500 PSI
1	010PSTD	48w x 22h x 24d Curbside Toolbox
1	011PSTD	Aluminum Fenders
1	012PSTD	Mud Flaps
1	014PSTD	Electric/Hydraulic Four Way Boom
1	016PSTD	Color Coded Sealed Electrical System
1	018PSTD	Remote Pendant Control With 35' Cord
1	019PASTD	Intuitouch Electronic Package
1	020PSTD	Double Acting Hoist Cylinder
1	025PSTD	Handgun Assembly w/35' x 1/2" Hose w/Quick Disconnects
1	026PSTD	Ex-Ten Steel Cylindrical Debris Tank
1	030PSTD	Flexible Hose Guide
1	032PSTD	(3) Nozzles with Carbide Inserts w/Rack
1	045PSTD	Suction Tube Storage - 4 Pipe
1	046PSTD	1" Nozzle Pipe
1	048PSTD	10' Leader Hose
1	1001PSTD	Flat Rear Door w/Hydraulic Locks
1	1005PSTD	Dual Stainless Steel Float Shut Off System
1	1016PSTD	SS Microstrainer Prior to Blower
1	1024PSTD	Debris Body Vacuum Relief System
1	1031PSTD	Debris Deflector Plate
1	1033PSTD	60" Dump Height
1	2022PSTD	Additional Water Tank Sight Gauge
1	2023PSTD	Liquid Float Level Indicator
1	5010PSTD	Rodder System Accumulator - Jack Hammer on/off Control w/ manual valve
1	5011PSTD	3" Y-Strainer @ Water Pump
1	5012PSTD	Performance Package
1	5014PSTD	1" Water Relief Valve
1	5015PSTD	Midship Handgun Coupling
1	5019PSTD	Chassis Engine Cooling Package
1	5022PSTD	Side Mounted Water Pump
1	6004PSTD	Hose Wind Guide (Dual Roller), Manual
1	6007PSTD	Hose Reel Manual Hyd Extend/Retract
1	6009PSTD	Hose Reel Chain Cover
1	6020PBSTD	Hydraulic Extending 15", Rotating Hose Reel, 1" x 800' Capacity
1	6017PSTD	Hydraulic Tank Shutoff Valves
1	7001PSTD	Tachometer/Chassis Engine w/Hourmeter
1	7003PSTD	Water Pump Hour Meter
1	7004PSTD	PTO Hour Meter
1	7007PSTD	Tachometer & Hourmeter/Blower
1	8000PSTD	Circuit Breakers
1	8025PSTD	LED Lights, Clearance, Back-up, Stop, Tail & Turn
1	9002PSTD	Tow Hooks, Front
1	9002PSTD	Tow Hooks, Rear
1	9003PSTD	Electronic Back-Up Alarm

1	S390ASTD	8" Vacuum Pipe Package
1	S560STD	Emergency Flare Kit
1	S590STD	Fire Extinguisher 5 Lbs.
1	1003P	Debris Body Washout
1	1008P	6" Rear Door Knife Valve w/Camloc, 3:00 position
1	1009PD	Full Rear Door Swinging Screen
1	1014P	Centrifugal Separators (Cyclones)
1	1015P	Folding Pipe Rack, Curbside
1	1015PA	Folding Pipe Rack, Streetside
1	1022P	Rear Door Splash Shield
1	1023P	Lube Manifold
1	1023PA	Plastic Lube Chart, included with Lube Manifold
1	2001PSTD	Low Water Indicator On Screen w/Alarm and Water Pump Flow Indicator
1	2011PSTD	3" Y-Strainer at Passenger Side Fill, in lieu of 2", with 25' Fill Hose
1	3019PSTD	Digital Water Pressure Gauge
1	4015P	180 deg. 10ft Telescoping Boom
1	4006PSTD	Front Joystick Boom Control
1	4010PSTD	Boom Hose Storage, Post
1	4022PSTD	Telescopic Boom Elbow, Standard
1	5021P	Hydro Excavation Kit/Retract Reel w/50' Hose and Nozzle
1	6002PB	600' x 1" Piranha Sewer Hose 2500 PSI in lieu of STD
1	6004PD	Rodder Hose Pinch Roller
1	6005PDSTD	Digital Hose Footage Counter
1	6019P	Rodder Pump Drain Valves
1	8001PA	Rear Directional Control, Signal Master Arrow Board, 10 Lights
1	8002P	Hand Light w/Bumper Plug
1	8007PC	Strobe Light, LED, Rear, Federal Signal, Amber
1	8007PB	Strobe Light, LED, Cab Guard, Federal Signal, Amber
1	8028P	Worklights (2), LED, Telescoping Boom
1	8029P	Worklights (2), LED, Rear Door
1	8029PA	Worklight, LED, Operators Station
1	8029PB	Worklight, LED, Hose Reel Manhole
1	8029PC	Worklight, LED, Curb Side
1	9021PA	Camera System, Front and Rear
1	9023PA	Safety Cone Storage Rack - Post Style
1	9071PE	Toolbox, Behind Cab - 16w 30h x 96d
1	9072PB	Toolbox, Driver Side Chassis Frame, 24w x 24h x 24d
1	P112STD	Module Paint, DuPont Imron Elite - Sanded Primer Base
1	P124STD	Vactor 2100i Body Decal, Standard
1	LOGO-APPL.	Vactor/Guzzler Logos - Applied
1	500655B-30	Vactor Standard Manual and USB Version - 1 + Dealer
1	Chassis- Mod	Chassis Modifications Charges
Mounted Peterbilt Model 348 Chassis Purchased thru local dealer (Rush Truck Center)		

Vector Factory Price: ~~\$260,618.00~~

Vector 2100Plus mounted onto Peterbilt 348 Chassis
Chassis not included in this quote, Body pricing only

Price valid for 90 Days from date of 3/27/2018

PROPOSAL DATE: 3/27/2018

QUOTE NUMBER: 2018-23811

Price List Date: 1/1/2018

PO NUMBER:

QTY: _____ Customer Initials: _____

PAYMENT TERMS:

PROPOSAL NOTES:

1. Multiple unit orders will be identical to signed proposal. Changes or deviations to any unit of a multiple unit order will requires a new signed proposal.
2. Chassis specifications and data codes for customer supplied chassis must be submitted to and approved by Vector Manufacturing prior to submittal of customer purchase order
3. All prices quoted are in US Dollars unless otherwise noted.

SIGNED BY:

_____ Date: _____

LIMITED WARRANTY

Limited Warranty. Each machine manufactured by VACTOR/GUZZLER MANUFACTURING (or, "the Company") is warranted against defects in material and workmanship for a period of 12 months, provided the machine is used in a normal and reasonable manner and in accordance with all operating instructions. In addition, certain machines and components of certain machines have extended warranties as set forth below. If sold to an end user, the applicable warranty period commences from the date of delivery to the end user. If used for rental purposes, the applicable warranty period commences from the date the machine is first made available for rental by the Company or its representative. This limited warranty may be enforced by any subsequent transferee during the warranty period. This limited warranty is the sole and exclusive warranty given by the Company.

STANDARD EXTENDED WARRANTIES (Total Warranty Duration)

2100 Series, HXX, Series and Jettors

10 years against water tank leakage due to corrosion. nonMetallic water tanks are covered for 5 yrs against any factory defect in material or workmanship.

2100 Series and HXX only

5 years against leakage of debris tank, centrifugal compressor or housing due to rust-through.

2100 Series and Jettors

2 years - VactorRodder Pump on all unit serial numbers starting with 13##V#####.

Exclusive Remedy. Should any warranted product fail during the warranty period, the Company will cause to be repaired or replaced, as the Company may elect, any part or parts of such machine that the Company's examination discloses to be defective in material or factory workmanship. Repairs or replacements are to be made at the selling Vactor/Guzzler distributor's location or at other locations approved by the Company. In lieu of repair or replacement, the Company may elect, at its sole discretion, to refund the purchase price of any product deemed defective. The foregoing remedies shall be the sole and exclusive remedies of any party making a valid warranty claim.

This Limited Warranty shall not apply to (and the Company shall not be responsible for):

1. Major components or trade accessories that have a separate warranty from their original manufacturer, such as, but not limited to, trucks, engines, hydraulic pumps and motors, tires and batteries.
2. Normal adjustments and maintenance services.
3. Normal wear parts such as, but not limited to, oils, fluids, vacuum hose, light bulbs, fuses, gaskets.
4. Failures resulting from the machine being operated in a manner or for a purpose not recommended by the Company.
5. Repairs, modifications or alterations without the express written consent of the Company, which in the Company's sole judgment, have adversely affected the machine's stability, operation or reliability as originally designed and manufactured.
6. Items subject to misuse, negligence, accident or improper maintenance.

NOTE The use in the product of any part other than parts approved by the Company may invalidate this warranty. The Company reserves the right to determine, in its sole discretion, if the use of non-approved parts operates to invalidate the warranty. Nothing contained in this warranty shall make the Company liable for loss, injury, or damage of any kind to any person or entity resulting from any defect or failure in the machine.

THIS WARRANTY SHALL BE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE DISCLAIMED.

This warranty is in lieu of all other obligations or liabilities, contractual and otherwise, on the part of the Company. For the avoidance of doubt, the Company shall not be liable for any indirect, special, incidental or consequential damages, including, but not limited to, loss of use or lost profits. The Company makes no representation that the machine has the capacity to perform any functions other than as contained in the Company's written literature, catalogs or specifications accompanying delivery of the machine. No person or affiliated company representative is authorized to alter the terms of this warranty, to give any other warranties or to assume any other liability on behalf of the Company in connection with the sale, servicing or repair of any machine manufactured by the Company. Any legal action based hereon must be commenced within eighteen (18) months of the event or facts giving rise to such action.

The Company reserves the right to make design changes or improvements in its products without imposing any obligation upon itself to change or improve previously manufactured products.

GUZZLER

VACTOR

VACTOR/GUZZLER MANUFACTURING

1621 S. Illinois Street
Streator, IL 61364