


Opw Support
877 679 8324

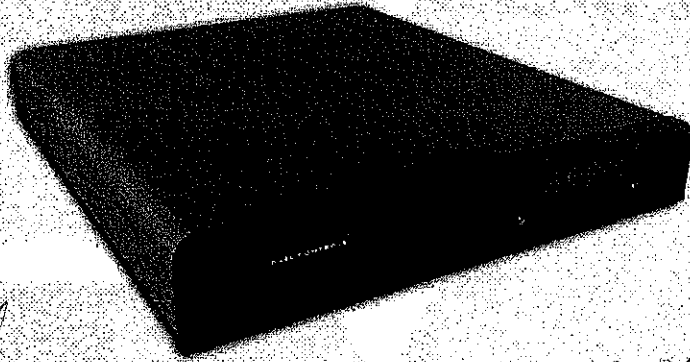

Opw Email

Customer Support

OpwSupport@opwglobal.com

Case# 317005

M00-051.00 - FSC3000™

Fuel Site Controller

Command-Line Configuration Guide

6.03a

CERTIFIED POLLUTANT STORAGE SYSTEM CONTRACTOR

PCC 1256948

JSR Fueling Technologies, LLC.

3111 Skyway Circle

Suite 111

Melbourne, FL 32934

Estimate

Date	Estimate No.
2/26/2025	5974

Name/Address

City of Fort Pierce

Job Site Address

Public Works Department
52 Savannah Rd
Fort Pierce, FL 34982

Description	Rate	Qty	Total
Mobilization - Demobilization truck and one (1) technician to preform the following: - Need (6) new circuits for card reader and dispensers - Run new electrical feed to fuel island, approx 250' - Requires 18-24" burial depth, 25' cut through asphalt. - All Island conduit to be rigid, explosion proof pipe and fittings. - Refurbish Canopy - Replace (4) dispensers	253.50	20	5,070.00
*** City of Fort Pierce Responsible for permitting and fees for canopy refurbishment - IF REQUIRED ***			
3/4" Galvanized Conduit	61.871	20	1,237.42
3/4" Seal Out , Class I, Division 1 and 2, Groups A, B, C, D; Class II, Division 1 and 2, Groups E, F, G; Class III	44.4184	25	1,110.46
ELBY75A 3/4 90D CAPPED ELBOW -	45.435	50	2,271.75
3/4" PVC Conduit (underground)	24.284	20	485.68
12 GA Wire	0.975	2,000	1,950.00
Belden - 2-Conductor, 18 Gauge, Tinned Copper Wire w/ - 20 Gauge Tinned Copper Drain Wire - Aluminum Foil Polyester Tape Shield - Red Fluorinated Ethylene Propylene (FEP) Outer Jacket - Thin for Multiple Runs in Single Conduit - Ideal for Wiring ATG Probes - Direct Bury	3.3335	500	1,666.75
Petroleum Technician Labor	93.50	300	28,050.00
PV-200 Fuel Island Terminal	6,463.60	2	12,927.20
Mag Stripe Reader	841.85	2	1,683.70
Pedestal - Standard 48" Height - 20-4359-48	711.90	2	1,423.80
Pedestal - PCM Mounting Bracket	186.45	2	372.90
FMS Part #			
PCM - Module (Master) - 2 Hose	1,322.10	2	2,644.20
FMS Part # 20-4404-01			
PCM - Module (Slave) - 2 Hose	1,000.05	2	2,000.10
FMS Part # 20-4404-01			
OPW Certified Petroleum Technician Labor ✓	95.00	40	3,800.00

Terms and Conditions

- All applicable sales taxes for material, equipment, supplies, and subcontractors used to satisfy this contract have been included in the cost of this estimate.
- A signed change order will be required for any extras prior to proceeding.
- Payment is due upon receipt of invoice per payment schedule.
- Proposal estimate is valid for 30 days from issue date.
- Assume that all existing electrical components, wiring and conduits can be used without modification.
- Contractor is NOT responsible for damage to any on-site underground utilities not identified and/or located by owner.
- Permit and Impact fees if applicable are not included in this estimate.
- Any and all contamination discovered during excavation, handling of such, will be an extra charge.
- Dewatering, sparging, sheet-piling, and any unforeseen underground obstructions will be an extra charge.

Total

Estimates including any and all steel products are subject to change daily until the price of steel stabilizes.

I have read, understand and agree to the above estimate and conditions contained within.

Responsible Party Name _____

Signature _____

Date _____

CERTIFIED POLLUTANT STORAGE SYSTEM CONTRACTOR

PCC 1256948

JSR Fueling Technologies, LLC.

3111 Skyway Circle
Suite 111
Melbourne, FL 32934

Estimate

Date	Estimate No.
2/26/2025	5974

Name/Address

City of Fort Pierce

Job Site Address

Public Works Department
52 Savannah Rd
Fort Pierce, FL 34982

Description	Rate	Qty	Total
REMOVE AND DISPOSE FROM SITE ALL EXISTING CANOPY FASCIA, GUTTERS, FRAMING AND DECKING.	96,000.80	1	96,000.80
MAINTENANCE WORK: SLEEVE 4 CANOPY COLUMNS AT TOPS TO BE WELDED BY CERTIFIED WELDER. PREP, PRIME UPPER STRUCTURAL STEEL WITH ONE COAT OF RUSTOLEUM GREY OXIDE SHOP PRIMER. PREP, PRIME AND PAINT (4) CANOPY COLUMNS WITH SHERWIN WILLIAMS OIL BASED INDUSTRIAL ENAMEL PREP, PRIME AND PAINT (2) ISLAND CURBS AND (16) BOLLARDS WITH SHERWIN WILLIAMS SAFETY YELLOW OIL BASED INDUSTRIAL ENAMEL 2384 SF OF NEW 20GA STEEL WHITE EMBOSSED CANOPY DECK AND CLIPS 196 LINEAR FEET OF 36" WHITE 3MM ACM FASCIA ON ALL SIDES OF CANOPY. INCLUDES FASCIA FRAMING. 196 LINEAR FEET OF .040 WHITE ALUMINUM EMBOSSED PERIMETER GUTTER AND DRAIN COVERS INSTALL (16) CUSTOMER SUPPLIED LIGHTS FIXTURES, ALL ELECTRICAL WORK BY OTHERS INCLUDES FASTENERS AND CAULK FOR INSTALLATION. ALL ELECTRICAL MUST BE DISCONNECTED FROM CANOPY WITH LOCK OUT/TAG OUT BY CUSTOMER BEFORE WORK STARTS. PRICING BASED ON STD INDUSTRY WAGE AND DOES NO INCLUDE ANY DAVIS-BACON OR PREVAILING WAGE. EXCLUSIONS: ENGINEERING DRAWINGS AND PERMITS, ELECTRICAL SALES TAX AND ANY ITEMS NOT LISTED ABOVE. PROJECT MANAGEMENT On-site with sub crew Electrical - Installation of the following: Lights and Electrical for canopy onsite bathroom facility 1 Month (4) 9100K GASBOY 2-HOSE, 1-PRODUCT DISPENSER, MECHANICAL -External filters -Stainless Panels with startup Freight for dispenser Adapter Plates - To retrofit old sumps with new dispenser - SS Petroleum Technician Labor Demo Old Install new with adapterplates and all hanging hardware Miscellaneous Equipment - Sump cleaning, prepping, testing *** DOES NOT INCLUDE BOOTS OR REPAIRS***			
	85.00	160	13,600.00
	7,850.00	1	7,850.00
	176.68	4	706.72
	13,554.42	4	54,217.68
	598.95	4	2,395.80
	1,531.085	4	6,124.34
	85.00	140	11,900.00
	250.00	4	1,000.00

Total

Terms and Conditions

1. All applicable sales taxes for material, equipment, supplies, and subcontractors used to satisfy this contract have been included in the cost of this estimate.
2. A signed change order will be required for any extras prior to proceeding.
3. Payment is due upon receipt of invoice per payment schedule.
4. Proposal estimate is valid for 30 days from issue date.
5. Assume that all existing electrical components, wiring and conduits can be used without modification.
6. Contractor is NOT responsible for damage to any on-site underground utilities not identified and/or located by owner.
7. Permit and impact fees if applicable are not included in this estimate.
8. Any and all contamination discovered during excavation, handling of such, will be an extra charge.
9. Dewatering, sparging, sheet-piling, and any unforeseen underground obstructions will be an extra charge.

Estimates including any and all steel products are subject to change daily until the price of steel stabilizes.

I have read, understand and agree to the above estimate and conditions contained within.

Responsible Party Name _____

Signature _____

Date _____

CERTIFIED POLLUTANT STORAGE SYSTEM CONTRACTOR

PCC 1256948

JSR Fueling Technologies, LLC.

3111 Skyway Circle

Suite 111

Melbourne, FL 32934

Estimate

Date	Estimate No.
2/26/2025	5974

Name/Address

City of Fort Pierce

Job Site Address

Public Works Department
52 Savannah Rd
Fort Pierce, FL 34982

Description	Rate	Qty	Total
Universal 871-HB125 871 Hose Retriever with Foot Base and 1-1/4" Hosebun	1,067.965	8	8,543.72
Pipe for Hose Hanger and Anchors	225.345	8	1,802.76
1 Inch x 20 Foot Black Hardwall Hose Male x Male Zinc Ends. UL330 And ULC Listed	163.88	4	655.52
3/4 Inch x 20 Foot Black Hardwall Hose Male x Male Zinc Ends. UL330 And ULC Listed	139.8425	4	559.37
1" breakaway - OPW	124.235	4	496.94
3/4" Breakaway - OPW	54.1175	4	216.47
1" Swivel - OPW	96.595	4	386.38
3/4" Swivel - OPW	50.2025	4	200.81
1" Whip	30.4925	4	121.97
3/4" Whip	30.4875	4	121.95
OPW - 7HB Series Green Diesel/B5 Pressure-Sensing Automatic Prepay Nozzle With 1 Inch NPT Inlet Splash Guard	199.415	2	398.83
1-Piece Hand Insulator Aluminum Spout And 3-Position Hold-Open Rack Without Spout Ring. UL 2586 Listed			
OPW - 11B Series Green B5 Diesel Pressure-Sensing Automatic Prepay Nozzle With 3/4 Inch NPT Inlet, 2-Piece Hand Insulator, Aluminum Spout, And 2-Position Hold-Open Rack. UL2586 Listed	107.62	2	215.24
11BP Series Black E10 Unleaded Pressure-Sensing Automatic Prepay Nozzle With 3/4 Inch NPT Inlet, 2-Piece Hand Insulator, Aluminum Spout, And 2-Position Hold-Open Rack. UL2586 Listed	107.6225	4	430.49

Total	\$274,639.75
--------------	---------------------

Terms and Conditions

1. All applicable sales taxes for material, equipment, supplies, and subcontractors used to satisfy this contract have been included in the cost of this estimate.
2. A signed change order will be required for any extras prior to proceeding.
3. Payment is due upon receipt of invoice per payment schedule.
4. Proposal estimate is valid for 30 days from issue date.
5. Assume that all existing electrical components, wiring and conduits can be used without modification.
6. Contractor is NOT responsible for damage to any on-site underground utilities not identified and/or located by owner.
7. Permit and impact fees if applicable are not included in this estimate.
8. Any and all contamination discovered during excavation, handling of such, will be an extra charge.
9. Dewatering, sparging, sheet-piling, and any unforeseen underground obstructions will be an extra charge.

Estimates including any and all steel products are subject to change daily until the price of steel stabilizes.

I have read, understand and agree to the above estimate and conditions contained within.

Responsible Party Name _____ Signature _____ Date _____

CERTIFIED POLLUTANT STORAGE SYSTEM CONTRACTOR

PCC 1256948

JSR Fueling Technologies, LLC.

3111 Skyway Circle

Suite 111

Melbourne, FL 32934

Estimate

Date	Estimate No.
2/26/2025	5974

Name/Address

City of Fort Pierce

Job Site Address

Public Works Department
52 Savannah Rd
Fort Pierce, FL 34982

Description	Rate	Qty	Total
REMOVE AND DISPOSE FROM SITE ALL EXISTING CANOPY FASCIA, GUTTERS, FRAMING AND DECKING.	96,000.80	1	96,000.80
MAINTENANCE WORK: SLEEVE 4 CANOPY COLUMNS AT TOPS TO BE WELDED BY CERTIFIED WELDER. PREP, PRIME UPPER STRUCTURAL STEEL WITH ONE COAT OF RUSTOLEUM GREY OXIDE SHOP PRIMER. PREP, PRIME AND PAINT (4) CANOPY COLUMNS WITH SHERWIN WILLIAMS OIL BASED INDUSTRIAL ENAMEL PREP, PRIME AND PAINT (2) ISLAND CURBS AND (16) BOLLARDS WITH SHERWIN WILLIAMS SAFETY YELLOW OIL BASED INDUSTRIAL ENAMEL 2384 SF OF NEW 20GA STEEL WHITE EMBOSSED CANOPY DECK AND CLIPS 196 LINEAR FEET OF 36" WHITE 3MM ACM FASCIA ON ALL SIDES OF CANOPY. INCLUDES FASCIA FRAMING. 196 LINEAR FEET OF .040 WHITE ALUMINUM EMBOSSED PERIMETER GUTTER AND DRAIN COVERS INSTALL (16) CUSTOMER SUPPLIED LIGHTS FIXTURES, ALL ELECTRICAL WORK BY OTHERS INCLUDES FASTENERS AND CAULK FOR INSTALLATION. ALL ELECTRICAL MUST BE DISCONNECTED FROM CANOPY WITH LOCK OUT/TAG OUT BY CUSTOMER BEFORE WORK STARTS. PRICING BASED ON STD INDUSTRY WAGE AND DOES NO INCLUDE ANY DAVIS-BACON OR PREVAILING WAGE. EXCLUSIONS: ENGINEERING DRAWINGS AND PERMITS, ELECTRICAL SALES TAX AND ANY ITEMS NOT LISTED ABOVE. PROJECT MANAGEMENT On-site with sub crew Electrical - Installation of the following: Lights and Electrical for canopy onsite bathroom facility 1 Month (4) 9100K GASBOY 2-HOSE, 1-PRODUCT DISPENSER, MECHANICAL -External filters -Stainless Panels with startup Freight for dispenser Adapter Plates - To retrofit old sumps with new dispenser - SS Petroleum Technician Labor Demo Old Install new with adpaterplates and all hanging hardware Miscellaneous Equipment - Sump cleaning, prepping, testing *** DOES NOT INCLUDE BOOTS OR REPAIRS***	85.00	160	13,600.00
Electrical - Installation of the following:	7,850.00	1	7,850.00
Lights and Electrical for canopy onsite bathroom facility 1 Month	176.68	4	706.72
(4) 9100K GASBOY 2-HOSE, 1-PRODUCT DISPENSER, MECHANICAL	13,554.42	4	54,217.68
-External filters	598.95	4	2,395.80
-Stainless Panels with startup	1,531.085	4	6,124.34
Freight for dispenser	85.00	140	11,900.00
Adapter Plates - To retrofit old sumps with new dispenser - SS	250.00	4	1,000.00
Petroleum Technician Labor			
Demo Old			
Install new with adpaterplates and all hanging hardware			
Miscellaneous Equipment			
- Sump cleaning, prepping, testing			
*** DOES NOT INCLUDE BOOTS OR REPAIRS***			

Total

Terms and Conditions

1. All applicable sales taxes for material, equipment, supplies, and subcontractors used to satisfy this contract have been included in the cost of this estimate.
2. A signed change order will be required for any extras prior to proceeding.
3. Payment is due upon receipt of invoice per payment schedule.
4. Proposal estimate is valid for 30 days from issue date.
5. Assume that all existing electrical components, wiring and conduits can be used without modification.
6. Contractor is NOT responsible for damage to any on-site underground utilities not identified and/or located by owner.
7. Permit and Impact fees if applicable are not included in this estimate.
8. Any and all contamination discovered during excavation, handling of such, will be an extra charge.
9. Dewatering, sparging, sheet-piling, and any unforeseen underground obstructions will be an extra charge.

Estimates including any and all steel products are subject to change daily until the price of steel stabilizes.

I have read, understand and agree to the above estimate and conditions contained within.

Responsible Party Name _____

Signature _____

Date _____

CERTIFIED POLLUTANT STORAGE SYSTEM CONTRACTOR

PCC 1256948

JSR Fueling Technologies, LLC.

3111 Skyway Circle

Suite 111

Melbourne, FL 32934

Estimate

Date	Estimate No.
2/26/2025	5974

Name/Address

City of Fort Pierce

Job Site Address

Public Works Department
52 Savannah Rd
Fort Pierce, FL 34982

Description	Rate	Qty	Total
Universal 871-HB125 871 Hose Retriever with Foot Base and 1-1/4" Hosebun	1,067.965	8	8,543.72
Pipe for Hose Hanger and Anchors	225.345	8	1,802.76
1 Inch x 20 Foot Black Hardwall Hose Male x Male Zinc Ends. UL330 And ULC Listed	163.88	4	655.52
3/4 Inch x 20 Foot Black Hardwall Hose Male x Male Zinc Ends. UL330 And ULC Listed	139.8425	4	559.37
1" breakaway - OPW	124.235	4	496.94
3/4" Breakaway - OPW	54.1175	4	216.47
1" Swivel - OPW	96.595	4	386.38
3/4" Swivel - OPW	50.2025	4	200.81
1" Whip	30.4925	4	121.97
3/4" Whip	30.4875	4	121.95
OPW - 7HB Series Green Diesel/B5 Pressure-Sensing Automatic Prepay Nozzle With 1 Inch NPT Inlet Splash Guard	199.415	2	398.83
1-Piece Hand Insulator Aluminum Spout And 3-Position Hold-Open Rack Without Spout Ring. UL 2586 Listed	107.62	2	215.24
OPW - 11B Series Green B5 Diesel Pressure-Sensing Automatic Prepay Nozzle With 3/4 Inch NPT Inlet, 2-Piece Hand Insulator, Aluminum Spout, And 2-Position Hold-Open Rack. UL2586 Listed	107.6225	4	430.49
11BP Series Black E10 Unleaded Pressure-Sensing Automatic Prepay Nozzle With 3/4 Inch NPT Inlet, 2-Piece Hand Insulator, Aluminum Spout, And 2-Position Hold-Open Rack. UL2586 Listed			

Terms and Conditions

Total \$274,639.75

1. All applicable sales taxes for material, equipment, supplies, and subcontractors used to satisfy this contract have been included in the cost of this estimate.
2. A signed change order will be required for any extras prior to proceeding.
3. Payment is due upon receipt of invoice per payment schedule.
4. Proposal estimate is valid for 30 days from issue date.
5. Assume that all existing electrical components, wiring and conduits can be used without modification.
6. Contractor is NOT responsible for damage to any on-site underground utilities not identified and/or located by owner.
7. Permit and impact fees if applicable are not included in this estimate.
8. Any and all contamination discovered during excavation, handling of such, will be an extra charge.
9. Dewatering, sparging, sheet-piling, and any unforeseen underground obstructions will be an extra charge.

Estimates including any and all steel products are subject to change daily until the price of steel stabilizes.

I have read, understand and agree to the above estimate and conditions contained within.

Responsible Party Name _____ Signature _____ Date _____