

SPECIFIC AUTHORIZATION NO. 3

FAIRWAY DRIVE DRAINAGE REPAIRS

Pursuant to the Piggyback Contract to the Town of Jupiter's Stormwater Utility Infrastructure Repairs Unit Price Contract, S2029 between the **City of Fort Pierce** (hereinafter referred to as "CITY") and **Johnson-Davis, Incorporated** (hereinafter referred to as "CONTRACTOR"), on or about February 18, 2025, CITY authorized the CONTRACTOR to provide services in accordance with the terms and conditions set forth in the Piggyback Contract.

Section 1 - Scope of Work and Schedule of Services

CONTRACTOR will provide the following emergency services in accordance with this AUTHORIZATION:

Repairs to the existing drainage system within the area of Fairway Drive from Grandview Boulevard to Trinidad Avenue in Fort Pierce, FL, a total of 1,131.10 LF (0.22 miles).

1. Remove and replace 392 LF of 36-inch and 711 LF of 42-inch Reinforced Concrete Pipes (RCP),
2. Remove and replace #2 manhole structure,
3. Rehabilitate 9 structures (two manholes and seven catch basins),
4. Roadway restoration to include curb, sod, roadway mill and overlay and final restorations.

Section 2 - Deliverables

CONTRACTOR will provide the deliverables to the CITY as described in Exhibit "A", attached hereto and incorporated by reference herein, 150 days from the Notice to Proceed.

Section 3 - Method and Amount of Compensation

CITY will compensate CONTRACTOR for services under this AUTHORIZATION in accordance with the payment method as set forth in the attached Exhibit "A".

The budget (or fee) for the services is not to exceed \$726,030.00.

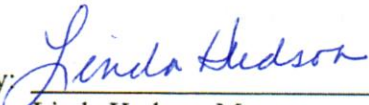
Section 4 - Other Provisions

All applicable portions of the Piggyback Contract not specifically modified herein shall remain in full force and effect and are incorporated by reference herein.

[SIGNATURE PAGE TO FOLLOW]

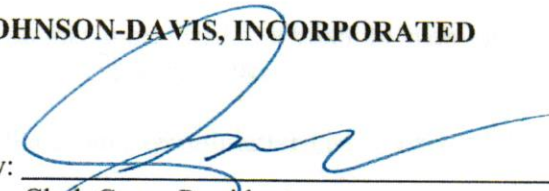
IN WITNESS WHEREOF, this AUTHORIZATION has been fully executed on behalf of the CONTRACTOR by its duly authorized officer, and the CITY has caused the same to be duly executed in its name and in its behalf, effective as of the date herein above written.

CITY OF FORT PIERCE, FLORIDA:

By: 
Linda Hudson, Mayor


Date: 2/18/25

JOHNSON-DAVIS, INCORPORATED

By: 
Clark Cryer, President

Date: 2/6/2025

APPROVED AS TO FORM & CORRECTNESS:

By: 
Sara Hedges, City Attorney

Date: 2/18/25

EXHIBIT A**FAIRWAY DR, FT PIERCE - STORMWATER IMPROVEMENTS**

Proposal REV 11-22-2024

#8 Manhole thru #10 Manhole - 36" RCP Replacement Only

A ITEM NO.	B DESCRIPTION OF WORK	QUANTITY	UNIT	UNIT PRICE	C SCHEDULED VALUE
1	MOBILIZATION	1.00	LSU	\$ 12,000.00	\$ 12,000.00
2	CLEARING & GRUBBING	1.00	LSU	\$ 6,400.00	\$ 6,400.00
3	GENERAL CONDITIONS	1.00	LSU	\$ 6,400.00	\$ 6,400.00
4	MAINTENANCE OF TRAFFIC	1.00	LSU	\$ 4,700.00	\$ 4,700.00
5	REHABILITATE STRUCTURE W/ CONNECTIONS: #8 MH THRU #10 MH	3.00	EA	\$ 5,000.00	\$ 15,000.00
6	REMOVE & REPLACE 36" RCP	392.00	LF	\$ 305.00	\$ 119,560.00
7	F-CURB RESTORATION	60.00	LF	\$ 55.00	\$ 3,300.00
8	CONCRETE DRIVEWAY RESTORATION	300.00	SF	\$ 25.00	\$ 7,500.00
9	CONCRETE FLUME RESTORATION	2.00	EA	\$ 300.00	\$ 600.00
10	ASPHALT PATCH - 9.5 TLC MIX	200.00	SY	\$ 85.00	\$ 17,000.00
11	SOD RESTORATIONS	500.00	SY	\$ 10.00	\$ 5,000.00
12	MILLING & OVERLAY 1" - 9.5 TLC ASPHALT	580.00	SY	\$ 60.00	\$ 34,800.00
13	FINAL RESTORATIONS	1.00	LSU	\$ 7,800.00	\$ 7,800.00
					\$ 240,060.00

NOTES:

Bond is not included in this Proposal.

Soil Proctor & Density Testing is included.

Concrete Driveway Replacement included - 1039 Grandview Blvd, Fort Pierce

SFWMD Dewatering Permit, Dewatering Permit Engineering, & FDEP NOI Included.

Excludes all additional Permits, Fees, and Impacts associated with the Work.

Daytime Hours Only: 7:00 AM - 5:00 PM

As-Built Drawing will be Contractor Red-Line.

Final Restorations include irrigation, landscaping, tree/vegetation pruning and/or restoration, and disposal of unsuitable/excess materials.

FAIRWAY DR, FT PIERCE - STORMWATER IMPROVEMENTS

Proposal REV 11-22-2024

#1 Catch Basin thru #7 Catch Basin - 42" RCP Replacement Only

A ITEM NO.	B DESCRIPTION OF WORK	QUANTITY	UNIT	UNIT PRICE	C SCHEDULED VALUE
1	MOBILIZATION	1.00	LSU	\$ 12,000.00	\$ 12,000.00
2	CLEARING & GRUBBING	1.00	LSU	\$ 10,600.00	\$ 10,600.00
3	GENERAL CONDITIONS	1.00	LSU	\$ 11,600.00	\$ 11,600.00
4	MAINTENANCE OF TRAFFIC	1.00	LSU	\$ 8,300.00	\$ 8,300.00
5	REMOVE & REPLACE #2 MANHOLE STRUCTURE	1.00	EA	\$ 15,000.00	\$ 15,000.00
6	REHABILITATE STRUCTURE W/ CONNECTIONS: #1 CB THRU #7 CB	6.00	EA	\$ 5,000.00	\$ 30,000.00
7	REMOVE & REPLACE 42" RCP	711.00	LF	\$ 370.00	\$ 263,070.00
8	F-CURB RESTORATION	100.00	LF	\$ 55.00	\$ 5,500.00
9	CONCRETE FLUME RESTORATION	2.00	EA	\$ 300.00	\$ 600.00
10	ASPHALT PATCH - 9.5 TLC MIX	600.00	SY	\$ 85.00	\$ 51,000.00
11	SOD RESTORATIONS	1,030.00	SY	\$ 10.00	\$ 10,300.00
12	MILLING & OVERLAY 1" - 9.5 TLC ASPHALT	1,000.00	SY	\$ 60.00	\$ 60,000.00
13	FINAL RESTORATIONS	1.00	LSU	\$ 8,000.00	\$ 8,000.00
					\$ 485,970.00

NOTES:

- Bond is not included in this Proposal.
- Soil Proctor & Density Testing is included.
- SFWMD Dewatering Permit, Dewatering Permit Engineering, & FDEP NOI Included.
- Excludes all additional Permits, Fees, and Impacts associated with the Work.
- Daytime Hours Only: 7:00 AM - 5:00 PM
- As-Built Drawing will be Contractor Red-Line.
- Final Restorations include irrigation, landscaping, tree/vegetation pruning and/or restoration, and disposal of unsuitable/excess materials.

