

MARC & LISA ANDERSON
RESIDENCE
1814 SURFSIDE DRIVE
FORT PIERCE, FLORIDA




PLANTING SPECIFICATONS

1. All plant materials shall be Florida Number 1 as provided in the most current edition of the "Grades and Standards for Nursery Plants, Parts I & II" prepared by the state Department of Agriculture and Consumer Services.
2. All trees, shrubs and groundcovers shall be of the sizes as specified in the Plant List.
3. Quantities listed on the Plant List are for estimating purposes. Contractor shall verify all quantities. Mulch, Topsoil, Fertilizer, etc. shall be included in the unit cost of the plants.
4. Where there is a discrepancy either in quantities, plant names, sizes or specifications between the plan or Plant List, the plan takes precedence.
5. All planting beds and water basins for trees shall be covered with a 3" minimum depth of shredded eucalyptus or Floramulch grade "B" or better. Refer to the Plant List for the specified mulch type. Alternative mulch material is required to be approved by Landscape Architect.
6. The Planting Plan shall be installed in compliance with all existing codes and applicable deed restrictions.
7. PLANTING SOIL: All trees and shrubs shall be planted with a minimum of 12" topsoil around and beneath the rootball. Minimum topsoil shall be 6" for groundcover areas.
8. Planting soil to be a weed-free mixture of 50% sand and 50% mulch or other organic planting material suitable to the Landscape Architect.
9. Contractor is responsible for determining all utility locations and installing facilities so as to not conflict. All damage to existing utilities or improvements caused by Contractor shall be repaired at no additional cost to the Owner.
10. Contractor shall be responsible for providing final grading of all associated planting areas.
11. After final grade, area to be raked to 6" depth and all rock and foreign inorganic materials removed and disposed of properly off site.
12. All planting holes to be hand dug except where machine dug holes will not adversely affect or damage utilities or improvements (see note 7).
13. No pruning of any tree or palm will be accepted. All plants to be planted at the nursery grade or slightly higher.
14. Contractor shall stake and guy all trees and palms at time of planting as per the appropriate detail. Contractor is responsible for the maintenance and/or repair of all staking and guying during the Warranty Period and removal and disposal of staking after the establishment period.
15. Fertilizer is required for plantings and shall be NPK 16-4-8 at 12.5 lbs/1000 s.f. or 345 lbs/acre. Nitrogen 50% slow release form and fertilizer to include secondary/minor micronutrients.
16. SUBSTITUTIONS AND CHANGES: All substitutions and changes shall be approved in writing prior to installation. Any discrepancies between plans, site and specifications shall be brought to the immediate attention of the Landscape Architect, the Owner and governing municipality.
17. WATERING: All plant material shall be watered in at time of planting in accordance with standard nursery practices. In addition, Contractor will continue watering of plant material until substantial completion and as needed and thereafter for a period of 2-months.
18. All new plant material shall be guaranteed for 1-year from time of final acceptance of the project. Any plant material not in a healthy growing condition will be replaced by the Contractor at no additional cost to the Owner within 10-days of notification. For all replacement plant material, the warranty period shall be extended an additional 45-days beyond the original warranty period. All trees that lean or are blown over, caused by winds less than 75-MPH, will be re-set and braced by the contractor at no additional cost to the Owner.
19. The successful bidder shall furnish to the Owner a unit price breakdown for all materials. The Owner may, at its discretion, add or delete from the materials utilizing the unit price breakdown submitted.
20. No plant material will be accepted showing evidence of cable, chain marks, equipment scars, or otherwise damaged.
21. Plant material will not be accepted when the ball of earth surrounding its roots has been cracked, broken or otherwise damaged.
22. Root prune all field grown trees a minimum of 8-weeks prior to planting.

GENERAL PLANTING NOTES


1. All dimensions 6" and less are exaggerated for illustrative purposes only.
2. Plant containers shall be removed prior to planting. If plants are not container grown, remove a minimum of the top 1/3 of burlap, fabric, or wire mesh. Never lift or handle the tree by the trunk.
3. The uppermost root on all trees shall be covered by no more than 1" of soil. Use hand tools to carefully remove all excess soil. The top of root ball shall be set 1" - 2" above finish grade and set plumb to the horizon. If planting pit is too deep, remove the tree and firmly pack additional soil in the bottom of the planting pit to raise the rootball. After positioning the tree in the planting pit slice through rootballs with 3 or 4 vertical slices (top to bottom) equally distributed around the tree.
4. Backfill shall be loosened existing soil. Remove rocks, sticks, or other deleterious material greater than 1" in any direction prior to backfilling. Water and tamp to remove air pockets. If existing soils contain excessive sand, clay, or other material not conducive to proper plant growth, contact Landscape Architect prior to planting.
5. Soil rings shall be constructed of existing soil at the outer edge of the planting pit, with a height of 3" and gently sloping sides. Do not pile soil on top of rootball.
6. Mulch shall be a 3" deep layer placed to the edge of the trunk flare, around the base of shrub, or solidly around groundcover. Never pile mulch against the plant trunk. Allow air to meet trunk of all plants.
7. Straps shall be a minimum 1" wide nylon or polypropylene. All wood stakes or anchors shall be located beyond the edge of soil ring and located below finished grade, unless otherwise specified. Remove above ground guying systems at the end of the establishment period.

PLANTING DETAILS

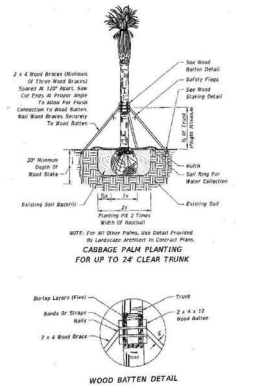

QTY	BOTANICAL NAME	COMMON NAME	N*	WW*	SIZE/SPECIFICATIONS
TREES					
1	Bursera simaruba	Gumbo limbo	X	X	12' Ht., 2 1/2" DBH., 65 Gal.
4	Quercus virginiana	Live Oak	X	X	12' Ht., 2 1/2" DBH., 65 Gal.
1	Citrus x meyeri	Meyer lemon	X	X	8' Ht., 1 1/2" DBH., 50 Gal.
1	Citrus paradisi	Ruby Red Grapefruit	X	X	8' Ht., 1 1/2" DBH., 50 Gal.
1	Citrus x sinensis	Valencia Orange	X	X	8' Ht., 1 1/2" DBH., 50 Gal.
1	Chrysophyllum oliviforme	Satin Leaf	X	X	12' Ht., 2 1/2" DBH., 65 Gal.
PALMS					
6	Coccothrinax L.	Coconut Palm	X	X	8' Ht. Grey Wood, Matched
2	Phoenix roebelenii	Pigmy Date Tripple	X	X	8' Ht. Grey Wood, Matched
6	Roystonea regia	Florida Royal Palm	X	X	6' G.W., Matched
1	Phoenix roebelenii	Pigmy Date Palm	X	X	3 - Stems: 4.5 and 6 foot grey wood
SHRUBS					
24	Ilex coccinea 'Nora Grant'	Nora Grant	X	X	7 Gal., 30" Ht.
36	Chrysobalanus icaco	Cocoplum 'Red Tip'	X	X	7 Gal., 30" Ht.
51	Clusia guttifera Dwarf	Dwarf Clusia	X	X	7 Gal., 30" Ht.
12	Hamelia patens Dwarf	Firebush Dwarf	X	X	7 Gal., 30" Ht.
8	Ilex vomitoria 'Shillings'	Dwarf Yaupon Holly	X	X	3 Gal., 24" Ht.
12	Gardenia jasminoides	Gardenia 'Jubilation'	X	X	7 Gal., 30" Ht.
10	Delphinium glauca	Thryallis	X	X	7 Gal., 30" Ht.
39	Viburnum obovatum	Walter's Viburnum	X	X	7 Gal., 30" Ht.
6	Podocarpus macrophyllus	Podocarpus	X	X	30 Gal., 5' Ht.
8	Jatropha integrirama	Jatropha	X	X	15 Gal., 4' Ht.
4	Bursera pauciflora	Yesterday, Today and Tomorrow	X	X	15 Gal., 4' Ht.
6	Streitizia reginae	Bird of Paradise	X	X	10 Gal., 30" Ht.
GROUNDCOVERS					
136	Juniperus conferta	Shore Juniper	X	X	1 Gal.
228	Helianthus debilis	Beach Sunflower	X	X	1 Gal.
30	Liriope Muscari 'Emerald Goddess'	Liriope Emerald Goddess	X	X	1 Gal.
159	Muhlenbergia capillaris	Muhly Grass	X	X	1 Gal.
LAWN GRASS					
SA	per plan	Stenotaphrum secundatum	St. Augustine 'Flortani'	Solid sod	

NOTE: * N = Florida Native; WW = Water Wise Drought tolerant

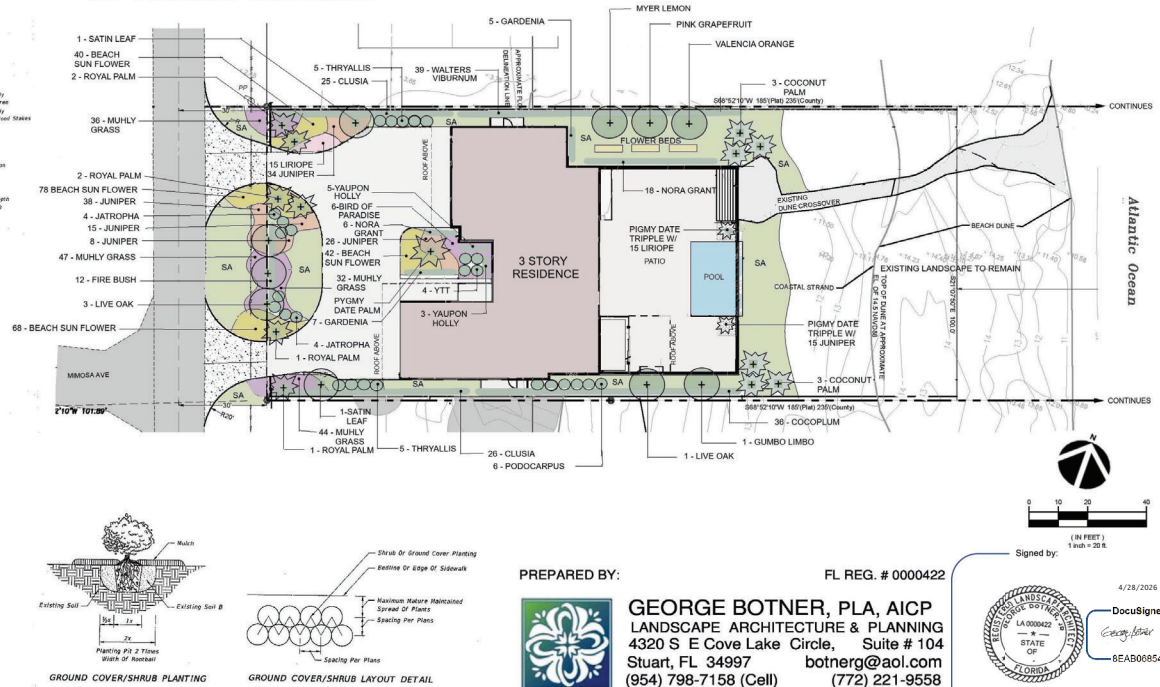

PREPARED BY:



GEORGE BOTNER, P.A., AICP
LANDSCAPE ARCHITECTURE & PLANNING
4320 S E Cove Lake Circle, Suite # 104
Stuart, FL 34997
(954) 798-7158 (Cell)

FL REG. # 0000422

Signed by:



4/28/2026

DocuSigned by:

8EAB0685402B41A