



**CAPITAL
IMPROVEMENT
PROJECTS**

**CITY OF FORT PIERCE
PLANNING BOARD MEETING
OCTOBER 11, 2021**



COMPLETED PROJECTS - FY 20/21

TRANSPORTATION

PROJECT	TOTAL AMOUNT
17 th Street Reconstruction (Orange Ave. to Avenue D)	\$1,897,694
Citrus Overpass Bridge Repair	\$1,068,315
2020 Street Resurfacing	\$270,669

BUILDINGS

PROJECT	TOTAL AMOUNT
City Hall Exterior Refurbishment	\$313,000

COMPLETED PROJECTS - FY 20/21

STORMWATER (SMU)

PROJECT	TOTAL AMOUNT
Thumb Point Drive Drainage Improvement / Rio Vista Outfall Connection	\$24,296
South 2 nd Street Drainage Improvement	\$69,000

TOTAL AMOUNT COMPLETED	\$3,642,974
-------------------------------	--------------------


UPCOMING PROJECTS - FY 21/22

TRANSPORTATION

- 2021 Street Resurfacing

T-1

Ave D

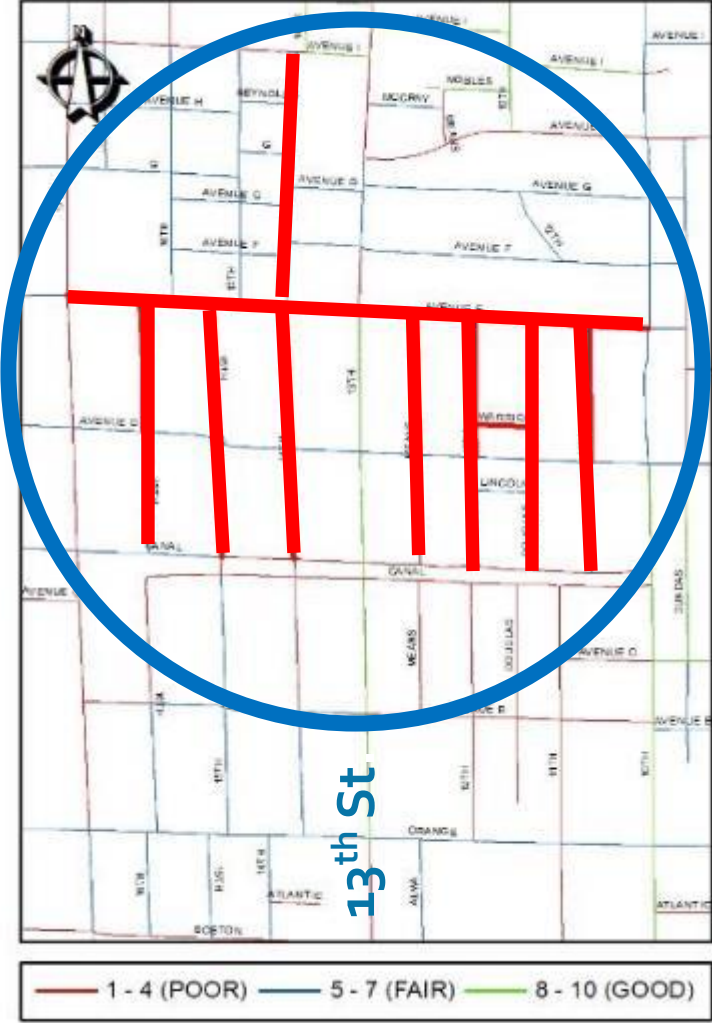

- 11th Street
- 12th Street
- 14th Street
- 15th Street
- 16th Street
- Douglas Ct.
- Means Ct.
- Warrick Dr.
- Avenue E

Estimated Cost:
\$ 485,000

UPCOMING PROJECTS - FY 21/22

TRANSPORTATION

	PROJECT NAME	STATUS
T-3	<ul style="list-style-type: none"> 8th Street (Avenue D to Avenue E) Project includes reconstruction of roadway, drainage, undergrounding of utilities and sidewalk reconstruction 	Engineering design completed. Request for proposals to be received by mid-November 2021.
T-4	<ul style="list-style-type: none"> Avenue B (8th Street to 13th Street) Project includes reconstruction of roadway, drainage, undergrounding of utilities and sidewalk reconstruction 	Engineering design completed. Request for proposals to be received by February 2022.
T-5	<ul style="list-style-type: none"> 5th Street (Boston Avenue to Delaware Avenue) Project includes reconstruction of roadway, drainage, landscaping, irrigation, street lighting, undergrounding of utilities and sidewalk reconstruction 	Project under construction. Completion scheduled for February 2022.

UPCOMING PROJECTS - FY 21/22

TRANSPORTATION

	PROJECT NAME	STATUS
T-8	<ul style="list-style-type: none"> Ohio Avenue (US 1 to 11th Street) A joint project by the City and Fort Pierce Utilities Authority primarily for the replacement of utilities. The project will entail water and sewer main replacement, drainage improvements, sidewalk replacement, limited landscaping, streetlights and roadway construction. 	Design currently underway. Plans and specifications scheduled to be completed by March 2022.
T-13	<ul style="list-style-type: none"> Granada Street (Porpoise Ave. to N. of Gulfstream) Paving, drainage, and sidewalks for unpaved section of Granada Street 	Engineering design to be completed in-house. Survey base maps currently being reviewed.
TS-1	<ul style="list-style-type: none"> Avenue D Streetscape (Indian River Drive to 29th St.) Improvements include milling, removal of existing paver crosswalks, asphalt resurfacing and construction of decorative stamped asphalt crosswalks. Proposed work also includes landscape improvements and construction of Lincoln Park Gateway Arch. 	Currently awaiting engineering design proposal from continuing service provider.

UPCOMING PROJECTS - FY 21/22


SUN TRAIL

PROJECT NAME	STATUS
<ul style="list-style-type: none"> Indian Hills Trial (South of Savannah Road to Indian Hills Dr.) The project entails the construction of a 12' wide concrete trail following the existing rock trail layout through the Indian Hills Recreation Area . 	Construction began in June 2021. Work is scheduled to be completed by December 2021. Fully funded by JPA agreement with FDOT.
<ul style="list-style-type: none"> Historic Highwayman Trail Gap (Indian Hills Dr. to Georgia Ave.) Section of proposed SUN Trail traversing Indian Hills Golf Course. 	Engineering design is currently at 30% completion. Design scheduled to be completed by November 2021. FDOT has programmed \$762,176 for construction starting July 2022.
<ul style="list-style-type: none"> SUN Trail - Historic Downtown Fort Pierce Retrofit - Bike Path/Trail (Georgia Ave. to N. A1A) Design phase of downtown segment of SUN Trail 	Design awarded to Marlin Engineering. Contract duration is 56 weeks, ending November 2022.

TB- 5

TB-3



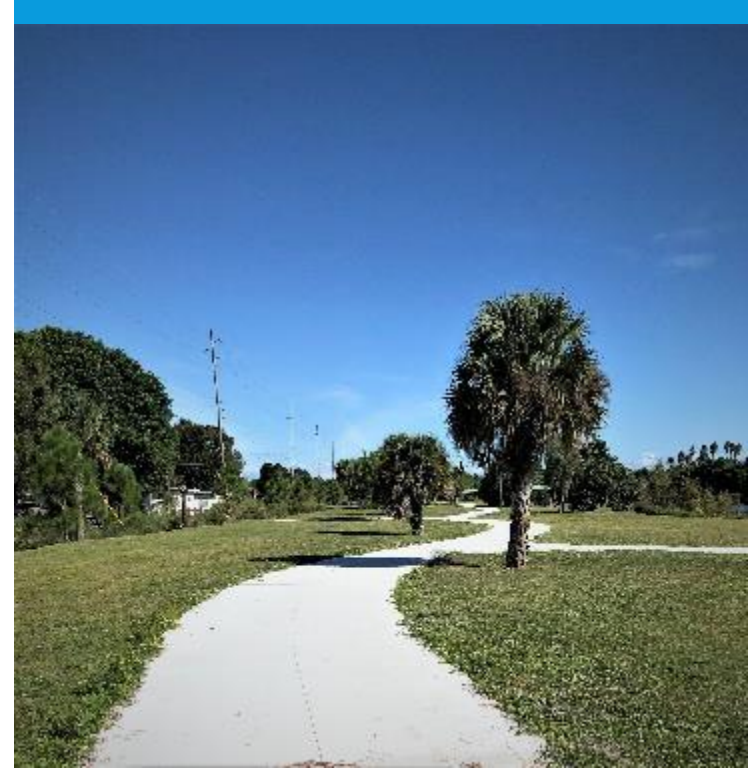

INDIAN HILLS RECREATION AREA – SUN TRAIL

Construction Photos Update

SURTAX UPDATE

• Unencumbered Funds		\$ 1,205,574.96
(As of September 2020)		
• Funds Received FY 20/21		\$ 2,171,741.20
(10/01/20 through 09/30/2021)		
• Encumbered Funds	(-)	\$ 596,858.59
(10/01/20 through 09/30/21)		
• Unencumbered Balance		\$ 2,780,457.57
(As of September 2021)		
• Upcoming Projects		\$ 2,150,000.00
• 8 th Street (Construction)	\$345,000	
• Avenue B (Construction)	\$673,000	
• 2021 Street Resurfacing	\$500,000	
• 2022 Street Resurfacing	\$500,000	
• Georgia Ave. Basin Improv.	\$132,000	

UPCOMING PROJECTS - FY 21/22

STORMWATER PROJECTS (SMU)

	PROJECT NAME	STATUS
S-1	<ul style="list-style-type: none"> Beach Court (Delaware Ave. to Florida Ave.) The project entails the replacement of failing stormdrain, inlets, curb and gutter and pavement reconstruction. 	Design contract awarded and design scheduled to be completed by January 2022.
S-2	<ul style="list-style-type: none"> 16th Street (Ave. K to Ave. I) – Stormdrain Replacement Project entails the replacement of a decrepit stormdrain along North 16th Street. The existing system has failed due to the deterioration and age of the infrastructure. The project also proposes milling and resurfacing of the roadway 	This project is proposed to be funded by the American Rescue Plan Act of 2021 (ARPA). Engineering design work will be funded by the SMU account with possible reimbursement from ARPA.
S-4	<ul style="list-style-type: none"> Atlantic Avenue (5th St. to 7th St.) – Pipe Replacement Numerous pavement failures have occurred directly in line with the stormdrain. Public Works Department has repeatedly filled those voids with asphalt. The failures continue to expand creating safety concerns and drainage problems. 	This project is proposed to be funded by the American Rescue Plan Act of 2021 (ARPA). Engineering design work will be completed in-house with survey provided by outside consultant.

UPCOMING PROJECTS - FY 21/22

STORMWATER PROJECTS (SMU)

PROJECT NAME	STATUS
<p>S-5</p> <ul style="list-style-type: none"> Avenue Q (14th to 17th Street) Project entails the replacement of failing stormdrain along Avenue Q. Approximately 1,200 LF of 48" pipe along with the installation of 8 drainage structures is proposed. Also, the replacement of curb and gutter and resurfacing is planned. 	<p>This project is proposed to be funded by the American Rescue Plan Act of 2021 (ARPA). Engineering design work will be funded by the SMU account with possible reimbursement from ARPA.</p>
<p>S-9</p> <ul style="list-style-type: none"> Surfside Drainage/Resurfacing – Phase II The streets identified for drainage improvements under this project are: Melaleuca, Plover, Pelican, Walnut, Eucalyptus and Cypress. Improvements will include valley gutters constructed on both sides of the roadway, elimination of the remaining roadside swale by re-grading, driveway replacement, milling and resurfacing. 	<p>Requested proposal for engineering design from continuing service provider. Design contract award to be on City Commission Agenda of November 1, 2021.</p>
<p>S-10</p> <ul style="list-style-type: none"> Surfside Drainage/Resurfacing – Phase III The streets identified for drainage improvements under this project are: Sunset Isles, Mimosa and Jacaranda. Improvements will include valley gutters constructed on both sides of the roadway, elimination of the remaining roadside swales by re-grading, driveway replacement, milling and resurfacing. 	<p>This project is proposed to be funded by the American Rescue Plan Act of 2021 (ARPA). Engineering design work will be funded by the SMU account with possible reimbursement from ARPA. Requested proposal for engineering design from continuing service provider. Design contract award to be on City Commission Agenda of November 1, 2021.</p>

UPCOMING PROJECTS - FY 21/22

STORMWATER PROJECTS (SMU)

PROJECT NAME	STATUS
<p>S-12</p> <ul style="list-style-type: none"> Georgia Avenue Basin Improvements Currently the 235-acre Georgia Avenue Basin drains through the Indian Hills Golf Course lake system, then discharges directly into the Indian River Lagoon. Improvements are being proposed to reduce the pollutants that are now discharging directly to these protected waters. Three (3) BMP Treatment Trains will be constructed to accomplish this goal. 	<p>This project will be funded by funds from the SURTAX account and a grant from SFWMD entitled Indian River Lagoon Water Quality Improvements. Engineering design work is currently underway.</p>