



Pavement Management Program/ Arterial Reconstruction Program/Bridge Repair Program

September 1, 2022 CTOC Meeting






FY 2023 PMP Activity

- \$13.21M Allocation
- Primarily all sealcoat and slurry seal treatments
- ~119 Miles



FY 2023 PMP Activity

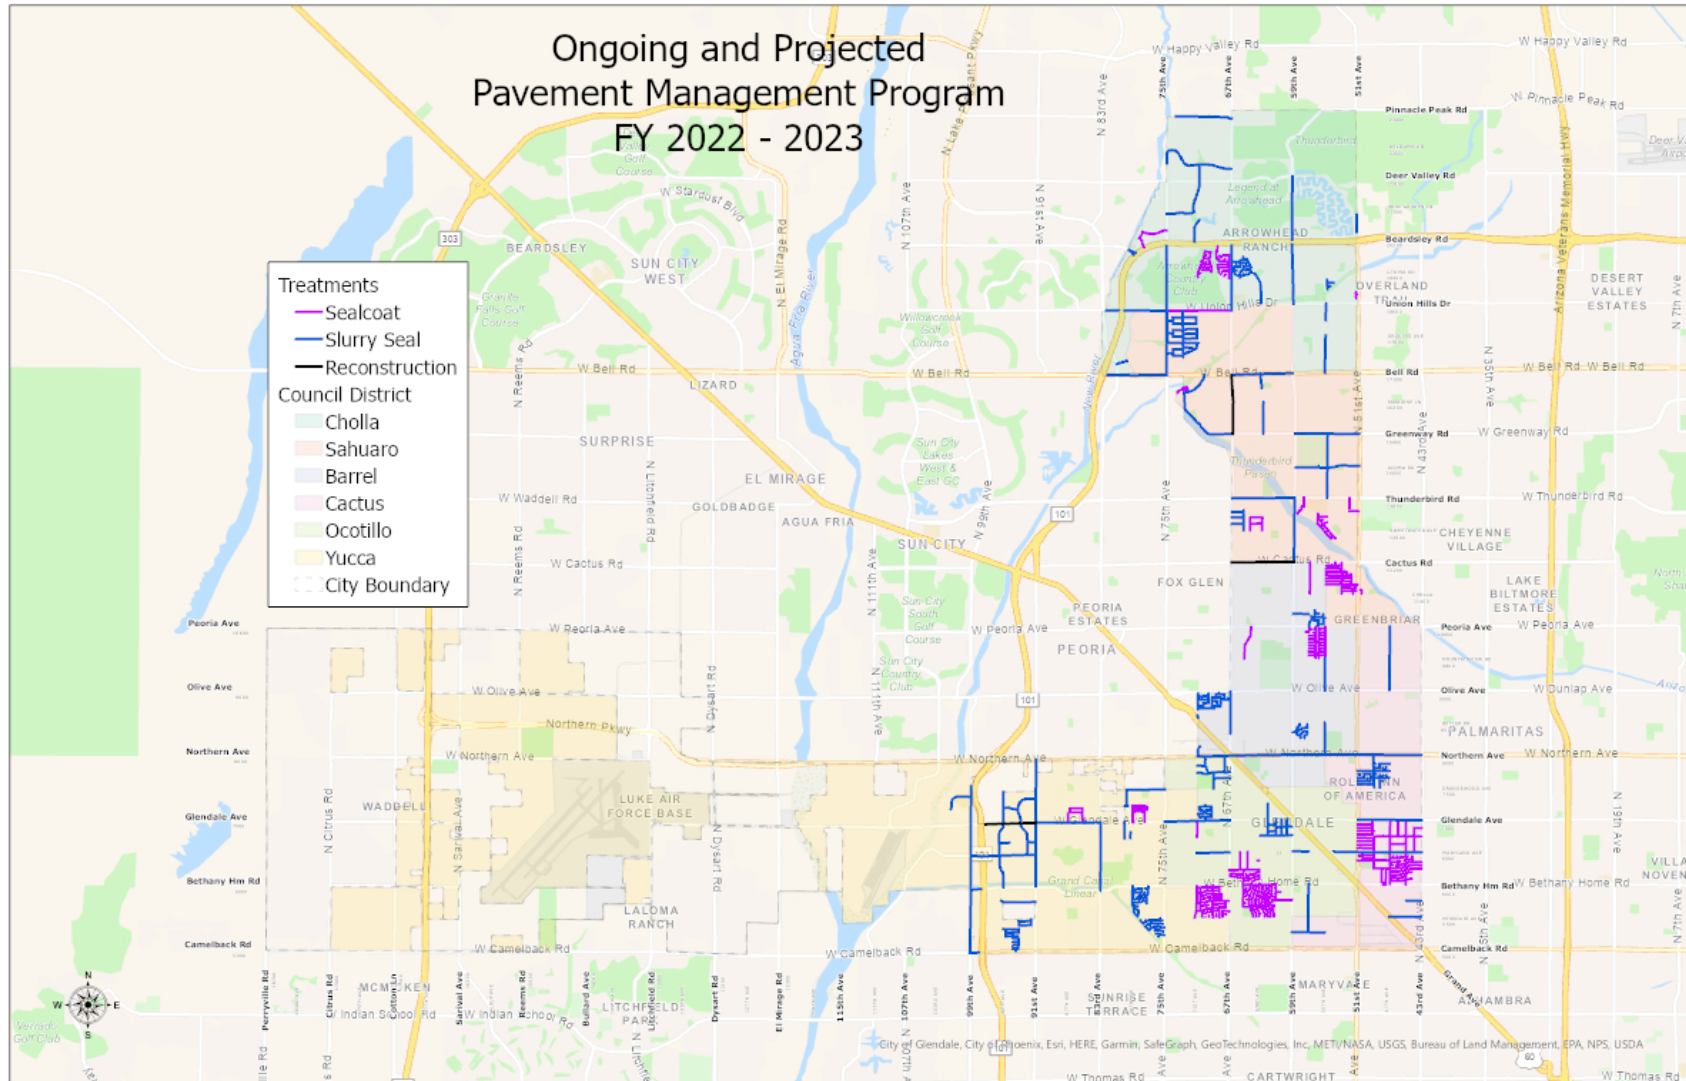

The logo features a stylized letter 'G' composed of two overlapping curved shapes, one in red and one in orange, set against a white background.

PMP Activity

For more information go to:

www.GlendalePavementManagement.com

Or call:

PMP Hotline – 602.532.6250



ARP Activity

- Glendale Ave (91st Ave – Loop 101)
 - Construction Started June 6
 - Anticipated Construction Completion September 2022, by 9/09
 - PCI 38 (2019)
 - AADT 25,500 (2018)
 - A very important economic corridor for the City!



ARP Activity

- Cactus Rd (59th Ave – 67th Ave)
 - Final design complete
 - Anticipated construction start Sept/Oct 2022
- 67th Ave (Greenway Rd – Bell Rd)
 - Final design nearing completion
 - Anticipated construction start Feb 2023



FY 2023 Bridge Repair Activity

- New River Bridge @ Glendale Ave
 - Spall repairs on substructure
 - Joints repairs
 - Reset bearings
- Arizona Canal Bridge @ Cactus Rd
 - Replace joints
- Arizona Canal/Diversion Channel Bridge @ Cactus Rd
 - Repair concrete on superstructure



Questions on PMP/ARP/Bridge Repair
