


NOT FOR CONSTRUCTION

FOR PRICING ONLY

These documents are for establishing Scope of Work only. The final design is yet to be approved by the local governing authority. That approval could result in changes to the design materials, quantities, finishes etc.

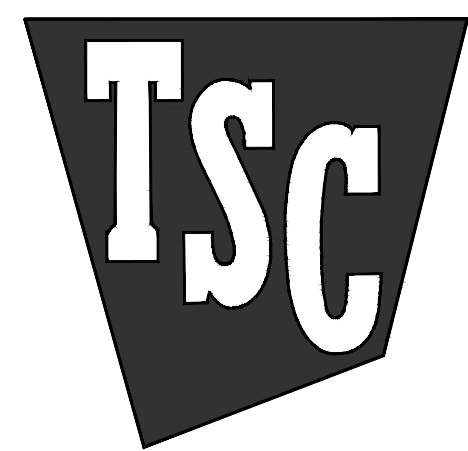

TRACTOR SUPPLY COMPANY

GOODYEAR
ARIZONA

Tractor Supply Company shall not be responsible for the payment of any work performed or material supplied by the Contractor or any of its sub-contractors, sub-subcontractors and anyone claiming by through or under any of them which is not identified in writing and signed by one of the following Tractor Supply Company personnel: Vice President, Real Estate, Director of Construction, or a Construction Project Manager. No action, conduct, omission, prior failure, or course of dealing by Tractor Supply Company shall act to waive, modify, change or alter the requirement that all work, whether by contract, change order or change directive, must be in writing and signed by the personnel identified in this provision. Any work performed or material provided by the Contractor, any of its sub-contractors, sub-subcontractors contrary to this provision shall be at its own risk and own expense and Tractor Supply Company shall not be obligated to reimburse or pay the Contractor or any of its sub-contractors, sub-subcontractors for same.

All measurements and items portrayed on this sheet are deemed to be accurate by architect, however all bidding General Contractors should field verify the actual conditions. Any changes to the scope of work, and thus potential change orders, should be identified and communicated in your bid submittal to TSC.

This drawing and the design shown is the property of the architect. The reproduction, copying or use of this drawing without their written consent is prohibited and any infringement will be subject to legal action.

Job Number: 2501


Date: 04.17.2025

Revisions:

Revisions:


Revisions:
PROPANE TANK LAYOUTS & FENCE DTLS

Sheet Number: AS1.1

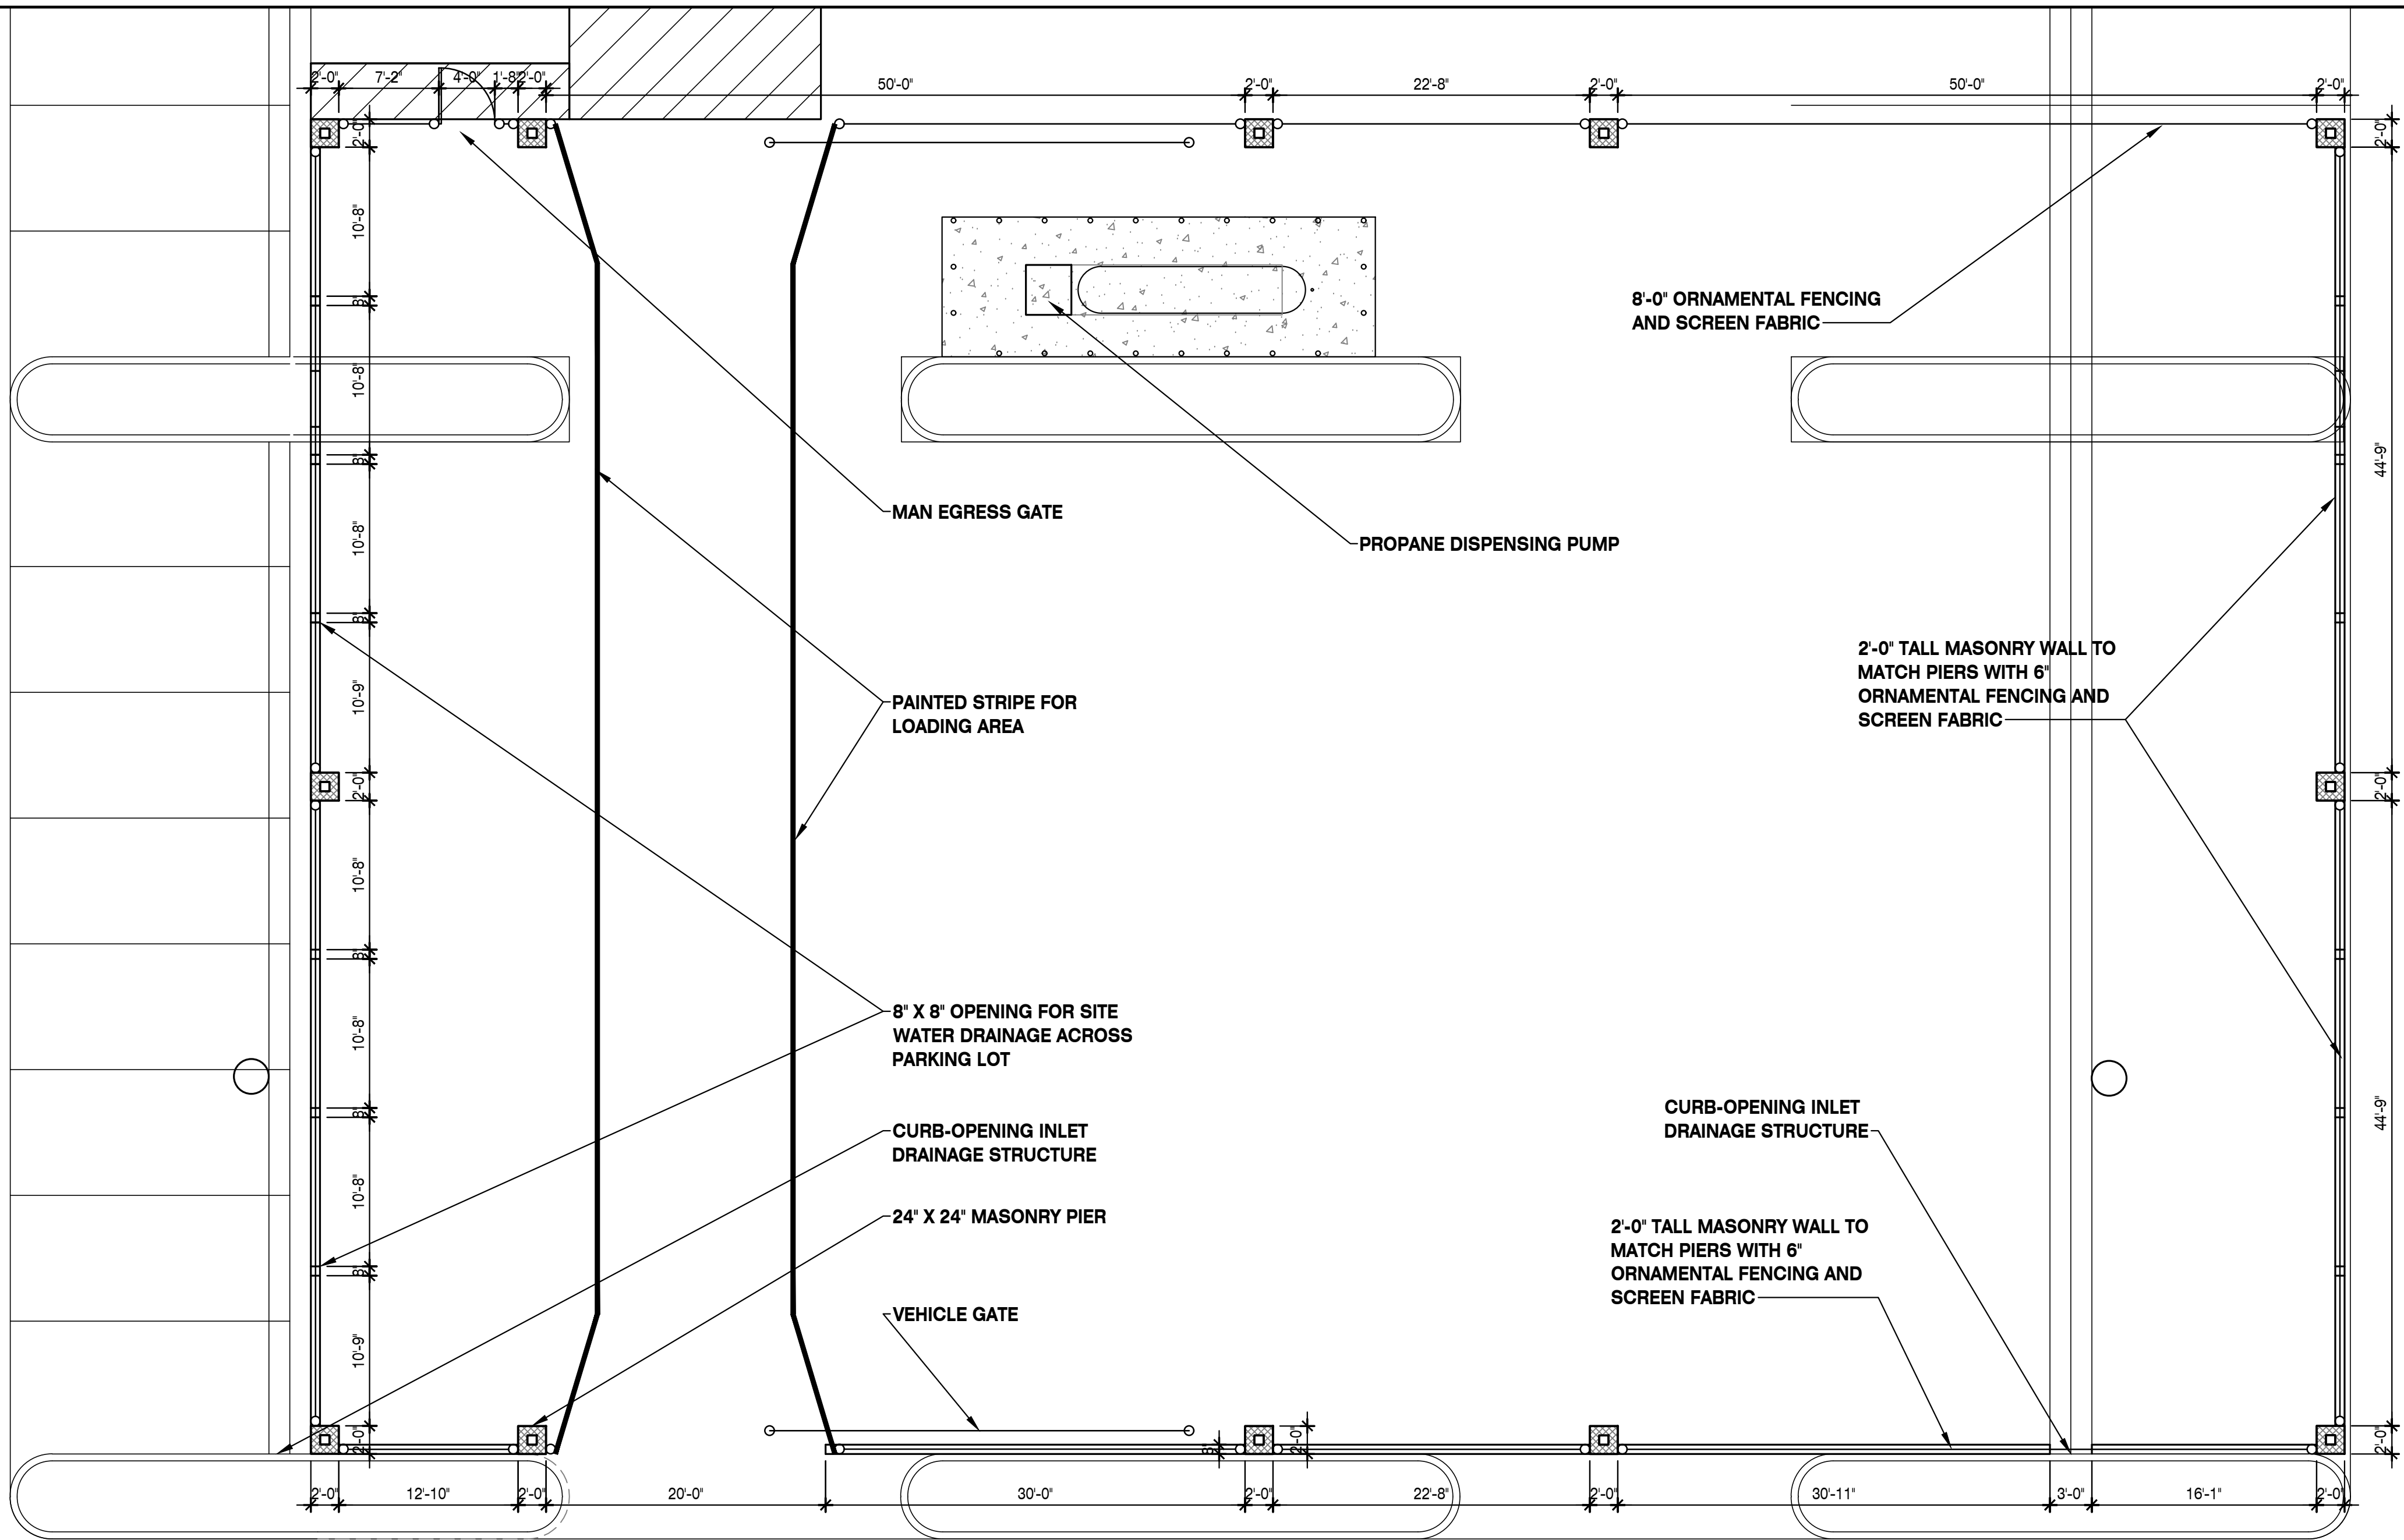

2 ENLARGED PLAN

SCALE: 1/8" = 1'-0" FENCED OUTDOOR DISPLAY

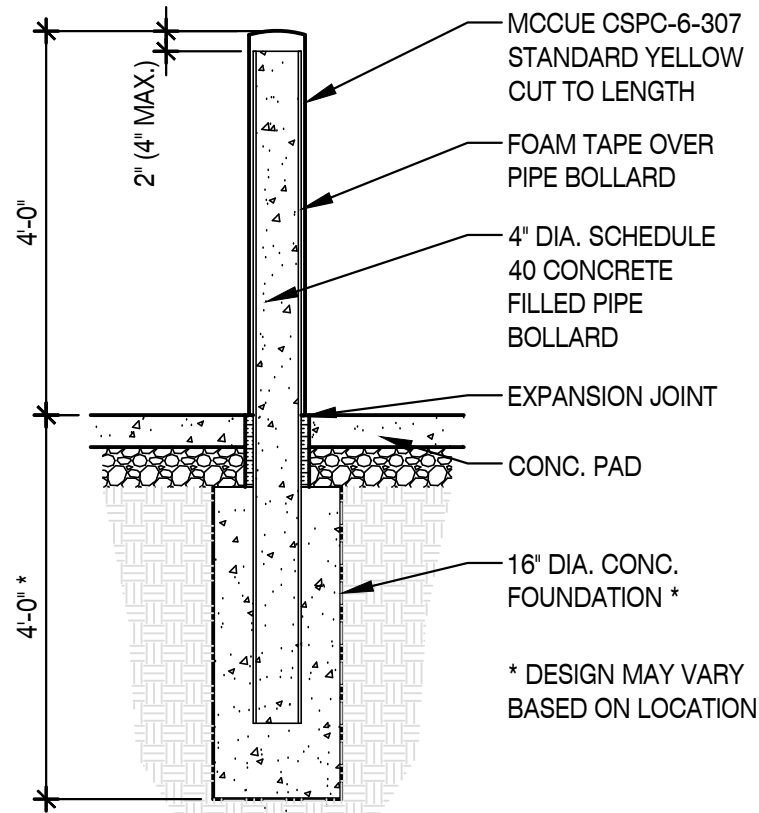


15 BOLLARD DETAIL

SCALE: 1/2" = 1'-0" TYPICAL PROPANE BOLLARD


TSC ID AND SIGN DESCRIPTION	MOUNTING LOCATION	TYP. MOUNTING METHOD
G5 - POLE SIGN: ONLINE ORDER PICK UP (18" X 24")	RIGHT SIDE OF GARDEN CENTER MAN DOOR	ON 2.5" DIA. GALVANIZED METAL POLE USING U-BOLTS
G6 - POLE SIGN: FEED, FENCING & MORE (18" X 24")	RIGHT SIDE OF FEED ROOM OVERHEAD DOOR	ON 2.5" DIA. GALVANIZED METAL POLE USING U-BOLTS
G7 - POLE SIGN: EXIT SIGN (18" X 24")	LEFT SIDE OF REAR DRIVE THRU FENCE GATE	ON 2.5" DIA. GALVANIZED METAL POLE USING U-BOLTS
TFS - GATE SIGN: THANKS FOR SHOPPING (39" X 21")	ON FRONT SIDE OF REAR DRIVE THRU FENCE GATE	YUNKER WILL SEND A UHOOK FOR INSTALLATION

*CONFIRM EXACT LOCATION WITH FINAL FIXTURE PLAN

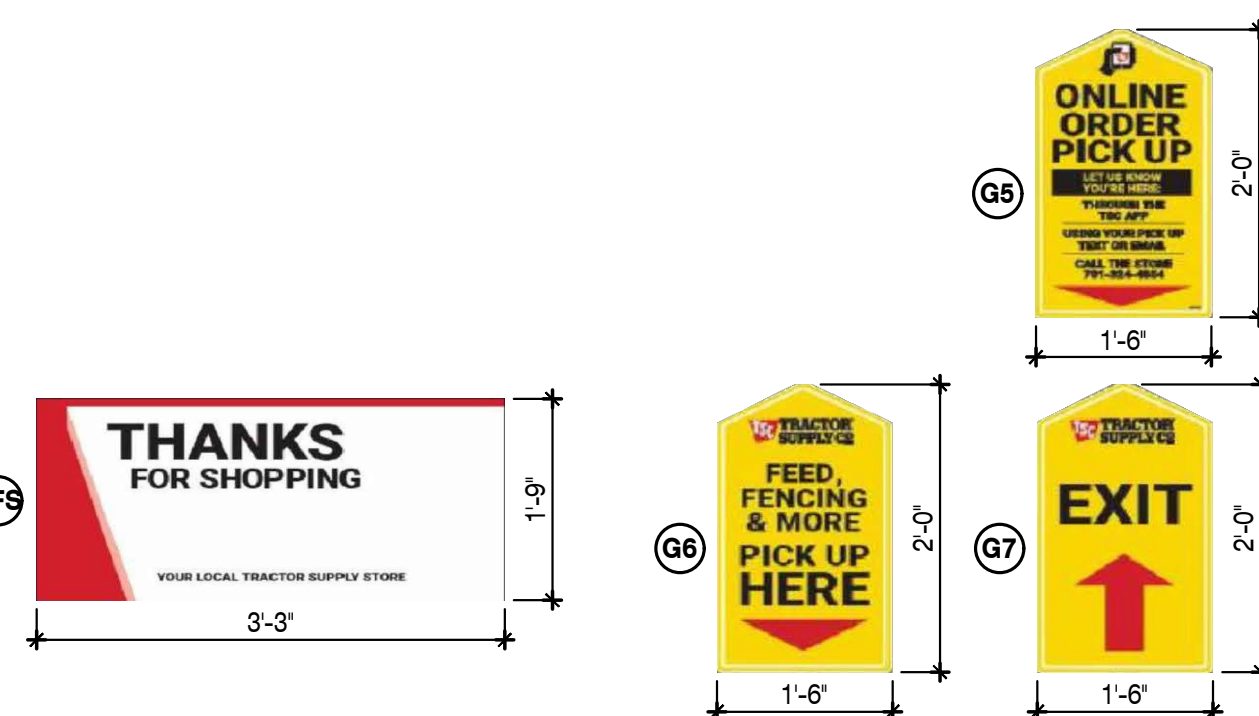


14 DETAIL

SCALE: NO SCALE FENCED AREA SIGNAGE

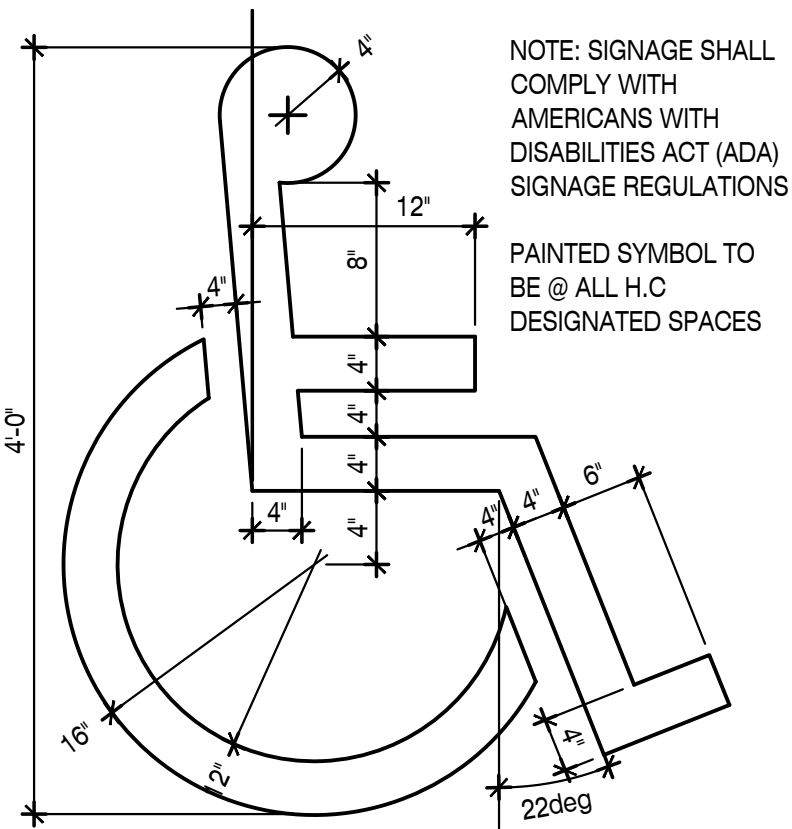


13 DETAIL

SCALE: 1" = 1'-0" PAINTED HANDICAP PARKING LOGO

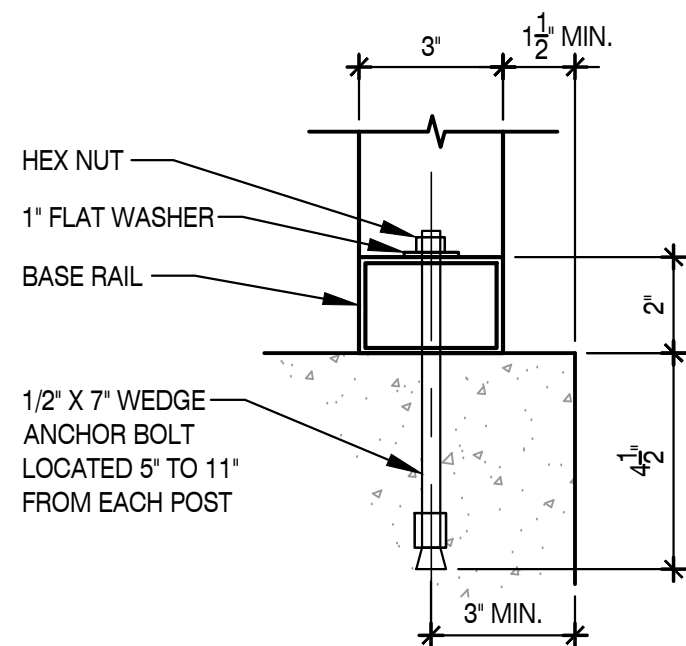


10 PROPANE CANOPY DETAIL

SCALE: 3/4" = 1'-0" CONNECTION @ CONCRETE

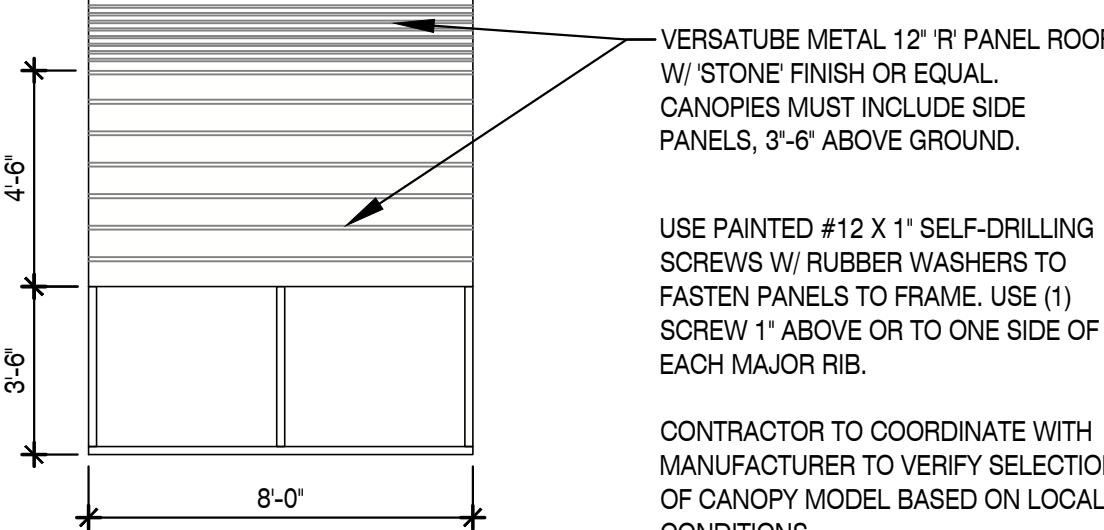

6 PROPANE CANOPY ELEVATION

SCALE: 1/4" = 1'-0" SIDE

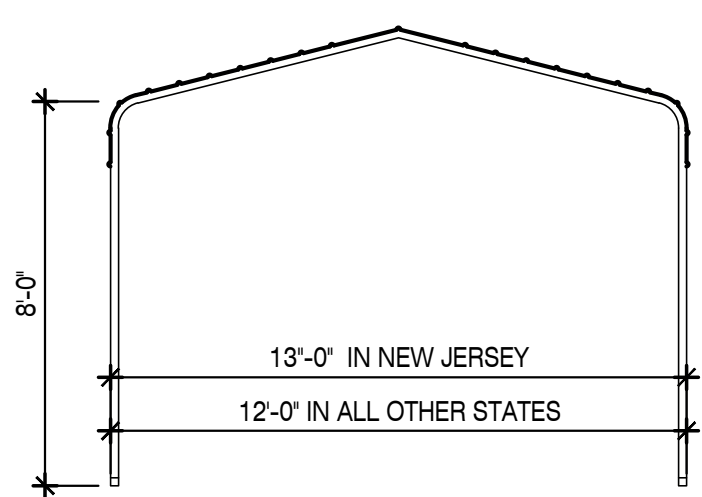

5 PROPANE CANOPY ELEVATION

SCALE: 1/4" = 1'-0" FRONT

4 PROPANE CANOPY FRAME


SCALE: NOT TO SCALE ISOMETRIC

- GENERAL GUIDELINES FOR PROPANE LOCATION AND INSTALLATION:
1. PROPANE TANK LOCATION TO COMPLY WITH NFPA STANDARDS AND GUIDELINES. CONTRACTOR TO VERIFY COMPLIANCE WITH PROPANE COMPANY PRIOR TO INSTALLATION.
 2. PROPANE TANK TO BE INSTALLED 25'-0" MIN. AWAY FROM ANY STRUCTURE PER NFPA 58.
 3. PROPANE TANK TO BE INSTALLED 25'-0" MIN. AWAY FROM LIGHT POLES UNLESS EXPLOSION PROOF BOX INSTALLED PER NFPA 58.
 4. PROPANE TANK TO BE INSTALLED 25'-0" AWAY FROM UTILITIES (I.E. STORMWATER, ELECTRICAL TRANSFORMERS, METERS) PER NFPA 58.
 5. PROPANE TANK TO BE INSTALLED 10'-0" MIN. AWAY FROM PROPERTY LINES PER NFPA 58.
 6. PROPANE TANK TO HAVE 15' CLEARANCE FROM RUNNING VEHICLES TO POINT OF TRANSFER PER NFPA 58.
 7. PROPANE TANK SIZE AND INSTALLATION REQUIREMENTS MAY VARY BASED ON STATE, SEE DETAILS THIS SHEET.
 8. FOR CONDUIT ONLY INSTALLATION (PROPANE TANK INSTALLED AT A LATER DATE): PROVIDE BOLLARD COVER (GLOBAL INDUSTRIAL MODEL WG62899M) AND (4) FOUR BOLLARD COVER ANCHOR BOLTS (GLOBAL INDUSTRIAL WG628901) OVER CONDUIT STUB-UP. INSTALL EXPLOSION PROOF JUNCTION BOX VERTICALLY TO ENSURE BOLLARD COVER FIT. SEE ELECTRICAL.

NOTE: GENERAL CONTRACTOR TO CONTACT PLAN EXPRESS FOR PROPANE TANK POWER-OPERATED DISPENSING DEVICE FOR LPG-GAS CUT-SHEET PDF DOCUMENT.

- PROPANE RESPONSIBILITY NOTES:
- IF PROPANE TANK IS DELIVERED **PRIOR TO FIXTURE DATE**:
1. GENERAL CONTRACTOR IS RESPONSIBLE FOR INFRASTRUCTURE RELATED TO PROPANE TANK INSTALLATION.
 2. GENERAL CONTRACTOR IS RESPONSIBLE FOR ELECTRICAL PERMITTING AND FINAL CONNECTION TO PUMP DISPENSING CONTROL PANEL.
 3. AMERIGAS OR OTHER SPECIFIED PROPANE PROVIDER IS RESPONSIBLE FOR GAS PERMITTING OF THE TANK.
 4. AMERIGAS OR OTHER SPECIFIED PROPANE PROVIDER IS RESPONSIBLE FOR INSTALLATION AND FINAL GAS CONNECTION OF THE TANK.
 5. SEE ELECTRICAL SHEET E3.2 FOR ADDITIONAL NOTES & DETAILS.

- IF PROPANE TANK IS DELIVERED **AFTER FIXTURE DATE**:
1. GENERAL CONTRACTOR IS RESPONSIBLE FOR INFRASTRUCTURE RELATED TO PROPANE TANK INSTALLATION.
 2. AMERIGAS OR OTHER SPECIFIED PROPANE PROVIDER IS RESPONSIBLE FOR ELECTRICAL PERMITTING AND FINAL CONNECTION TO PUMP DISPENSING CONTROL PANEL.
 3. AMERIGAS OR OTHER SPECIFIED PROPANE PROVIDER IS RESPONSIBLE FOR GAS PERMITTING OF THE TANK.
 4. AMERIGAS OR OTHER SPECIFIED PROPANE PROVIDER IS RESPONSIBLE FOR INSTALLATION AND FINAL GAS CONNECTION OF THE TANK.
 5. SEE ELECTRICAL SHEET E3.2 FOR ADDITIONAL NOTES & DETAILS.

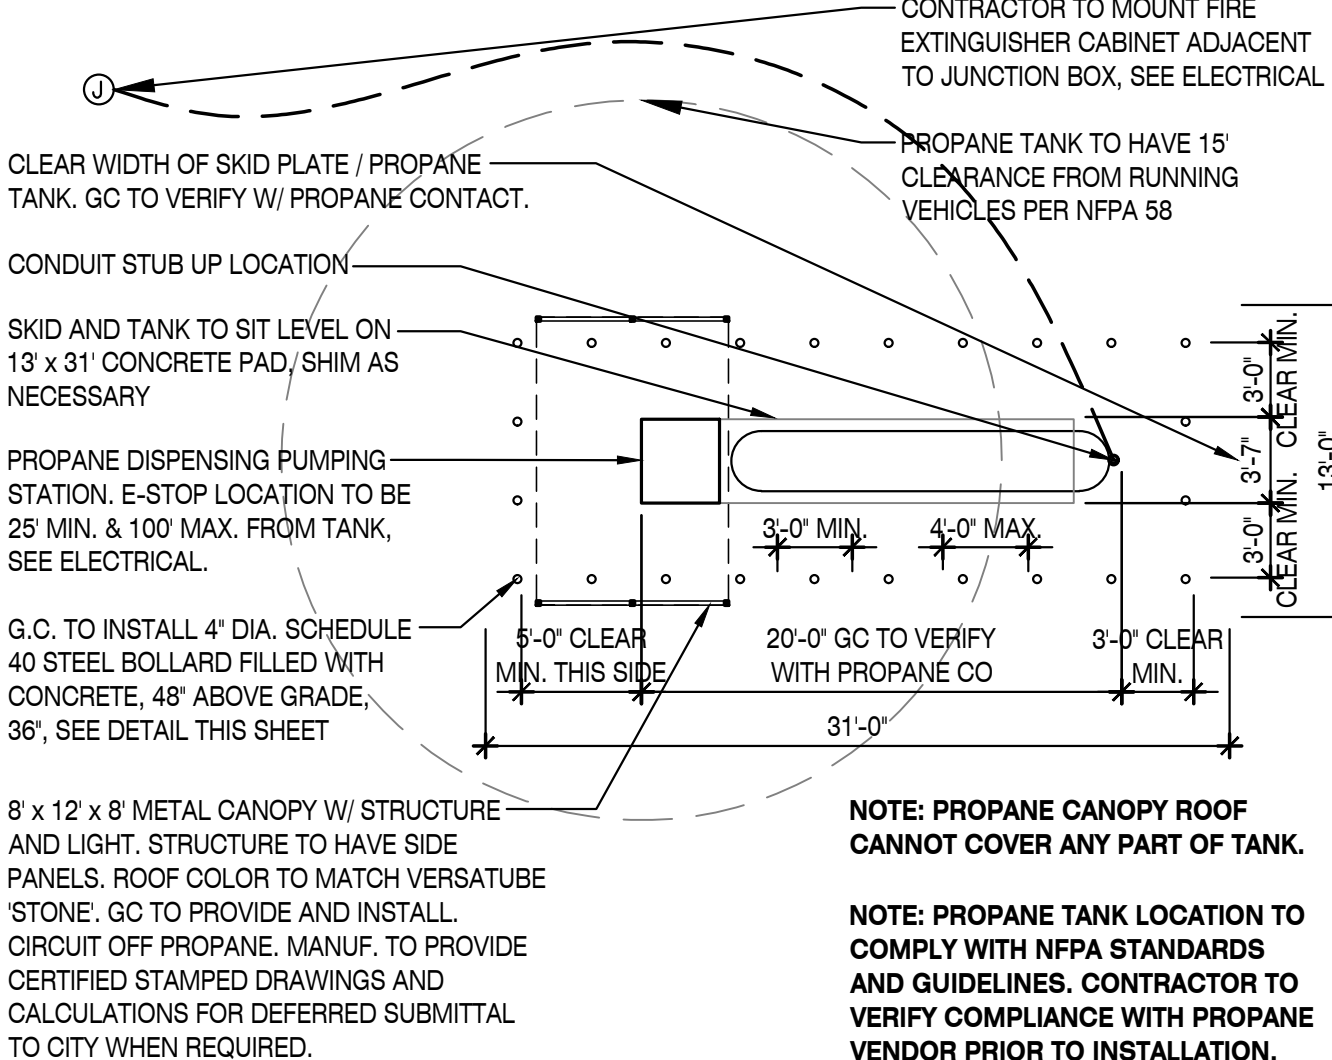

1 PROPANE PLAN

SCALE: 1/8" = 1'-0" STANDARD LAYOUT (NOT IN NJ OR TX)