

THE STATE OF TEXAS     §  
COUNTY OF HIDALGO     §  
§

AGREEMENT FOR PROFESSIONAL SERVICES  
C-13-305-10-07

**THIS AGREEMENT** is made, by and between **HIDALGO COUNTY**, acting herein by and through the Commissioner's Court, hereinafter called the "Owner", and **L & G Consulting Engineers Inc. d/b/a L & G Engineering, Professional Engineers of Mercedes, Texas**, hereinafter called the "Engineer".

WITNESSETH:

**WHEREAS**, the Owner desires to contract with the Engineer to provide professional engineering services for the "Mile 3 Road (from FM 2221 to FM 492)" project for Hidalgo County Precinct No. 3 hereinafter referred to as the "Project".

**NOW, THEREFORE**, the Owner and the Engineer in consideration of the mutual covenants and agreements herein contained do mutually agree as follows:

**ARTICLE 1. Employment of Engineer.** The Owner agrees to employ the Engineer and the Engineer agrees to perform professional engineering services in connection with the Project as stated in the articles to follow and for having rendered such services, the owner agrees to pay the Engineer compensation as stated in the articles to follow.

**ARTICLE 2. Character and Extent of Services.** This Agreement will provide for the development of the Project with the following:

**2.1 Scope of Work.** The Owner will furnish items and provide those services for the

development of the Project and fulfillment of this Agreement, as identified in **EXHIBIT "A"** *Services to be Provided by the Owner*, attached hereto and made a part of this Agreement as identified in **EXHIBIT "B"**- *Services to Provided by the Engineer*, attached hereto and made a

part of this agreement.

## **2.2 Classification of Services** For this Agreement, the professional services to be

provided by the Engineer, as more particularly identified in EXHIBIT "B", attached hereto.

**2.3 Schedule of Work.** The Engineer shall prepare a schedule of work (hereinafter referred to as "Work Schedule") in accordance with the terms identified in EXHIBIT "C" - *Work Schedule*, attached hereto and made a part of this Agreement.

**ARTICLE 3. Period of Service.** Upon execution of this Agreement, the Engineer shall proceed with the work outlined under Article 2 hereof.

**3.1 Termination Date.** This Agreement shall terminate on the earlier of September 10, 2015 or upon completion of projects (hereinafter referred to as the "Termination Date"), unless extended by written supplemental agreement, as provided in Article 8 hereof, duly executed by the Engineer and the Owner prior to the Termination Date, or otherwise terminated as provided in Article 3.4 herein and below. The Owner assumes no liability or obligation for payment to the Engineer for work performed or costs incurred by the Engineer prior to the date authorized by the Owner for the Engineer to begin work, during periods when work is suspended, or subsequent to the Termination Date.

**3.2 Extension of the Termination Date.** The Engineer shall notify the Owner in writing as soon as possible if it is determined, or reasonably anticipated, that the work under this Agreement cannot be completed before the Termination Date, and the Owner may, at the Owner's sole discretion, extend the Termination Date by written supplemental agreement as provided in Article 8 hereof. The Engineer shall allow adequate time for review and approval by the Owner of the written notice and request by the Engineer to extend the Termination Date.

**3.3 Suspension of Work.** Should the Owner desire to suspend the work under this Agreement, but not terminate this Agreement, the Owner shall provide thirty (30) calendar days verbal notification to the Engineer, followed by written confirmation from the Owner to the Engineer to that effect. The thirty-day notice may be waived as agreed in writing by both the Owner and the Engineer. The work under this Agreement may be reinstated and resumed in full

set forth herein, after the **Engineer** provides written notice to the **Owner** of

(4) By the **Engineer**, upon failure of the **Owner** to fulfill the **Owner's** obligations such failure within (30) days of such written notice by the **Owner**.

notice to the **Engineer** of such failure and the **Engineer** has not corrected **Owner** and in sole opinion of the **Owner**, after the **Owner** provides written obligations set forth herein in a satisfactory manner as determined by the By the **Owner**, upon failure of the **Engineer** to fulfill the **Engineer's** **Owner**.

(2) By mutual agreement and consent, in writing, of both the **Engineer** and the §271.903 (Vernon Supp. 1995).

period of the **Owner** pursuant to the provisions of Tex. Loc. Govt. Code Ann. continuing right to terminate this Agreement at the expiration of each budget performance of this Agreement. The parties intend this provision to be a to use reasonable efforts to secure funds necessary for the continued thirty (30) days written notice to the **Engineer**. The **Owner** agrees, however, obligations of this Agreement, the **Owner** may terminate this Agreement upon hereof, the **Owner** does not appropriate sufficient funds to meet to the **Commitment of Current Revenues**. In the event that, during any term (1)

**Termination Date** identified in Article 3.1 herein by any of the following conditions:

**3.4 Termination of Agreement.** This Agreement may be terminated before the stated

the **Termination Date**.

agreement, as provided in Article 8 hereof, duly executed by the **Engineer** and the **Owner** prior to and this Agreement will terminate on the date specified, unless extended by written supplemental If the **Owner** suspends the work, the **Termination Date** as identified above is not affected,

The sixty-day notice may be waived as agreed in writing by both the **Owner** and the **Engineer**. force and effect within sixty (60) days of receipt of written notice from the **Owner** to the **Engineer**.

such failure and the **Owner** has not corrected such failure within thirty (30)

days of such written notice by the **Engineer**.

- (5) By the **Owner** without cause upon thirty (30) days written notice to the **Engineer**.
- (6) By satisfactory completion of all services and obligations described herein.

Should the **Owner** terminate this Agreement as herein provided, no fees other than fees due and payable at the time of termination shall thereafter be paid to the **Engineer** notwithstanding anything herein to the contrary. In determining the value of the work performed by the **Engineer** prior to termination, the **Owner** shall be the sole judge of the value of such work performed. Compensation for work at termination will be based on a percentage of the work completed at that time. Should the **Owner** terminate this Agreement under (5) of the paragraph above, the amount charged during the thirty (30) day notice period shall not exceed the amount charged during the preceding ninety (90) days.

If the termination of this Agreement is due to the failure of the **Engineer** to fulfill the **Engineer's** obligations under this Agreement, the **Owner** may take over the Project and prosecute the work to completion. In such case, the **Engineer** shall be liable to the **Owner** for any additional cost occasioned by the **Owner**.

If the **Engineer** defaults in the performance of this Agreement or if the **Owner** terminates this Agreement for fault on the part of the **Engineer**, the **Owner** will give consideration to payment of an amount in settlement to include: the actual costs incurred by the **Engineer** in performing the work to the date of default, the amount of work required which was satisfactorily completed to date of default, the value of the work which is usable to the **Owner**, the cost to the **Owner** of employing another consultant and/or firm to complete the work required and the time required to do so, and other factors which affect the value to the **Owner** of the work performed at the time of default. This Agreement shall not be considered as specifying the exclusive remedy for any

default by the **Engineer**, but all remedies existing at law and in equity may be availed of by either party and shall be cumulative.

The termination of the Agreement and payment of an amount is settlement as prescribed above shall extinguish all rights, duties, and obligations of the **Owner** and the **Engineer** under this Agreement, except the obligations set forth in Articles 11.2, 12, 13, 15, 16, 17, 18.3, 19, 22 and 26 hereto.

**ARTICLE 4. Progress and Coordination.** The **Engineer** shall, from time to time during the progress of the work, confer with the **Owner**. The **Engineer** shall prepare and present such information as may be pertinent and necessary, or as may be requested by the **Owner**, in order to evaluate features of the **Engineer's** services and work.

At the request of the **Owner** or the **Engineer**, conferences shall be provided at the **Engineer's** office, the office of the **Owner**, or at other locations designated by the **Owner**. These conferences shall also include evaluation of the **Engineer's** services and work when requested by the **Owner**.

All applicable study reports shall be submitted in preliminary form for approval by the **Owner** before the final report is issued. The **Owner's** comments regarding the **Engineer's** preliminary report will be addressed by the **Engineer** in the final report.

If funds by other agencies or entities are to be used for the development of the project under this Agreement, the **Engineer's** services and work will be subject to periodic review and approval by other agencies or entities, including those of the city, county, state and/or federal agencies.

Should it be determined that the progress in the production of the **Engineer's** services and work does not satisfy the requirements of the approved **Work Schedule** as provided by **Exhibit "C"**, attached hereto, the **Owner** shall review the approved **Work Schedule** with the **Engineer** to determine the corrective action needed by either the **Owner** or the **Engineer**.

The **Engineer** shall promptly advise the **Owner** in writing of events which have a significant impact upon the progress of the **Engineer's** services and work and the approved **Work Schedule**, including:

- (1) problems, delays, adverse conditions which will materially affect the ability to attain contract objectives, prevent the meeting of time schedules and goals, or preclude the timely completion and submittal of **Project** deliverables by the **Engineer** within established time periods; this disclosure will be accompanied by a statement by the **Engineer** of recommended or immediate action taken, or contemplated, and any **Owner** or other agency or entity assistance needed to resolve the situation; and
- (2) favorable developments or events which enable meeting the **Work Schedule** goals sooner than anticipated.

#### **ARTICLE 5. Compensation and Fees.** For and in consideration of the services

to be

rendered by the **Engineer**, the **Owner** shall compensate the **Engineer** as follows:

**5.1 Basic Services.** For and in consideration of the **Services** to be rendered by the **Engineer**, as identified in Article 2 and more particularly identified in **EXHIBIT "B"**, attached hereto, the maximum amount payable by the **Owner** to the **Engineer** for **Services**, subject to adjustment in accordance with Article 6.1 herein, will be provided in each work authorization issued. An outline and breakdown of the **Services Fee** is more particularly identified in **EXHIBIT "D1"- Estimated Project Fee Schedule**, attached hereto and made a part of this Agreement. Payments to the **Engineer** for **Services** shall be made by the **Owner**, upon presentation by the **Engineer** of the monthly **Request for Payment**, in accordance with the terms and provisions of Article 6 herein.

**5.2 Special Services.** Those services that may be required to provided by the **Engineer** as **Special Services** are set forth below and more particularly described in **EXHIBIT "B"**,

attached hereto. For and in consideration of these **Special Services** rendered as required by the Engineer, the Owner shall pay the Engineer a negotiated lump sum fee (hereafter referred to as "Special Services Fee") at the hourly labor rates and non-labor rates (hereinafter referred to as "Contract Rates") specified in EXHIBIT "D" - **Contract Rates**, attached hereto and made a part of this Agreement, and as follows:

1. **RESIDENT OR SITE ENGINEER, INSPECTOR** Actual performance of services of project site engineer, resident engineer and/or inspector, if required by Owner.

2. **DOCUMENT COPIES** Actual performance and/or providing of additional copies (over 10) of report; additional copies (over 10) of plans (contract drawings), specifications and estimates (PS&E); additional copies (over 10) of bidding documents: additional copies (over 10) of as-built drawings.

3. **EXTRA TRAVEL** Extra travel required of Engineer and authorized by Owner to points outside of Hidalgo County.

4. **EXPERT WITNESS** Assistance to the Owner as expert witness in any litigation with third parties, arising from the development or construction of the Project.

5. **MISCELLANEOUS.** Investigations involving detailed consideration of operation, maintenance and overhead expenses and (unless otherwise agreed) the preparation of rate schedules, earning and expense statements; preparation of feasibility studies; environmental document preparation; appraisals, valuations, and material audits; or inventories required for certification of force account construction performed by the Owner; preparation of change orders for extra work done by the Contractor.

#### ARTICLE 6. Method of Payment.

6.1 **Request for Payment.** Payments to the Engineer for services rendered will be made while work is in progress as executed through a lump sum fee assigned to each work authorization (hereinafter referred to as "Work Authorization") in accordance with Article 7 herein. For each **Work Authorization**, the Engineer shall prepare and submit to the Owner monthly progress reports in sufficient detail to support the progress of the work and in support of a request for payment (hereinafter referred to as "Request for Payment"). The progress report shall indicate the percent completion of the work accomplished by the Engineer during the billing period and to the date of the **Request for Payment**. On or before noon of the first Monday of

following conditions precedent exist:

under Article 6.1 hereof or **Final Payment**) to the **Engineer** hereunder if any one or more of the notwithstanding, the **Owner** shall not be obligated to make any payment (whether a payment **6.3 Qualification on Obligations to Pay.** Any provision hereof to the contrary

services over which the **Engineer** has control have been paid.

so far as the **Engineer** has knowledge or information any and all amounts due for materials and The **Final Payment** shall not be made until the **Engineer** delivers to the **Owner** an affidavit that under such **Final Request for Payment** in accordance with the provisions of Article 6.1 hereof. thereof by the **Owner**, the **Owner** shall pay to the **Engineer** the amount due ("**Final Payment**") which shall set forth all amounts due and remaining unpaid to the **Engineer** and upon approval **Owner**, the **Engineer** shall submit a final request for payment ("**Final Request for Payment**") **6.2 Final Payment.** After final completion of the work and acceptance thereof by the

**Authorization(s)** approved by the **Owner.**

be only the amounts paid the **Engineer** for actual work performed in accordance with the **Work** compensation to the **Engineer** by the **Owner** for the **Project** or such portions of the project shall If the **Project**, or any portion(s) thereof, are deleted or otherwise not constructed,

amount approved as aforesaid subject to Article 6.4 herein and below.

**Owner** meets approving such payment, the **Owner** shall make payment to the **Engineer** in the circumstances then existing. About ten (10) working days after the Commissioners Court of the may make such exceptions as the **Owner** reasonably deems necessary or appropriate under the and the sum of all prior payments. The **Owner** shall review each such **Request for Payment** and tasks identified in such **Work Authorizations** together with a detailed breakdown of the amount identified in the **Request for Payment** will be in proportion to the percent completion of the work approval a **Request for Payment.** Payment of the lump sum fee for each **Work Authorization** each month during the performance of the services, the **Engineer** shall submit to the **Owner** for

proceed with the work outlined under Article 2 hereof, only as authorized by the **Owner** through  
**ARTICLE 7. Work Authorization.** After execution of this Agreement, the **Engineer** shall

#### **Request for Payment.**

previously made in writing and identified by the **Engineer** as unsettled at the time of the **Final**  
 acceptance of **Final Payment** shall constitute a waiver of all claims by the **Engineer** except those  
 terms of any special warranties required by this Agreement or provided at law or in equity. The  
 requirements of this Agreement or any contracts or Agreements related to the **Project**, or (3)  
 after completion of the **Project**. (2) failure of the **Engineer's** services to comply with the  
 the **Owner** except those arising from (1) faulty or defective services of the **Engineer** appearing  
**6.6 Waiver.** The making of the **Final Payment** shall constitute a waiver of all claims by

furnished by others in connection with the performance of the **Engineer's** services.

**6.5** The **Engineer** shall promptly pay all bills for labor and material performed and

the **Engineer** of any of its obligations hereunder with respect thereto.

approval of that part of the **Engineer's** services to which such partial payment related or relieves

**6.4** No partial payment made hereunder shall be or construed to be final acceptance or

(4) If the **Owner**, in good faith judgement, determines that the portion of the  
 compensation then remaining unpaid will not be sufficient to complete the  
**Engineer's** services in accordance with this Agreement, no additional payments will  
 be due the **Engineer** hereunder unless and until the **Engineer**, at its sole cost,  
 performs a sufficient portion of the **Engineer's** services so that such portion of the  
 compensation then remaining unpaid is determined by the **Owner** to be sufficient to  
 so complete the **Engineer's** services.

(3) The **Engineer** has failed to make payments promptly to consultants or other third  
 parties used in connection with the **Project** for which the **Owner** has made payment  
 to the **Engineer**;

(2) Any part of such payment is attributable to the **Engineer's** services which are not  
 performed in accordance with this Agreement; provided, however, such payment  
 shall be made as to the part thereof attributable to the **Engineer's** services which  
 were performed in accordance with this Agreement.

(1) The **Engineer** is in default of any of its obligations hereunder or otherwise is in  
 default under this Agreement or under any contract documents related to this  
 Agreement;

an agreed **Work Authorization** document in the form identified in EXHIBIT "E"- **Work Authorization Form**, attached hereto and made a part of this Agreement. The **Engineer** will identify, as approved by the **Owner**, the needed services for the **Project**, as required through the course of the development to the **Project**. The **Owner** shall authorize the **Engineer** to perform one or more of the agreed tasks identified in EXHIBIT "B", attached hereto, in the form of individual work authorizations. Upon authorization from the **Owner**, the **Engineer** will prepare a **Work Authorization** document, which will include a description of the work to be performed, including a description of the tasks and milestones, a work schedule, and an estimated cost proposal agreed upon by the **Owner** and the **Engineer**. The estimated cost proposal shall set forth in detail the computation of the cost of each work task, at the hourly rates established and identified in EXHIBIT "D-2", attached hereto. The **Work Authorizations** shall not waive the **Owner's** and the **Engineer's** responsibilities and obligations established in this Agreement.

The estimated cost proposal for each **Work Authorization**, developed by the **Engineer** and approved by the **Owner** shall be used by the **Owner** to appropriate a purchase order for the **Work Authorization**. Each executed **Work Authorization** shall become a part of this Agreement. Upon satisfactory completion of the **Work Authorization**, the **Engineer** shall submit the **Project's** deliverables as specified in the executed **Work Authorization** to the **Owner** for review and acceptance.

Work included in a **Work Authorization** shall not begin until the **Owner** and the **Engineer** have signed the **Work Authorization**. All work must be completed on or before the completion date specified in the **Work Authorization**, unless extended by written agreement by the **Engineer** and the **Owner**. The **Engineer** shall promptly notify the **Owner** of any event that will affect completion of the **Work Authorization**. All **Work Authorizations** must be executed and completed by both the **Engineer** and the **Owner** within the period established for this Agreement as specified in Article 3 hereof.

The final acceptance by the **Owner** of each **Work Authorization** for the **Project** shall serve as evidence of completion, on the part of the **Engineer**, of all services under this Agreement insofar as they pertain to that portion of work on the **Project** identified in the applicable work authorization.

**ARTICLE 8. Supplemental Agreements.** The terms of this Agreement may be amended by supplemental agreement if the **Owner** determines that (1) there is a need to extend the **Termination Date** identified in Article 3.1 hereof, (2) there has been a significant change in the scope, complexity or character of the services to be performed by the **Engineer**, and/or (3) for any other reason agreeable to the **Owner** and the **Engineer**. All supplemental agreements will be developed in the form identified in EXHIBIT "F" - *Supplemental Agreement Form*, attached hereto and made a part of this Agreement, and incorporated herein by reference as "Supplemental Agreement".

If determined appropriate by the **Owner**, additional compensation to the **Engineer** for (1), (2) and/or (3) above shall be paid as a negotiated lump sum fee at the **Contract Rates** specified in EXHIBIT "D", attached hereto. The negotiated lump sum fee shall be incorporated into the **Supplemental Agreement**.

Any **Supplemental Agreement** must be executed by both the **Engineer** and the **Owner** prior to the **Termination Date** specified in Article 3 hereof.

It is distinctly understood and agreed that no claim by the **Engineer** for additional work, as identified in Article 9 hereof, or changes or revisions in work, as identified in Article 10 hereof, shall be made by the **Engineer** until full execution of the **Supplemental Agreement** and authorization to proceed is granted by the **Owner**. The **Owner** reserves the right to withhold payment to the **Engineer** pending verification of satisfactory work performed by the **Engineer**.

**ARTICLE 9. Additional Work.** If the **Engineer** is of the opinion that any work it has been directed to perform is beyond the scope of this Agreement and constitutes extra work, the **Engineer** shall promptly notify the **Owner** in writing, in the event the **Owner** finds that such work

does constitute extra work, the **Owner** shall so advise the **Engineer** and a written supplemental agreement will be executed between the **Owner** and the **Engineer** as provided herein. The **Engineer** shall not perform any proposed additional work or incur any additional cost prior to the execution by both the **Engineer** and the **Owner** of a supplemental agreement. Additional compensation from the **Owner** to the **Engineer** shall be paid as a negotiated lump sum fee at the Contract Rates specified in **EXHIBIT "D"** attached hereto. The negotiated lump sum fee shall be incorporated into the supplemental agreement as specified in Article 8 hereof. The **Owner** shall not be liable or under any obligation to compensate the **Engineer** for work performed or costs incurred by the **Engineer** relating to additional work not directly associated with the performance of the work authorized in this Agreement or as amended through supplemental agreement.

**ARTICLE 10. Changes or Revisions in Work.** If the **Owner** finds it necessary to request changes to the work, and the changes are within the applications of sound engineering principles, the **Engineer** shall make such revisions if requested and directed by the **Owner**.

**10.1 Preliminary Work.** The **Engineer** will make, without expense to the **Owner**, such revisions of any preliminary reports or drawings as may be required to meet the needs of the **Owner** and the applications of sound engineering principles.

**10.2 Previously Approved or Satisfactorily Completed Work.** If the **Owner** funds it necessary to request the **Engineer** to make changes to work previously approved by the **Owner** or work satisfactorily completed for which the **Owner** approves or, after a definite plan has been approved by the **Owner**, if a decision is subsequently made by the **Owner**, which for proper execution involves extra services and expenses for changes in or additions to the drawings specifications or other documents, this will be considered as additional work, and compensation from the **Owner** to the **Engineer** will be in accordance with Article 9 hereof.

**10.3 Project Delays.** If the **Engineer** is required to perform additional work due to delays by the imposition of causes not within the **Engineer's** control, such as by the re-advertisement of bids or by the delinquency or insolvency of contractors, such work associated

**11.1 Ownership of Documents.** Original drawings and specifications are the property of the **Engineer** however the **Project** is the property of the **Owner**, and the **Engineer** may not use the drawings and specifications thereof for any purpose not relating to the **Project** with the **Owner's** consent. The **Owner** shall be furnished with such reproductions of drawings and specifications as the **Owner** may reasonably require. Upon completion of the work or any earlier termination of this Agreement under Article 3.4 hereof, the **Engineer** will revise drawings to reflect changes made during construction and will promptly furnish the **Owner** with one complete set of reproducible record prints. Prints shall be furnished by the **Engineer**, as an additional service, at any other time requested by **Owner**. All such reproductions shall be the property of the **Owner** who may use them without the **Engineer's** permission for any proper purpose relating to the **Project**, including but not limited to additions to or completion of the **Project**. Any additions or

#### **ARTICLE 11. Ownership and Release of Documents.**

**10.4 Reduction of Project Cost.** Notwithstanding any provision herein to the contrary, in the event it is necessary for the **Owner** to require changes in the final plan of the **Project** to enable it to reduce the construction cost of the **Project** to an amount within the sum estimated by the **Engineer**, the **Engineer** will be required to make such revisions or changes. These changes will only be considered additional work by the **Engineer**, if the **Engineer** previously provided these same changes as options to the **Owner** at the stage of preliminary work or prior to the approval of the final plan for the **Project**, and the option or options were not selected or approved by the **Owner** to be incorporated into the final plan of the **Project**. Payment for this additional work will then be made to the **Engineer** in accordance with Article 9 hereof. If the **Engineer** failed to provide these changes as an option or options to the **Owner** at the stage of preliminary work or prior to the approval of the final plan of the **Project**, these changes will not be considered additional work and no additional compensation will be made to the **Engineer**.

with these delays shall be considered additional work, and the **Engineer** shall be compensated by the **Owner** for such extra services and expense in accordance with Article 9 hereof.

revisions by the **Owner** to a drawing signed, sealed, and dated by a registered professional engineer, shall be made in accordance with the Texas Engineering practice Act and the Rules of the State Board of Registration for Professional Engineers.

All documents furnished to the **Engineer** by the **Owner** shall be delivered to the **Owner** upon completion or termination of this Agreement. The **Engineer**, at the **Engineer's** own expense, may retain copies of such documents or any other data under this Agreement.

**11.2 Release of Documents or Information.** Release of information to the public or others regarding the **Project** will be accordance with the Texas Public Information Act.

**ARTICLE 12 Discounts, Rebates, Refunds.** In connection with procurement services rendered by the **Engineer**, if procurement services are required of the **Engineer** hereunder, all discounts, rebates and refunds shall accrue to the **Owner**. For some purchases, the **Engineer** may deem that payment within the discount period is not safe; and/or inspection, guarantees, or other considerations may dictate delay. In such cases, the **Engineer** shall promptly notify the **Owner** so that a course of action may be mutually agreed upon by the **Owner** and the **Engineer**.

**ARTICLE 13. Records, Accounting, Inspection.** The **Engineer** shall keep full and detailed records and accounts in a manner approved by the **Owner**. The **Engineer** shall afford the **Owner's** authorized personnel and independent auditors, if any, full access to the work performed by the **Engineer** regarding the **Project** and to all of the **Engineer's** books, records, correspondence, instructions, drawings, receipts, vouchers and other documents relating to such work under this Agreement and the **Engineer** shall preserve all such records for three (3) years after final payment. The **Engineer** shall deliver to the **Owner** upon completion of such work, a statement of the cost of such work detailed according to the accounting procedure and requirements of the **Owner**.

**ARTICLE 14. Subcontracting and Assignment.** The **Engineer** shall not assign, subcontract or transfer the **Engineer's** interest in this Agreement without the prior written consent of the **Owner**. The **Engineer** shall bind every subconsultant by written subcontract to observe all

the terms of this Agreement to the extent that they may be applicable to each subconsultant. No subcontract relieves the **Engineer** of any responsibilities under this Agreement.

The **Engineer**, and the **Owner**, do hereby bind themselves, their successors, executors, administrators and assigns to each other party of this Agreement and to the successors, executors, administrators, and assigns of such other party in respect to all covenants of this contract.

#### **ARTICLE 15. Patents.** The **Engineer** shall indemnify and save the **Owner** harmless from

all liability for alleged or actual infringement of any patent resulting from the use of apparatus or equipment furnished or designed by the **Engineer** or from the use of any process designed by the **Engineer** or effected by said apparatus or equipment, and the **Engineer** shall indemnify and save the **Owner** harmless from and against all costs, legal fees, expenses and liabilities incurred in or about any claim of or action for such infringement; provided, however, that the **Owner** shall promptly transmit to the **Engineer** all papers served on the **Owner** in any suit involving such claim of infringement, and provided further, that the **Owner** permits the **Engineer** to have entire charge and control of the defense of any such suit. If because of actual infringement the use of such apparatus, equipment, or process is enjoined, the **Engineer** shall refund the purchase price thereof in proportion to the length of service uncompleted, the life of such apparatus or equipment being assumed as five years. The **Engineer** hereby grants to the **Owner** a non-exclusive, royalty-free license under patents now or hereafter owned by the **Engineer** covering any machines, apparatus, processes, articles, or products included in the **Engineer's** work hereunder.

#### **ARTICLE 16. Confidential Information, Inventions and Other Restrictions.**

**16.1 Confidential Information.** The **Engineer** shall not use in any way, commercial or otherwise, except to the extent required by the proper performance of this Agreement, and shall hold in confidence and not disclose to any person, for any reason or at any time, any information relating to the secret processes, products, compositions, machinery, apparatus or trade secrets of the **Owner**, or any other confidential information given to the **Engineer** by any of the **Owner's**

**16.2 Inventions.** The **Engineer** shall communicate to the **Owner** at once, and require the **Engineer's** employees assigned to this **Project** to communicate to the **Owner** all inventions and improvements which any of the **Engineer's** employees, either alone or in conjunction with any of the **Owner's** employees may conceive, make or discover during the course of or as a result of work on this **Project** under this or any ensuing agreement with the **Owner** that relates to the processes, products, compositions, machinery or plants of the **Owner**, or relating in any way to any of the operations in which the **Owner** may be obligated to pay to the **Engineer** as compensation for services rendered by the **Engineer** under contract with the **Owner**. The **Engineer** shall require its employees to execute patent applications and assignments thereof to the **Owner** or its nominees, and powers of attorney relating thereto for any country the **Owner** may designate, and shall take all other actions as the **Owner** may request to maintain and protect such

agreements satisfactory to the **Owner**, effectuating the purposes of this Article.

restrictions by all of its officers, employees, and agents, obtaining from them if necessary, reasonable precautions and exert all reasonable efforts to assure conformance with such of its employees who receive such information of these restrictions and the **Engineer** shall take all the **Owner** if necessary to perform the work hereunder. The **Engineer** shall, however, inform each such work. Such information may, of course, be disclosed to the proper officials or employees of as well as to any information and ideas originated or developed by the **Engineer** in performing these provisions. All the foregoing stipulations shall apply to such information and work hereunder become available to the **Engineer** from a source other than the **Owner**, shall not be subject to disclosure to the **Engineer** by the **Owner** or which is or shall lawfully be published or become part of general knowledge from sources other than the **Engineer** or which otherwise shall lawfully that any technical information which was lawfully in the **Engineer's** possession prior to such public shall be considered secret and confidential for the foregoing purposes; provided, however, during the term of or as a result of this Agreement. Any information not generally available to the commissioners, elected officials, employees, or representatives or acquired by the **Engineer**

inventions and improvements. The **Owner** shall pay all costs or charges incurred in protecting such inventions and improvements if the **Owner** desires to protect them. Before assigning any of the **Engineer's** employees to work under any contract with the **Owner** concerning this **Project**, the **Engineer** shall obtain from them agreements satisfactory to **Owner** complying in all respects with the terms and provisions of this Article.

**16.3** The rights and obligations set forth in Article 16 shall survive the performance of this Agreement, or any termination, discharge or cancellation thereof

#### **ARTICLE 17. Engineer's Seal, Responsibility and Warranties.**

**17.1 Engineer's Seal.** The **Engineer** shall assign a responsible engineer or engineers licensed to practice in the State of Texas, who shall sign, seal and date all appropriate engineering submissions to the **Owner** in accordance with the Texas Engineering Practice Act and the Rules of the State Board of Registration for Professional Engineers.

**17.2 Engineer's Responsibility.** The **Engineer** shall be responsible for the accuracy of the work for the **Project** and shall promptly make necessary revisions or corrections resulting from errors, omissions, or negligent acts by the **Engineer**. No additional compensation will be made to the **Engineer** for any necessary revisions or corrections resulting from errors, omissions, or negligent acts by the **Engineer**.

The **Engineer's** responsibility for all questions arising from design errors and/or omissions will be determined by the **Owner** or a designee appointed by the **Owner**. The **Engineer** will not be relieved of the responsibility for subsequent correction of any such errors or omissions or for clarification of any ambiguities until after the construction phase of the **Project** has been completed.

#### **17.3 Warranties.**

(a) The **Engineer** warrants that engineering design work performed by the **Engineer** hereunder shall be in accordance with sound engineering design practices and in conformance with applicable code and standards established for such work.

(d) The **Engineer** represents, covenants and agrees that the **Engineer's** special talent, training and experience cause the **Engineer** to be the prime professional on the **Project**; that because of such talent and training, the **Engineer** envisions the construction of the **Project** in

construction of **Project**.

(c) The **Engineer** represents, covenants and agrees that all of **Engineer's** services to be furnished by the **Engineer** under or pursuant to this Agreement form the inception of the Agreement until the **Project** has been fully completed, shall be of the standard and quality which prevail among engineers of similar experience, knowledge, skill and ability engaged in engineering practice throughout Texas under the same or similar circumstances involving the design and

impediments of any kind that will limit or prevent performance of the **Engineer's** services.

**Engineer** represents covenants and agrees that there are no obligations, commitments or conform to all applicable governmental regulations, statutes and ordinances then in effect. The **Owner** that the **PS&E** for the **Project**, and the improvements when built in accordance therewith, **Project**, prior to the commencement of construction, the **Engineer** shall certify in writing to the **EXHIBIT "B"**, attached hereto, as part of the services to be provided by the **Engineer** for the (hereinafter referred to as "**PS&E**") are identified in this Agreement under Article 2 hereof or other body having jurisdiction. If the development of plans, specifications and estimates state, county and municipal laws, regulations, codes, ordinances, orders and with those of any accordance with all professional standards, and in compliance with all applicable national, federal, interests of the **Owner** in accordance with the **Owner's** requirements and procedures, in **Engineer's** best efforts, skill, judgement and abilities to design the **Project** and to further the between it and the **Owner** by this Agreement. The **Engineer** covenants with the **Owner** to use the services hereunder. The **Engineer** accepts the relationship of trust and confidence established in reliance on the **Engineer's** experience and abilities with respect to performing the **Engineer's** **Owner** and the **Engineer** agree and acknowledge that the **Owner** is entering into this Agreement notwithstanding anything to the contrary contained in this Agreement, the

its entirely and possesses the special skills which enable the **Engineer** to recognize dangerous conditions that a reasonable, prudent engineer having such special skills could anticipate may arise from the proper use of the **Project** after acceptance by **Owner**; and that the **Engineer** recognizes that any commissioners, elected officials, employees and agents of the **Owner**, plus residents and owners of property within the area affected by the **Project** are within a class of foreseeable persons who will be relying on the project being designed in a professional and safe manner.

(e) If the development of **PS&E** is identified in this Agreement under Article 2 hereof or **EXHIBIT "B"**, attached hereto, as part of the services to be provided by the **Engineer** for the **Project**, the **Engineer** represents, covenants and agrees that the **PS&E** of the **Project** will be accurate and free from any material errors. The **Engineer** additionally represents, covenants and agrees to the following: that the design of the **Project** will conform to its foreseeable use as a **Project** with all the amenities as set forth in any **PS&E** developed by the **Engineer** for the **Project**; that the result of such **PS&E**, if built in accordance therewith, will be suitable for purposes for which the **Project** is designed; and the **Project** will be inspected in a workmanlike, professional manner and will be suitable for the **Project's** intended purpose. The **Engineer's** responsibilities as set forth herein shall at no time be in any way diminished by reason of any approval by the **Owner** of any **PS&E** developed by the **Engineer** for the **Project**, nor shall the **Engineer** be released from any liability by reason of such approval by the **Owner**, it being understood that the **Owner** at all times is ultimately relying upon the **Engineer's** skill and knowledge in preparing such **PS&E**.

(f) In connection with the **Engineer's** performance of procurement services hereunder, if any, the **Engineer** use its best efforts to obtain from all vendors of equipment and materials, fullest possible warranties against defective materials and workmanship for the benefit of the **Owner**.

**ARTICLE 18. Engineer's Resources.** The **Engineer** shall furnish and maintain, at the **Engineer's** own expense, office space for the performance of all services, skilled and sufficient

personnel, as well as adequate and sufficient equipment to perform the services as required under this Agreement.

**18.1 Project Manager.** The **Engineer** shall provide a manager (**Project Manager**) for the **Project** that is a registered professional engineer in the State of Texas. The **Project manager** shall have such knowledge and experience as will enable that **Project Manager** during the course of the **Project** without prior consent of the **Owner**. If, due to situations beyond the control of the **Engineer**, the **Engineer** must change the **Project Manager** prior to the completion and acceptance of the **Project**, the **Engineer** will submit a request to change the **Project Manager** to the **Owner** for approval.

**18.2 Employees of the Engineer.** All employees of the **Engineer** shall have such knowledge and experience as will enable them to perform the duties assigned to them and required for the services under this Agreement. Any employee of the **Engineer** who, in the opinion of the **Owner**, is incompetent, or whose conduct becomes detrimental to the work required under this Agreement, shall immediately be removed from association with the **Project** when so instructed by the **Owner**. The **Engineer** certifies that the **Engineer** presently has employed sufficient and qualified personnel, and will maintain sufficient and qualified personnel for performance of the services under this Agreement.

**18.3 Documents/Information Exchange** The purpose of this Article is to define the required automated resources, format for graphics files, and information exchange pertaining to the **Project**. Taking into consideration that the **Owner** has a significant investment in the development of the **Project**, there is a need for the **Engineer** to provide consistency in document development for information exchange. Consistency in document development for information exchange and production will help facilitate an economically efficient **Project**. Therefore, the **Engineer** shall provide the **Owner** with documents and information in accordance with the special requirement outlined in **EXHIBIT "B"** attached hereto.

**ARTICLE 19. Indemnification.** To the fullest extent permitted by applicable law, the **Engineer** and its agents, partners, subcontractors, and consultants (collectively "**Indemnitors**") shall and do agree to indemnify, and hold harmless the **Owner**, the **Owner's** respective directors, elected officials, employees and agents (collectively "**Indemnitees**") from and against all claims, damages, losses, liens, causes of action, suits, judgments and expenses, including attorney fees, of any nature, kind or description (collectively "**Liabilities**") of any person or entity whomsoever arising out of, caused by or resulting from the negligent performance of the **Engineer's** services through activities of the **Engineer**, its agents, partners, subcontractors and/or consultants performed under this Agreement, and which are caused by or result from error, omission, or negligent act of the **Engineer** or of any person employed or contracted by the **Engineer** provided that any such **Liabilities** (1) are attributable to bodily injury, personal injury, sickness, disease or death of any person, or to the injury to or destruction of tangible personal property including the loss of use and consequential damages resulting there from and (2) are caused in whole or in part by any negligent act or omission of the **Engineer**, anyone directly or indirectly employed by the **Engineer** or anyone for whose acts the **Engineer** may be legally liable. The **Engineer** shall also save harmless the **Owner** from any and all expense, including but not limited to, attorney fees which may be incurred by the **Owner** in litigation or otherwise resisting said claim or liabilities which may be imposed on the **Owner** as a result of such activities by the **Engineer**, its agents partners, subcontractors and/or consultants. In this connection, it is agreed and understood that the **Engineer** shall not be responsible for any portion of the liability proximately caused by the **Owner's** negligence.

**ARTICLE 20. Joint and Several Liability.** In the event more than one of the **Indemnitors** are connected with an accident or occurrence covered by the indemnification in Article 19 hereof, then each of such **Indemnitors** shall be jointly and severally responsible to the **Indemnitees** for indemnification and the ultimate responsibility among such **Indemnitors** for the loss and expense of any such indemnification shall be settled by separate proceedings and without jeopardy to any

**Indemnitee.** The provisions of this Article shall not be construed to eliminate or reduce any other indemnification or right which the **Owner** or any of the **Indemnitees** has by law.

**ARTICLE 21. Insurance.** The **Engineer** shall obtain and maintain insurance in the limits of liability for each of the types of insurance coverage identified as follows.

- (1) **Workers' Compensation**, endorsed with a waiver of subrogation in favor of the **Owner** in accordance with the statutory obligations imposed by Workers' Compensation or Occupational Disease laws under the Texas Workers' Compensation Law ("Statutory Texas")
- (2) **Commercial General Liability**, endorsed with the **Owner** as an additional insured and endorsed with a waiver of subrogation in favor of the **Owner all to the extent of the liabilities assumed by the Engineer under Article 19 and Article 20** herein, in limits of liability not less than one million dollars (\$1,000,000) combined single limit each occurrence and in the aggregate for bodily injury and property damage.

- (3) **Texas Business Automobile Policy**, endorsed with the **Owner** as an additional insured and endorsed with a waiver of subrogation in favor of the **Owner all to the extent of the liabilities assumed by the Engineer under Article 19 and Article 20** herein, in limits of liability not less than two hundred fifty thousand dollars (\$250,000) each person for bodily injury, five hundred thousand dollars (\$500,000) each occurrence for bodily injury, and one hundred thousand dollars (\$100,000) each occurrence for property damage.
- (4) **Professional Liability** in limits of \$1,000,000 each claim and aggregate.

The **Engineer** covenants and agrees to maintain an insurance policy in the minimum limits of liability for each of the types of insurance coverage identified above. The **Engineer** shall furnish the **Owner** with a certificate of insurance (**Hidalgo County Certificate of Insurance**) showing the

said policy to be in full force and effect during the period of service, identified in Article 3 hereto, for this Agreement. The completed Hidalgo County Certificate of Insurance shall be attached hereto and identified as **EXHIBIT "G"**- *Hidalgo County Certificate of Insurance*. The **Engineer** will be considered in breach of contract should the **Engineer** fail to maintain an insurance policy in the minimum limits of liability and requirements identified above while performing services for and under this Agreement, and will be subject to default and termination of the Agreement as outlined in Article 3.4 hereto. Additionally, the **Engineer** covenants and agrees to use its best efforts to maintain an insurance policy in the minimum limits of liability and requirements identified above until one year following the date of the acceptance of the **Project** by **Owner**.

**ARTICLE 22. Compliance with Laws.** The **Engineer** shall comply with all applicable Federal, State and local laws, statutes, codes, ordinances, rules and regulations and the orders and decrees of any court, or administrative bodies or tribunals in any manner affecting the performance of this Agreement including, without limitation, worker's compensation laws, minimum and maximum salary and wage statutes and regulations and licensing laws and regulations. When required the **Engineer** shall furnish the **Owner** with satisfactory proof of its compliance therewith.

**ARTICLE 23. Non-collusion.** The **Engineer** warrants that the **Engineer** has not employed or retained any company or persons, other than a bona fide employee working solely for the **Engineer**, to solicit or secure this Agreement, and that the **Engineer** has not paid or agreed to pay any company, engineer or any other person or entity any fee, commission, percentage, brokerage fee, gifts or any other consideration contingent upon or resulting from the award or execution of this Agreement. For breach or violation of this warranty the **Owner** shall have the right to annul this Agreement without liability or, in the **Owner's** discretion, to deduct from the *Services Fee*, or otherwise recover, the full amount of each fee, commission, percentage, brokerage fee, gift or contingent fee.

**ARTICLE 24. Gratuities.** The **Owner** mandates that employees of the **Owner** shall not accept any benefits, gifts or favors from any person doing business or who reasonably speaking

may do business with the **Owner** under this Agreement; the only exceptions allowed are ordinary business meals. Any person doing business with or who may reasonably seeking to do business with the **Owner** under this Agreement may not make any offer of benefits, gifts or favors to **Owner** employees, except as mentioned herein above. Failure on the part of the **Engineer** to adhere to this provision may result in the termination of this Agreement.

**ARTICLE 25. Payment of Franchise Tax.** The **Engineer** hereby certifies that the **Engineer** is not delinquent in Texas franchise tax payments, or that the **Engineer** is exempt from, or not subject to, such as tax. A false statement concerning corporation's franchise tax status shall constitute grounds for termination of the Agreement at the sole option of the **Owner**.

**ARTICLE 26. Disputes.** The **Engineer** shall be responsible for the settlement of all contractual and administrative issues arising out of any procurement made by the **Engineer** in support of the services under this Agreement.

**ARTICLE 27. Severability.** In the event any one or more of the provisions contained in this Agreement shall for any reason, be held to be invalid, illegal, or unenforceable in any respect such invalidity, illegality or unenforceability shall not affect any other provision thereof and this Agreement shall be construed as if such invalid, illegal or unenforceable provision had never been contained herein .

**ARTICLE 28. Notices.** All notices to either party by the other required under this Agreement shall be personally delivered or mailed to such party at the following respective addresses:

OWNER

Hidalgo County  
1615 S. Clossner, Suite J  
Edinburg, Texas 78539

ENGINEER

L & G Consulting Engineers, Inc.  
2100 West Expywy 83  
Mercedes, Texas 78570

The Address may be changed by either party by written notice and notices mailed shall be effective upon mailing.

**ARTICLE 29. Miscellaneous Provisions.**

(a) This Agreement constitutes the entire Agreement between the **Engineer** and the **Owner** relating to the work herein described and supersedes any prior understanding or written or oral contracts between the parties respecting the subject matter defined herein. There are no previous or contemporary representations or warranties of the **Owner** or the **Engineer** not set forth herein.

(b) Except as specifically provided herein no modification, waiver, termination, rescission, discharge or cancellation of this Agreement or of any terms thereof shall be binding on the **Owner** unless in writing and executed by an officer or employee of the **Owner** specifically authorized to do so.

(c) No waiver of any provision of or a default under this Agreement shall affect the right of the **Owner** thereafter to enforce said provision or to exercise any right or remedy in the event of any other default whether or not similar.

(d) No modification, waiver, termination, discharge or cancellation of this Agreement or of any terms thereof shall impair the **Owner's** right with respect to any liabilities whether or not liquidated of the **Engineer** to the **Owner** theretofore accrued.

(e) All rights and remedies of the **Owner** specified in this Agreement are in addition to the **Owner's** other rights and remedies.

(f) The **Engineer** shall remain an independent contractor and shall have no power nor shall the **Engineer** represent that the **Engineer** has any power to bind the **Owner** or to assume or to create any obligation express or implied on behalf of the **Owner** except as specifically authorized in advance by the **Owner**.


(g) The Agreement shall be construed under the laws of the State of Texas and is performable in Hidalgo County, Texas.

(h) This Agreement may only be amended by a written document executed by the **Owner** and the **Engineer** as provided by Article 8 herein.

**ARTICLE 30. Signatory Warranty** The undersigned signatory or signatories for the

Engineer hereby represent and warrant that the signatory is an officer of the organization for which he or she has executed this Agreement and that he or she has full and complete authority to enter into this Agreement on behalf of the Engineer. The above-stated representations and warranties are made for the purpose of inducing the Owner to enter into this Agreement.

WITNESS WHEREOF, the Engineer and the Owner have caused this Agreement for Professional Services to be effective as of the \_\_\_\_\_ day of \_\_\_\_\_, 2013.

ENGINEER:  
L & G CONSULTING ENGINEERS INC.  
d/b/a L & G ENGINEERING  
BY:   
Jacinto Garza, P.E./President

OWNER:  
HIDALGO COUNTY

BY: \_\_\_\_\_  
Ramon Garcia, County Judge

ATTEST:

\_\_\_\_\_  
Arturo Guajardo, Jr., County Clerk

Approved on Commissioners' Court:

APPROVED AS TO FORM:

Atlas & Hall, L.L.P.

By: \_\_\_\_\_

EXHIBITS: LOCATION MAP

EXHIBIT A –Scope of Services to be provided by the Owner

EXHIBIT B –Scope of Services to be provided by the Engineer

EXHIBIT C –Work Schedule

EXHIBIT D –Contract Rates

EXHIBIT D1 – Estimated Project Fee Schedule

EXHIBIT D2 – Estimated Man-hour Breakdown (to be provided in Work Authorization)

EXHIBIT E – "Sample" Work Authorization Form

EXHIBIT F – "Sample" Supplemental Agreement Form

EXHIBIT G –Certificate of Insurance (*Hidalgo County*)



**EXHIBIT "A"**  
**SERVICES TO BE PROVIDED BY THE OWNER**

1. The COUNTY will issue work authorization to initiate all required services and designate the authorized representative of the coordination of each work authorization.
2. The COUNTY will provide copies of all subdivision plats of record and/or in the subdivision process.
3. The COUNTY will provide the ENGINEER with on-going guidance, timely reviews, and decisions necessary to complete services required by the work authorization in order to permit the ENGINEER to maintain an agreed upon project schedule.
4. The COUNTY will process all acceptable requests for payment in a timely manner.

**GENERAL INSTRUCTIONS**

ENGINEER shall mean L&G Engineering.

STATE shall mean Texas Department of Transportation.

COUNTY shall mean the Hidalgo County.

The services designated herein as "Services provided by the ENGINEER" shall include the performance of all engineering services for the following described facility:

|                      |                                                                                                      |
|----------------------|------------------------------------------------------------------------------------------------------|
| COUNTY/CITY:         | HIDALGO COUNTY                                                                                       |
| CONTROL:             |                                                                                                      |
| PROJECT/DESCRIPTION: | Environmental Assessment, Public Involvement, Schematic and Hydrologic Design for the MILE 3 PROJECT |
| LENGTH:              | 6 MILES                                                                                              |
| HIGHWAY:             | MILE 3 PROJECT                                                                                       |
| LIMITS:              | from FM 2221 TO FM 492                                                                               |
| EXISTING FACILITY    |                                                                                                      |

PROJECT CLASSIFICATION

(Place an "X" in only one Project Classification)

|                                                             |              |
|-------------------------------------------------------------|--------------|
| Surface Treatment                                           | _____        |
| Overlay                                                     | _____        |
| Rehabilitation Existing Road (Scarify & Reshape)            | _____        |
| Convert Non-Freeway to Freeway                              | _____        |
| Widen Freeway                                               | _____        |
| Widen Non-Freeway                                           | <u>  X  </u> |
| New Location Toll Freeway                                   | _____        |
| New Location Non-Freeway                                    | <u>  X  </u> |
| Interchange (New or Reconstruct)                            | _____        |
| Bridge Widening or Rehabilitation                           | _____        |
| Bridge Replacement                                          | _____        |
| Upgrade to Standards - Freeway                              | _____        |
| Upgrade to Standards - Non-Freeway                          | _____        |
| Miscellaneous Studies (Use Function Code 110 for All Tasks) | _____        |

NOTES

**ROUTE AND DESIGN STUDIES**  
(Function Code 110)

Services  
Provided By:  
ENGINEER COUNTY

|    |                                                                                 |       |       |
|----|---------------------------------------------------------------------------------|-------|-------|
| 1. | Route Location Studies                                                          | _____ | _____ |
| 2. | Level of Service Analysis                                                       | _____ | _____ |
| 3. | Traffic Evaluations and Projections                                             | _____ | _____ |
| 4. | Develop Roadway Design Criteria                                                 | _____ | _____ |
| 5. | Preliminary Cost Estimates                                                      | _____ | _____ |
| 6. | Design Schematic<br>(See Section 7, page 7-1 for schematic layout requirements) | _____ | _____ |
| 7. | Preliminary Right-of-Way Requirements                                           | _____ | _____ |
| 8. | Design Concept Conference                                                       | _____ | _____ |
| 9. | Soil Core Hole Drilling                                                         | _____ | _____ |
| a. | Pavement (See Section 7, pages 7-3 thru 7-4 for requirements)                   | _____ | _____ |
| b. | Retaining Walls (See Section 10, page 10-1 thru 10-2 for requirements)          | _____ | _____ |
| c. | Miscellaneous Structures (See Section 10, page 10-4 for requirements)           | _____ | _____ |
| d. | Bridges (See Section 11, page 11-3 for requirements)                            | _____ | _____ |

**NOTES**  
**SOCIAL, ECONOMIC AND ENVIRONMENTAL STUDIES AND PUBLIC INVOLVEMENT**  
 (Function Code 120)

Services  
 Provided By:  
**ENGINEER COUNTY**

|                                                                                                                                                                                                                                                                                                                                                                   |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| 1. Environmental Reports                                                                                                                                                                                                                                                                                                                                          |  |  |  |
| All Environmental Reports shall be in accordance with 43 Texas Administrative Code (TAC) 2.40-2.51, Code of Federal Regulations, Title 23, Part 771 and Highway Design Operations and Procedures Manual, Part II-B.                                                                                                                                               |  |  |  |
| a. Environmental Assessments                                                                                                                                                                                                                                                                                                                                      |  |  |  |
| (1) An Environmental Assessment shall be prepared, anticipating a Categorical Exclusion.                                                                                                                                                                                                                                                                          |  |  |  |
| (2) An Environmental Assessment shall be prepared, anticipating a Finding of No Significant Impact.                                                                                                                                                                                                                                                               |  |  |  |
| (3) An Environmental Assessment shall be prepared, anticipating the need for a Draft Environmental Impact Statement.                                                                                                                                                                                                                                              |  |  |  |
| b. Environmental Impact Statement                                                                                                                                                                                                                                                                                                                                 |  |  |  |
| (1) A Draft Environmental Impact Statement shall be prepared. After appropriate interagency and public reviews within time limits prescribed by the Code of Federal Regulations, Title 23, Part 771 and 43 Texas Administrative Code 2.40-2.51, a Final Environmental Impact Statement shall be prepared.                                                         |  |  |  |
| (2) A Section 4(f) Statement of Department of Transportation Act) shall be provided by the ENGINEER. The format and content of the statement is found in FHWA Technical Advisory T6640.8A.                                                                                                                                                                        |  |  |  |
| 2. Public Involvement                                                                                                                                                                                                                                                                                                                                             |  |  |  |
| All public involvement procedures shall be in accordance with 43 Texas Administrative Code (TAC) 2.40-2.51, Code of Federal Regulations Title 23, Part 771 and Highway Design Operations and Procedures Manual, Part II-B.                                                                                                                                        |  |  |  |
| a. A public involvement meeting(s)/hearing(s) shall be scheduled, coordinated and conducted.*                                                                                                                                                                                                                                                                     |  |  |  |
| b. Technical assistance, meeting(s)/hearing(s) preparation, maintenance of contracts lists, minutes of meeting(s), exhibit preparation, and other tasks outlined by the COUNTY, shall be provided.                                                                                                                                                                |  |  |  |
| 3. Cultural Resources                                                                                                                                                                                                                                                                                                                                             |  |  |  |
| Formal consultation with the State Historic Preservation Office (SHPO) and the Texas Historical Commission (THC) will be conducted by the COUNTY.                                                                                                                                                                                                                 |  |  |  |
| a. Historic Structure Studies                                                                                                                                                                                                                                                                                                                                     |  |  |  |
| A records search and reconnaissance survey shall be performed, and documentation prepared regarding identification efforts, National Register eligibility and potential impacts to historic properties in accordance with the state's historic structure requirements.                                                                                            |  |  |  |
| b. Archaeological Studies                                                                                                                                                                                                                                                                                                                                         |  |  |  |
| (1) Files searches shall be conducted to determine if known archaeological sites are present; to identify whether these sites have been listed or determined eligible for the National Register of Historic Places or have been designated State Archaeological Landmarks; and to identify the need (if any) to perform additional archaeological investigations. |  |  |  |
| (2) Archaeological reconnaissance will be performed under a Texas Antiquities Permit (13 TAC 26) signed for the Sponsor by a professional archaeologist with the STATE.                                                                                                                                                                                           |  |  |  |
| (3) Archaeological survey shall be performed under a Texas Antiquities Permit (13 TAC 26) signed for the Sponsor by a professional archaeologist with the STATE.                                                                                                                                                                                                  |  |  |  |

Services  
 Provided By:  
 ENGINEER COUNTY

4. Noise and Air Quality Analyses
  - a. Noise Analysis  
 A noise analysis shall be prepared, including predicted noise levels and the consideration and evaluation of noise mitigation, in accordance with the STATE'S Noise Guidelines. The noise analysis or a summary of the noise analysis shall be included in the environmental document for the project.
  - b. Air Quality Analysis  
 An air quality analysis shall be prepared in accordance with the STATE'S Air Quality Guidelines. The air quality analysis or a summary of the air quality shall be included in the environmental document for the project.
5. Ecological Investigations  
 A wetland survey and if necessary, a wetland delineation shall be conducted and a "wetland finding" shall be provided if necessary. As part of the environmental phase of the project, the consultant should notify the District if it is believed that a Section 404 or Section 9 permit is required, and provide the technical data to the District for application to the U.S. Army Corps of Engineers and/or the U.S. Coast Guard.  
 A determination should be made if there are potential federally listed endangered or threatened species that could be impacted. The District will be notified as soon as possible that Section 7 or 10 consultations may be required. Supporting data will be furnished to the district when consultation with the U.S. Fish and Wildlife Service is undertaken.
6. Hazardous Materials  
 The consultant shall perform an Environmental Site Assessment for hazardous materials impact in accordance with the American Society for Testing and Materials (ASTM) 1528.93 (Transaction Screen Process).
7. General Guidelines for Preparation of Environmental Documents
  - a. The Biological Impact Evaluation Report will be prepared and submitted electronically to TxDOT.
  - b. All cultural resource reports (i.e. Archaeological and Historical Project Coordination Requests (PCRs), background and reconnaissance surveys) will be submitted electronically to TxDOT.
  - c. The draft administratively complete document will be submitted to TxDOT electronically through their FTP site.
  - d. The administratively complete document will be prepared in accordance with the content and format of FHWA Technical Advisory T6640.8A and the TxDOT Administrative Code 43 TAC §2.44.
  - e. The administratively complete document will be submitted to TxDOT electronically through their FTP site.
  - f. Upon completion and approval of the administratively and technically complete document, the Engineer will provide one (1) hard copy to the Client, one (1) hardcopy to the district, and (3) hardcopies to TxDOT ENV.
  - g. Exhibits in the environmental document shall be color copies and text shall be black and white.

**RIGHT-OF-WAY DATA**  
(Function Code 130)

Services  
Provided By:  
SURVEYOR COUNTY

**NOTE:** No work involving right-of-way (ROW) data is to be performed until the COUNTY has given the ENGINEER written approval of the final location of the proposed ROW lines as approved by TXDOT.

**A. RIGHT-OF-WAY MAPPING:**

**1. PURPOSE:**

The purpose of right-of-way mapping is to prepare documents suitable for the acquisition of real property interests and the probable issuance of a title policy.

**2. DEFINITIONS:**

For purposes of this Contract, the following definitions shall apply:

- 2.1. Abstract Map – A drawing to scale prepared from record documents depicting proposed right-of-way lines, existing right-of-way lines, easement lines, and private property lines with relevant grantee names, recording data, and recording dates.
- 2.2. Closure/Area Calculation Sheet – A computer generated print-out of the area and the perimeter bearings, distances, curve data, and coordinates of an individual parcel of land to be acquired.
- 2.3. Access Denial Line – A line which indicates specific location where access to the roadway is denied.
- 2.4. Property Descriptions – A written metes and bounds description delineating the area and the boundary and describing the location of an individual parcel of land unique to all other parcels of land.
- 2.5. Owner – The most current title holder of record as determined by a study of the Real Property Records.
- 2.6. Parcel Plat – An 8 ½ inch by 11 inch drawing to scale depicting all the information shown on the right-of-way map regarding an individual parcel of land to be acquired.
- 2.7. Parent Tract – A unit or contiguous units of land under one ownership, comprising a single marketable tract of land consistent with the principle of highest and best use. A parent tract may be described by a single instrument or several instruments. A single parent tract cannot be severed by a public right-of-way, easement, or separate ownership which destroys unity of use.
- 2.8. Parent Tract Inset – A small line drawing, to an appropriate scale, of the parent tract perimeter placed upon the right-of-way map in the proximity of the respective parcel. Parent tract insets are used in cases where the parent tract cannot be shown to the same scale as the right-of-way map. Since parent tract insets are used to identify the limits and location of parent tracts, they should include public right-of-ways, utility easements and fee strips, and identifiable water courses which bound the parent tract.
- 2.9. Point of Beginning (P.O.B.) – A corner of the parcel of land to be acquired, located on the proposed right-of-way line and being the beginning terminus of the first course of the property description.
- 2.10. Point of Commencing (P.O.C.) – A monumented property corner which can be identified in the Real Property Records and is located outside the proposed right-of-way corridor.

may be used.

monumented property corner located outside the proposed right-of-way corridor corner of the parent tract cannot be recovered, the nearest identifiable monumented back corner of the parent tract. In the event a monumented back corner of the parent tract cannot be recovered, the point of commencing should be a right-of-way corridor. For title purposes, the point of commencing should be a right-of-way corridor.

Services  
Provided By:  
SURVEYOR COUNTY

2.11. Preliminary Right-of-Way Layout/Abstract Map – A drawing to scale depicting proposed right-of-way lines, existing right-of-way lines, proposed pavement, access denial lines, the proposed centerline alignment, private property lines, easement lines, visible improvements, visible utilities, the station and offset from the centerline alignment to each Point of Curvature (PC), Point of Tangency (PT), and angle point in the proposed right-of-way lines and to each PC, PT, and angle point in the existing right-of-way lines in areas of no proposed acquisition. (Reference Sample on CD Attached)

2.12. Right-of-Way Maps/Property Description/Parcel Plats – A series of 22 inch by 34 inch and 11 inch by 17 inch drawings to scale depicting the results of relevant elements of records research, field work, analysis, computation, and map making required to determine title, delineate areas and boundaries, locate and describe utilities and improvements to the extent necessary to appraise the value and negotiate the acquisition of individual parcels of private land for a proposed right-of-way project. (Reference Sample on CD Attached)

### 3. WORK TO BE PERFORMED:

#### 3.1. Preliminary Right-of-Way Layout/Abstract Map:

An abstract map shall be prepared sufficient to determine the following:

- 3.1.1. Any and all interests of public record held in the land to be acquired.
- 3.1.2. The total record holdings of an owner contiguous to land to be acquired from that owner.
- 3.1.3. Any and all interests in land to be acquired held in common (shopping mall parking lots, subdivision reserves, etc.)
- 3.1.4. Any and all improvements proposed by other agencies which may have a bearing on project development.
- 3.1.5. All called monuments, bearings, and distances as per recorded information.

#### 3.2. Right-of-Way Map:

The SURVEYOR shall field locate property corners, existing right-of-way markers, improvements, visible utilities, verify and update the planimetric file, if provided, and as directed by the ENGINEER.

A right-of-way map shall be prepared for each proposed right-of-way project. A right-of-way map shall include a title sheet, an index sheet, a survey control index sheet, a horizontal and vertical control data sheet, and sufficient plan sheets to cover the proposed project, or as directed by the ENGINEER. The STATE has developed standard title sheets, index sheets, and plan sheets, copies of which the SURVEYOR shall request and secure for all purposes of this Contract. Plan sheets shall include, but need not be limited to, the following items of information.

By mutual agreement between the Texas Board of Professional Land Surveying and the TxDOT, right-of-way maps need not be signed and sealed by a Registered Professional Land Surveyor.

- 3.2.1. Proposed right-of-way lines shall be delineated with appropriate bearings, distances, and curve data. Curve data shall include the radius, delta angle, arc length, and long chord bearing and distance.
- 3.2.2. Existing right-of-way lines shall be delineated with appropriate bearings, distances, and curve data to the extent necessary to describe the individual parcels of land to be acquired. Curve data shall include the radius, delta angle, arc length, and long chord bearing and distance.

Services  
Provided By:  
SURVEYOR COUNTY

- 3.2.3. The proposed project baseline alignment shall be delineated with appropriate bearings, distances, and curve data. Curve data shall include the station of the curve Point of Intersection (PI), radius, delta angle, arc length, tangent length, long chord bearing and distance, and the N and E coordinates of the curve PI. All alignment PCs, PTs, and even 500 foot stations shall be labeled as to station.
- 3.2.4. Proposed paving lines combined with relevant existing paving lines shall be shown to the extent necessary to compile a complete picture of proposed traffic movements. Proposed paving on the final mylars submitted to the ENGINEER shall be shaded with a dot pattern or highlighted by some other means acceptable to the ENGINEER.
- 3.2.5. Access denial lines shall be shown sufficiently to indicate areas where access is to be denied and where access is to be permitted if required by the ENGINEER.
- 3.2.6. Private property lines shall be delineated with appropriate bearings, distances, and curve data to the extent necessary to describe the individual parcels of land to be acquired. Curve data shall include the radius, delta angle, arc length, and long chord bearing and distance.
- 3.2.7. Portion lines, subdivision lines and survey lines shall be shown and identified by name and Portion number.
- 3.2.8. County lines and city limit lines shall be located and identified by name.
- 3.2.9. A north arrow shall be shown on each sheet, and, if possible, located in the upper right corner of the sheet.
- 3.2.10. Monumentation set or found shall be shown and described as to material and size.
- 3.2.11. A station and offset shall be shown for each PC, PT, and angle point in the proposed right-of-way lines. Stations and offsets shall be with respect to the proposed centerline alignment.
- 3.2.12. Intersecting and adjoining public right-of-ways shall be shown and identified by name, right-of-way width, and recording data.
- 3.2.13. Railroads shall be shown and identified by name, right-of-way width, and recording data.
- 3.2.14. Utility corridors shall be identified as to easement or fee and recording information shall be identified.
- 3.2.15. Easements and fee strips shall be shown and identified by width, owner, distance of easement to a property corner of the parent track, and recording data.
- 3.2.16. Building lines or set-back lines shall be shown and identified.
- 3.2.17. Visible improvements located within the proposed right-of-way corridor or within 50 feet of a proposed right-of-way line shall be shown and identified.
- 3.2.18. Structures shall be identified as commercial or residential, by number of stories, and as to type (brick, wood frame, etc.).
- 3.2.19. Structures which are severed by a proposed right-of-way line shall be dimensioned to the extent necessary to completely delineate the severed parts.
- 3.2.20. Parking areas, billboards, and other on-premise signs which are severed by a proposed right-of-way line shall be dimensioned to the extent necessary to delineate that portion of the parking area, billboard, or sign which is located within the proposed right-of-way corridor.

Services  
Provided By:  
SURVEYOR COUNTY

- 3.2.21. In cases where structures are located outside the proposed right-of-way corridor and within 25 feet of a proposed right-of-way line, the shortest distance between the structure and the proposed right-of-way line shall be shown and field verified.
- 3.2.22. Visible utilities located within the proposed right-of-way corridor or within 50 feet of a proposed right-of-way line shall be shown and identified.
- 3.2.23. The location of underground utilities and fuel storage tanks situated within the proposed right-of-way corridor or within 50 feet of a proposed right-of-way line shall be determined and shown as required by the ENGINEER. The visible location of stand pipes, vents and filler caps in conjunction with available design and as-built drawings may be used to determine a most probable location and size in the event an actual location is indeterminable.
- 3.2.24. Points of commencing and points of beginning shall be shown and labeled. Points of beginning shall be shown with their respective N and E surface coordinates. As an exception, a point of commencing will not be required in the case of a total taking without a remainder.
- 3.2.25. Each parcel of land to be acquired shall be identified by a parcel number which shall appear in the ownership tabulation and on the right-of-way map in the proximity of the respective parcel. If the SURVEYOR is unfamiliar with the criteria used by the STATE to assign parcel numbers, he shall seek the assistance of the ENGINEER at the time the abstract map is complete. THE SURVEYOR SHALL SEEK ASSISTANCE FROM THE ENGINEER IN DEVELOPING AN OWNERSHIP TABULATION TABLE.
- 3.2.26. An ownership tabulation shall be shown which include the parcel number, existing area of the parent tract, lot(s) and block(s) constituting the parent tract when applicable, owner's name, type of conveyance, film code, county clerk's file number, taking area, and remaining area of the parent tract located left and/or right of the centerline alignment. Types of conveyance, film code and file numbers refer to conveyances into the STATE and will be added to the right-of-way map by the STATE at a later date. Several blank lines shall be provided in the tabulation block to facilitate future map additions.
- 3.2.27. A parent tract inset shall be shown for each parent tract which cannot be shown to scale on the right-of-way map. The use of broken scale lines should be avoided. When parent tract insets are used, the point of commencing with the appropriate bearing and distance to the point of beginning may be shown on the parent tract inset.
- 3.2.28. A note shall be included on the title sheet and each map sheet stating the source of bearings, coordinates, and datum used.
- 3.2.29. Appropriate notes shall be included on the title sheet and each map sheet stating the following:  
a. Month(s) and year abstracting upon which the map is based.  
b. Month(s) and year field surveys were conducted upon which the map is based.  
c. Month and year the map was completed by the SURVEYOR.
- 3.2.30. The right-of-way CSI number, if available, shall be shown on each right-of-way map sheet.

Services  
Provided By:  
SURVEYOR COUNTY

3.3. Exhibits:

An Exhibit shall be prepared for each parcel or tract consisting of a property description and a parcel plat.

3.3.1. Property Description:

A property description shall be prepared for each parcel of land to be acquired. Standard formats for property descriptions, copies of which the SURVEYOR shall request to the ENGINEER and secure for all purposes of this Contract. Property descriptions shall include, but need not be limited to, the following items of information.

All property descriptions shall be signed and sealed by a Registered Professional Land Surveyor. The property description shall begin with a general description which shall include as a minimum:

- a. State, County, and Survey within which the proposed parcel of land to be acquired is located.
- b. A reference to unrecorded and recorded subdivisions by name, lot, block, and recording data to the extent applicable.
- c. A reference by name to the grantor and grantee, date and recording data of the most current instrument(s) of conveyance describing the parent tract. Use execution dates in deed references as opposed to recording or filing dates. In any case, the property description shall make clear which date is being used.

The property description shall continue with a metes and bounds description which shall include as a minimum:

- d. A point of commencing.
  - e. A point of beginning with the appropriate N and E surface coordinates.
  - f. A series of courses, identified by number and proceeding in a clockwise direction, describing the perimeter of the parcel of land to be acquired, and delineated with appropriate bearings, distances, and curve data.
- Curve data shall include the radius, delta angle, arc length, and long chord bearing and distance. Each course shall be identified either as a proposed right-of-way line, and existing right-of-way line, or a property line of the parent tract. Each property line of the parent tract shall be described with an appropriate adjoiner call.
- g. A description of all monumentation set or found shall include, as a minimum, size and material.
  - h. A reference to the source of bearings, coordinates, and datum used.

3.3.2. Parcel Plat:

A parcel plat shall be prepared for each parcel of land to be acquired. The STATE has developed standard formats for parcel plats, copies of which the SURVEYOR shall request from the ENGINEER and secure for all purposes in this Contract. Parcel plats shall include each and every item of information shown on the right-of-way map which concerns the individual parcel. All parcel plats shall be signed and sealed by a Registered Professional Land Surveyor.

Services  
Provided By:  
SURVEYOR COUNTY

4. DELIVERABLES:

In preparing right-of-way maps, the following is an outline of the work to be submitted (records should be delivered in a binder):

- |      |                                                                                                                                                                                                          |       |       |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| 4.1. | An Abstract Map of the current record title holders included in the Preliminary Map showing the proposed schematic and existing right-of-way as per General Specifications.                              | _____ | _____ |
| 4.2. | A Right-of-Way map for the project limits under cover of Title Sheet, Index Sheet, Control Data Sheet, and Exhibits of the property descriptions and parcel plats as per General Specifications.         | _____ | _____ |
| 4.3. | Appropriate monuments on the proposed right-of-way lines at intersecting property lines, and at all PCs, PTs, angle points, intersecting right-of-way lines of side streets, and at 1,000 foot stations. | _____ | _____ |
| 4.4. | Appropriate monuments on the existing right-of-way lines in areas of no acquisition at all PCs, PTs, angle points, and 1,000 foot stations, and as directed by the ENGINEER.                             | _____ | _____ |
| 4.5. | A SURVEYOR'S report, outlining the approach, reasons or basis for the existing right-of-way determination, and conclusions made.                                                                         | _____ | _____ |
| 4.6. | Records used to establish ownership.                                                                                                                                                                     | _____ | _____ |
| 4.7. | ROW and parcel filed notes signed and sealed by a RPLS.                                                                                                                                                  | _____ | _____ |
| 4.8. | Computation sheets of survey closures, ground surveys, etc. used to develop plats and meets and bound information.                                                                                       | _____ | _____ |
| 4.9. | Items indicated under the Automation Requirements Section 6.                                                                                                                                             | _____ | _____ |
| 4.10 | Completed (Attached) Checklist with submittal of ROW Map etc.                                                                                                                                            | _____ | _____ |

5. GENERAL REQUIREMENTS:

For purposes of this Contract, the following general requirements shall apply:

- 5.1. Copies of instruments of record submitted to the ENGINEER shall be indexed by parcel number.
- 5.2. Coordinates appearing on right-of-way maps, on parcel plats, and in property descriptions shall be surface coordinates based on the Texas State Plane Coordinate System. The combined adjustment factors (sea level factor x scale factor) which have been developed by the STATE for its use are as follows:
- 5.2.1. In (List Applicable Counties): Counties (----- Zone), grid coordinates are multiplied by a combined adjustment factor of 1.000000 to obtain surface coordinates. For work in Counties other than those listed, the ENGINEER will provide the combine adjustment factor.
- 5.3. Line and curve tables may be used when necessary.
- 5.4. The number of centerline alignment stations to be shown on a single plan sheet shall be restricted to the extent necessary to allow approximately 4 inches between match lines and sheet borders for future details and notes.
- 5.5. A minimum 4 inch by 4 inch space shall be reserved at the bottom right corner of each map sheet for future revision notes.

Services  
Provided By:  
SURVEYOR COUNTY

6. **AUTOMATION REQUIREMENTS:**
- In addition to standard hard copy plots and mylar copies, the following will be required electronically:

- 6.1. Right-of-way maps and parcel plats shall be prepared using a *Micro Station* software graphics system capable of producing graphics files that can be plotted and viewed without further modification or conversion using the State's *Micro Station V8* graphics system.
- 6.2. It is the intent of the ENGINEER to secure graphics files which have elements of equal integrity, singularity, and attributes as elements prepared using the State's *Micro Station V8* graphics system.
- 6.3. For purposes of clarity, consistency, and ease of utilization, the SURVEYOR shall request and secure standards relevant to right-of-way mapping to the extent necessary to ensure that the needs of the ENGINEER are met. This includes, but may not be limited to, TxDOT seed file and corresponding units.def file, TxDOT font resource file, TxDOT GEOPAK SMD file, TxDOT DGNLIB, associated cell libraries and custom line styles, and other files as deemed appropriate for the project.
- 6.4. Graphics files furnished to the ENGINEER by the SURVEYOR shall be submitted on a Compact Disk CD, DVD or USB, in a format compatible with the STATE's computer system. The SURVEYOR shall confer with the ENGINEER regarding acceptable media and formats before making submissions. The SURVEYOR shall request and secure a Consultant File Index form provided by the ENGINEER, to be completed by the SURVEYOR, and to be submitted to the ENGINEER along with the graphics files.
- 6.5. Property descriptions shall be prepared using a computer word processing system capable of producing data files readable using *Microsoft Office Word Version 2007* word processing software.
- 6.6. Data files furnished to the ENGINEER by the SURVEYOR shall be submitted in ASCII format on a CD, DVD or USB.
- 6.7. Provide to the ENGINEER electronic copies of all instruments of record acquired pursuant to a work authorization.

7. **GENERAL SPECIFICATIONS:**

- For purposes of this Contract, the following general specifications for right-of-way mapping shall apply:
- 7.1. Completed right-of-way maps shall be submitted to the ENGINEER on single or double matte mylar, 22 inches by 34 inches in size with a 21 inch by 32 inch printed border positioned ½ inch from the top, bottom, and right edge of the sheet. Two copies on 11 inch by 17 inch paper will also be supplied to the ENGINEER.
  - 7.2. Parcel plats shall be submitted to the ENGINEER on 8 ½ inch by 11 inch bond paper with respective borders of 7 ½ inches by 10 inches, positioned ½ inch from the top, bottom, and right edge of the sheet. Match lines shall be used where more than one sheet is required.
  - 7.3. Right-of-way maps shall be drawn to a scale of 1 inch = 50 feet. An appropriate scale other than 1 inch = 50 feet may be used on some proposed right-of-way projects upon prior approval by the ENGINEER.

Services  
Provided By:  
SURVEYOR COUNTY

- 7.4. Since right-of-way maps are reduced in size by one-half for archiving purposes, the smallest size lettering acceptable on a right-of-way map shall be 1/10 of one inch (Leroy #100). A right-of-way map which contains any lettering smaller than 1/10 of one inch will not be accepted by the ENGINEER.
- 7.5. Parcel plats shall be drawn to a preferred scale of 1 inch = 50 feet. An appropriate scale other than 1 inch = 50 feet may be used on some proposed right-of-way projects upon prior approval by the ENGINEER. In the case of a very large parcel which would be difficult to show with clarity on a single 8 1/2 inch by 11 inch sheet, the SURVEYOR shall use multiple 8 1/2 inch by 11 inch sheets with matching lines.
- 7.6. The smallest size lettering acceptable on a parcel plat shall be 0.06 of an inch (Leroy #60).
- 7.7. Property descriptions shall be submitted on 8 1/2 inch by 11 inch bond paper.
- 7.8. The ENGINEER has encountered a number of mylar products which are considered unacceptable. The SURVEYOR shall confer with the ENGINEER regarding mylar products he intends to use which have not been previously used on State projects.
- 7.9. Zip-A-Tone or other similar stick-on products shall not be used on right-of-way maps or parcel plats.

## 8. ADHERENCE TO STANDARDS:

For purposes of clarity, consistency, and ease of understanding, the COUNTY, as an acquiring agency of private property for public use, has adopted the STATE standards and formats for right-of-way mapping which have proven to facilitate the processes of negotiation, appraisal, relocation assistance, and condemnation. It shall be the responsibility of the SURVEYOR to adhere to these standards and formats to every extent possible to ensure that the needs of the acquiring agency are met.

SAMPLES ATTACHED FC 130:

- PRELIMINARY Right-of-Way Layout / Abstract Map
- Right-of-Way Map, Field Notes, Parcel Sketches and Area Computation Sheets

ROW MAP CHECKLIST

Consultant:  
Contract/WA#  
Responsible Office:  
Project Manager:  
County:  
Highway:  
RCSJ:  
CCSJ:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

As the responsible consultant project manager, I hereby certify that the attached ROW Map has undergone a QA/QC review, with the following applicable items specifically checked for accuracy, completeness and constructability (as noted by Checkmarks)

Signature \_\_\_\_\_  
Date \_\_\_\_\_  
Printed Name \_\_\_\_\_

**MAP:**

General

\_\_\_\_ All documents have been proofread and are accurate.  
\_\_\_\_ Title Commitments for each individual parcel.  
\_\_\_\_ Graphics files compatible with Micro station and Word software are provided.  
\_\_\_\_ Photos of proposed ROW staking included.  
\_\_\_\_ Field notes and Parcel Plats are numbered continuous.  
\_\_\_\_ Scale shall be 1"=50' or 1"=100".

Title Sheet Requirements

\_\_\_\_ Title and description of project including county, limits, etc....  
\_\_\_\_ Vicinity map with beginning and ending station  
\_\_\_\_ Equations and Exceptions  
\_\_\_\_ Index  
\_\_\_\_ Legend  
\_\_\_\_ Title block completely filled out with Construction and R.O.W. CSJs?  
\_\_\_\_ List all Major Utilities from Station to Station

Individual Map Sheet Requirements

\_\_\_\_ Sheet size 34" X 22"  
\_\_\_\_ Text legible when reduced to half-scale.  
\_\_\_\_ Title block completely filled out with R.O.W. CSJ  
\_\_\_\_ Matchlines  
\_\_\_\_ Project layout sheet  
\_\_\_\_ Existing utility lines and easements, deed reference, as shown on Schedule "B" of the Title Commitment, and defined on parcel plats  
\_\_\_\_ Existing information:  
\_\_\_\_ R.O.W. lines  
\_\_\_\_ Whole property or whole property inset  
\_\_\_\_ Roadways  
\_\_\_\_ Survey, county, and city limit lines shown and labeled  
\_\_\_\_ Improvements shown and labeled (*see below*)  
\_\_\_\_ Monumentation i.e. P.C., P.T., Break Points  
\_\_\_\_ North arrow  
\_\_\_\_ Scale  
\_\_\_\_ Property lines

**(This Checklist must be signed by the RPLS and turned in with all proposed ROW Projects.**

|                                                                                                                                                                             |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| Property descriptions i.e., lot, block, tract, subdivision, etc...                                                                                                          | _____ |
| Identify existing and proposed access denial locations (if applicable)                                                                                                      | _____ |
| <b>Proposed Information:</b>                                                                                                                                                |       |
| #5- 2-ft Iron road set monumentation i.e. P.C., P.T., Break Points and 1000' stations at proposed ROW lines and where existing ROW line is the proposed ROW.                | _____ |
| Survey and R.O.W. lines                                                                                                                                                     | _____ |
| Basis of bearings                                                                                                                                                           | _____ |
| Parcel bearings and distances correspond with traverse sheet                                                                                                                | _____ |
| Outside ties (P.O.C.) corresponds with field notes                                                                                                                          | _____ |
| Point of beginning (P.O.B.) established on proposed R.O.W. line                                                                                                             | _____ |
| Parcel tied to baseline                                                                                                                                                     | _____ |
| Baseline information shown i.e. Stationing, bearings, curve data, etc...                                                                                                    | _____ |
| Conveyance information shown in tables i.e. parcel number, grantors name, amount of take, remainder etc.                                                                    | _____ |
| Math checked on remainder                                                                                                                                                   | _____ |
| <b>Improvements:</b>                                                                                                                                                        |       |
| Improvements bisected or within 25' of proposed R.O.W. line are shown on map with stationing and distance from proposed R.O.W. line. Buildings are labeled and dimensioned. | _____ |
| Off-premise outdoor advertising signs within proposed R.O.W. are shown and labeled.                                                                                         | _____ |
| <b>Utilities:</b>                                                                                                                                                           |       |
| All utilities within or crossing existing and proposed right of way are shown and labeled as to size, easement or fee width, and recording data of instrument.              | _____ |
| Location of underground storage tanks and/or filler caps are shown and labeled                                                                                              | _____ |
| <b>FIELD NOTES - Heading</b>                                                                                                                                                |       |
| County                                                                                                                                                                      | _____ |
| Highway                                                                                                                                                                     | _____ |
| Parcel number                                                                                                                                                               | _____ |
| R.O.W. CSJ                                                                                                                                                                  | _____ |
| Construction CSJ                                                                                                                                                            | _____ |
| <b>General Description or "preamble"</b>                                                                                                                                    |       |
| Area of parcel to be acquired is shown in acreage (0.000) for rural land and/or square feet (to nearest whole sq. ft.) for urban land or smaller parcels                    | _____ |
| Parent tract data is shown:                                                                                                                                                 | _____ |
| Size of parent tract                                                                                                                                                        | _____ |
| Survey data or lot, block, and subdivision                                                                                                                                  | _____ |
| Name of last recorded seller and buyer                                                                                                                                      | _____ |
| Date, volume and page or document number of last recorded conveyance                                                                                                        | _____ |
| Records and county of last recorded conveyance                                                                                                                              | _____ |
| <b>Beginning Description</b>                                                                                                                                                |       |
| Point of commencement is on outside tie and is described accurately by bearings and distances as it leads to the point of beginning.                                        | _____ |
| Point of beginning is on proposed R.O.W. line                                                                                                                               | _____ |
| <b>Particular Description</b>                                                                                                                                               |       |
| Traverse calls are clockwise sequence                                                                                                                                       | _____ |
| Bearings and distances correspond exactly with map, parcel sketch, and traverse sheet                                                                                       | _____ |
| Bearings are to nearest whole second and distances are to the nearest one-hundredth of a foot                                                                               | _____ |
| Calls are numbered                                                                                                                                                          | _____ |
| Denial of access shall be described from beginning to end (if applicable)                                                                                                   | _____ |
| <b>Closing Description</b>                                                                                                                                                  |       |
| Last call leads back to P.O.B.                                                                                                                                              | _____ |
| Restates area of parcel                                                                                                                                                     | _____ |

- Establishes taking in existing road R.O.W. if applicable
- Legal description is referenced to Plat
- Sealed and signed
- Include an access clause whether access is permitted or denied (*if applicable*)

**PARCEL SKETCH:**

- Shows P.O.B. and P.O.C.
- All data corresponds exactly with Map and Field Notes
- Sheet size is no larger than 8 1/2" x 11"
- Plat closely matches example provided
- Plat referenced to legal description
- Sealed and signed
- Include an access clause whether access is permitted or denied (*if applicable*)
- Existing utility lines and easements (deed reference, if available);

**TRAVERSE SHEET**

- Computations show area to be acquired in sq. ft. or acres, whichever is applicable
- Computations show area that is existing road R.O.W. if applicable
- Traverse calls are in clockwise sequence
- Error of closure meets the following:
  - Secondary rural .0003
  - Primary rural - secondary urban .0002
  - Urban or industrial .00013

# FIELD SURVEYING AND PHOTOGRAMMETRY

(Function Code 150)

Services

Provided By:

ENGINEER COUNTY

B.

## DESIGN AND CONSTRUCTION SURVEYS:

### 1. PURPOSE:

The purpose of a "design survey" is to provide field information in support of transportation systems design.

The purpose of a "construction survey" is to provide field data in support of highway construction.

### 2. DEFINITIONS:

A "design survey" is defined as the combined performance of research, field work, analysis, computation, and documentation necessary to provide detailed topographic (3-dimensional) mapping of a project site. A design survey may include, but need not be limited to, cross-sections or data to create cross-sections and Digital Terrain Models (DTM), horizontal and vertical location of utilities and improvements, detailing of bridges and other structures, review of right-of-way maps, establishing control points, etc.

A "construction survey" is defined as the combined performance of reconnaissance, field work, analysis, computation, and documentation necessary to provide the horizontal and vertical position of specific ground points to be used by the construction contractor for determining lines and grades.

### 3. WORK TO BE PERFORMED:

#### 3.1. Design Surveys:

In performing design surveys, the following will be requested by the ENGINEER on an as needed basis, but need not be limited to:

3.1.1. Obtain or collect data to create cross-sections and digital terrain models including any missing voids identified by the ENGINEER.

3.1.2. Locate all existing utilities, overhead and underground.

Horizontally – the SURVEYOR shall call the 1-800 number for the utilities to be marked on the ground as well as any city water and sewer lines. He shall tie all visible utility crossings with name, address and Phone #'s of utility companies. The ENGINEER will coordinate with the utility companies and jointly the SURVEYOR and the ENGINEER will identify which utilities were missed and need to be tied down.

Vertically – The ENGINEER shall identify all utilities that are potential conflicts and that need to be tied vertically and coordinate the exposure. The ENGINEER will advise the SURVEYOR in writing of the needed vertical ties and he will provide the required information to the ENGINEER promptly.

3.1.3. Locate topographical features and existing improvements.

3.1.4. Provide details of existing bridge structures. The SURVEYOR shall tie the top of deck and/or top of cap elevations at the Profile Grade Line (PGL) and the edges of slab at bent locations.

3.1.5. Provide details of existing drainage features, such as culverts, manholes, inlets, etc. The SURVEYOR will tie horizontally and vertically all existing storm drain systems that lie within the existing & proposed ROW including the elevation of the outfall of said recovered existing storm drain systems.

3.1.6. Profile and cross section intersecting streets for ties into project (500-ft. beyond the proposed ROW per schematic and 20-ft wider than the existing ROW of intersecting street).

Services  
Provided By:  
ENGINEER COUNTY

|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| 3.1.7.  | Cross section irrigation crossings for a distance of 20-ft beyond the proposed ROW at 100-ft intervals in a DTM file. Provide a complete description of irrigation appurtenances as identified by the engineer before he ties down any irrigation lines. The ENGINEER will provide him the existing Irrigation District Maps and the A&M Data of existing irrigation lines that are identified of record. He will follow the sample given to him by the ENGINEER and tie the structures horizontally and vertically and include in the field books to be submitted.                                                                                                                    |  |  |
| 3.1.8.  | Cross section and profile all outfall channels identified on the Hydrologic Map for a distance of 200-ft beyond the proposed ROW upstream and downstream at 100-ft intervals. The SURVEYOR will provide a complete 2D/3D File including utilities of the outfalls identified.                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |
| 3.1.9.  | Inventory all driveways, commercial entrances, public roads and side streets separately. Obtain centerline station. (Width at ROW, PAV'T and existing radius. Inventory by type (dirt, caliche, gravel or paved). If paved, indicate condition in terms of no patches, has patches or has potholes. Obtain width at R.O.W. line. Obtain elevations at both edges of the driveway or turnout in line with the side drain.                                                                                                                                                                                                                                                               |  |  |
| 3.1.10. | Inventory signs, mailboxes, and large trees within the proposed ROW.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |  |
| 3.1.11. | Locate wetlands.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |
| 3.1.12. | Establish additional control points.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |  |
| 3.1.13. | Locate existing right-of-ways.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |  |
| 3.1.14. | Review right-of-way maps.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |
| 3.1.15. | Locate boreholes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |  |
| 3.1.16. | Perform hydrographic surveys.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |
| 3.1.17. | Update existing control data and prepare survey control data sheets, as required by the Design Manual, signed by a Registered Professional Land Surveyor, for inclusion into a construction plan set.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |  |
| 3.2.    | <u>Construction Surveys:</u><br>In performing construction surveys, the following will be requested by the ENGINEER on an as needed basis, but need not be limited to:<br>3.2.1. Stake existing and/or proposed right-of-ways.<br>3.2.2. Stake existing and/or proposed baseline/centerline.<br>3.2.3. Stake proposed bridge structures.<br>3.2.4. Stake proposed drainage structures, such as manholes, culverts, etc.<br>3.2.5. Set grade stakes.<br>3.2.6. Recover and check existing control points.<br>3.2.7. Establish additional control points.<br>3.2.8. Check elevations and locations of structures.<br>3.2.9. Determine and resolve conflicts associated with survey data. |  |  |
| 4.      | <u>DELIVERABLES:</u><br>The deliverables to be specified in individual work authorizations for design surveys and construction surveys may be any combination of the following:<br>4.1. Digital Terrain Models (DTM) in a format acceptable by the ENGINEER.<br>4.2. Final H&V Field Book Binder with all pertinent information obtained in the field for Design Surveys. Maps, plans, or sketches prepared by the SURVEYOR showing the results of field surveys.                                                                                                                                                                                                                      |  |  |

|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |       |       |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| 4.3.  | Computer printouts or other tabulations summarizing the results of field surveys.                                                                                                                                                                                                                                                                                                                                                                                 | _____ | _____ |
| 4.4.  | Digital files or media acceptable by the ENGINEER containing field survey data.                                                                                                                                                                                                                                                                                                                                                                                   | _____ | _____ |
| 4.5.  | Maps, plats, plans, sketches, or other documents acquired from utility companies, private corporations, or other public agencies, the contents of which are relevant to the survey.                                                                                                                                                                                                                                                                               | _____ | _____ |
| 4.6.  | Field survey notes, as electronic and/or hard copies.                                                                                                                                                                                                                                                                                                                                                                                                             | _____ | _____ |
| 4.7.  | An 8 ½ inch by 11 inch survey control data sheet for each construction control point which shall include, but need not be limited to, a location sketch, a physical description of the point including a minimum of two reference ties, surface coordinates, a surface adjustment factor, elevation, and the horizontal and vertical datums used. Survey control data sheets shall be signed and sealed by the supervising Registered Professional Land Surveyor. | _____ | _____ |
| 4.8.  | Final mylar set of 11 inch by 17 inch Survey Control data sheets sign and seal by the RPLS per TXDOT guidelines.                                                                                                                                                                                                                                                                                                                                                  | _____ | _____ |
| 4.9.  | A digital and/or hard copy of all computer printouts of horizontal and vertical conventional traverses, GPS analysis and results, data including property descriptions with field notes and plats, right-of-way maps, and survey control data sheets to include in the H&V Field Book Binder.                                                                                                                                                                     | _____ | _____ |
| 4.10. | Survey reports in a format requested by the ENGINEER.                                                                                                                                                                                                                                                                                                                                                                                                             | _____ | _____ |
| 4.11. | Items indicated under the Automation Requirements Section 6.                                                                                                                                                                                                                                                                                                                                                                                                      | _____ | _____ |

## 5. GENERAL REQUIREMENTS:

- 5.1. Design surveys and construction surveys shall be performed under the supervision of a Registered Professional Land Surveyor currently registered with the Texas Board of Professional Land Surveying.
- 5.2. Horizontal ground control used for design surveys and construction surveys, furnished to the SURVEYOR by the ENGINEER or based on acceptable methods conducted by the SURVEYOR, shall meet the standards of accuracy required by the STATE.
- 5.3. Vertical ground control used for design surveys and construction surveys, furnished to the SURVEYOR by the ENGINEER or based on acceptable methods conducted by the SURVEYOR, shall meet the standards of accuracy required by the ENGINEER.
- Reference may be made to standards of accuracy for horizontal control traverses, as described in the FGCS Standards and Specifications for Geodetic Control Networks, latest edition, the TXDOT Survey Manual, latest edition, the TXDOT GPS Manual of Practice, latest edition, or the TSPS Manual of Practice for Land Surveying in the State of Texas, as may be applicable.
- 5.4. Side shots or short traverse procedures used to determine horizontal and vertical locations shall meet the following criteria:

- 5.4.1. Side shots or short traverses shall begin and end on horizontal and vertical ground control as described above.
- 5.4.2. Standards, procedures, and equipment used shall be such that horizontal locations relative to the control may be reported within the following limits:
- a. Bridges and other roadway structures: less than 0.1 of one foot.
  - b. Utilities and improvements: less than 0.2 of one foot.
  - c. Cross-sections and profiles: less than 1 foot.
  - d. Bore holes: less than 3 feet.

- 5.4.3. Standards, procedures, and equipment used shall be such that vertical locations relative to the control may be reported within the following limits:
- a. Bridges and other roadway structures: less than 0.02 of one foot.
  - b. Utilities and improvements: less than 0.1 of one foot.
  - c. Cross-sections and profiles: less than 0.2 of one foot.
  - d. Bore holes: less than 0.5 of one foot.

**6. AUTOMATION REQUIREMENTS:**

- 6.1. Planimetric design files (DGN) shall be fully compatible with the State's *Micro Station V8* graphics program without further modification or conversion.
- 6.2. Electronically collected and processed field survey data files shall be fully compatible with the State's *CADD* systems without further modification or conversion. All files shall incorporate only those feature codes currently being used by the STATE.
- 6.3. Digital Terrain Models (DTM) shall be fully compatible with the STATE's *GEOPAK* system without further modification or conversion. All DTM files shall be fully edited and rectified to provide a complete digital terrain model with all necessary break lines.

**ADDITIONAL RESPONSIBILITIES**

- A. TRAFFIC CONTROL:**  
The SURVEYOR shall control traffic in and near surveying operations adequately to comply with provisions of the latest edition of the TxDOT Manual on Uniform Traffic Control Devices – Part VI and the latest edition of the Occupational Safety Manual both of which can be found on the TxDOT internet site.
- In the event field crew personnel must divert traffic or close traveled lanes, a Traffic Control Plan based upon principles outlined in the latest edition of the TxDOT Manual on Uniform Traffic Control Devices – Part VI shall be prepared by the SURVEYOR and approved by the ENGINEER prior to commencement of field work. A copy of the approved plan shall be in the possession of field crew personnel on the job site at all times and shall be made available to the ENGINEER for inspection upon request.
- B. INVOICING:**  
Payment requests shall include a SURVEYOR's invoice. With each payment request, the SURVEYOR shall submit a project status report which will, as a minimum, include the percentage of total work complete as of the date of the payment request and a description of current work activity. The percentage of total work complete shall not be based simply on the percentage of funds expended, but shall be based on the best judgment of the SURVEYOR as to the percentage of actual work complete.
- C. EASEMENTS, LETTERS OF PERMISSION, ETC.**  
The SURVEYOR shall be responsible for delineating easements. The SURVEYOR will be responsible for securing the necessary legal instruments and obtaining all Right-of-Entries (ROEs).
- D. MEETINGS:**  
The ENGINEER shall setup the necessary meetings with the SURVEYOR in order to assure all field information is provided on-time and products are delivered in accordance with TxDOT's specifications. SURVEYOR must attend all meetings involving data provided if requested by ENGINEER.
- E. PROJECT MANAGER/SURVEYOR COMMUNICATION:**  
The SURVEYOR shall designate one Texas Registered Professional Land Surveyor (RPLS) to be responsible throughout the project for project surveying coordination and all communications, including billing, with the ENGINEER.
- F. OFFICE LOCATION:**  
The SURVEYOR will perform the services to be provided under this agreement out of a local office and have a crew available to perform requested tasks within 24 hours of request. The coordinating SURVEYOR's Project Manager (RPLS) shall be accessible at all times and working from the local office.

ROADWAY DESIGN CONTROLS

(Function Code 160)

Services  
Provided By:  
ENGINEER COUNTY

1. Geometric Design
    - a. Horizontal and Vertical Alignment
    - b. Schematic Layout
  - (1) The location of interchanges, main lanes, grade separations, frontage roads and ramps.
  - (2) Develop vertical and horizontal alignment of main lanes, ramps and cross roads at proposed interchanges or grade separations. Frontage road alignment data need not be shown on the schematic; however, it should be developed in sufficient detail to determine ROW needs. The degree of horizontal curves and vertical curve data, including "K" values, shall also be shown for ease of checking.
  - (3) For freeways, show the location and text of the proposed main lane guide signs. Lane lines and/or arrows indicating the number of lanes shall also be shown.
  - (4) A complete explanation of the sequence and methods of stage construction, if proposed, including the initial and ultimate proposed treatment of crossovers and ramps.
  - (5) The tentative ROW limits.
  - (a) Provide a roadway Design System (RDS) or (GEOPAK) computer tape of the preliminary earthwork to verify ROW requirements.
  - (b) Provide a graphics file containing the approved schematic.
  - (6) The geometric (pavement cross slopes, lane and shoulder widths, slope rates for fills and cuts) of the typical sections of proposed highway main lanes, ramps, frontage roads, and cross roads.
  - (7) The current and projected traffic volumes as provided by the TxDOT (20 year traffic projection, unless otherwise determined by the District Engineer).
  - (8) The control of access lines if Interstate or designated under House Bill 179.
  - (9) Direction of traffic flow on all roadways.
  - (10) Location and width of median openings for highway without access control.
  - (11) The geometric of speed change (acceleration, deceleration, climbing) lanes.
2. General Guidelines for Project Development
    - a. Prior to preparing detailed plans for a proposed project, a preliminary schematic layout shall be prepared which indicates the general geometric features and location requirements peculiar to the project. Four copies of the schematic layout shall be provided for this use. The Design Division for approval and subsequent coordination with the Federal Highway Administration (FHWA) where applicable. The layout shall be submitted for two-lane arterial highway projects on new locations and for all multi-lane highway projects. No geometric design is to be performed until the COUNTY has given the engineer written approval of the preliminary schematic layout.
    - b. All geometric design shall be in conformance with the State's Design Division, Operations and Procedures Manual, except where variances are permitted in writing by the STATE.
    - c. The schematic layout shall include basic information which is necessary for the proper review and evaluation including the items listed above in the checklist for schematic layout.
    - d. Handling of traffic during construction shall be a consideration in the development of preliminary designs.

Services  
Provided By:  
ENGINEER COUNTY

|     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| 2.  | General Guidelines for Project Development ( <i>continued</i> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |
| e.  | Upon approval of the schematic layout by Design Division (FHWA on Federal-aid projects), it shall be the basis for an exhibit at any required public hearing prior to final development of the project. If there are any changes to the schematic after the Design Division and FHWA approval at the hearing, four copies of the revised schematic, as displayed at the hearing, shall be submitted either prior to or accompanying the public hearing data. If there are no changes in the schematic as displayed at the hearing, only photographs of the schematic and other displays shall be submitted with the public hearing data. |  |  |
| f.  | For all freeway construction projects, these schematics shall show the location and text of the proposed main lane guide signs. A schematic layout shall be submitted through the district to the Traffic Operations Division, Traffic Safety Section for approval and subsequent coordination with the FHWA. All signing shall be in conformance with the Texas MUTCD.                                                                                                                                                                                                                                                                  |  |  |
| g.  | On complex projects, informal contact through the district with the Design Division and FHWA personnel is encouraged with regard to development of preliminary design prior to official schematic submission.                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |
| h.  | The engineer shall furnish a project tape that is compatible with the STATE's computer system, a project listing, and a cross section plot showing the original design sections containing the earthwork input and original cross sections for the project. Accuracy of the earthwork design is of utmost importance since it is the basis for contractor payments and construction staking.                                                                                                                                                                                                                                             |  |  |
| 3.  | Exhibit for Airway/Highway Clearance Permits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |  |
| 4.  | Grading Design                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |
| a.  | Refine the horizontal and vertical alignment of main lanes, frontage roads, ramps, cross roads and direct connectors based upon the approved schematic layout. Determine vertical clearances at grade separations and overpasses, taking into account the appropriate super elevation rate.                                                                                                                                                                                                                                                                                                                                              |  |  |
| b.  | Typical Sections                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |  |
| c.  | Design Cross Sections                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |  |
| d.  | Determine Cut and Fill Quantities                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |
| e.  | Slope Stability Analysis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |
| f.  | Embankment Foundation Stability Analysis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |
| g.  | Embankment Settlement Analysis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |
| 5.  | Pavement Design                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |  |
| a.  | Prior to initiating detailed plan preparations for a project, a preliminary investigation shall be made to determine the approximate section and pavement type to be used for the pavement structure. The Flexible Pavement Design Manual for flexible pavement, "Appendix F" of the Design Division, Operations and Procedures Manual, and the current AASHTO Guide for the Design of Pavement Structures, may be used for this purpose.                                                                                                                                                                                                |  |  |
| b.  | The typical section shall also reflect proposed geometric including pavement cross slopes, lane and shoulder widths, and slope rates whenever this data have not been previously shown on a schematic submission.                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |
| c.  | Embankment and Subgrade                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |  |
| (1) | Soil Core Holes (Show cost estimate with Function Code 110)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |  |
| (a) | Along center line                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |
| (b) | Along center line of each roadway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |
|     | The location and minimum number of soil core holes required for this project are as follows: (To be determined when schematic is being completed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |  |

Services  
Provided By:  
ENGINEER COUNTY

5. Pavement Design (*continued*)
- c. Embankment and Subgrade (*continued*)
  - (2) Identify, interpret and summarize geologic features that affect engineering design (PI, Sulfate content, % of lime)
  - d. Traffic Data for Pavement Design by STATE
  - e. Basic Design Criteria
  - f. Life Cycle Cost Analysis(es)
  - g. Cost Data
  - h. Pavement Material Properties
  - i. Rehabilitation Investigations
  - (1) Core Hole Survey (Show cost estimate with Function Code 110)
  - (a) Determine type and depth of existing material, pavement, etc. The Engineer will determine whether to salvage ACP and FLEXBASE as well as their properties and provide this information to TXDOT.

**DRAINAGE**  
(Function Code 161)

Services  
Provided By:  
**ENGINEER COUNTY**

All hydraulic design shall be in accordance with the TXDOT's Hydraulic Manual, except where variances are permitted in writing by the COUNTY.

|     |                                                                                               |  |  |
|-----|-----------------------------------------------------------------------------------------------|--|--|
| 1.  | Hydrologic Studies, Discharges                                                                |  |  |
| a.  | Drainage area maps showing existing conditions and proposed improvements.                     |  |  |
| b.  | Hydrologic data/discharge determination                                                       |  |  |
| 2.  | Hydraulic Drainage Study and Documentation                                                    |  |  |
| a.  | Hydraulic computations                                                                        |  |  |
| (1) | Storm water detention available within the ROW (linear ft. along side drain ditch).           |  |  |
| (2) | Storm water detention required outside the ROW (as per HCDD#1)                                |  |  |
| (3) | Culverts                                                                                      |  |  |
| (4) | Bridge waterways                                                                              |  |  |
| (5) | Channels                                                                                      |  |  |
| (6) | Storm sewers/inlets                                                                           |  |  |
| (7) | Pump stations                                                                                 |  |  |
| (8) | Storm Water Management facilities                                                             |  |  |
| (9) | Other                                                                                         |  |  |
| b.  | Hydraulic report(s)                                                                           |  |  |
| c.  | Federal Emergency Management Agency (FEMA) floodway requirements                              |  |  |
| d.  | Determine impact of proposed drainage plan on the following receiving stream(s)               |  |  |
| (1) | Hidalgo County Drainage District Outfalls                                                     |  |  |
| (2) | All Irrigation District Outfalls impacted                                                     |  |  |
| 3.  | Layout, Structural Design and Detailing of Drainage Features                                  |  |  |
| a.  | Culverts                                                                                      |  |  |
| (1) | New culverts                                                                                  |  |  |
| (2) | Culvert widening and/or lengthening                                                           |  |  |
| (3) | Culvert replacements                                                                          |  |  |
| b.  | Storm sewers                                                                                  |  |  |
| (1) | New storm sewers                                                                              |  |  |
| (2) | Modify existing storm sewers                                                                  |  |  |
| (3) | Inlets                                                                                        |  |  |
| (4) | Manholes                                                                                      |  |  |
| (5) | Trunk lines                                                                                   |  |  |
| c.  | Pump stations                                                                                 |  |  |
| d.  | Subsurface drainage at retaining walls                                                        |  |  |
| e.  | Outfall channel(s) within the ROW                                                             |  |  |
| f.  | Outfall channel(s) outside the ROW                                                            |  |  |
| g.  | Detention Pond(s) within the ROW                                                              |  |  |
| h.  | Detention Pond(s) outside the ROW                                                             |  |  |
| i.  | Summary of Quantities                                                                         |  |  |
| j.  | Storm Water Management facilities                                                             |  |  |
| 4.  | Storm Water Pollution Prevention Plan (SW3P)                                                  |  |  |
| 5.  | Scour Evaluation - Waterway Structures only (to be completed by Bridge Engineer under FC 170. |  |  |

**SIGNING, MARKINGS AND SIGNALIZATION**

(Function Code 162)

Services

Provided By:

ENGINEER COUNTY

|      |                                                                                                                                                                                      |       |       |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| 1.   | Signing and Markings Layout                                                                                                                                                          | _____ | _____ |
| a.   | Requirements (Separate Layout)                                                                                                                                                       |       |       |
| (1)  | Roadway layout                                                                                                                                                                       |       |       |
| (2)  | Center line with station numbering                                                                                                                                                   |       |       |
| (3)  | ROW lines                                                                                                                                                                            |       |       |
| (4)  | Culverts and other structures that present a hazard to traffic                                                                                                                       |       |       |
| (5)  | Location of utilities, if not shown on plan and profile                                                                                                                              |       |       |
| (6)  | Existing signs to remain, to be removed, to be relocated                                                                                                                             |       |       |
| (7)  | Proposed signs (illustrated and numbered)                                                                                                                                            |       |       |
| (8)  | Existing overhead sign bridges to remain, to be revised, removed or relocated                                                                                                        |       |       |
| (9)  | Proposed overhead sign bridges indicating location by plan layout (electrical details need not be shown on this layout)                                                              |       |       |
| (10) | Proposed markings (illustrated and quantified) which include pavement markings, object markings and delineation                                                                      |       |       |
| (12) | Quantities of existing pavement markings to be removed                                                                                                                               |       |       |
| (13) | Proposed delineators and object markers                                                                                                                                              |       |       |
| b.   | For projects involving freeway to freeway or other types of directional interchanges, projects including left-hand ramps or connections, the following information must be provided: |       |       |
| (1)  | The location of interchanges, main lanes, grade separations, frontage roads and ramps                                                                                                |       |       |
| (2)  | complete explanation of the sequence and methods of stage construction, where applicable, which would include the initial and ultimate proposed treatment of crossovers and ramps    |       |       |
| (3)  | The number of lanes in each section of proposed highway and the location of changes in numbers of lanes                                                                              |       |       |
| (4)  | The projected traffic volumes as provided by the STATE (20 year traffic projection, unless otherwise determined by the District Engineer)                                            |       |       |
| (5)  | Tentative ROW limits                                                                                                                                                                 |       |       |
| (6)  | Direction of traffic flow on all roadways                                                                                                                                            |       |       |
| (7)  | Main lane, ramp, frontage road, and necessary cross road profiles at proposed interchanges or grade separations                                                                      |       |       |
| 2.   | Summary of Small Signs Tabulation                                                                                                                                                    | _____ | _____ |
| 3.   | Summary of Large Signs Tabulation including all Guide Signs                                                                                                                          | _____ | _____ |
| 4.   | Sign Detail Sheets                                                                                                                                                                   | _____ | _____ |
| a.   | All signs except route markers                                                                                                                                                       |       |       |
| b.   | Design details for large guide signs                                                                                                                                                 |       |       |
| c.   | Dimensions of letters, shields, borders, corner radii etc.                                                                                                                           |       |       |
| d.   | Designation of shields attached to guide signs                                                                                                                                       |       |       |
| e.   | Designation of arrow used on exit direction signs                                                                                                                                    |       |       |

Services  
Provided By:  
ENGINEER COUNTY

|                    |                                                |                                                                                                                 |       |       |
|--------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-------|-------|
| 5. Traffic Signals | a. Development of Justification (Warrant) Data | (1) Location Map                                                                                                | _____ | _____ |
|                    |                                                | Relationship of proposed installation to other traffic signals, highways, business areas and traffic generators | _____ | _____ |
|                    | b. Layout                                      | (2) Photographs as appropriate                                                                                  | _____ | _____ |
|                    |                                                | (3) Accident data as appropriate                                                                                | _____ | _____ |
|                    |                                                | (4) Vehicle volumes (provided by TxDOT)                                                                         | _____ | _____ |
|                    |                                                | (a) Existing                                                                                                    | _____ | _____ |
|                    |                                                | (b) Estimated                                                                                                   | _____ | _____ |
|                    |                                                | (c) Projected                                                                                                   | _____ | _____ |
|                    |                                                | (d) Pedestrian                                                                                                  | _____ | _____ |
|                    |                                                | (5) Traffic Survey - Count Analysis                                                                             | _____ | _____ |
|                    |                                                | (6) Recommendation based on above data                                                                          | _____ | _____ |

|                   |                                                                                                              |       |
|-------------------|--------------------------------------------------------------------------------------------------------------|-------|
| (6) Plan sheet(s) | (a) Existing traffic control that will remain (signs and markings)                                           | _____ |
|                   | (b) Existing utilities                                                                                       | _____ |
|                   | (c) Proposed highway improvements                                                                            | _____ |
|                   | (d) Proposed installation                                                                                    | _____ |
|                   | (e) Proposed additional traffic controls                                                                     | _____ |
|                   | (f) When applicable, proposed conduit for Railroad interconnect with standard details for runs under tracks. | _____ |
|                   | (g) Proposed illumination attached to signal poles.                                                          | _____ |
|                   | (7) Notes for plan layout                                                                                    | _____ |
|                   | (8) Elevation sheet(s) (span wire design)                                                                    | _____ |
|                   | (9) Phase sequence diagram(s)                                                                                | _____ |
|                   | (a) Signal locations                                                                                         | _____ |
|                   | (b) Signal indications                                                                                       | _____ |
|                   | (c) Phase diagram                                                                                            | _____ |
|                   | (d) Signal sequence table                                                                                    | _____ |
|                   | (e) Flashing operation (normal and emergency)                                                                | _____ |
|                   | (f) Preemption operation (when applicable)                                                                   | _____ |
|                   | (g) Interval timing, cycle length and offset                                                                 | _____ |
|                   | (a) Existing traffic control that will remain (signs and markings)                                           | _____ |
|                   | (b) Existing utilities                                                                                       | _____ |
|                   | (c) Proposed highway improvements                                                                            | _____ |
|                   | (d) Proposed installation                                                                                    | _____ |
|                   | (e) Proposed additional traffic controls                                                                     | _____ |
|                   | (f) When applicable, proposed conduit for Railroad interconnect with standard details for runs under tracks. | _____ |
|                   | (g) Proposed illumination attached to signal poles.                                                          | _____ |
|                   | (7) Notes for plan layout                                                                                    | _____ |
|                   | (8) Elevation sheet(s) (span wire design)                                                                    | _____ |
|                   | (9) Phase sequence diagram(s)                                                                                | _____ |

Services  
Provided By:  
ENGINEER COUNTY

5. Traffic Signals (continued)  
b. Layout (continued)

- (10) Construction detail sheets(s)
- (a) Poles (TXDOT standard sheets)
- (b) Detectors
- (c) Pull Box and conduit layout
- (d) Controller Foundation standard sheet
- (11) Marking details (when applicable)
- (12) Barricade and warning sign standard sheet and any special details for work zone
- (13) Traffic control for special conditions
- (13) Aerial or underground interconnect details (when applicable)

c. General Requirements

- (1) Contact local utility company
- (a) Confirm power source
- (b) Discuss route of aerial or underground interconnect cable (when applicable)
- (c) Adjustment of overhead utility lines
- (2) Prepare governing specifications and special provisions list
- (3) Prepare project estimate

d. Summary of Quantities

## MISCELLANEOUS (ROADWAY)

(Function Code 163)

Services

Provided By:

ENGINEER COUNTY

1. Retaining Walls
- a. Structural Details
- (1) Cast-in-Place Cantilever at \_\_\_\_\_ locations. (TXDOT Standard Retaining Wall)\*
- (2) Tiedback Retaining Wall at \_\_\_\_\_ location. (TXDOT standard retaining wall)
- (3) Specialized Retaining Wall at \_\_\_\_\_ locations (Unique Design).\*
- b. Alternate Patented Retaining Walls at all locations. (Layouts Only)\*\*
- (1) Mechanically Stabilized Earth
- (2) Concrete Block Wall Systems
- c. Retaining Wall Layout (PLAN)
- (1) Designation of reference line
- (2) Beginning and ending retaining wall stations
- (3) Station of each retaining wall joint\*\*\*
- (4) Offset from reference line
- (5) Horizontal curve data
- (6) Number of retaining wall panels and lengths\*\*\*
- (7) Total length of wall
- (8) Indicate face of wall
- (9) All wall dimensions and alignment relations (alignment data as necessary)
- (10) Soil core hole locations
- d. Retaining Wall Layout (ELEVATION)
- (1) Top of wall elevations at each joint or intervals\*\*\*
- (2) Existing and finished ground line elevations
- (3) Height of stem at each joint\*\*\*
- (4) Wall panel designations\*\*\*
- (5) Top of footing elevations\*\*\*
- (6) Limits of measurement for payment\*\*\*\*
- (7) Type, limits and anchorage details of railing (if applicable)
- (8) Top and bottom of wall profiles and soil core hole data plotted at correct station and elevation. The plot shall be at the same scale as the wall profile. Ground water elevations and the observation date shall be shown.
- e. Foundation Studies (Show cost estimate with Function Code 110)
- (1) The soil core holes shall be obtained at approximately 200 foot intervals along retaining wall alignments. The core holes shall extend 25 feet below the footing elevation.
- f. Stability Analysis (the ENGINEER shall estimate this task as part of his bid to complete the work).
- g. Estimate
- h. Summary of Quantities
- i. Typical X-section.
- j. General Guidelines for Retaining Walls
- (1) The ENGINEER shall make final design calculations and final detail drawings in accordance with standard requirements of the Texas Department of Transportation. The designer and checker shall check all calculations and initial each page.
- (2) The ground water level should be observed at the water strike.
- (3) For purposes of uniformity statewide, soil core hole data shall be shown on layouts as illustrated in the Bridges and Structures Foundation Exploration and Design Manual.
- (4) Foundation exploration shall conform to the requirements set forth in Administrative Circular No. 25-84, Administrative Circular 33-87 and Administrative Circular No. 25-92.

Services  
Provided By:  
ENGINEER COUNTY

2. Traffic Control Plan, Detours and Sequence of Construction
- Traffic Control Plans (TCP) are required for all projects. A detailed TCP shall be developed when traffic handling during construction involves complications for which a feasible solution is not covered by the Texas MUTCD or the current Barricade and Construction (BC) Standards. The following items are required on all Traffic Control Plan Layouts:
- The sequence of construction and method of handling traffic during each phase.
  - The existing and proposed traffic control devices that will be used to handle traffic during each construction sequence. Include signals, regulatory signs, warning signs, construction warning signs, guide signs, route markers, construction pavement markings, channelizing devices, portable changeable message signs, flashing arrow boards, barricades, barriers, etc.
  - The proposed traffic control devices (stop signs, signals, flag person, etc.) at grade intersections during each construction sequence.
  - Where detours are provided, typical cross sections shall be shown.
  - Road construction work hours shall be developed after an investigation of the traffic volumes has been performed.

3. Illumination
- Preliminary Roadway Illumination Layout and Circuit Layout
    - For projects involving freeway to freeway or other types of directional interchanges and projects including left-hand ramps or connections, provide the following:
      - The location of interchanges, main lanes, grade separations, frontage roads and ramps
      - A complete explanation of the sequence and methods of stage construction, where applicable, which would include the initial and ultimate proposed treatment of crossovers and ramps
      - The number of lanes in each section of proposed highway and the location of changes in the number of lanes
      - The projected traffic volumes as provided by the STATE (20 year traffic projection unless otherwise determined by the district engineer)
      - Tentative ROW limits
      - Direction of traffic flow on all roadways
      - Main lane, ramp, frontage road, and necessary cross road profiles at proposed interchanges or grade separations
  - Final Roadway Illumination and Electrical Circuit Layouts
    - Roadway layout showing pavement edges, shoulders, curbs, retaining walls, etc.
    - Center line with station numbering.
    - ROW lines.
    - Symbol legend. Use department standard symbols for lighting and electrical.
    - Culverts and other structures that present a hazard to traffic.
    - Location of underground utilities, if not shown on plan profile.
    - Location of overhead electrical lines, both crossing and parallel to ROW.
    - Existing sign lighting circuits and roadway illumination to remain, to be removed, to be relocated.
    - Existing service poles, electrical circuits, ground boxes, etc.
    - Contact electric utility for service pole locations, voltage characteristics.
    - Location of proposed sign lighting circuits and roadway illumination.
    - Proposed electrical circuits.
    - Tabulation of all quantities including proposed, existing to be relocated, existing to be removed. The layout sheet quantities and lighting summary shall be shown. Tabulations to include estimated quantity with a column for final quantities.

Services  
Provided By:  
ENGINEER COUNTY

3. Illumination (continued)  
c. General Guidelines for Illumination (If applicable)  
The ENGINEER shall submit to the COUNTY, well in advance of PS&E due date, the roadway illumination and electrical circuit layout sheets for review by the STATE. Two copies of the layout sheets are to be submitted. One copy will be returned to the Engineer showing corrections that are to be made by the ENGINEER. When final plan submission is made, the ENGINEER shall provide a written statement regarding completion of the corrections.

4. Miscellaneous Drafting/Standards  
a. Erosion Control  
b. Landscape Development  
5. Compute and Tabulate Quantities  
6. Special Utility Details (Irrigation lines)  
7. Miscellaneous Structures  
a. Type of Structure\*

(1) Overhead Sign Bridges (O.S.B.)  
Modifications or special O.S.B. designs shall be prepared using the same design assumptions that are used for the standard O.S.B. structures.

(a) New O.S.B. structure(s)  
(b) Structural evaluation of existing O.S.B. structure(s) that are to remain in place or to be relocated.

(2) High Mast Illumination Poles (HMIP)  
(3) Traffic Signal Supports  
(4) Conventional Illumination Poles  
(5) Sound Barrier Walls  
b. Checklist for Layouts  
(1) Reference appropriate O.S.B. standard  
(2) Drilled shaft size and length  
(3) Soil strength used for design {indicate basis and boring(s) used}  
(4) Design height  
(5) Tower heights  
(6) Leg spacings  
(7) Design wind speed

c. Foundation Studies (Show cost estimate with Function Code 110)  
The soils exploration requirements for miscellaneous structures on this project are as follows: (To be provided by the Engineer on an as-needed basis)

8. Agreements  
a. Utility Agreements  
b. Exhibits for Utility Agreements  
c. Railroad Agreements  
d. Railroad Exhibits  
(1) Railroad Underpasses  
(2) Railroad Overpasses  
(3) Railroad Grade Crossing (Replaning)  
(4) Railroad Grade Crossing Warning Systems (Signals)  
(5) Other Miscellaneous Sketches for Railroads

e. Traffic Signal Agreements  
f. Exhibits for Traffic Signal Agreements

9. Estimate

10. Specifications and General Notes

**BRIDGE DESIGN**  
(Function Code 170)

Services  
Provided By: ENGINEER COUNTY

NUMBER  
REQUIRED

1. Preparation of Structural Details

|                                         |       |       |
|-----------------------------------------|-------|-------|
| a. New Structure(s)                     | _____ | _____ |
| (1) Underpass(es)                       | _____ | _____ |
| (2) Overpass(es)                        | _____ | _____ |
| (3) Main Lanes                          | _____ | _____ |
| (4) Direct Connector(s)                 | _____ | _____ |
| (5) Ramp Bridge(s)                      | _____ | _____ |
| (6) Waterway Structure(s)**             | _____ | _____ |
| (7) Pedestrian Structure(s)             | _____ | _____ |
| (8) Utility Structure(s)                | _____ | _____ |
| (9) Railroad Underpass(es)              | _____ | _____ |
| (10) Railroad Overpass(es)              | _____ | _____ |
| (11) Bridge Classification Culvert(s)** | _____ | _____ |
| (11) Alternate Structural Designs       | _____ | _____ |
| (12) Alternate Foundation Design        | _____ | _____ |

Total New Structures = \_\_\_\_\_

|                                            |       |       |
|--------------------------------------------|-------|-------|
| b. Existing Structure(s)                   | _____ | _____ |
| (1) Bridge Widening, Rehabilitation and/or | _____ | _____ |
| Modification of Existing Structure(s)      | _____ | _____ |
| (2) Bridge Replacement                     | _____ | _____ |
| (3) Raising Bridge Elevation               | _____ | _____ |
| (4) Bridge Classification Culvert(s)       | _____ | _____ |
| Widening and/or Modification of            | _____ | _____ |
| Existing Structure(s)                      | _____ | _____ |
| (5) Railroad Overpass(es)                  | _____ | _____ |
| (6) Railroad Underpass(es)                 | _____ | _____ |

Total Existing Structures = \_\_\_\_\_

\* Countour plots of bridge gores are required for projects involving ramps within the main bridge in order to ensure project transition. The Template data and vertical alignment necessary to generate the contour plots are also required.

\*\* In the early stages of a project, it sometimes cannot be determined whether a Waterway Bridge Structure or a Bridge Classification Culvert (20' minimum length) will be required. Therefore, the ENGINEER should be aware that either of these two types of bridges may be reclassified later in the project for the other type when more information is known that would dictate a change in structure classification.

## Services

Provided By:

ENGINEER COUNTY

## 2. Preparation of Bridge Layouts (each bridge)

## a. Bridge Layouts (PLAN)

- (1) Horizontal curve information or bearing of centerline.
- (2) Including horizontal, vertical, and template information of all roadways or railroads crossed.
- (3) Bearing of center line or reference line.
- (4) Skew angle(s).
- (5) Slope for header banks and approach fills.
- (6) Control stations at beginning and ending of bridge (with deck elevation), intersections, etc.
- (7) Approach pavement and crown width.
- (8) Bridge roadway width and curbs, face of rail, shoulders, or sidewalks.
- (9) Approach slab and curb returns.
- (10) Limits and type of riprap.
- (11) Proposed features under structure.
- (12) Location of profile grade line.
- (13) North arrow.
- (14) Typical bridge roadway section including preliminary proposed beam types and spacings.
- (15) Cross slope and super elevation data.
- (16) Minimum horizontal clearances when applicable.
- (a) Dimensions to features that control clearances. (Calculate and indicate points of minimum vertical and horizontal clearances.

- (17) Location of soil core holes (station and offset), shown on layout.

- (18) Bent stations and bearings.
- (19) Retaining wall locations.
- (20) Traffic flow directional arrows.
- (21) Railing types shown.
- (22) Joint types and seal size, if used.
- (23) Beam line numbers consistent with span details.
- (24) Critical horizontal clearances (location of railroad tracks, nearby structures and utilities).
- (25) Bearings of utilities.

## b. Bridge Layouts (ELEVATION)

- (1) Type of foundation.
- (2) Finished grade elevations at beginning and end of bridge.
- (3) Overall length of structure.
- (4) Length, type of spans and units.
- (5) Type of railing.
- (6) Minimum calculated vertical clearance(s).
- (7) Existing and proposed ground lines clearly marked.
- (8) Grid elevations and stations.
- (9) Bent numbers encircled.
- (10) Stationing of bridge compatible with grid stations.
- (11) Standard title.
- (12) Profile grade data.
- (13) Type of riprap.
- (14) Soil Core Hole information with penetrometer test data shall be shown on the bridge layout at correct station, elevation and scale.
- (15) Fixed/expansion condition of all bents.
- (16) Column "H" heights.
- (17) Number, size and length of foundations.

Services  
Provided By:  
ENGINEER COUNTY

2. Preparation of Bridge Layouts (each bridge) *(continued)*
- c. Additional layout requirements for waterway structures and bridge classification culverts.
- (1) Design and 100-year peak discharges.
- (2) Design and 100-year high water (HW) (Recorded HW and date if available).
- (3) Natural and through-bridge velocities for design and 100-year floods.
- (4) Calculated backwater for design and 100-year floods.
- (5) Direction of flow for waterway crossings.
- (6) Contours for water crossing.

3. Bridge Classification Culvert, Estimate, Quantities, and Specifications (each bridge)
4. Foundation Studies (Show cost estimate with Function Code 110)
- The minimum number of soil core holes shall be obtained in accordance with Section 1-301 of the Bridges and Structures Foundation Exploration and Design Manual. Soil core holes shall be obtained at approximately (300 foot) intervals along bridge alignments. Texas cone penetrometer (TCP) tests shall be conducted in all soil types encountered at a maximum of (10 foot) intervals. If single column bents with single drilled shafts are planned, TCP values should be taken at close intervals in the upper (15 feet).
5. Bridge Total Quantities and Cost Estimates (each bridge)
6. Bridge Special Provisions and Specifications (each bridge)
7. Bearing seat elevations for each beam or girder. Top of cap elevations for non-beam type structures.
8. General Guidelines for Bridge Design

- a. The ENGINEER shall prepare a bridge layout of each bridge structure for Company's review and approval. The bridge layout shall be in conformance with the Bridges and Structures, Operation and Planning Manual and the Bridges and Structures, Detailing Manual. Soil core hole data is not required for submission of the preliminary bridge layout. No bridge design work is to be performed until the COUNTY has given the engineer written approval of the preliminary bridge layout.

Several months may be required, after the preliminary bridge layout is submitted, for the district to obtain approval and/or permits from the following:

- TXDOT Design Division, when applicable:

- Railroad Companies
- FHWA
- U.S. Army Corps of Engineers
- U.S. Coast Guard
- Bureau of Reclamation
- Texas Parks and Wildlife
- Others

Therefore, the bridge layout should be submitted at the earliest possible date and the ENGINEER's design schedule should reflect this.

- b. All bridge superstructure and substructure design will be reviewed by the Design Division for purposes of verifying structural integrity and optimization of design.

- c. The final bridge layout shall be in conformance with the Bridges and Structures, Operation and Planning Manual and the Bridges and Structures Detailing Manual.

Services  
Provided By:  
ENGINEER COUNTY

8. General Guidelines for Bridge Design (*continued*)

- d. The ENGINEER shall make final design calculations and final detail drawings in accordance with standard requirements of the Texas Department of Transportation. All bridge design shall be in conformance with the Texas Department of Transportation Bridges and Structures Operation and Planning Manual, the current American Association of State Highway and Transportation Officials or American Railway Engineers Association Specifications for railway structures, Standard Specifications for Highway Bridges, including applicable interim specifications, and the Bridges and Structures, Foundation Exploration and Design Manual. The ENGINEER shall furnish design calculations to the Design Division. The designer and checker shall check all calculations and initial each page.
- e. Structural steel or prestressed concrete shop drawings, form work drawings and false work drawings are not part of the design requirements. However, contract plans shall be in sufficient detail to permit the preparation of complete shop details for fabrication and erection.
- f. Elements of the bridge (abutments, bents, slabs, etc.) shall be detailed to a metric scale of 1:20 (1/2 inch equals one foot architect scale) or 1:50 (1/4 inch equals one foot architect scale) to provide clear legible drawings when the drawings are reduced. Lettering shall be a minimum size of 4 millimeters (5/32 inch) height for hand lettering and 1/40 for lettering by computer-aided design and drafting (CAD).
- g. Standard drawings for beams, diaphragms, railings, armor joints, riprap, etc., shall be furnished to the ENGINEER upon request. These standards shall not be redrawn by the ENGINEER nor shall his title block be transferred to the standard drawings. Modifications to the standards, if necessary, shall be clearly identified and designated by "MOD" in the standard title. Specific special drawings prepared by the ENGINEER shall not be identified as standards.
- h. Bridge layout sheets shall have the same vertical and horizontal scale. Usually a metric scale of 1:100 (1 inch = 10 feet) or 1:200 (1 inch = 20 feet) is used. Sections of existing and proposed structures usually have a metric scale of 1:50 (1 inch = 5 feet). Soil core holes shall be positioned and labeled on the bridge layout plan view. The core hole data shall be plotted at the correct station, at the same vertical scale, and at the proper elevation unless otherwise approved by the Design Division.
- i. APPENDIX C, "GENERAL PLAN CHECKLIST", on pages C-1 thru C-5, more specifically relates various sheet types, details, summaries, standards, etc.
- j. For purposes of uniformity statewide, soil core hole data shall be shown on layouts as illustrated in the Bridges and Structures Foundation Exploration and Design Manual.
- k. Geometry and structural design errors found after acceptance of bridge plans shall be promptly corrected by the consultant at no cost to the Company.

**CONSTRUCTION PHASE SERVICES**

(Function Code 320)

Services

Provided By:

ENGINEER COUNTY**CONSTRUCTION MANAGEMENT SERVICES:**

The ENGINEER will provide engineering, geotechnical testing and support services for and during the construction of the Project or portions of the Project approved by the COUNTY. Specific (basic and special) services for CONSTRUCTION MANAGEMENT AND SUPPORT by the ENGINEER will include the following:

**Construction Bidding:**

- 1) The ENGINEER will furnish the COUNTY the necessary copies of approved plans, specifications, notices to bidders, and proposals as prepared under PS&E.
- 2) The ENGINEER will assist the COUNTY on the tabulation of bids, recommendations to the Owner as to the proper action on all bid proposals received, and the preparation of formal contract documents for the award of each construction contract.

**Construction Contract Administration and Inspection:**

- 3) In general, the ENGINEER will provide the management and engineering support/data required for consultation and advisement to the COUNTY and act as the COUNTY's representative as provided in the General Condition of the Construction Contract.

- 4) The ENGINEER will coordinate and conduct a pre-construction conference (if required).

- 5) Defects and Deficiencies. The ENGINEER will use his best efforts to protect the COUNTY against defects and deficiencies in the work of the Contractor. The ENGINEER will promptly notify the COUNTY of any such defect or deficiency, and take all steps possible to require the Contractor to correct the defect or deficiency.

- 6) Contractor Payment. The ENGINEER will review quantities as submitted by the Contractor and will coordinate with the COUNTY for the preparation of the monthly and final estimates for payment to the Contractor.

- 7) The ENGINEER will provide Project site inspection of the authorized construction contract as follows:

- a) Project Engineer. The ENGINEER will provide visits by the Project Engineer or a competent representative of the ENGINEER to the site of construction for the purpose of monitoring the Contractor's progress and conformance to the construction contract plans and specifications.

- b) Resident Engineer and/or Construction Inspector(s). The ENGINEER will furnish the services of a Resident Engineer and/or Construction Inspector(s) for on the site inspection construction to monitor/inspect the Contractor's daily progress and conformance to TXDOT's PS&E specifications.

**Miscellaneous Technical Activities:**

- 8) Shop Drawings. The ENGINEER will review and check all shop or working drawings furnished by the Contractor.

- 9) Control of Materials & Equipment. The ENGINEER will provide inspection of all materials and equipment furnished/used by the Contractor as follows:

- a) Review and record all laboratory, shop and mill tests of materials and equipment for compliance with the construction contract specifications.
- b) Observe and/or perform Project record testing and/or independent assurance testing as outlined in the construction contract specifications.

- 10) Change Orders. When applicable the ENGINEER will prepare the engineering data, including plan sheet drawings, specifications, and estimates, for the preparation of construction contract change orders, which may be required due to actual field conditions encountered or new requirements directed by the COUNTY.

- 11) As Built Drawings. The ENGINEER will develop as built drawings to depict the work as actually constructed. The COUNTY will be furnished five (5) set of prints.

#### **CONSTRUCTION MATERIAL TESTING:**

The ENGINEER will provide the COUNTY with construction material testing services for the Project. The services to be provided include sampling and testing of all construction materials as required by the project plans and specifications. All sampling frequencies and test procedures will be performed in general accordance with the Texas Department of Transportation TEX methods (or ASTM methods as required) as outlined in the Guide Schedule for Sampling and Testing (11/07). The construction material testing includes, but is not limited to the following:

- (a) Sampling and laboratory testing of soils and base materials proposed for use in the construction of Project (Roads/Bridges/Misc.) to determine compliance of these materials with project plans and specifications.
- (b) Field density testing of soils and base materials to ensure proper compaction as required by project plans and specifications.
- (c) Field sampling and testing of fresh concrete, and laboratory testing of hardened concrete to determine compliance with project plans and specifications.
- (d) Field compaction testing of asphalt to ensure proper compaction during lay down operations.
- (e) Field inspection, sampling and laboratory testing of asphalt materials to determine their material properties and their compliance with project plans and specifications.
- (f) The ENGINEER will be responsible for concrete batching as well as the asphalt testing at the plants to insure delivery of acceptable material to the job site.
- (g) Any additional laboratory testing as required/requested by the COUNTY and the project plans and specifications.
- (h) Providing accurate and timely reports to the COUNTY and all/other recipients as designated by the COUNTY.
- (i) The ENGINEER will verify the concrete and asphalt designs to assure it is in accordance with TXDOT specifications to be developed by the contractor.

**FC 600 – ACQUISITION PROVIDER SERVICES**  
**(for EST. 0 PARCELS, 0 EASEMENTS AND 0 RELOCATIONS/DISPLACEMENTS)**  
(Services to be provided by L&G Engineering)

Services  
Provided By:  
ENGINEER COUNTY

**1) PROJECT ADMINISTRATION**

- a) Negotiation of Scope of Services for Work Authorization  
i) Acquisition Provider will visit project site with COUNTY personnel if necessary.

- b) Project Presence at L&G Consultant Office Headquarters

- i) Full Project Office  
(1) No Joint Use of COUNTY or TxDOT facilities  
(2) Open during normal COUNTY and State work hours  
(3) Personnel available to answer questions  
(4) Availability of Project Files  
(5) At least one office staff member is required to be a current commissioned notary public.

- c) Overhead Costs  
i) Administrative costs

- d) Communication  
i) Provide monthly progress reports with invoice.  
ii) Participate in project review meetings as determined by the COUNTY.  
iii) Prepare initial property owner contact list for use by the COUNTY in distribution of Acquisition Provider introduction letters.

- e) File Management  
i) Project and parcel files will be kept in the COUNTY's Office, if necessary. Working files will be kept in the Acquisition Provider's project administrative office, but documents generated or received by the Acquisition Provider will be forwarded to the COUNTY office as they are generated or received by the Acquisition Provider, if necessary.  
ii) Prepare payment transmittal request utilizing standard payment submissions forms with supporting documentation.  
iii) Maintain records of all payments including check number, amount, and date paid, etc.  
iv) Provide copies of all incoming and outgoing correspondence as generated if requested by COUNTY at provider conference.  
v) Maintain copies of all correspondence and contacts with property owners.

**2) TITLE SERVICES**

- a) Secure preliminary title commitments from the Title Company that will be providing title insurance. Cost of preliminary title commitments will be included in the Acquisition Provider (if requested by the title company) and will be included in the Acquisition Provider's scope of work for payment and paid as a separate item.  
b) Secure title commitment updates in accordance with insurance rules and requirements for parcel payment submissions. Cost of title commitment updates will be paid by the Acquisition Provider (if requested by the title company) and will be included in the Acquisition Provider's scope of work and paid as a separate item.  
c) Secure title insurance for all parcels acquired, insuring acceptable title to COUNTY OF HIDALGO. Written approval by the COUNTY required for any exception.

Services  
Provided By:  
ENGINEER COUNTY

## 3) APPRAISAL

- a) Appraiser may be selected from TxDOT's list of state approved fee appraisers. This list will be available for review at all District offices or at the Right of Way Division Office at 118 E. Riverside Drive, Austin, Texas, upon request.

- b) Secure written permission (if necessary) from the owner to enter the property from which land is to be acquired. If the Acquisition Provider and/or the fee appraiser, after diligent effort, is unable to secure the necessary letter of permission from the property owner, a waiver must be obtained, in writing from the COUNTY/TxDOT. Maintain permission letters with appraisal reports.

- c) Prepare (if necessary) pre-appraisal contact with interest owner(s) for each parcel using acceptable COUNTY/TxDOT forms.

- d) Contact property owners or their designated representative to offer opportunity to accompany the appraiser on the appraiser's inspection of subject property. Maintain record of contact in file.

- e) Prepare complete appraisal report for each parcel to be acquired utilizing TxDOT Forms No. ROW-A-5 and ROW-A-6 as applicable. These reports shall conform to TxDOT/COUNTY policies and procedures along with the Uniform Standards of Professional Appraisal Practices.

- f) As necessary, prepare written notification to COUNTY/TxDOT of any environmental concerns associated with the right of way to be acquired which could require environmental remediation.

- g) All completed appraisals will be administratively reviewed by L&G Engineering ROW Office and recommended for approval by TxDOT.

- h) As necessary, the appraiser will appear and or testify as an Expert Witness in eminent domain proceedings and be available for pre-hearing/pre-trial meetings as directed by L&G Engineering and/or TxDOT.

- i) As necessary, the appraiser will coordinate with review appraiser regarding revisions, comments, or additional information that may be required.

- j) The cost of the appraiser appearing as an expert witness for testimony at special commissioners hearing must be included in the proposed fee schedule for the appraiser. The cost of the appraiser's expert witness testimony for trial is not part of this contract, and shall be paid by the COUNTY.

## 4) APPRAISAL REVIEW

- a) Review Appraiser may be selected from TxDOT's list of state approved fee appraisers. This list is available for viewing at all District offices or the Right of Way Division office at 118 E. Riverside Drive, Austin, Texas upon request.

- b) Review all appraisal reports for each parcel to determine consistency of values, supporting documentation related to the conclusion reached and compliance with TxDOT/COUNTY policies and procedures and the Uniform Standards of Professional Appraisal Practices.

- c) Prepare and submit to TxDOT the Form ROW-RTA-10 "Tabulation of Values", for each appraisal.

Services  
Provided By:  
ENGINEER COUNTY

- d) The cost of the review appraiser appearing as an expert witness for testimony at special commissioners hearing must be included in the proposed fee schedule for the review appraiser. The cost of the appraiser's expert witness testimony for trial is not part of this contract, and shall be paid by the COUNTY.

### 5) APPRAISAL UPDATES

- a) Prepare complete appraisal update for the parcel to be acquired utilizing TXDOT Form No. ROW-A-5, which will be furnished to the provider by TXDOT. These reports shall conform to COUNTY/TXDOT policies and procedures along with the Uniform Standards of Professional Appraisal Practices.

- b) As necessary, prepare written notification to COUNTY/TXDOT of any environmental concerns associated with the right of way to be acquired which could require environmental remediation. All completed appraisals will be administratively reviewed by L&G Engineering Right of Way Office and recommended for approval by TXDOT.

- c) As necessary, the appraiser will appear or testify as an Expert Witness in eminent domain proceedings and be available for pre-hearing or pre-trial meetings as directed by the TXDOT/COUNTY.

- d) The cost of the appraiser appearing as an expert witness for testimony at special commissioners hearing must be included in the proposed fee schedule for the appraiser. The cost of the appraiser's expert witness testimony for trial is not part of this contract, and shall be paid by the COUNTY.

- e) As necessary, the appraiser will coordinate with the review appraiser regarding corrections and/or additional information that may be required.

### 6) NEGOTIATION, TASKS AND FEES

- a) Analyze appraisal and appraisal review reports and confirm the TXDOT's approved value prior to making offer for each parcel.

- b) Analyze preliminary title report to determine potential title problems, propose methods to cure title deficiencies.

- c) Prepare the initial offer letter, instruments of conveyance, and any other documents required or requested by COUNTY/TXDOT on applicable COUNTY/TXDOT forms.

- d) Mail (Certified Mail Return Receipt Requested) initial offer letter, draft deed, Bill of Rights Brochures and Appraisal Reports to address confirmed with the Appraisal District of Hidalgo County. Maintain follow-up contacts and secure the necessary instruments upon acceptance of the offer for the closing.

- e) Provide a copy of the appraisal report for the subject property exclusively to the property owner or authorized representative at mailing of initial offer. Maintain original signed Receipt of Appraisal. (unless property owner refuses to sign it).

- f) Respond to property owner inquiries verbally and in writing within two business days.

- g) Prepare a separate negotiator contact report for each parcel per contact.

Services  
Provided By:  
ENGINEER COUNTY

|                                                                                                                                                                                                                                                                                                     |       |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| b) Maintain parcel files of original documentation related to the purchase of the real property or property interests.                                                                                                                                                                              | _____ | _____ |
| i) Advise property owner on the Administrative Settlement process. Transmit to TXDOT any written counter offer from property owners including supporting documentation, and provide recommendation with regard to Administrative Settlements in accordance with COUNTY/TXDOT policy and procedures. | _____ | _____ |
| j) Prepare final offer letter, documents of conveyance as necessary.                                                                                                                                                                                                                                | _____ | _____ |
| k) Appear and provide Expert Witness testimony as an Acquisition Provider when requested.                                                                                                                                                                                                           | _____ | _____ |
| l) Meet at the L&G Engineering ROW office in Mission once per week as agreed-upon with the Right of Way Acquisition Manager/Administrator.                                                                                                                                                          | _____ | _____ |
| m) Provide a monthly progress report per parcel by the 25th of the month with invoice.                                                                                                                                                                                                              | _____ | _____ |
| n) The consultant shall, as part of this proposal, estimates 10% of the parcels identified on Page 37 may end up in condemnation. The consultant shall be available for any meeting/hearings as requested by the COUNTY Attorney.                                                                   | _____ | _____ |
| <b>7) CLOSING SERVICE FEES</b>                                                                                                                                                                                                                                                                      | _____ | _____ |
| a) Coordinate with COUNTY and Title Company to obtain an updated title commitment along with other Forms and certified copy of the instrument of conveyance necessary when requesting the Parcel Payment from the COUNTY.                                                                           | _____ | _____ |
| b) Acquisition Provider shall attend closings and provide closing services in conjunction with Title Company.                                                                                                                                                                                       | _____ | _____ |
| c) Acquisition Provider shall record all original instruments immediately after closing at the respective County Clerk's Office, except for donations which must be forwarded to TXDOT for acceptance by the Texas Transportation Commission.                                                       | _____ | _____ |
| <b>8) RELOCATION ASSISTANCE SERVICES (separate Work Authorization will be issued once relocations have been identified, unless noted otherwise).</b>                                                                                                                                                | _____ | _____ |
| a) The amount of relocations or displacements as identified. L&G will provide relocation advisory services. L&G will compute replacement housing supplements (owner occupant and/or tenants)                                                                                                        | _____ | _____ |
| b) L&G will provide advisory services to business displacements and relocate them effectively.                                                                                                                                                                                                      | _____ | _____ |
| c) TXDOT will review, approve and pay for all relocation costs as per the Agreement.                                                                                                                                                                                                                | _____ | _____ |
| <b>9) CONDEMNATION SUPPORT</b>                                                                                                                                                                                                                                                                      | _____ | _____ |
| a) Pre-Hearing Support                                                                                                                                                                                                                                                                              | _____ | _____ |
| i) Upon receipt of a copy of the final offer, request an updated title commitment for Eminent Domain from the Title Company.                                                                                                                                                                        | _____ | _____ |
| ii) Prepare a Bisecton Clause for the original set of Legal Descriptions supplied by Surveyor if applicable                                                                                                                                                                                         | _____ | _____ |
| iii) Use the information from the Title Commitment to join all interested parties on the necessary forms. Spouses of owners must also be joined.                                                                                                                                                    | _____ | _____ |

Services  
Provided By:  
ENGINEER COUNTY

- iv) Upon completion of the necessary forms, prepare a packet containing 2 copies each of the following documents: Title Commitment, Negotiator's Reports, Appraisal Acknowledgment, Preappraisal Contact Sheet, signed and sealed property description, and plat, Final Offer Letter, any correspondence from the land owner or representatives, along with one copy of the appraisal report. Submit packet to the COUNTY Office for submission to the COUNTY Attorney's office.
- v) Upon receipt of concurrence for the Appraisal Witness, request the update of appraisal.
- vi) Upon receipt of packet prepared by the COUNTY Attorney which will include Petition for Condemnation, Lis Pendens, Order Appointing Special Commissioners, Order Setting Hearing, Oath of Special Commissioner, and Notice of Hearings, developed by the COUNTY Attorney; the attorney shall file the original petition with the COUNTY Court at Law or other appropriate Court for a cause number to be assigned.
- vii) The COUNTY attorney shall file the Lis Pendens including the cause number with the COUNTY Clerk's Office.
- viii) Upon assignment of a court, the COUNTY Attorney shall file the Order Appointing Commissioners with the judge retaining a copy of the Order for the files.
- ix) Following appointment of Special Commissioners by the judge, the COUNTY shall secure the following documents: Oath of Commissioners signed by the Commissioners, Order Setting Hearing, 2 copies of the Notice of Hearing signed by the Commissioners.
- x) The COUNTY shall file all originals with the court and send copies marked "copy" to L & G Engineering.
- xi) The COUNTY Attorney shall send a copy of the petition to the Title Company so that the Title Company can make sure the appropriate parties were joined and that no changes in title have occurred.
- xii) The COUNTY Attorney shall set the Special Commissioners Hearing after the updated appraisal has been submitted, if there is no change in value. If there is an increase in value, COUNTY will approve the new value and the COUNTY's provider will present a revised offer and a final offer letter and submit a copy of the final offer letter.
- xiii) The COUNTY Attorney shall coordinate a pre-hearing conference prior to the hearing (the day before or earlier) to discuss facts of the case with the COUNTY, Appraiser, and Negotiator.
- xiv) After the hearing is set, the COUNTY Attorney shall serve Notices of Hearing to the indicated parties at least 11 days prior to the Commissioner's hearing. If it is necessary to join the Federal Government, be advised that they have an additional 60 days to prepare for the Hearing.
- xv) Once the notices have been served, the COUNTY Attorney shall file the original notices with the court and send copies stamped "copy" to L&G Engineering ROW Office.
- xvi) The COUNTY's Attorney shall send a reminder letter 2-3 weeks in advance to the COUNTY Administration offices, Acquisition Provider, the three special commissioners and court reporter concerning Hearing dates.
- b) Post Hearing Support (by COUNTY Attorney)
- i) For the hearing, prepare the necessary forms and Special Commissioners time sheets and submit forms to Hidalgo COUNTY clerk's office.
  - ii) Obtain the signatures of Special Commissioners on the Award of Commissioners and file with the court for the judge's signatures within 48 hours of the Hearing.
  - iii) Give timesheets to judge. The amount paid to the Special Commissioners is determined by the judge.
  - iv) Obtain and distribute 3 certified copies of the award as follows: 1 certified copy to the title company with a request for a commitment, 1 certified copy to the COUNTY, 1 certified copy to L&G Engineering with the Commitment to request the warrant in the amount of the Special Commissioners Award.

- v) Send the Commitment and the Award to COUNTY, along with individual special commissioner's billing requesting the payment for their fees.
- vi) File COUNTY warrant in the registry of the court. File a Notice of Deposit with the court and send certified copies to each defendant notifying them of the date of the deposit. The Date of Deposit is the Date of Take.
- vii) Take photograph of the interest to be acquired (if necessary) on the day of deposit for relocation verification.
- viii) Send written notices of the date of deposit to the COUNTY Administration office and all interested parties.
- ix) Appear as Expert Witness as requested. Sub-contractors must also appear as Expert Witnesses as requested.
- x) All acquisition negotiations file indicating all "due diligence" provided by the Acquisition Provider will be directed to the COUNTY Attorney's office for his further handling in accordance to the Eminent Domain process by the COUNTY.

## 10) COMPENSABLE UTILITIES

Utility Accommodation is an integral factor in road construction and design. Coordination of utility adjustments is a necessary function within planning, design, acquisition and construction and requires the administration of property rights issues, utility policy, and reimbursement of eligible utility adjustments. It includes the following tasks:

- a) Preliminary Design Consultations
  - i) Conduct Field Investigation and review Certificate of Convenience and Necessity boundaries to identify utility providers within the project area. Communications through letter, phone calls and email to establish a contact list. Coordinate data gathering by surveyors and design team. Introduce project to utility providers.
- b) Field Observations and Verifications
  - i) Provide maps to Utility providers to "redline" and identify conflicts. Coordinate exposures and data collection by surveyor. Provide and confirm utility data on project maps. Order Utility Location Service.
- c) Exchange of Information with Utility Providers
  - i) Provide project schedule.
  - ii) Request schedules for utility adjustments.
  - iii) Identify who is responsible for utility process.
- d) Confirmation of Property Interests
  - i) Request Documents.
  - ii) Coordination of data on maps and citation of property interest documents.
  - iii) Confirm utilities are within easements.
- e) Coordination of Agreements
  - i) Identify utilities that are compensable.
  - ii) Determine parties and agreements necessary to complete compensable process.
  - iii) Coordinate execution and processing of Standard Utility Agreements.
- f) Utility Meetings throughout project development
  - i) Set up and coordinate utility meetings during planning, design, acquisition and construction phases.
  - ii) Attend and participate in meetings by other parties.

## 11) PAYMENT SCHEDULE

- a) Project Administration
  - i) Payment and Milestones
- (a) Full Project Office
- (1) Lump Sum Basis (assume 1 year project presence)

- (2) Initial payment of 25% upon establishment of a project office with functional phone and utility services.
- (3) Remainder paid out in equal monthly installments of 15% starting the following month.
- (4) Monthly billing to COUNTY OF HIDALGO will be required.
- b) Title Services
  - ii) Payment
  - (a) Per Parcel basis.
  - iii) Milestones
  - (a) 100% upon securing initial title commitment.
- c) Appraisal Services
  - i) Payment
  - (a) Per Parcel Basis
  - ii) Milestones
  - (a) 100% paid upon delivery of complete and acceptable appraisal report
- d) Appraisal Review
  - i) Payment
  - (a) Per Parcel Basis
  - ii) Milestones
  - (a) 100% upon delivery of complete and acceptable appraisal report
- e) Appraisal Update
  - i) Payment
  - (a) Per Parcel Basis
  - ii) Milestones
  - (a) 100% upon submission of ROW-A-10
- f) Negotiation, Task, and Fees
  - i) Payment
  - (a) Per Parcel Basis
  - ii) Milestones
  - (a) 80% upon presentation of initial offer.
  - (b) 20% upon successful negotiation and all instruments are recorded.
- g) Closing Service Fees
  - i) Payment
  - (a) Per Parcel Basis
  - ii) Milestones
  - (a) 100% upon recordation of instrument of conveyance.
- h) Relocation Assistance
  - i) Payment
  - (a) Per Relocation
  - ii) Milestones
  - (a) 100% upon issuance of 90-day vacancy letter.
- i) Compensable Utilities
  - i) Payment
  - (a) By percent complete

**ADDITIONAL RESPONSIBILITIES****Easements, Letters of Permission, Etc.**

The ENGINEER shall be responsible for delineating easements. The ENGINEER will be responsible for securing the necessary legal instruments.

**Coordination of Utilities**

The ENGINEER shall furnish the COUNTY prints of a project layout which will be distributed by ENGINEER to various utility companies to determine which utilities are in the limits of the project. These shall be preliminary layouts. Upon completion of the preliminary drainage plans and U&D sheets, the ENGINEER shall distribute to the various utility companies and request return. Upon return of these prints, the ENGINEER will schedule a meeting with the various utility companies to discuss potential conflicts and conformance with the State's Utility Accommodation Policy. The ENGINEER is responsible for coordination with the various utility companies for exposing potential conflicts and field ties to uncover utilities in potential conflict areas.

**Meetings**

Meetings will be held with the FHWA, State Officials, local governments, property owners, utility owners, railroad companies, other consulting firms, etc., as needed or required by the COUNTY. The ENGINEER shall coordinate through the COUNTY for the development of this project with any local entity having jurisdiction or interest in the project (i.e., city, county, etc).

**Specifications, Special Provisions, Special Specifications**

Use the State's standard specifications or previously approved special provisions and/or special specifications. If a special provision and/or special specification is developed for this project, it shall be in the State's format and incorporate references to approved State test procedures.

**Project Manager/Engineer Communication**

The ENGINEER shall designate one Texas Registered Professional Engineer to be responsible throughout the project for project management and all communications, including billing, with the COUNTY's Director. Any replacements to the ENGINEER's designated Project Manager/Engineer must be approved by the COUNTY.

Engineering documents produced for the department's engineering projects shall be signed, sealed and dated or CAD'd sealed in accordance with Administrative Order No. 5-89 and Administrative Circular No. 26-91.

**Design Responsibilities**

The ENGINEER is responsible for design errors and/or omissions that become evident before, during or after construction of the project. The ENGINEER's responsibility for all questions arising from design errors and/or omissions will be determined by the COUNTY and all decisions shall be final and binding. This would include, but not necessarily be limited to:

1. All design errors and/or omissions resulting in additional design work to correct the errors and/or omissions.
2. Preparation of design documents and detail drawings necessary for a field change due to design errors and/or omissions.
3. Revision of original tracings to the extent required for a field change due to design errors and/or omissions.

The ENGINEER shall promptly make necessary revisions or corrections resulting from the ENGINEER's errors, omissions or negligent acts without additional compensation. Acceptance of the work by the COUNTY will not relieve the ENGINEER of the responsibility for subsequent correction of any such errors or omissions or for clarification of any ambiguities.

**Document and Information Exchange**

Data, Plan Sheets, General Notes and/or Specifications provided to the COUNTY shall be furnished on 8GB USB flash drives. Each 8 GB flash drive shall have a file titled Table of Contents. The Table of Contents shall indicate the locations of files within the directory structure of the documentation.

General Notes and specifications shall be provided in MS Office 2007 format. Plan sheets shall be provided in Microstation DGN or GEOPAK GPK format. PDF copies of plan sheets shall also be provided. Two copies of the documentation shall be provided to the COUNTY.

If required, the ENGINEER shall provide to the COUNTY, a CD that contains all the plan sheets for the project. The graphics tape shall be compatible with the COUNTY's computer system.

CD Tape Required (YES or NO): YES

**Proposal Time**

The time indicated in the proposal and the contract shall include time necessary for reviews, approval, etc.

**Office Location**

The ENGINEER will perform the services to be provided under this agreement out of their office or offices listed below:

|                        |                 |
|------------------------|-----------------|
| Service                | Office Location |
| PS&E                   | Mission Office  |
| Schematic              | Mission Office  |
| Environmental Document | Mercedes Office |

The work effort will be managed out of the \_\_\_\_\_  
Mercedes  
2100 West Expressway 83  
(Address)  
Mercedes  
Texas  
(State)

**APPENDIX A - PLAN SHEET SEQUENCE PROCEDURE**

1. Title Sheet
- Detailed Index of Sheets
2. Typical Sections
3. General Notes and Specifications Data
4. Estimate and Quantity Sheets
5. Storm Water Pollution Prevention Plan (SW3P) Sheets
6. Traffic Control Plans
  - a. Sequence of Construction Layouts
  - b. Detour Plan/Profile/Typical Sections/Quantities
7. Roadway Layouts
  - a. Roadway Plan/Profile Sheets
  - b. Intersection Plan/Profile Sheets
  - c. Intersection Layouts
  - d. Alignment Layouts/Data
  - e. Ramp Layouts/Profiles
  - f. Connection Roads/U-turns Layouts/Profile
8. Roadway Details
  - a. Concrete Pavement Details/Standards
  - b. Concrete Pavement Terminal Anchorage Details/Standards
  - c. Bridge Approach Details/Standards
  - d. Bridge Terminal Anchorage Details/Standards
  - e. Roadway/Median Barrier Details/Standards
  - f. Curb Details
  - g. Driveway Details/Typical Sections/Standards
9. Signing Layouts and Marking Layouts
10. Traffic Signal Layouts
11. Lighting Layouts
12. Illumination Detail Standards (HMID, HMIF, HMIP, RID)
13. Utility Layouts/Profiles
14. Drainage Area Maps and Hydraulic Data
  - a. General Drainage Area Maps
  - b. Stage-Discharge Curves
  - c. Main Cross-Drainage Culvert/Bridge Hydraulic Data
  - d. Drainage Area Maps/Culverts/Storm Sewer
  - e. Hydraulic Data/Culverts/Inlets/Storm Sewer/Pumps
15. Detailed Drainage Plans
  - a. Drainage Plan/Profile Sheets (Storm Sewer Plan/Profile Sheets)
  - b. Channel Plan/Profiles/Typical Sections
  - c. Box Culvert Plan/Profile
  - d. Pipe Sewer/Culvert Cross Sections

## APPENDIX A - PLAN SHEET SEQUENCE PROCEDURE (Continued)

16. Drainage Structural Details/Standards
  - a. Inlet Details/Standards
  - b. Manhole Details/Standards
  - c. Junction Box Details/Standards
  - d. Safety End Treatment Details/Standards
  - e. Box Culvert Details/Standards
  - f. Culvert Wingwall Details/Standards
  - g. Excavation-Backfill Diaphragms
  - h. Riprap Details/Standards
  - i. Temporary Pollution and Erosion Control Details
17. Pumphouse Layouts
18. Pumphouse Details
19. Pumphouse Standard Details
20. Bridge Layouts/Profile/Typical Sections\*
21. Bridge Details\*
  - a. Summary of Bridge Quantities
  - b. Abutments
  - c. Interior Bents
  - d. Spans
  - e. Special details for the specific bridge
22. Bridge Standard Details\*
23. Bridge Railing Standards
24. Retaining Wall Layouts/Profiles\*\*
25. Retaining Wall Details\*\*
26. Retaining Wall Standard Details\*\*
27. Guard Fence/Standards and Signal Pole Standards
28. Signal/Electrical Details/Standards and Signal Pole Standards
29. Signing/Markers/Striping Details/Standards
30. Barricade/Construction/Beacon Standards
31. Miscellaneous Standards
  - a. Chain Link Fence Standards
  - b. Bridge End Detail/Standards
  - c. Roadway Clearance Details/Standards
  - e. Attenuator Standards

**NOTE:** Variations of these plan sheet sequence guidelines may be permitted if approved in writing by the County.

## APPENDIX B - PLAN PREPARATION PROCEDURES

1. Title Sheet  
The ENGINEER shall be responsible for completing the title sheet as required and formatted by the STATE and as discussed in Part V of the Highway Design, Operations and Procedures Manual. Refer to Section K - Plans, I - Title Sheets, page 5-24, for the procedure to be used regarding all plans prepared by the ENGINEER.
2. Project Layout  
The project layout shall clearly depict the entire project as it is proposed and will usually be drawn at a scale of 1 inch=100 feet or 1 inch=200 feet, depending on the size of the project.
3. Typical Sections  
See Part IV of the Highway Design, Operations and Procedures Manual.
4. Sequence of Work Sheets (Traffic Control Plan)  
Clarity and completeness should be the rule to follow in preparing these sheets, with particular attention given to location of construction signs and barricades, lane widths, protection of drop offs, etc. For a reference guide use the Texas Department of Transportation, Texas Manual on Uniform Traffic Control Devices. Usual scale of 1 inch=100 feet and/or 1 inch=50 feet for special locations. A narrative sequence shall be included in the special provisions for the project. Staging of structural elements shall be considered. Provisions for drainage shall be considered, included and indicated during all stages of construction operations.
5. Removal Item Sheets  
These sheets indicate removal of existing facilities necessary to the proposed construction. (1 inch=40 feet) (use same scale as plan/profile sheets).
6. Summary Sheets  
Summary Sheets are required to indicate type, quantity and/or location of work for individual items of the proposed project.
7. Alignment Layout Sheets  
These sheets indicate the horizontal alignment with curve data and coordinates usually tabulated thereon. On some projects, depending on size, this information may be included on the plan profile sheets. Usual scale (1 inch=100 feet) or (1 inch=40 feet).
8. Plan Profile Sheet  
Clarity and completeness should be the rule to follow in preparation of these sheets. Usual scale (1 inch=40 feet or 1 inch=50 feet) or (1 inch=20 feet), depending on project complexity.
9. Drainage Area Maps  
Usual scale (1 inch=100 feet) and/or (1 inch=200 feet) supplemented by large scale area maps as necessary.
10. Drainage Plan Profile Sheets  
These sheets may be required on some projects to clearly depict location of inlets, storm sewer lines, and profile of storm sewer lines and laterals. Usual scale (1 inch=40 feet or 1 inch=50 feet) or (1 inch=20 feet). Storm sewer design does include redesign of storm sewers imposed by utility constraints developing after initial reviews by the STATE and consequential redesign and adjustments.
11. Runoff, Inlet, Storm Sewer and Culvert Sheets  
Use standard sheets.

## APPENDIX B - PLAN PREPARATION PROCEDURES (Continued)

12. Culvert Cross Sections and Details  
District standard reproducible sheets can be furnished (one each) to the ENGINEER for modification of special designs.
13. Manhole and Inlet Details  
District standard reproducible sheets can be furnished (one each) to the ENGINEER.
14. Miscellaneous Detail  
Curb, Sidewalk, Driveways, etc.
15. Intersection Details
16. Marking Layouts and/or Details  
Layouts of the entire project with markings depicted thereon. Usual scale 1:500 (1 inch=40 feet or 1 inch=50 feet). On some projects typical details might suffice.
17. Structural Details  
Bridge layout sheets shall have the same horizontal and vertical scale. Usually (1 inch = 10 feet) (1 inch = 20 feet). Sections of existing and proposed structures usually have a scale of (1 inch = 5 feet). Elements of the bridge (abutments, bents, slabs, etc.) shall be detailed to a (1/2 inch = 1 foot) or (1/4 inch equals 1 foot) architect scale to provide clear legible drawings when reduced. Letters shall be a minimum size of 4 millimeters (5/32 inch) height for hand lettering and 1/40 for lettering by computer-aided design and drafting (CADD).
18. Overhead Sign Bridge Layouts  
A maximum of four structures may be shown on each layout sheet. The reference to the appropriate overhead sign bridge (OSB) standard and the following requirements shall be shown on the layout:  
 (1) Drilled shaft size and length  
 (2) Soil strength used for design {indicate basis and boring(s) used}  
 (3) Design height  
 (4) Tower height  
 (5) Leg spacings and  
 (6) Design wind speed.  
 The wind speed design map need not be included in the project plans. Designation of tower member size and anchor bolt size shall not be shown. For OSBs which require special design, the design shall be in accordance with the AASHTO sign specifications (see Item 22 of References on page 49) and to the same loading requirements as for normal standard structures. Structures (special or standard) which will have changeable message signs shall be analyzed by the ENGINEER.

APPENDIX C - GENERAL PLAN CHECKLIST

Services  
Provided By:  
ENGINEER COUNTY

|                                                                                       |       |       |
|---------------------------------------------------------------------------------------|-------|-------|
| Title Sheet                                                                           | _____ | _____ |
| Project Layout                                                                        | _____ | _____ |
| Sequence of Work                                                                      | _____ | _____ |
| Detour Layouts & Profiles                                                             | _____ | _____ |
| Construction Pavement Markings                                                        | _____ | _____ |
| Signing & Barricades                                                                  | _____ | _____ |
| Construction Sign & Beacons                                                           | _____ | _____ |
| Typical Sections                                                                      | _____ | _____ |
| Shaping & Finishing Sections                                                          | _____ | _____ |
| Slopes Adjacent to Shoulders                                                          | _____ | _____ |
| Estimate & Quantities                                                                 | _____ | _____ |
| General Notes & Specification Data                                                    | _____ | _____ |
| Grading Summary                                                                       | _____ | _____ |
| Miscellaneous Summaries (See following "SUMMARIES" heading)                           | _____ | _____ |
| Horizontal Curve Data & Alignment Layouts                                             | _____ | _____ |
| Drainage Summaries                                                                    | _____ | _____ |
| Structure Summaries                                                                   | _____ | _____ |
| Erosion Control Summary & Details                                                     | _____ | _____ |
| Plan/Profile Sheets                                                                   | _____ | _____ |
| Erosion Control Summary & Details                                                     | _____ | _____ |
| Pavement Contours                                                                     | _____ | _____ |
| Superelevation Transition (If Required)                                               | _____ | _____ |
| Grading Contours                                                                      | _____ | _____ |
| Guard Fence Layouts                                                                   | _____ | _____ |
| Storm Water Pollution Prevention Plans (SW3P)                                         | _____ | _____ |
| Drainage Area Maps                                                                    | _____ | _____ |
| Hydraulic Data                                                                        | _____ | _____ |
| Drainage Sheets                                                                       | _____ | _____ |
| Bridge Hydrology Sheets                                                               | _____ | _____ |
| Inlet & Manhole Details                                                               | _____ | _____ |
| Utility Support Details                                                               | _____ | _____ |
| Culvert Cross Sections & Details                                                      | _____ | _____ |
| Special Culvert Designs                                                               | _____ | _____ |
| Special Drainage Details                                                              | _____ | _____ |
| Chain Link Fence Locations                                                            | _____ | _____ |
| Ramp Details Sheet                                                                    | _____ | _____ |
| Removal Item Sheet - Including detours                                                | _____ | _____ |
| (Shown in detour summary, No payment for removal; subsidiary to construction detours) | _____ | _____ |
| Pavement Details                                                                      | _____ | _____ |
| Pavement Standard Modification for Concrete Shoulder                                  | _____ | _____ |
| Concrete Pavement Continuously Reinforced (CPCR)                                      | _____ | _____ |
| Concrete Pavement Contraction Design (CPCD)                                           | _____ | _____ |
| Concrete Pavement Details - Jointed Reinforced (Steel Bars) (CPJR)                    | _____ | _____ |
| Bridge Approach Slab Details                                                          | _____ | _____ |
| Vehicle Attenuator Details                                                            | _____ | _____ |
| Miscellaneous Details                                                                 | _____ | _____ |
| Wheelchair Ramps                                                                      | _____ | _____ |
| Pavement Marking Details                                                              | _____ | _____ |
| Modified Standards                                                                    | _____ | _____ |
| List of Standards                                                                     | _____ | _____ |
| Permanent Signing Plans & Quantities                                                  | _____ | _____ |

**APPENDIX C - GENERAL PLAN CHECKLIST (continued)**

Services  
Provided By:  
**ENGINEER COUNTY**

|                                                                              |       |       |
|------------------------------------------------------------------------------|-------|-------|
| Permanent Lighting Plans, Quantities & Standards                             | _____ | _____ |
| Bridge Layout(s)                                                             | _____ | _____ |
| Bridge Details                                                               | _____ | _____ |
| Retaining Wall Layout(s)                                                     | _____ | _____ |
| Retaining Wall Details                                                       | _____ | _____ |
| Pumphouse Details                                                            | _____ | _____ |
| Underdrain Details (Retaining Walls)                                         | _____ | _____ |
| Culvert Standards                                                            | _____ | _____ |
| Soil Profile                                                                 | _____ | _____ |
| Temporary Traffic Signals                                                    | _____ | _____ |
| Design Cross Sections                                                        | _____ | _____ |
| Estimate                                                                     | _____ | _____ |
| List of Standard Specifications, Special Provisions & Special Specifications | _____ | _____ |
| Detour Special Provisions (If Required)                                      | _____ | _____ |
| Construction Time Estimate                                                   | _____ | _____ |
| Critical Path Method (CPM)                                                   | _____ | _____ |
| Unit Price Documentation                                                     | _____ | _____ |
| <b>Miscellaneous</b>                                                         |       |       |
| Conduit Requirements                                                         | _____ | _____ |
| Traffic signal Requirements                                                  | _____ | _____ |
| <b>Summaries</b>                                                             |       |       |
| <b>(ALL BELOW YES FOR ENGINEER AND NO FOR COUNTY UNLESS NOTED OTHERWISE)</b> |       |       |
| Salvaging and Placing Topsoil                                                | _____ | _____ |
| Prepare ROW                                                                  | _____ | _____ |
| Remove Old Structures                                                        | _____ | _____ |
| Scarify Existing Pavement                                                    | _____ | _____ |
| Remove Old Concrete Curb of Curb and Gutter (C&G)                            | _____ | _____ |
| Remove Old Concrete Pavement                                                 | _____ | _____ |
| Remove Old Concrete Riprap                                                   | _____ | _____ |
| Remove Metal Beam Guard Fence                                                | _____ | _____ |
| Galvanized steel Beam Guard Fence (12Ga) (GSBGF)                             | _____ | _____ |
| Temporary Guard Fence (TEMPGF)                                               | _____ | _____ |
| Summary of Concrete Flumes                                                   | _____ | _____ |
| Curbs                                                                        | _____ | _____ |
| Adjust Manholes & Inlets                                                     | _____ | _____ |
| Underdrains                                                                  | _____ | _____ |
| Base and Pavement                                                            | _____ | _____ |
| Large Structure                                                              | _____ | _____ |
| Concrete Riprap (RR8 & RR9)                                                  | _____ | _____ |
| Temporary Portable Concrete Barrier (PCBR)                                   | _____ | _____ |
| Concrete Traffic Barrier                                                     | _____ | _____ |
| Vehicle Attenuator                                                           | _____ | _____ |
| Guard Rail Energy Absorbing Terminal (Great System)                          | _____ | _____ |
| Pavement Markings & Blast Cleaning (Thermoplastic)                           | _____ | _____ |
| Retaining Walls                                                              | _____ | _____ |
| Large Structure Summaries                                                    | _____ | _____ |
| Small Structure Summaries                                                    | _____ | _____ |

APPENDIX C - GENERAL PLAN CHECKLIST (continued)

Services

Provided By:

ENGINEER COUNTY

Summaries

(ALL BELOW YES FOR ENGINEER AND NO FOR COUNTY UNLESS NOTED OTHERWISE)

|                                                             |       |       |
|-------------------------------------------------------------|-------|-------|
| Earthwork (Roadway & Channel) & Channel Details             | _____ | _____ |
| Culverts                                                    | _____ | _____ |
| Detours                                                     | _____ | _____ |
| Seeding or Mulch Sod - Quantity Only                        | _____ | _____ |
| Inlet & Manholes                                            | _____ | _____ |
| Sidewalks                                                   | _____ | _____ |
| Construction Pavement Markings                              | _____ | _____ |
| Driveways                                                   | _____ | _____ |
| Concrete Median                                             | _____ | _____ |
| Storm Sewers                                                | _____ | _____ |
| Head Walls & Safety End Treatments                          | _____ | _____ |
| Curb Openings                                               | _____ | _____ |
| Manholes                                                    | _____ | _____ |
| Chain Link Fence, Remove & Replace Chain Link Fence         | _____ | _____ |
| Remove & Relay Reinforced Concrete Pipe (RCP) or Pipe Sewer | _____ | _____ |

[illegible]

**L&G FUNCTION  
ENVIRONMENTAL ASSESSMENT WORK  
TXDOT FUNCTION**

# EXHIBIT "D"

## CONTRACT RATES



|                                                                                                                                                                      |    |                  |                               |        |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|------------------|-------------------------------|--------|--|
| <div><b>L &amp; G Engineering</b><br/>Transportation Consulting Engineers</div> |    |                  | Audited Overhead Rate FY 2012 |        |  |
| Labor/Staff Classification                                                                                                                                           |    | Hourly Base Rate | Contract Rate<br>FY 13        |        |  |
|                                                                                                                                                                      |    |                  |                               |        |  |
| Principal                                                                                                                                                            | \$ | -                | \$                            | -      |  |
| Senior Project Manager                                                                                                                                               | \$ | 68.00            | \$                            | 215.40 |  |
| Senior Engineer                                                                                                                                                      | \$ | 53.00            | \$                            | 167.89 |  |
| Project Engineer                                                                                                                                                     | \$ | 39.00            | \$                            | 123.54 |  |
| Senior Environmental Scientist/Specialist                                                                                                                            | \$ | 43.00            | \$                            | 136.21 |  |
| Design Engineer                                                                                                                                                      | \$ | 36.00            | \$                            | 114.04 |  |
| ROW Administrator                                                                                                                                                    | \$ | 34.00            | \$                            | 107.70 |  |
| ROW Negotiator                                                                                                                                                       | \$ | 31.00            | \$                            | 98.20  |  |
| EIT                                                                                                                                                                  | \$ | 26.00            | \$                            | 82.36  |  |
| Senior Engineer Tech                                                                                                                                                 | \$ | 25.00            | \$                            | 79.19  |  |
| Environmental Scientist/ Specialist                                                                                                                                  | \$ | 25.00            | \$                            | 79.19  |  |
| Engineer Tech                                                                                                                                                        | \$ | 24.00            | \$                            | 76.02  |  |
| CADD Operator / GIS Analyst                                                                                                                                          | \$ | 21.00            | \$                            | 66.52  |  |
| Admin/Clerical                                                                                                                                                       | \$ | 18.00            | \$                            | 57.02  |  |
| Biologist                                                                                                                                                            | \$ | 16.00            | \$                            | 50.68  |  |
| Overhead Rate: 182.83%                                                                                                                                               |    |                  |                               |        |  |
| Profit Rate: 12.00%                                                                                                                                                  |    |                  |                               |        |  |
|                                                                                                                                                                      |    |                  |                               |        |  |
| Other Direct Expenses:                                                                                                                                               |    |                  |                               |        |  |
| Cost                                                                                                                                                                 |    |                  |                               |        |  |
| Lodging                                                                                                                                                              |    | \$85/night       |                               |        |  |
| Meals                                                                                                                                                                |    | \$36/day         |                               |        |  |
| Mileage                                                                                                                                                              |    | \$0.55/mile      |                               |        |  |
| Car Rental                                                                                                                                                           |    | \$50.00/day      |                               |        |  |
| Air Travel (Coach/Business Class)                                                                                                                                    |    | At Cost          |                               |        |  |
| 8 1/2" X 11" copies                                                                                                                                                  |    | \$1.00/sheet     |                               |        |  |
| 11" X 17" copies                                                                                                                                                     |    | \$1.50/sheet     |                               |        |  |
| 11" X 17" Mylar                                                                                                                                                      |    | \$2.00/sheet     |                               |        |  |
| Overnight Mail - Letter Size                                                                                                                                         |    | \$15.00/Each     |                               |        |  |
| Overnight Mail - Oversized Box                                                                                                                                       |    | \$25.00/Each     |                               |        |  |

EXHIBIT "D-1"  
ESTIMATED PROJECT FEE SCHEDULE  
MILE 3 PROJECT

| FOR ACCOUNTING PURPOSES PERCENTAGE OF FUNDING BASED ON MILEAGE |  |  |  | CITY                             |           | COUNTY      |           |
|----------------------------------------------------------------|--|--|--|----------------------------------|-----------|-------------|-----------|
|                                                                |  |  |  | 0.83 MILE                        | 1.12 MILE | 2.67 MILE   | 1.38 MILE |
|                                                                |  |  |  | CITY                             |           | COUNTY      |           |
|                                                                |  |  |  | MILE 3 PROJECT                   |           | HIDALGO CTY |           |
|                                                                |  |  |  | FR: TOM GILL ROAD EAST TO FM 492 |           | STATE/PO    |           |
|                                                                |  |  |  | 40' -- Rural                     |           |             |           |
|                                                                |  |  |  | 60 Varies and New Location       |           |             |           |
|                                                                |  |  |  | 4-Hane urban for Section 1       |           |             |           |
|                                                                |  |  |  | 2-Hane rural for Section 2       |           |             |           |
|                                                                |  |  |  | 120ft                            |           |             |           |
|                                                                |  |  |  | \$15,750,000.00                  |           |             |           |
|                                                                |  |  |  | \$5,750,000.00                   |           |             |           |
|                                                                |  |  |  | 3.5 Miles                        |           |             |           |
|                                                                |  |  |  | 2.5 Miles                        |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |
|                                                                |  |  |  |                                  |           |             |           |

**PROJECT LOCATION MAP**  
**MILE 3**  
 SECTION I - FROM TOM GILL TO FM 492  
 SECTION II - FROM FM 2221 TO TOM GILL

- LEGEND**
- MILE 3 PROJECT LIMITS
  - PROJECT APPROX. LENGTH: 6.0 MILES
  - STATE ROADS
  - STREETS
  - CITY LIMITS
  - COUNTY LIMITS

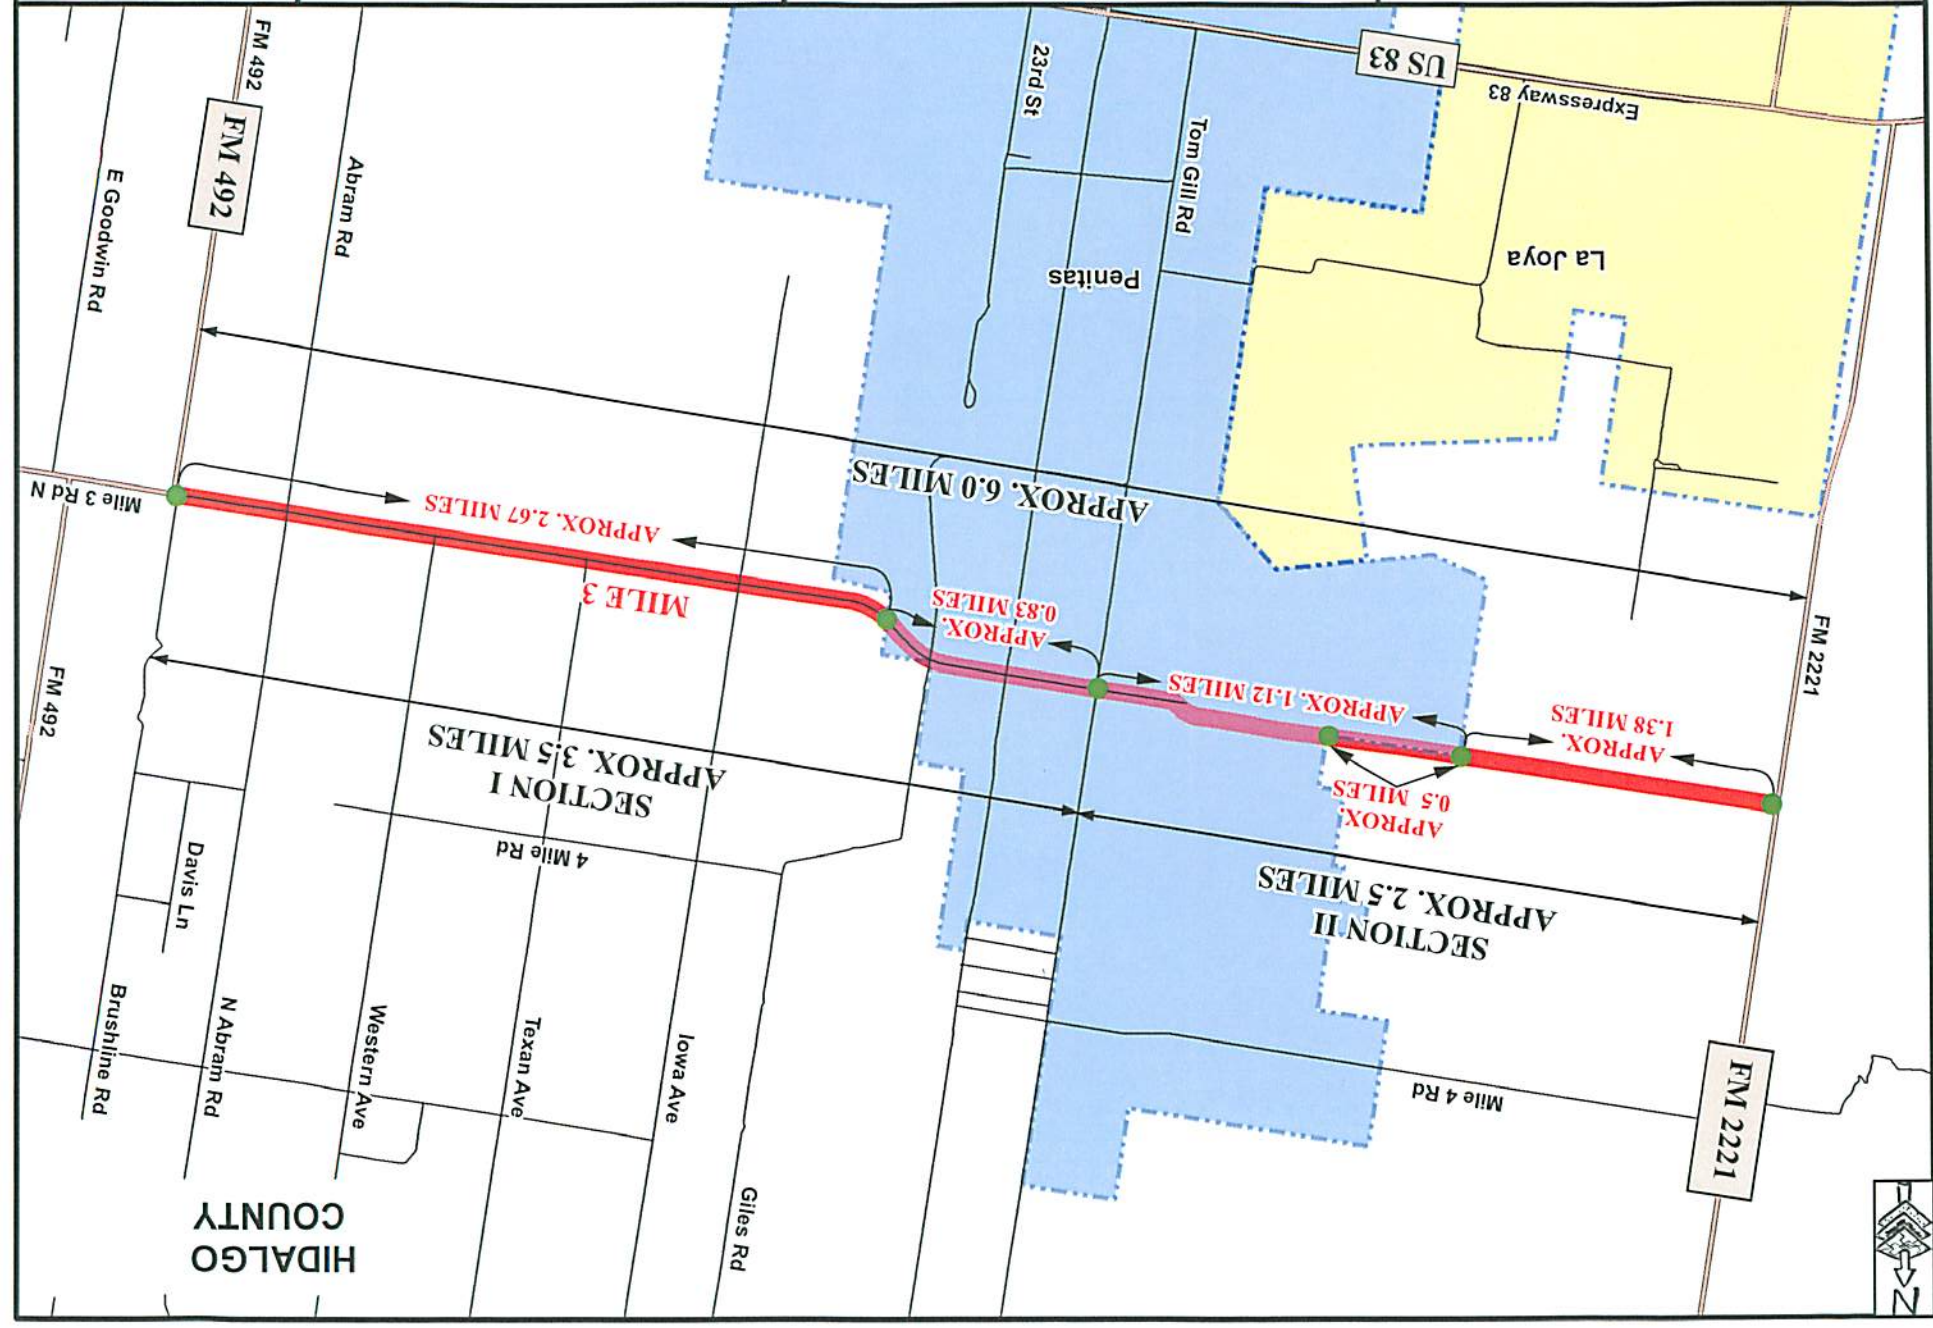

# HIDALGO COUNTY

Professional Engineering Services

Contract # C-

## EXHIBIT "E"

Work Authorization Form

WORK AUTHORIZATION NO. \_\_\_\_\_

THIS WORK AUTHORIZATION is made pursuant to the terms and conditions of Article I. of the Agreement made by and between HIDALGO COUNTY, action herein by and through the Commissioner's Court, hereinafter called the "Owner," and, L & G Consulting Engineers, Inc. d/b/a L & G Engineering, professional engineers of Mercedes, Texas, hereinafter called "Engineer".

### PART 1. SCOPE OF WORK

The purpose of this Work Authorization is for the Engineer to provide

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

The scope of services to be provided by the Owner is identified in *EXHIBIT "A" - Scope of Services to be Provided by the Owner* attached hereto.

The scope of services to be provided by the Engineer is identified in *EXHIBIT "B" - Scope of Services to be Provided by the Engineer* attached hereto.

**PART 2. ESTIMATED COST**

The estimated cost for services under this Work Authorization is \$ \_\_\_\_\_. This amount is based upon the costs outlined in the Estimated Cost Proposal attached hereto as EXHIBIT "D".

**PART 3. PAYMENT**

Compensation and payment to the Engineer for the services established under this Work Authorization shall be made in accordance with Article 6 of the Agreement.

**PART 4. FUNDING**

This Work Authorization No.1 shall be funded through funding source:

Account No. \_\_\_\_\_  
Requisition Number \_\_\_\_\_ (MUST BE INCLUDED AFTER CC APPROVAL)

**PART 5. PERIOD OF SERVICE**

This Work Authorization shall become effective on the date of final acceptance of the parties hereto, and terminate upon completion of scopes of the work authorization.

**PART 6. RESPONSIBILITIES AND OBLIGATIONS**

This Authorization does not waive the parties' responsibilities and obligations provided under the Agreement.

**PART 7. ACKNOWLEDGEMENT AND CONFIRMATION**

Acknowledgement and confirmation by Hidalgo County \_\_\_\_\_, Commissioner \_\_\_\_\_ as to content and detail of this Work Authorization No. 1.

HIDALGO COUNTY

BY: \_\_\_\_\_

**PART 8. ACCEPTANCE AND APPROVAL**  
This Work Authorization is hereby accepted, approved by Hidalgo County Commissioners' Court on \_\_\_\_\_ as indicated below and effective as of \_\_\_\_ day of \_\_\_\_\_, 2013.

**THE ENGINEER:**  
**THE OWNER:**  
HIDALGO COUNTY

By: Jacinto Garza, P.E.  
\_\_\_\_\_  
President  
By: Ramon Garcia, County Judge  
\_\_\_\_\_

**ATTEST:**

By: Arturo Guajardo, Jr., County Clerk  
\_\_\_\_\_

**LIST OF EXHIBITS**

- EXHIBIT "A" - Service to be provided by the Owner
- EXHIBIT "B" - Services to be provided by the Engineer
- EXHIBIT "C" - Work Schedule
- EXHIBIT "D2" - Estimated Man-hour Breakdown

EXHIBIT "F"

Supplemental Agreement Form

THE STATE OF TEXAS     §  
COUNTY OF HIDALGO     §  
§

**SUPPLEMENTAL AGREEMENT NO. \_\_\_\_\_**  
**TO AGREEMENT FOR PROFESSIONAL SERVICES**

This SUPPLEMENTAL AGREEMENT is made pursuant to the terms and conditions of Article 8 of the Agreement made by and between HIDALGO COUNTY, acting herein by and through the Commissioner's Court, hereinafter called the "Owner", and \_\_\_\_\_, Professional Engineers of \_\_\_\_\_, Texas, hereinafter called "Engineer".  
WITNESSETH

WHEREAS, the Owner and the Engineer executed the Agreement on the \_\_\_\_ day of \_\_\_\_\_ 2013 concerning engineering for \_\_\_\_\_ (hereinafter referred to as the "Project"); and,

WHEREAS, Article \_\_\_\_ of the Agreement, (article title), establishes \_\_\_\_\_; and,  
WHEREAS, it has become necessary to amend the contract to

**A. AGREEMENT**

NOW THEREFORE, premises considered, the Owner and the Engineer agree that said Agreement is amended as follows:

I. Article \_\_\_\_ of the Agreement, (article title), is revised to

All other provisions are unchanged and remain in full force and effect.

IN WITNESS WHEREOF, the Engineer and the Owner have caused this Supplemental Agreement to the Agreement for Professional Services to be executed as of the \_\_\_\_\_ day of \_\_\_\_\_, 2013.

**THE ENGINEER:**  
ENGINEER  
BY: \_\_\_\_\_

**THE OWNER:**  
HIDALGO COUNTY  
BY: \_\_\_\_\_  
Ramon Garcia, County Judge

**LIST OF EXHIBITS**  
(as required)

**SALES**

# EXHIBIT "G"

## CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 07/17/2013

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

|                                                                                                                                           |  |                                                                                                                                                                                                                                                                            |  |
|-------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>PRODUCER</b><br>The Risk Specialty Group LLC<br>4801 Woodway Drive<br>Suite 300 East<br>Houston TX 77056<br>INSURED                    |  | <b>COVERAGES</b><br>L&G Engineering Laboratory, LLC<br>2100 W. Expressway 83<br>Mercedes TX 78570                                                                                                                                                                          |  |
| <b>CONTACT</b><br>NAME: _____<br>PHONE: (713) 552-1900<br>FAX: (713) 513-5411<br>E-MAIL: tlanders@rskspecialtygroup.com<br>ADDRESS: _____ |  | <b>INSURER(S) AFFORDING COVERAGE</b><br>INSURER A: Valley Forge Insurance Company<br>INSURER B: Continental Insurance Company<br>INSURER C: Continental Casualty Insurance Co.<br>INSURER D: Endurance American Specialty Ins. Co.<br>INSURER E: _____<br>INSURER F: _____ |  |
| <b>REVISION NUMBER:</b> _____                                                                                                             |  | <b>CERTIFICATE NUMBER:</b> _____                                                                                                                                                                                                                                           |  |

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.


| INSR | TYPE OF INSURANCE                             | ADDITIONAL INSURED | POLICY NUMBER  | POLICY EFF. DATE (MM/DD/YYYY) | POLICY EXPIRATION DATE (MM/DD/YYYY) | LIMITS                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------|-----------------------------------------------|--------------------|----------------|-------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A    | GENERAL LIABILITY                             |                    | 5095025836     | 07/19/2013                    | 07/19/2014                          | EACH OCCURRENCE \$1,000,000<br>DAMAGE TO RENTED PREMISES (per occurrence) \$100,000<br>MED EXP (Any one person) \$5,000<br>PERSONAL & ADV INJURY \$1,000,000<br>GENERAL AGGREGATE \$2,000,000<br>PRODUCTS - COMP/OP AGG \$2,000,000<br>COMBINED SINGLE LIMIT \$1,000,000<br>BODILY INJURY (Per person) \$<br>BODILY INJURY (Per accident) \$<br>PROPERTY DAMAGE (Per accident) \$<br>EACH OCCURRENCE \$1,000,000<br>AGGREGATE \$1,000,000 |
| B    | AUTOMOBILE LIABILITY                          |                    | 5095025884     | 07/19/2013                    | 07/19/2014                          | ANY AUTO \$<br>ALL OWNED AUTOS \$<br>HIREN AUTOS \$<br>NON-OWNED AUTOS \$<br>SCHEDULED AUTOS \$<br>UMBRELLA LIAB \$<br>EXCESS LIAB \$<br>RETENTION \$10,000                                                                                                                                                                                                                                                                               |
| C    | WORKERS COMPENSATION AND EMPLOYERS' LIABILITY |                    | 5095026016     | 07/15/2013                    | 07/15/2014                          | DEATH \$<br>DISMEMBERMENT \$<br>MEDICAL \$<br>AGGREGATE \$1,000,000                                                                                                                                                                                                                                                                                                                                                                       |
| A    | WORKERS COMPENSATION AND EMPLOYERS' LIABILITY |                    | 5095025920     | 07/23/2013                    | 07/23/2014                          | ANY PROPRIETOR/PARTNER/EXECUTIVE \$<br>OFFICER/MEMBER EXCLUDED? <input type="checkbox"/> Y/N<br>DESCRIPTION OF OPERATIONS below                                                                                                                                                                                                                                                                                                           |
| D    | Professional Liability                        |                    | PPL10004099100 | 07/19/2013                    | 07/19/2014                          | EACH CLAIM LIMIT \$2,000,000<br>Aggregate Limit \$2,000,000                                                                                                                                                                                                                                                                                                                                                                               |

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

Certificate holder is automatically included as additional insured on the General Liability & Automobile policies and provided with blanket waiver of subrogation in their favor on General Liability, Automobile & Workers Compensation as required by written contract.

CERTIFICATE HOLDER

CANCELLATION

|                                                                                                                                                                |                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Hidalgo County<br>2802 S Business Hwy 83<br>Edinburg, TX 78539                                                                                                 | AUTHORIZED REPRESENTATIVE<br><br><CC> |
| SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. |                                                                                                                        |

ACORD 25 (2010/05)

The ACORD name and logo are registered marks of ACORD

© 1988-2010 ACORD CORPORATION. All rights reserved.