

September 9, 2014

Brandy R. Salinas
Program Coordinator 1
Urban County Program
1916 Tesoro Boulevard
Pharr, TX 78577

RE: South Fork Drain Project – Change Order No. 3


Dear Ms. Salinas:

This letter is in reference to the proposed Change Order No. 3 of the South Fork Drain project. An explanation of the proposed change is as follows:

- The method of measurement for the excavation quantities was changed with Change Order No. 1, as requested by the Owner, from San Juan Road (approx Station 39+50) to the end of project (approx Station 184+00). The original method of measurement was kept for the section from the beginning of the project (approx Station 1+00) to San Juan Road (approx Station 39+50).
- The original method of measurement was based on measuring by the cubic yard in its original position as computed by the method of average end areas.
- The method of measurement was changed to be that of cubic yards by the truckload based on truck counts and truck capacity, as provided by the contractor using a 35% reduction factor.
- The change in method of measurement for excavation resulted in an increase of 55,948 cubic yards.
- The bid price for excavation is \$3.51 per cubic yard.
- The increase resulted in an increased cost of \$196,377.48.

If you require additional information, please do not hesitate to call me. I can be reached at my office at 956-782-2557 or on my cell phone at 956-227-2154.

Sincerely,

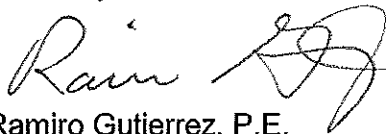

Ramiro Gutierrez, P.E.
President

cc: Files