

FILED
AT 12:00 O'CLOCK P M
JUN 21 2017
ARTURO GUAJARDO, JR. COUNTY CLERK
HIDALGO COUNTY, TEXAS
BY NGC DEPUTY

HIDALGO COUNTY
Professional Engineering Services
Contract # C-15-046-03-03
Work Authorization Form

WORK AUTHORIZATION NO. 9

THIS WORK AUTHORIZATION is made pursuant to the terms and conditions of Article 7 of the Agreement made by and between **HIDALGO COUNTY**, action herein by and through the **Commissioner's Court**, hereinafter called the "**Owner**," and, **L & G Consulting Engineers, Inc. d/b/a L & G Engineering**, professional engineers of Mercedes, Texas, hereinafter called "**Engineer**".

PART 1. SCOPE OF WORK

The purpose of this Work Authorization is for the **Engineer** to provide:
Environmental Re-Evaluation, Public Involvement and Schematic Design for the Pct 2 Regional Linear Park Project ~ Segment 2.

The scope of services to be provided by the **Owner** is identified in **EXHIBIT "A" – Scope of Services to be provided by the Owner** attached hereto.

The scope of services to be provided by the **Engineer** is identified in **EXHIBIT "B" – Scope of Services to be provided by the Engineer** attached hereto.

PART 2. ESTIMATED COST

The estimated cost for services under this Work Authorization is **\$260,673.64**. This amount is based upon the costs outlined in the Estimated **Cost Proposal** attached hereto as **EXHIBIT "D" Fee Schedule**.

PART 3. PAYMENT

Compensation and payment to the **Engineer** for the services established under this Work Authorization shall be made in accordance with **Article 5 & 6** of the Agreement.

PART 4. FUNDING

This Work Authorization No. 9 shall be funded through funding source:
Account No. _____
Requisition Number _____

PART 5. PERIOD OF SERVICE

This Work Authorization shall become effective on the date of final acceptance of the parties hereto, and terminate upon completion of scopes of the work authorization.


PART 6. RESPONSIBILITIES AND OBLIGATIONS

This Authorization does not waive the parties' responsibilities and obligations provided under the **Agreement**.

PART 7. ACKNOWLEDGEMENT AND CONFIRMATION

Acknowledgement and confirmation by Hidalgo County Precinct No. 2, Commissioner Eduardo Cantu as to content and detail of this **Work Authorization No. 9**.

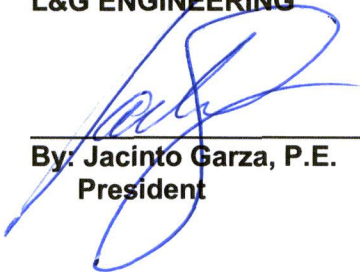
**HIDALGO COUNTY
COMMISSIONER PRECINCT NO. 2**

BY: 

PART 8. ACCEPTANCE AND APPROVAL

This Work Authorization is hereby accepted, approved by Hidalgo County Commissioners' Court on _____ as indicated below.


**THE ENGINEER:
L&G ENGINEERING**


By: **Jacinto Garza, P.E.**
President

**THE OWNER:
HIDALGO COUNTY**


By: **Ramon Garcia**
County Judge

ATTEST:


By: **Arturo Guajardo, Jr., County Clerk**



APPROVED BY
COMMISSIONERS' COURT
ON: 6/13/17 

LIST OF ATTACHMENTS

- Exhibit A – Services to be Provided by the Owner
- Exhibit B – Services to be Provided by the Engineer
- Exhibit C – Work Schedule
- Exhibit D – Fee Schedule

**EXHIBIT “A”
Services to be Provided by the Owner**

The following provides an outline of the services to be provided by the **Owner** for the Environmental Assessment, Public Involvement and Schematic Design of the proposed Regional Linear Park Project located within the Cities of Pharr, San Juan & McAllen and within the limits of South San Antonio Avenue to South 2nd Street in Hidalgo County hereinafter denoted as the **Project**.

GENERAL:

The **Owner** will provide to the **Engineer** the following:

- 1) Provide the authorization to proceed with services through coordination with the project consulting and design Engineer.
- 2) Payment for work performed by the **Engineer** and accepted by the **Owner** in accordance with Article 3 of the Agreement.
- 3) Assistance to the **Engineer**, as necessary, to obtain the required data and information from other local, regional, State and Federal agencies the **Engineer** cannot easily obtain.
- 4) Provide any available relevant data the **Owner** may have on file concerning the **Project**.
- 5) Provide timely review and decisions in response to the **Engineer’s** request for information and/or required submittals and deliverables, in order for the **Engineer** to maintain the agreed upon work schedule prepared in accordance with Exhibit “C” attached to this Work Authorization.
- 6) Attend and participate in progress meetings as required and as coordinated and conducted by **Engineer**.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 1 - PROJECT DESCRIPTION

The services designated herein as "Services provided by the ENGINEER" shall include the performance of all engineering services for the following described facility:

COUNTY/CITY: HIDALGO COUNTY

CONTROL: _____

PROJECT/DESCRIPTION: Environmental Assessment Re-Evaluation, Public Involvement,
and Schematic Design for the Hidalgo County
Pct. 2 Regional Linear Park Project ~ Segment 2

LENGTH: 6.56 Miles (Approx.)

HIGHWAY: Prop. Linear Park

LIMITS: From Ridge Rd. (Pharr) to 2nd Street (McAllen)

EXISTING FACILITY

PROJECT CLASSIFICATION

(Place an "X" in only one Project Classification)

- Surface Treatment
- Overlay
- Rehabilitation Existing Road (Scarify & Reshape)
- Convert Non-Freeway to Freeway
- Widen Freeway
- Widen Non-Freeway
- New Location Toll Freeway
- New Location Non-Freeway
- Interchange (New or Reconstruct)
- Bridge Widening or Rehabilitation
- Bridge Replacement
- Upgrade to Standards - Freeway
- Upgrade to Standards - Non-Freeway
- Miscellaneous Studies (Use Function Code 110 for All Tasks)
- Pedestrian Facility – Linear Park

ENGINEER shall mean L&G Consulting Engineers, Inc.

STATE shall mean Texas Department of Transportation (TxDOT).

COUNTY shall mean the Hidalgo County.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 3 - ROUTE AND DESIGN STUDIES
(Function Code 110)

Services
Provided By:
ENGINEER COUNTY

- | | | |
|------------|------------|--|
| <u>YES</u> | <u>NO</u> | 1. Route Location Studies |
| <u>N/A</u> | <u>N/A</u> | 2. Level of Service Analysis |
| <u>N/A</u> | <u>N/A</u> | 3. Traffic Evaluations and Projections |
| <u>YES</u> | <u>NO</u> | 4. Develop Roadway Design Criteria (Hike & Bike Trail Criteria) |
| <u>YES</u> | <u>NO</u> | 5. Preliminary Cost Estimates |
| <u>YES</u> | <u>NO</u> | 6. Design Schematic
(See Section 7, page 7-1 for schematic layout requirements) |
| <u>YES</u> | <u>NO</u> | 7. Preliminary Right-of-Way Requirements |
| <u>YES</u> | <u>NO</u> | 8. Design Concept Conference |
| <u>NO</u> | <u>NO</u> | 9. Soil Core Hole Drilling |
| <u>NO</u> | <u>NO</u> | a. Pavement |
| <u>NO</u> | <u>NO</u> | b. Retaining Walls |
| <u>NO</u> | <u>NO</u> | c. Miscellaneous Structures |
| <u>NO</u> | <u>NO</u> | d. Bridges |

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 4
SOCIAL, ECONOMIC AND ENVIRONMENTAL STUDIES AND PUBLIC INVOLVEMENT
(Function Code 120)

Services
Provided By:
ENGINEER COUNTY

- | | | |
|------------|------------|--|
| | | 1. Environmental Reports |
| | | All Environmental Reports shall be in accordance with 43 Texas Administrative Code (TAC) 2.40-2.51, Code of Federal Regulations, Title 23, Part 771 and Highway Design Operations and Procedures Manual, Part II-B. |
| | | a. Environmental Assessments |
| <u>YES</u> | <u>NO</u> | (1) An Environmental Assessment shall be prepared, anticipating a Categorical Exclusion. |
| <u>N/A</u> | <u>N/A</u> | (2) An Environmental Assessment shall be prepared, anticipating a Finding of No Significant Impact. |
| <u>N/A</u> | <u>N/A</u> | (3) An Environmental Assessment shall be prepared, anticipating the need for a Draft Environmental Impact Statement. |
| | | b. Environmental Impact Statement |
| <u>N/A</u> | <u>N/A</u> | (1) A Draft Environmental Impact Statement shall be prepared. After appropriate interagency and public reviews within time limits prescribed by the Code of Federal Regulations, Title 23, Part 771 and 43 Texas Administrative Code 2.40-2.51, a Final Environmental Impact Statement shall be prepared. |
| <u>N/A</u> | <u>N/A</u> | (2) A Section 4(f) Statement (Department of Transportation Act) shall be provided by the ENGINEER. The format and content of the statement is found in FHWA Technical Advisory T6640.8A. |
| | | 2. Public Involvement |
| | | All public involvement procedures shall be in accordance with 43 Texas Administrative Code (TAC) 2.40-2.51, Code of Federal Regulations Title 23, Part 771 and Highway Design Operations and Procedures Manual, Part II-B. |
| <u>YES</u> | <u>NO</u> | a. A public involvement meeting(s)/hearing(s) shall be scheduled, coordinated and conducted.* |
| <u>YES</u> | <u>NO</u> | b. Technical assistance, meeting(s)/hearing(s) preparation, maintenance of contracts lists, minutes of meeting(s), exhibit preparation, and other tasks outlined by the COUNTY, shall be provided. |
| | | 3. Cultural Resources |
| | | Formal consultation with the State Historic Preservation Office (SHPO) and the Texas Historical Commission (THC) will be conducted by the COUNTY. |
| <u>YES</u> | <u>NO</u> | a. Historic Structure Studies |
| | | A records search and reconnaissance survey shall be performed, and documentation prepared regarding identification efforts, National Register eligibility and potential impacts to historic properties in accordance with the state's historic structure requirements. |
| <u>YES</u> | <u>NO</u> | b. Archeological Studies |
| | | (1) Files searches shall be conducted to determine if known archeological sites are present; to identify whether these sites have been listed or determined eligible for the National Register of Historic Places or have been designated State Archeological Landmarks; and to identify the need (if any) to perform additional archeological investigations. |
| <u>YES</u> | <u>NO</u> | (2) Archeological reconnaissance will be performed under a Texas Antiquities Permit (13 TAC 26) signed for the Sponsor by a professional archeologist with the STATE. |
| <u>YES</u> | <u>NO</u> | (3) Archeological survey shall be performed under a Texas Antiquities Permit (13 TAC 26) signed for the Sponsor by a professional archeologist with the STATE. |

EXHIBIT “B”
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
 Provided By:
ENGINEER COUNTY

- | | | |
|------------|------------|--|
| <u>N/A</u> | <u>N/A</u> | <p>4. Noise and Air Quality Analyses</p> <p>a. Noise Analysis
 A noise analysis shall be prepared, including predicted noise levels and the consideration and evaluation of noise mitigation, in accordance with the STATE’S Noise Guidelines. The noise analysis or a summary of the noise analysis shall be included in the environmental document for the project.</p> |
| <u>N/A</u> | <u>N/A</u> | <p>b. Air Quality Analysis
 An air quality analysis shall be prepared in accordance with the STATE’S Air Quality Guidelines. The air quality analysis or a summary of the air quality shall be included in the environmental document for the project.</p> |
| <u>YES</u> | <u>NO</u> | <p>5. Ecological Investigations
 A wetland survey and if necessary, a wetland delineation shall be conducted and a “wetland finding” shall be provided if necessary. As part of the environmental phase of the project, the consultant should notify the District if it is believed that a Section 404 or Section 9 permit is required, and provide the technical data to the District for application to the U.S. Army Corps of Engineers and/or the U.S. Coast Guard.</p> <p>A determination should be made if there are potential federally listed endangered or threatened species that could be impacted. The District will be notified as soon as possible that Section 7 or 10 consultations may be required. Supporting data will be furnished to the district when consultation with the U.S. Fish and Wildlife Service is undertaken.</p> |
| <u>YES</u> | <u>NO</u> | <p>6. Hazardous Materials
 The consultant shall perform an Environmental Site Assessment for hazardous materials impact in accordance with the American Society for Testing and Materials (ASTM) 1528.93 (Transaction Screen Process).</p> |
| <u>YES</u> | <u>NO</u> | <p>7. General Guidelines for Preparation of Environmental Documents</p> <p>a. The Biological Impact Evaluation Report will be prepared and submitted electronically to TxDOT.</p> <p>b. All cultural resource reports (i.e. Archeological and Historical Project Coordination Requests (PCRs), background and reconnaissance surveys) will be submitted electronically to TxDOT.</p> <p>c. The draft administratively complete document will be submitted to TxDOT electronically through their FTP site.</p> <p>d. The administratively complete document will be prepared in accordance with the content and format of FHWA Technical Advisory T6640.8A and the TxDOT Administrative Code 43 TAC §2.44.</p> <p>e. The administratively complete document will be submitted to TxDOT electronically through their FTP site.</p> <p>f. Upon completion and approval of the administratively and technically complete document, the Engineer will provide one (1) hard copy to the Client, one (1) hardcopy to the district, and (3) hardcopies to TxDOT ENV.</p> <p>g. Exhibits in the environmental document shall be color copies and text shall be black and white.</p> |

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

SECTION 7 - ROADWAY DESIGN CONTROLS
(Function Code 160)

Services
Provided By:
ENGINEER COUNTY

YES
YES

NO
NO

1. Geometric Design
 - a. Horizontal and Vertical Alignment
 - b. Schematic Layout
 - (1) The location of interchanges, main lanes, grade separations, frontage roads and ramps.
 - (2) Develop vertical and horizontal alignment of main lanes, ramps and cross roads at proposed interchanges or grade separations. Frontage road alignment data need not be shown on the schematic; however, it should be developed in sufficient detail to determine ROW needs. The degree of horizontal curves and vertical curve data, including "K" values, shall also be shown for ease of checking.
 - (3) A complete explanation of the sequence and methods of stage construction, if proposed, including the initial and ultimate proposed treatment of crossovers and ramps.
 - (4) The tentative ROW limits.
 - (a) Provide a roadway Design System (RDS) or (GEOPAK) computer tape of the preliminary earthwork to verify ROW requirements.
 - (b) Provide a graphics file containing the approved schematic.
 - (5) The geometric (pavement cross slopes, lane and shoulder widths, slope rates for fills and cuts) of the typical sections of proposed highway main lanes, ramps, frontage roads, and cross roads.
 - (6) Direction of traffic flow on all roadways.
 - (7) The geometric of speed change (acceleration, deceleration, climbing) lanes.

YES

NO

2. General Guidelines for Project Development
 - a. Prior to preparing detailed plans for a proposed project, a preliminary schematic layout shall be prepared which indicates the general geometric features and location requirements peculiar to the project. An uncontrolled aerial mosaic will be provided for this use. Four copies of the schematic layout shall be submitted through the district to the Design Division for approval and subsequent coordination with the Federal Highway Administration (FHWA) where applicable. **No geometric design is to be performed until the COUNTY has given the engineer written approval of the preliminary schematic layout.**
 - b. All geometric design shall be in conformance with the State's Design Division, Operations and Procedures Manual, except where variances are permitted in writing by the STATE.
 - c. The schematic layout shall include basic information which is necessary for the proper review and evaluation including the items listed above in the checklist for schematic layout.
 - d. Handling of traffic during construction shall be a consideration in the development of preliminary designs.

EXHIBIT "B"
SCOPE OF SERVICES TO BE PROVIDED BY THE ENGINEER

Services
Provided By:
ENGINEER COUNTY
YES NO

2. General Guidelines for Project Development (*continued*)
- e. Upon approval of the schematic layout by Design Division (FHWA on Federal-aid projects), it shall be the basis for an exhibit at any required public hearing prior to final development of the project. If there are any changes to the schematic after the Design Division and FHWA approval and before the public hearing, four copies of the revised schematic, as displayed at the hearing, shall be submitted either prior to or accompanying the public hearing data. If there are no changes in the schematic as displayed at the hearing, only photographs of the schematic and other displays shall be submitted with the public hearing data.
 - f. On complex projects, informal contact through the district with the Design Division and FHWA personnel is encouraged with regard to development of preliminary design prior to official schematic submission.
 - g. The engineer shall furnish a project tape that is compatible with the STATE's computer system, a project listing, and a cross section plot showing the original design sections containing the earthwork input and original cross sections for the project.

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR
SECTION 1-PROJECT DESCRIPTION

The services designated herein as "Services provided by the SURVEYOR" shall include the performance of all surveying services for the following described facility:

COUNTY/CITY: Hidalgo County

CONTROL: _____

PROJECT/DESCRIPTION: Regional Linear Park Full Detail Measurements @ major roadway crossing

LENGTH: @ 5 Intersections/Culvert Crossings

HIGHWAY: Several

LIMITS: From Intersections throughout Linear Park

PROJECT CLASSIFICATION

(Place an "X" in only one Project Classification)

- Surface Treatment
- Overlay
- Rehabilitation Existing Road (Scarify & Reshape)
- Convert Non-Freeway to Freeway
- Widen Freeway
- Widen Non-Freeway
- New Location Toll Freeway
- New Location Non-Freeway
- Interchange (New or Reconstruct)
- Bridge Widening or Rehabilitation
- Bridge Replacement
- Upgrade to Standards - Freeway
- Upgrade to Standards - Non-Freeway
- Design Survey and SUE

ENGINEER shall mean L&G Engineering.

SURVEYOR shall mean ROW Surveying Services

COUNTY shall mean Hidalgo County

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

SECTION 6 - FIELD SURVEYING AND PHOTOGRAMMETRY
(Function Code 150)

Services
Provided By:
SURVEYOR CITY/COUNTY

DESIGN AND CONSTRUCTION SURVEYS:

PURPOSE:

The purpose of a “design survey” is to provide field information in support of transportation systems design.

The purpose of a “construction survey” is to provide field data in support of highway construction.

DEFINITIONS:

A “design survey” is defined as the combined performance of research, field work, analysis, computation, and documentation necessary to provide detailed topographic (3-dimensional) mapping of a project site. A design survey may include, but need not be limited to, cross-sections or data to create cross-sections and Digital Terrain Models (DTM), horizontal and vertical location of utilities and improvements, detailing of bridges and other structures, review of right-of-way maps, establishing control points, etc.

A “construction survey” is defined as the combined performance of reconnaissance, field work, analysis, computation, and documentation necessary to provide the horizontal and vertical position of specific ground points to be used by the construction contractor for determining lines and grades.

1. Design Surveying

N/A N/A

a. Primary Project Control –Secondary Control

Precision shall be 1 part in 20,000 or better, unless otherwise directed by the District Engineer.

- (1) Establish horizontal control points
- (2) Establish vertical control points

NOTE: ALL BEARING AND DISTANCE SHALL BE BASED ON THE STATE PLANE COORDINATE SYSTEM NAD 1983, SOUTH ZONE. ALL DISTANCES AND COORDINATES SHALL BE SURFACE AND MAY BE CONVERTED TO GRID BY MULTIPLYING BY A COMBINED SCALE FACTOR OF 0.999960

N/A N/A

b. Secondary Project Control – Surveyor shall recover and/or reset H&V Control Points as provided by the Engineer and create Survey Control Data Sheets for inclusion in the Construction Project Plans signed and sealed by an R.P.L.S.

- (1) No traverse should exceed 25 angle points. Planimetrics shall be 20 ft Lt & Rt from the proposed ROW as per the schematic provided by the Engineer.
- (2) The unadjusted angular error should not exceed 2 seconds per angle, plus 14 seconds.
- (3) The unadjusted ratio of precision should be one part in 10,000 or better. (The ratio of precision is the total length of the traverse divided by the total error.)
- (4) The unadjusted vertical error should not exceed 0.03 foot per mile of traverse.
- (5) Project control base lines

N/A N/A

- (6) Photogrammetric ground control
 - (a) Establish horizontal control
 - (b) Establish vertical control points
 - (c) Place and maintain control point targets

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

Services
 Provided By:
SURVEYOR CITY/COUNTY

YES N/A

- c. Other Design Surveying
- (1) ~~The limit of the Design surveys shall be 100-ft before and after the limits of the project as identified by the Project Engineer on the schematic. Surveys will include all SUE work to a full detail box culvert crossing. This full detail of intersection will include all utilities and structures that will allow and determine the accommodation of an alternate route for pedestrian crossing within the ditch and road right of way. Establish horizontal and vertical control. Set H&V Control at 1000 ft intervals along the project proposed right of way. Provide x, y, z for each H&V Control. Provide an H&V Control along each outfall identified on the Hydrologic Map. The H&V Control shall be #5 I.R. 2 ft in depth set in concrete. The surveyor shall provide an H&V Control Book (a Sample shall be provided by the Engineer to the Surveyor). The Surveyor will provide a 3-pt reference sketch with ties to the BMs for inclusion the existing H&V Control Book. Establish benchmark circuit throughout the project with a tolerance of 0.03' /ft per mile error vertically.~~
 - (2) Complete topographic and cross section survey, data processing, and CADD mapping (2D & 3D) for the limits of the project.
 - (3) Locate all visible utilities, data processing and CADD mapping (2D & 3D) including irrigation lines. Follow sample provided by the Engineer.
 - (4) Field locate cross culverts, driveway culverts, inverts, irrigation lines, within the project limits, data processing and CADD mapping (2D & 3D).
 - (5) ~~Right of Entry, Right of Way Research, and Appraisal District Records is the responsibility of the Surveyor.~~
 - (6) ~~The Surveyor shall stake the proposed centerline on the existing fields as approved by Engineer before construction for the purpose of utility adjustments and project location.~~
 - (7) Profile and cross section intersecting streets for ties into project (100-ft. beyond the proposed ROW per schematic and 20-ft wider than the existing ROW of intersecting street). Reference missing voids as per CD provided by the Engineer.
 - (8) Cross section irrigation crossings for a distance of 20-ft beyond the proposed ROW at 100-ft intervals in a DTM file. Provide a complete description of irrigation appurtances as identified by the engineer sample layout "EXHIBIT E". The SURVEYOR will meet with the ENGINEER before he ties down any irrigation lines. Jointly the SURVEYOR and the ENGINEER will identify from records such as the Irrigation District Maps and the A&M Data of existing irrigation lines that will need to be tied down. The SURVEYOR will follow the sample given to him by the ENGINEER and tie the structures horizontally and vertically and include in the field books to be submitted.
 - (9) Tie Horizontally and Vertically the existing storm drain system that lies within the existing proposed ROW including the elevation of the outfall of said recovered existing storm drain systems.
 - (10) Tie to existing underground and overhead utilities (location, elevation and direction)
Horizontally – The surveyor shall call the 1-800 number for the utilities to be marked on the ground as well as any city water and sewer lines. He shall tie all visible utility crossings with name, address and Phone #'s of utility companies. The engineer will coordinate with the utility companies and jointly the Surveyor and the Engineer will identify which utilities were missed and need to be tied down.

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

Vertically – The engineer shall identify all utilities that are potential conflicts and that need to be tied vertically. The engineer will advise the surveyor in writing of the needed vertical ties and the surveyor will tie the lines vertically once the surveyor has coordinated the exposure and provide the information to the engineer.

Services
 Provided By:
SURVEYOR CITY/COUNTY

- | | |
|---|--|
| <p><u>YES</u> <u>N/A</u></p> | <p>(11) Cross section and profile all outfall channels identified on the Hydrologic Map for a distance of 200 ft beyond the proposed ROW upstream and downstream at 100 ft intervals. The SURVEYOR will provide a complete 2D/3D File including utilities of the outfalls identified.</p> <p>(12) Driveways and Turnouts</p> <p style="margin-left: 20px;">(a) Inventory commercial entrances, public roads and side streets separately.</p> <p style="margin-left: 20px;">(b) Obtain centerline station. (Width at ROW, PAV'T and existing radius.</p> <p style="margin-left: 20px;">(c) Inventory by type (dirt, caliche, gravel or paved). If paved, indicate condition in terms of no patches, has patches or has potholes.</p> <p style="margin-left: 20px;">(d) Obtain width at R.O.W. line.</p> <p style="margin-left: 20px;">(e) Obtain elevations at both edges of the driveway or turnout in line with the side drain.</p> |
| <p><u>N/A</u> <u>N/A</u></p> | <p>(13) ROW staking (Existing and Proposed @ 1,000 ft. stations PC's PT's and Angle points as per ROW Map)</p> |
| <p><u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u></p> | <p>(14) Soil core hole staking at bridge class structures.</p> <p>(15) Determine changes in topography from voids and outdated maps due to development, erosion, etc.</p> |
| <p><u>YES</u> <u>N/A</u>
 <u>YES</u> <u>N/A</u></p> | <p>(16) Profiles of existing drainage facilities.</p> <p>(17) Measurement of hydraulic opening under existing bridges.</p> <p style="margin-left: 20px;">(a) Full detail for possible alternate pedestrian crossings within the ditch and road right of way to include the full detail of the hydraulic opening under existing Cross Culvert (Bridges).</p> |
| <p><u>YES</u> <u>N/A</u>
 <u>YES</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u></p> | <p>(18) Obtain elevations of manholes and valves of utilities</p> <p>(19) Provide temporary signs, traffic control, flags, safety equipment, etc.</p> <p>(20) Ties to existing bridges railroad rail elevations or culverts that may conflict with new construction.</p> |
| <p><u>N/A</u> <u>N/A</u></p> | <p>(21) Bridge widening top of deck and/or top of cap elevations at the Profile Grade Line (PGL) and the edges of slab at bent locations.</p> |
| <p><u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u></p> | <p>(22) Inventory signs, mailboxes, and driveways</p> <p>(23) Locate wetlands.</p> <p>(24) Locate existing right-of-ways.</p> |

d. Construction Surveys:

In performing construction surveys, the following will be requested by the ENGINEER on an as needed basis, but need not be limited to:

- | | |
|---|--|
| <p><u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u>
 <u>N/A</u> <u>N/A</u></p> | <p>(1) Stake existing and/or proposed right-of-ways.</p> <p>(2) Stake existing and/or proposed baseline/centerline.</p> <p>(3) Stake proposed bridge structures.</p> <p>(4) Stake proposed drainage structures, such as manholes, culverts, etc.</p> <p>(5) Set grade stakes.</p> <p>(6) Recover and check existing control points.</p> <p>(7) Establish additional control points.</p> <p>(8) Check elevations and locations of structures.</p> <p>(9) Determine and resolve conflicts associated with survey data.</p> |
|---|--|

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

Services
 Provided By:
SURVEYOR CITY/COUNTY

- | | | |
|------------|------------|--|
| <u>N/A</u> | <u>N/A</u> | <p>2. Photogrammetric Products</p> <p>a. Uncontrolled Photography</p> <p style="margin-left: 20px;">(1) Contact Prints</p> <p style="margin-left: 20px;">(2) Mosaics</p> <p style="margin-left: 20px;">(3) Digital ortho plots</p> <p>b. Mapping</p> <p style="margin-left: 20px;">(1) Planimetric Maps</p> <p style="margin-left: 20px;">(2) Contour Maps</p> <p style="margin-left: 20px;">(3) Cross Sections</p> <p style="margin-left: 20px;">(4) Profiles</p> <p style="margin-left: 20px;">(5) Digital Terrain Models (DTM)</p> |
|------------|------------|--|

3. UTILITY SUBSURFACE INVESTIGATION:
Utility Quality Levels are in cumulative order (least to greatest) as follows

<u>YES</u>	<u>N/A</u>	<p>3.1. Quality Level C - Existing Records: Utilities are plotted from review of available existing records that will be generated by the Engineer on the schematic and provided to the surveyor for his further creation of a Utility Map which will be turned in as a deliverable as part of this work order.</p>
------------	------------	---

<u>YES</u>	<u>N/A</u>	<p>3.2. Quality Level B - Surface Visible Feature Survey: The Surveyor shall gather the field tied Utility Information and compare it to the existing records (if any) as provided by the Engineer and correlate with surveyed surface-visible features. The surveyor shall create a Utility Layout Map or plan layout 2D, showing the limits of the proposed project and limits of the work area required for this work authorization; including highway stations, limits within existing or proposed right of way. Correlate utility owner records with designating data and resolve discrepancies using professional judgment. A color-coded composite utility facility plan with utility owner names, quality levels, line sizes and subsurface utility locate (test hole) locations. The Layout Map will include all utilities that have been field tied – 2D Horizontal Utilities. This Layout will be provided to the Engineer and a meeting held with Engineer to identify which utilities will need to be tied down vertically. A note must be placed on the designate deliverable only that states "lines sizes are from best available records". All above ground appurtenance locations must be included in the deliverable to the Engineer. This information will be provided in the latest version of Micro Station or Geopak used by the State. The electronic file will be delivered on C.D. or DVD. A hard copy is required and must be signed, sealed, and dated by the Surveyor. Note: Determine and inform the Engineer of the approximate utility depths at critical locations. This depth indication is understood by the Engineer to be approximate only and is not intended to be used for preparing the construction plans.</p>
------------	------------	--

<u>YES</u>	<u>N/A</u>	<p>3.3. <u>Subsurface Utility Locate (Test Hole) Service (Quality Level A), THE SURVEYOR SHALL ESTIMATE 40 POT HOLES LOCATING VERTICALLY UTILITES AS IDENTIFIED BY THE ENGINEER.</u> Locate shall mean to obtain precise horizontal and vertical position, material type, condition, size and other data that may be obtainable about the utility facility and its surrounding environment through exposure by non-destructive excavation techniques that ensures the integrity of the utility facility. Subsurface Utility Locate (Test Hole) Services (Quality Level A) are inclusive of Quality Levels B and C. The Surveyor shall:</p> <p>3.3.1 Review the requested test hole locations that have been identified by the Engineer and Coordinate with utility owner inspectors as may be required by law or utility owner policy.</p>
------------	------------	---

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

Services
 Provided By:
SURVEYOR CITY/COUNTY

3. *Utility Subsurface (continued)*
- 3.3.2 Measure and record the following data on an appropriately formatted test hole data sheet that has been sealed and dated by the Engineer:
- Elevation of top and/or bottom of utility tied to the datum of the furnished plan.
 - Identify a minimum of two benchmarks utilized. Elevations shall be within an accuracy of 15mm (.591 inches) of utilized benchmarks.
 - Elevation of existing grade over utility at test hole location.
 - Horizontal location referenced to project coordinate datum.
 - Outside diameter of pipe or width of duct banks and configuration of non-encased multi-conduit systems.
 - Utility facility material(s).
 - Utility facility condition.
 - Coating/Wrapping information and condition.
 - Unusual circumstances or field conditions.
- 3.3.3 Excavate test holes in such a manner as to prevent any damage to wrappings, coatings, cathodic protection or other protective coverings and features. Water excavation can only be utilized with written approval from the appropriate State District Office.
- 3.3.4 Back fill all excavations with appropriate material, compact backfill by mechanical means, and restore pavement and surface material. The Engineer shall be responsible for the integrity of the backfill and surface restoration for a period of three years. Install a marker ribbon throughout the backfill.
- 3.3.5 Provide complete restoration of work site and landscape to equal or better condition than before excavation.
- 3.3.6 Plot utility location position information on the Utility Layout sheet and identify the vertical elevation and sealed by the responsible Surveyor. This information will be provided in the latest version of Micro Station or Geopak format used by the State. The electronic file will be delivered on C.D or DVD.

4. DELIVERABLES:

The deliverables to be specified in individual work authorizations for design surveys and construction surveys may be any combination of the following:

- | | | |
|--|--|--|
| <u>YES</u>
<u>N/A</u> | <u>N/A</u>
<u>N/A</u> | 4.1. Digital Terrain Models (DTM) in a format acceptable by the ENGINEER.
4.2. Final H&V Field Book Binder with all pertinent information obtained in the field for Design Surveys. Maps, plans, or sketches prepared by the SURVEYOR showing the results of field surveys. |
| <u>YES</u>
<u>YES</u>
<u>YES</u> | <u>N/A</u>
<u>N/A</u>
<u>N/A</u> | 4.3. Computer printouts or other tabulations summarizing the results of field surveys.
4.4. Digital files or media acceptable by the ENGINEER containing field survey data.
4.5. Maps, plats, plans, sketches, or other documents acquired from utility companies, private corporations, or other public agencies, the contents of which are relevant to the survey. |
| <u>YES</u>
<u>N/A</u> | <u>N/A</u>
<u>N/A</u> | 4.6. Field survey notes, as electronic and/or hard copies.
4.7. A H&V Control Book identifying the basis of the Primary and Secondary Control and an 8 ½ inch by 11 inch survey control data sheet for each construction control point which shall include, but need not be limited to, a location sketch, a physical description of the point including a minimum of two reference ties, surface coordinates, a surface adjustment factor, elevation, and the horizontal and vertical datums used. Survey control data sheets shall be signed and sealed by the supervising Registered Professional Land Surveyor. |

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

Services
 Provided By:
SURVEYOR CITY/COUNTY

4. *Deliverables (continued)*

- | | | |
|------------|------------|--|
| <u>N/A</u> | <u>N/A</u> | 4.8. Final mylar set of 11 inch by 17 inch Survey Control data sheets sign and seal by the RPLS per TxDOT guidelines. If requested by Engineer |
| <u>N/A</u> | <u>N/A</u> | 4.9. A digital and/or hard copy of all computer printouts of horizontal and vertical conventional traverses, GPS analysis and results, data including property descriptions with field notes and plats, right-of-way maps, and survey control data sheets to include in the H&V Field Book Binder. |
| <u>YES</u> | <u>N/A</u> | 4.10. Survey reports in a format requested by the ENGINEER. |
| <u>YES</u> | <u>N/A</u> | 4.11. Items indicated under the Automation Requirements Section 6. |

5. **GENERAL REQUIREMENTS:**

- 5.1. Design surveys and construction surveys shall be performed under the supervision of a Registered Professional Land Surveyor currently registered with the Texas Board of Professional Land Surveying.
- 5.2. Horizontal ground control used for design surveys and construction surveys, furnished to the SURVEYOR by the ENGINEER or based on acceptable methods conducted by the SURVEYOR, shall meet the standards of accuracy required by the STATE.
- 5.3. Reference may be made to standards of accuracy for horizontal control traverses, as described in the FGCS Standards and Specifications for Geodetic Control Networks, latest edition, the TxDOT Survey Manual, latest edition, the TxDOT GPS Manual of Practice, latest edition, or the TSPS Manual of Practice for Land Surveying in the State of Texas, as may be applicable.
- 5.4. Vertical ground control used for design surveys and construction surveys, furnished to the SURVEYOR by the ENGINEER or based on acceptable methods conducted by the SURVEYOR, shall meet the standards of accuracy required by the ENGINEER.
- 5.5. Reference may be made to standards of accuracy for vertical control traverses, as described in the FGCS Standards and Specifications for Geodetic Control Networks, latest edition, the TxDOT Survey Manual, latest edition, the TxDOT GPS Manual of Practice, latest edition, or the TSPS Manual of Practice for Land Surveying in the State of Texas, as may be applicable.
- 5.6. Side shots or short traverse procedures used to determine horizontal and vertical locations shall meet the following criteria:
 - Side shots or short traverses shall begin and end on horizontal and vertical ground control as described above.
 - Standards, procedures, and equipment used shall be such that horizontal locations relative to the control may be reported within the following limits:
 - Bridges and other roadway structures: less than 0.1 of one foot.
 - Utilities and improvements: less than 0.2 of one foot.
 - Cross-sections and profiles: less than 1 foot.
 - Bore holes: less than 3 feet.
 - Standards, procedures, and equipment used shall be such that vertical locations relative to the control may be reported within the following limits:
 - Bridges and other roadway structures: less than 0.02 of one foot.
 - Utilities and improvements: less than 0.1 of one foot.
 - Cross-sections and profiles: less than 0.2 of one foot.
 - Bore holes: less than 0.5 of one foot.

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

Services
Provided By:
SURVEYOR CITY/COUNTY

5. **AUTOMATION REQUIREMENTS:**

- 6.1 Planimetric design files (DGN) shall be fully compatible with the State's *Micro Station V8* graphics program without further modification or conversion.
- 6.2 Electronically collected and processed field survey data files shall be fully compatible with the State's *CADD* systems without further modification or conversion. All files shall incorporate only those feature codes currently being used by the STATE.
- 6.3 Digital Terrain Models (DTM) shall be fully compatible with the STATE's *GEOPAK* system without further modification or conversion. All DTM files shall be fully edited and rectified to provide a complete digital terrain model with all necessary break lines.

EXHIBIT B-1
SCOPE OF SERVICES TO BE PROVIDED BY THE SURVEYOR

ADDITIONAL RESPONSIBILITIES

A. TRAFFIC CONTROL:

The SURVEYOR shall control traffic in and near surveying operations adequately to comply with provisions of the latest edition of the TxDOT Manual on Uniform Traffic Control Devices – Part VI and the latest edition of the Occupational Safety Manual both of which can be found on the TxDOT internet site.

In the event field crew personnel must divert traffic or close traveled lanes, a Traffic Control Plan based upon principles outlined in the latest edition of the TxDOT Manual on Uniform Traffic Control Devices – Part VI shall be prepared by the SURVEYOR and approved by the ENGINEER prior to commencement of field work. A copy of the approved plan shall be in the possession of field crew personnel on the job site at all times and shall be made available to the ENGINEER for inspection upon request.

B. INVOICING:

Payment requests shall include a SURVEYOR's invoice. With each payment request, the SURVEYOR shall submit a project status report which will, as a minimum, include the percentage of total work complete as of the date of the payment request and a description of current work activity. The percentage of total work complete shall not be based simply on the percentage of funds expended, but shall be based on the best judgment of the SURVEYOR as to the percentage of actual work complete.

C. EASEMENTS, LETTERS OF PERMISSION, ETC.

The SURVEYOR shall be responsible for delineating easements. The SURVEYOR will be responsible for securing the necessary legal instruments and obtaining all Right-of-Entries (ROEs).

D. MEETINGS:

The ENGINEER shall setup the necessary meetings with the SURVEYOR in order to assure all field information is provided on-time and products are delivered in accordance with TxDOT's specifications. SURVEYOR must attend all meetings involving data provided if requested by ENGINEER.

E. PROJECT MANAGER/SURVEYOR COMMUNICATION:

The SURVEYOR shall designate one Texas Registered Professional Land Surveyor (RPLS) to be responsible throughout the project for project surveying coordination and all communications, including billing, with the ENGINEER.

F. OFFICE LOCATION:

The SURVEYOR will perform the services to be provided under this agreement out of a local office and have a crew available to perform requested tasks within 24 hours of request. The coordinating SURVEYOR's Project Manager (RPLS) shall be accessible at all times and working from the local office.

EXHIBIT D
FEE PROPOSAL

Pct 2 Regional Linear Park Project
HIDALGO COUNTY PRECINCT #2

TASK	MANHOURS										L&G TOTAL HOURS	Total Line Item Cost
	Senior Project Manager	Senior Engineer	Project Engineer	Senior Engineering Technician	Senior Environmental Scientist	ROW Administrator	Admin / Clerical	Senior Engineer	Senior Environmental Scientist	Senior Engineering Technician		
WA #9 - Pct 2 Regional Linear Park Project Environmental Assessment Re-Evaluation, Public Involvement & Schematic Design - Segment 2												
1. Environmental Document Re-Evaluation with TxDOT												
2. Public involvement for the project with stakeholders and 1 Public meeting												
3. Archeological and Historical Research	24	24	36		160							\$ 31,196.00
4. Engineering Technical Support at Public Meetings with Layouts, etc	14	22	32	36	80							\$ 22,154.28
5. Coordination and Management of Survey Subcontractor	4	8	12	6								\$ 15,598.00
6. SUB ROWS: Survey, Subcontractor												\$ 16,761.08
7. Schematic Design for Linear Park (Plan & Profile)	18	50	86	180								\$ 4,758.68
8. Schematic Design for Linear Park Tunnel Crossings (I Rd., Ridge Rd., E. Moore Rd., and US 281) To be approved by County & TxDOT	10	24	28	36								\$ 43,813.06
9. Office Support for Schematic Design (Ownership Identification and Property Rights)	8	18	24	32								\$ 14,461.12
10. Preliminary Schematic Identification on Schematic	8	16	30	36								\$ 12,940.94
11. Update Schematic based on comments provided by TxDOT/HWA for schematic and EA update w/ HWA	12	22	34	42								\$ 12,749.32
12. Engineering Technical Support at Public Hearing with Layouts, etc	4	8	10	20								\$ 15,983.86
13. Public involvement for 1 Public Hearing	14	26	40									\$ 6,391.16
												\$ 16,285.14
												\$ 47,577.00
												\$ 43,813.06
												\$ 14,461.12
												\$ 12,940.94
												\$ 12,749.32
												\$ 15,983.86
												\$ 6,391.16
												\$ 16,285.14
Subtotal Hours	116	218	332	388	276						1544	
Hourly Base Rate	\$ 70.00	\$ 58.00	\$ 43.00	\$ 30.00	\$ 49.00	\$ 34.00	\$ 20.00					
EV 17 Contract Hourly Rate w/ OH Mult. (178.12%) & Fixed Fee (12.00%)	\$ 231.32	\$ 191.67	\$ 142.10	\$ 99.14	\$ 161.03	\$ 112.36	\$ 66.09					
Total Labor Costs	\$ 26,833.12	\$ 41,784.06	\$ 47,177.20	\$ 38,466.32	\$ 44,692.68	\$ -	\$ 14,143.26					\$ 260,673.64

Project Team Cost Proposals - Sub Consultants
R.O.W. Surveying Services, LLC

Cont Proposal
\$ 47,577.00

Grand Total \$ 260,673.64

AI-60199**Purchasing Department 21. D. 5.****CC - REGULAR****Meeting Date:** 06/13/2017**Submitted For:** Eddie Cantu, COMM. PCT. #2 **Submitted By:** Erika Zamora, COMM. PCT. #2**Department:** COMM. PCT. #2**Information****CAPTION**

a. Acceptance and approval of Work Authorization No. 9 (with an estimated cost of \$260,673.64) as submitted by project engineer, L&G Consulting Engineers, to provide environmental re-evaluation, public involvement, and schematic design for the Pct 2 Regional Linear Park Project ~ Segment 2 through Contract # C-15-046-03-03.

b. Pursuant to contract with L&G Engineering (Article 14), a request for approval by engineer to permit the subcontracting of ROW Surveying Services, LLC and B2Z Engineering, LLC, in connection with C-15-046-03-03, Work Authorization No. 9 for the Pct 2 Regional Linear Park Project.

BACKGROUND**Fiscal Impact****CALENDAR YEAR:** 2017**ACCT. #:** 7-1315-452-00-122-110-0-740**FUNDS AVAILABLE Y/N?:** Y/Pending**MATCHING FUNDS Y/N?:** N**BUDGETARY IMPACT:**

Funding pending approval of AI#60242 CC6/13/17.

AttachmentsSubcontracting NoticeWA**Form Review**

Inbox	Reviewed By	Date
Purchasing - Internal	Darlene Betancourt	06/09/2017 02:10 PM
Budget & Management	Veronica Ortiz	06/09/2017 02:11 PM
Final Approval	Monica Badillo	06/09/2017 05:19 PM
Form Started By: Erika Zamora		Started On: 06/07/2017 06:13 PM
Final Approval Date: 06/09/2017		