

FINAL REPORT

***UPDATE OF
PAVEMENT MANAGEMENT PROGRAM
(Citywide)***

2025-2032



Submitted to:

City of La Habra, CA

May 20, 2025



May 20, 2025

Mr. Andrew Luna, P.E.
Associate Civil Engineer
City of La Habra
110 E. La Habra Boulevard
La Habra, CA 90631

Subject: Final Report - Update of the Pavement Management Program

Dear Andrew:

As part of the 2025 Update of the Pavement Management Program for the City of La Habra, Bucknam Infrastructure Group, Inc. is pleased to submit the Final Report for the City's pavement network.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

1. Executive Summary (Section I)

2. Pavement Management Program Development and Reporting (Section II)

3. Pavement Conditions For Each Segment in the Network (PCI Report – Section III)

- The Pavement Condition Index report shows the present condition of each street in the pavement network. In addition, the report shows the basic geometry of each street segment.

4. Forecast Maintenance & Rehabilitation (FMR) Reports (Section IV)

- **Recommended Maintenance and Repair Strategies**

The recommended maintenance and repair strategies were used to generate the Forecast Maintenance & Rehabilitation (FMR) Report and were based on our 2025 inspections. Additionally, we have assessed and incorporated unit cost and maintenance application practices/types with our strategies.

- **Projected Projects based on M&R Strategies**

The Forecast Maintenance Report projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for Arterials, Collectors, Local and Alley streets. The report included in this section is broken down by fiscal year.



3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

5. OCTA Renewed Measure M Compliance Reporting (Section V)

- We have included the necessary OCTA Renewed Measure M compliance reporting, mapping and budget forecasting that is required for La Habra's 2025 Pavement Management Program (includes Appendix A – PMP Agency Submittal Checklist)

Our thorough analysis of previous and current La Habra PMP strategies enabled our staff to make proactive recommendations to the City's pavement CIP. All comments received from the City have been incorporated in the reports that follow. It has been a pleasure working with you and the City on updating your Pavement Management Program. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.

A handwritten signature in black ink, appearing to read 'Peter J. Bucknam', with a stylized flourish at the end.

Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services

TABLE OF CONTENTS

- I. Executive Summary**
 - A. 2025 Update of Pavement Management Program
 - B. City's Pavement Network
 - C. Current Citywide Conditions (Arterials, Locals, Alleys)
 - D. Maintenance Strategy Development
 - E. Annual Budget Projections
 - F. Quality Control Efforts
 - G. Findings and Recommendations

- II. Pavement Management Program-Capital Improvement Program**
 - A. Maintenance / Rehabilitation Strategy Assignment Table
 - B. Multi-Year Annual Work Program Projections
 - i. Annual \$3.5 Million Annual Budget Scenario
 - ii. Increase PCI Budget
 - C. La Habra MyRoads® PMP Web-Portal
 - D. Condition Distribution Report
 - E. Calculation of PCI
 - F. Section II – Appendix IIA – La Habra Alley Network

- III. Pavement Condition Index (PCI) Reports**
 - A. Pavement Condition Index Reports – Data Definitions
 - B. 2025 Citywide PCI Maps
 - C. Name Order (A-Z)
 - D. PCI Order (0-100)

- IV. Forecast Maintenance & Rehabilitation (FMR) Report**
 - A. Recommended Budget, Seven Year Plan (2025-2032)

- V. OCTA – La Habra Pavement Management Compliance Report 2025**
 - A. For OCTA Submittal – Seven Year Plan (2025-2032)

Section V can be copied / removed and sent to OCTA for compliance

<u>Table and Figure Reference</u>	<u>Section-Page #</u>
Figure 1 – Pavement Area (SF) by Street Classification	Sec 1-3
Figure 2 – Historical PCI Findings (2003-2025)	Sec 1-4
Figure 3 – PCI Condition Distribution by Section Mileage (All Streets)	Sec 1-5
Figure 4 – Sample Pavement Life Cycle / Deterioration Rate	Sec 2-16
Figure 5 – Resulting Network PCI (\$24.5 Million/7yr Budget)	Sec 2-20
Figure 6 – Resulting Network PCI (Increase PCI Budget)	Sec 2-22
Figure 7 – La Habra MyRoads® PMP Web-Portal	Sec 2-24
Figure 8 – PCI Calculation Worksheet	Sec 2-26
Figure 9 – Arterial Condition Distribution	Sec 2-27
Figure 10 – Local Condition Distribution	Sec 2-27
Figure 11/14 – La Habra 2025 PCI Maps (NW, NE, SE, SW)	Sec 3-31 thru 34

Table 1 – Past and Present PCI Results and Comparisons (FY 2003-2025)	Sec 1-3
Table 2 – Condition Distribution by Mileage for All Streets	Sec 1-4
Table 3 – Citywide Projection Utilizing “\$24.5 Million/Seven Yr” Budget	Sec 1-8
Table 4 – Necessary Annual Funding to Increase PCI to 80.5	Sec 1-8
Table 5 – Pavement Condition Index (PCI) Range	Sec 2-14
Table 6 – Maintenance / Rehabilitation Strategy Assignments Table	Sec 2-15
Table 7 – Annual Public Works PMP Budget	Sec 2-17
Table 8 – Citywide Projection Utilizing “\$24.5 Million / Seven-Yr” Budget	Sec 2-19
Table 9 – Necessary Annual Funding to Increase PCI to 80.5	Sec 2-21
Table 10 – PCI Condition Description Table	Sec 2-25

Acronym Listing

Army Corps of Engineers (USACE)
Asphalt Concrete (AC)
American Public Works Association (APWA)
Capital Improvement Program (CIP)
Countywide Pavement Management Plan Guidelines (Guidelines)
Forecast Maintenance & Rehabilitation (FMR)
Geographic Information System (GIS)
Master Plan of Arterial Highway (MPAH)
Pavement Condition Index (PCI)
Orange County Transportation Authority (OCTA)
Pavement Management Program (PMP)
Portland Cement Concrete (PCC)

SECTION I

EXECUTIVE SUMMARY

A. 2025 UPDATE OF PAVEMENT MANAGEMENT PROGRAM (PMP)

As the City of La Habra continues to show growth with its population, demographics, infrastructure, and maintenance needs, the street network has been running parallel as new developments/annexations increase the size of La Habra's pavement infrastructure. As growth continues within the City and regionally, wear and tear on the infrastructure will occur at an ever increasing rate. Pavement aging through annual weathering and increased usage, compounded with the increased cost of performing maintenance add to the yearly operational maintenance of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

In the upcoming years as the City continues to build upon this study through future inspections and maintenance efforts, La Habra pavement data will continue to provide reliable data to enhance the PMP through detailed Orange County Transportation Authority (OCTA) Measure M2 funding analysis, City specific budgetary reporting and level of service reporting.

The La Habra PMP has been developed to assist City personnel by providing current data on the City's street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City's 2023 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all defined Master Plan of Arterial Highways (MPAH) routes (Arterials/Collectors) this past winter/spring to assist the City in being consistent with OCTA Measure M2 guidelines; additionally, we surveyed all local and alley streets that required inspection. We updated the City's unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of the City's MyRoads® and GIS Enterprise.

Bucknam Infrastructure Group (Bucknam) reviewed the City's previous CIP/maintenance efforts and the current 2025-2032 proposed street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The result of these work efforts is this report.

Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

- PMP report consistent with OCTA Measure M2 guidelines
- the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;
- a ranked list of all streets, or segments of streets, by condition within the network;



- rehabilitation/maintenance needs of each street segment by year;
- an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;
- optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;
- prediction of the life-cycle performance of the City's pavement network and each individual street section; and
- pavement condition data and analysis presented in GIS through MyRoads®, ESRI ArcGIS and uploaded into the City's GIS Enterprise

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecast maintenance recommendations we worked with La Habra staff in identifying unit costs for all maintenance practices used on an annual basis (these not only included the material costs but contingency costs for design and ADA improvements).

Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the La Habra pavement network is \$301,183,900. This value clearly indicates that the City's pavement network is the most valuable and essential asset to La Habra. The City's use of slurry seal, AC Overlay and R&R practices are typically applied every seven years depending on the street conditions. These frequencies are typical but the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of La Habra's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

This report reflects our findings and recommendations for the PMP and the current state of the City's pavement network. Furthermore, we have recommended detailed funding and maintenance strategies for the arterial/collector and residential networks for next seven (7) years.

B. CITY'S PAVEMENT NETWORK

Within the La Habra pavement management network there are approximately 16.3 section miles of Arterial/Collector streets consisting of approximately 5,004,355 SF of pavement and 68 pavement sections. The Local network consists of approx. 92.9 section miles consisting of 16,562,693 SF of pavement which consists of 735 pavement sections. The Alley network consists of approx. 582,079 SF of pavement that includes 102 sections totaling 6.4 section miles. Combined, the entire network consists of 115.6 section miles of streets, 22,149,127 SF and 905 total pavement sections.

The City's pavement network is broken down into manageable groups that have similar characteristics, such as pavement street classification, surface type and logical segmentation. Pavement segments are identified by their branch and section numbers. Pavement "branches" that have a common usage, such as La Habra Blvd, defines a "branch" within MicroPAVER. Pavement "sections" are pavement segments within the defined branch that have consistent pavement street classifications,



construction/maintenance histories and use. Representative inspection samples are then selected and visually surveyed to locate distress data. This data is used to calculate the pavement sections Pavement Condition Index (PCI) which includes distress type, extent of the distress and its severity.

The PCI is a condition rating that ranges from 100 (a new pavement section or recently overlaid or reconstructed) to 0 for a section that has structurally failed and deteriorated dramatically. Weighted average PCI of a given area/zone equals the pavement section PCI multiplied by its own area then divided by the total square footage of the given area/zone. Table 1 summarizes the section conditions found within the City of La Habra pavement network by street classification.

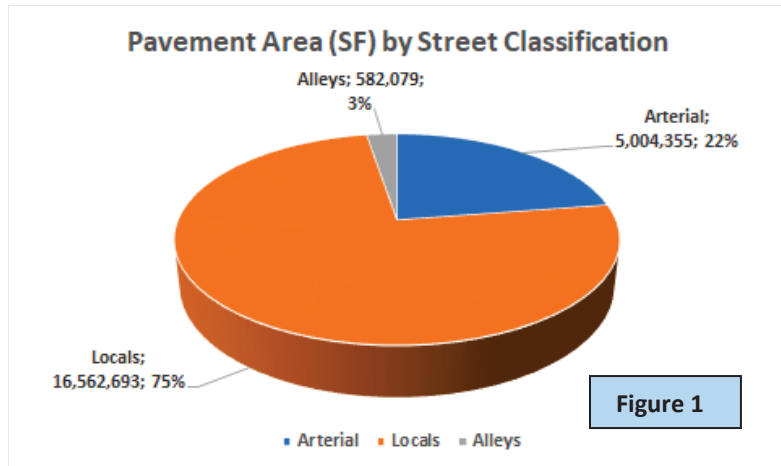


Figure 1

- **The weighted average PCI for the La Habra Arterial/Collector network is 82.6**
- **The weighted average PCI for the La Habra Local network is 77.2**

The weighted PCI value associated with the Arterial/Collector and Local routes shown through our survey analysis is timely in that it is showing that a reasonable amount of preventive, slurry seal, and overlay work will continue to be needed over the next several years to proactively sustain the current PCI level. The reduction in PCI value can be explained by the network-wide natural deterioration of pavement conditions due to age, load and weather. If pavement sections are properly addressed with necessary maintenance/rehabilitation over the next seven years the City will continue to see its weighted average PCI range between 78 and 80.

Rank	Mileage	SF	2025 PCI	2023 PCI	2021 PCI	2019 PCI	2017 PCI	2015 PCI	2013 PCI	2011 PCI	2009 PCI	2006 PCI	2003 PCI
Arterial	16.3	5,004,355	82.6	83.9	83.3	83.2	78.5	74.0	75.5	75.0	74.6	74.6	74.6
Locals	92.9	16,562,693	77.2	83.8	81.9	82.3	88.4	88.9	83.5	79.2	66.7	66.7	66.7
Alleys	6.4	582,079	72.2	73.5	69.5	64.8	50.7	47.5	43.4	46.2	40.6	40.6	40.6
Citywide	115.6	22,149,127	78.3	83.6	81.9	82.1	85.6	84.0	80.1	76.4	69.3	69.3	69.3

City's weighted average PCI w/o Alleys is 78.5

Table 1 – Past and Present PCI Results and Comparisons (FY 2003-2025)

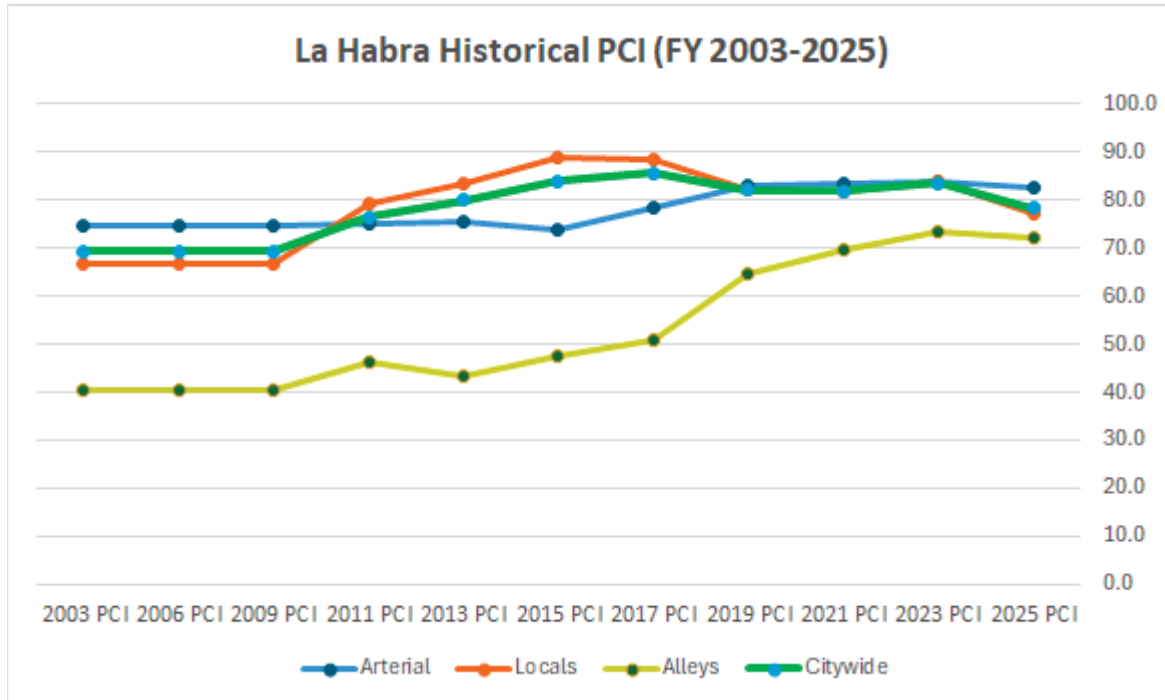


Figure 2 – Historical PCI Findings (FY 2003-2025)

C. CURRENT CITYWIDE CONDITIONS (ARTERIALS, LOCALS, ALLEYS)

The overall condition of the City’s pavement network is “Good” with a weighted average PCI of 78.3 based on the surface area of each segment. The distribution of the City’s overall pavement network is shown in Section III of this report (Condition Distribution).

Condition	PCI Range	MPAH	Local	Alleys	Total Section Mi.	% of Network
Very Good	86-100	6.9	21.8	3.3	32.0	27.7%
Good	75-85	5.3	36.3	1.0	42.6	36.9%
Fair	60-74	3.6	27.8	0.5	31.9	27.6%
Poor	41-59	0.3	6.9	0.5	7.7	6.7%
Very Poor	0-40	0.2	0.1	1.1	1.4	1.2%
		16.3	92.9	6.4	115.6	

Table 2 – Condition Distribution by Mileage for All Streets

As shown above, a large majority of segments are evenly distributed through Very Good to Good condition categories. For a network to be in a “preventive condition status” you would typically see Very Good section percentage totals at the 50% to 60% range, this is true for La Habra. These findings indicate that the proper overlay rehabilitation and slurry seal maintenance has been applied to the network over the past several years. The condition ranges shown above are defined by the OCTA PMP Guidelines.

With approximately 33.3% of the City’s pavement sections within a condition level of “Fair to Very Poor” (approximately 39.6 miles), a proactive/continued slurry seal maintenance program needs to be sustained and funded; this will allow the City’s PMP to provide high quality conditions the

citywide network while reducing deferred maintenance costs in fiscal years 2025 and beyond.

- Local conditions show that 53% (49.8 miles) of the pavement network will potentially require slurry seal maintenance within the next seven years while 17% (15.5 miles) of the network requires overlay rehabilitation or reconstruction. The cyclical nature of the ROI of slurry seal is showing with the current lower Local PCI compared to the 2023 results. If the Section IV recommendations are followed/applied, the Local PCI will again be in the low 80's.
- Arterial/Collector conditions show that 37% (6.0 miles) of the pavement network will potentially require slurry seal maintenance within the next seven years (the City does not currently utilize slurry seal on Arterial sections); while 28% (4.6 miles) of the network requires overlay rehabilitation .

Through our assessment of the City's annual pavement maintenance budget allocations the current available CIP funds will allow the City's current citywide weighted PCI to moderately increase over the next five years. **The general goal of any pavement management program should be to achieve a citywide PCI between 82 to 83 and sustain that value for the long-term.**

Furthermore, as large overlay and rehabilitation projects are considered for funding, the City should also consider using sub-grade R - Values, structural design, distress severities and extents as parameters for determining whether a pavement section that lies within the Fair to Very Poor condition range should be overlaid or reconstructed. PCI conditions reflect "surface" conditions; additional sub-surface data such as coring data, R-Values and asphalt depths will provide City to with a better approach to the maintenance that should be applied.

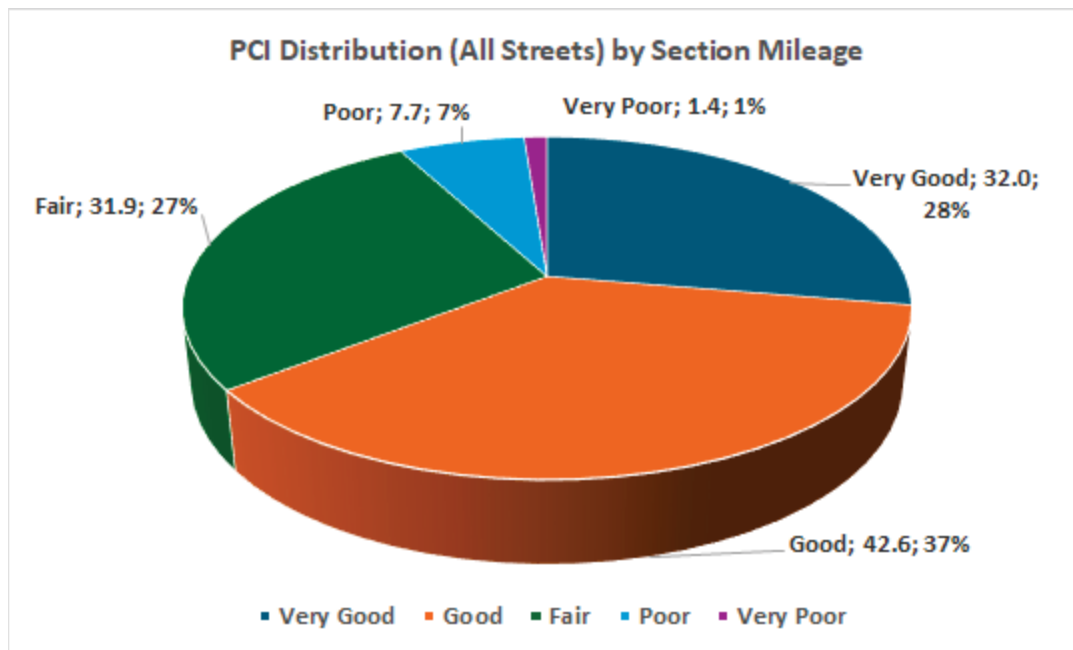


Figure 3 – PCI Condition Distribution by Section Mileage (All Streets)

D. MAINTENANCE STRATEGY DEVELOPMENT

Based on the results of the condition survey and input from the City, pavement maintenance/rehabilitation strategies were developed. At the outset, the City and Bucknam staff identified a distribution of City maintenance funds that would be applied to the network over the next seven years. This was based upon the desire to prevent the decrease in street conditions and not allow an increase in the maintenance backlog funds over the seven-year program.

With this approach, Bucknam has recommended a “minimal level of service” which creates a major dividing line in determining between preventive maintenance and major pavement rehabilitation. Generally within pavement management programs, a PCI range between 55 to 70 determines the threshold of when preventive maintenance or major overlay rehabilitation is activated. Based on the City’s weighted average PCI, condition distribution, maintenance practices, our team has identified a PCI of “65” as the minimum level of service. This means that any pavement section with a PCI greater than 65 will be recommended for preventive maintenance (i.e. slurry seal). This recommendation is indicated in Table 6, Section II, page 15.

Bucknam developed two multi-year Capital Improvement Programs for the City based on the pavement records, yearly capital expenditures, available funding and the most recent 2025 inspections. These recommendations and results are shown in Section II of this report.

As shown in Figure 3 (page 5), 64% of the City’s streets are in Very Good to Good condition. These sections will be targeted for “preventive” maintenance within our Capital Improvement Program (CIP) recommendations. The reasoning in doing this is to extend the life cycles of those “good” pavement sections which accrues capital saving to aggressively rehabilitate those pavement sections that are below the “minimal level of service”.

In order to achieve the most effective and optimum program for the City, certain strategies have been selected and/or analyzed. Below is a listing of the maintenance activities utilized in strategy development. Each activity is representative of the types of work that have been programmed as part of the long-term maintenance requirements of the City’s street network.

General Repairs-Stop Gap (Localized Maintenance*)

For this maintenance type, small localized surface treatments are utilized as “holding action” solutions (stop gaps) to delay the need for pavement structural strengthening. They typically include activities such as crack sealing, AC deep patching, AC skin patching, PCC slab replacement, grinding and leveling.

The City of La Habra may consider an Asphalt Zipper to apply proactive localized surface patch repairs. In doing this, they prevent portions of pavement sections (high severity distress locations) from deteriorating at a continuously fast rate.

Slurry Seals (Global Maintenance*); PCI range – 60 to 85

Surface treatments applied to pavements with minimal surface distress to provide new wearing surfaces and extend pavement life. Generally consists of a mixture of conventional or latex-modified emulsified asphalt, well-graded fine aggregate, mineral filler and water placed over an existing AC surface; Slurry seal application life-cycles are averaging 4 to 5 years. Type II Slurry is recommended for Local streets.

Overlays (Major Rehabilitation*); PCI range – 20 to 60

AC Overlay – Placement of a layer of hot-mixed asphalt concrete over the existing pavement surface (may include pavement fabric). Grinding (milling) is performed prior to the overlay to reduce the total height of asphalt and assure alignment with existing gutter lines. This also includes “dig-outs” and crack sealing prior to the application of an overlay. This treatment provides a new wearing surface and increased structural strength to the pavement section. A conventional overlay should be designed for a ten-year life.

Asphalt Rubber Hot-Mix Overlay - The ASTM definition is: Asphalt-Rubber is a blend of asphalt cement, reclaimed tire rubber and certain additives in which the rubber component is at least 15% by weight of the total blend and has reacted in the hot asphalt cement sufficiently to cause swelling of the rubber particles. Specifically, using crumb rubber modified binders in pavement application benefit local agencies in that cities find:

- Pavement resists cracking by being more flexible;
- Cost savings come from a longer life cycle (from Bucknam’s experience typically 20% longer), decreased maintenance and the use of less material
- Improvement in skid resistance;
- Decreased noise; and
- It provides long-lasting color contrast for marking and striping
- Life cycles are averaging 8 to 12 years

Reconstruction (Major Rehabilitation*); PCI range – 0 to 20

Reconstruction of an existing pavement section includes demolition and removal of the asphalt to a prescribed depth, grading, sub-base compaction, application of a binder/surface course followed by the placement of a conventional flexible pavement section using a structural AC Hot Mix, ARHM or a full depth asphalt. Each classification of road has a typical design cross-section based on anticipated traffic loading. Reconstruction resets a roadway section PCI to 100 and restarts the life-cycle deterioration curve of the section.

*Localized, Global and Major maintenance activities are default terms used within the MicroPAVER pavement software. Specific pavement repair applications are placed within each maintenance activity in order to develop multi-year maintenance forecast recommendations.

E. ANNUAL BUDGET PROJECTIONS

The budgeting process was approached with the following in mind; generate two unique work programs for the next seven (7) years based upon actual road pavement conditions in order to:

1. Demonstrate how the “actual” citywide pavement budget (\$24,500,000 available over seven years) performs against the existing 2025 conditions
2. Identify the required annual citywide budget to “increase” the current 2025 PCI level of 78.3 to 80.5 after seven years

Based on current and future pavement maintenance needs, two annual work programs have been prepared and summarized below. Table 3 demonstrates the how today’s conditions react to the City’s annual pavement funding budget (\$24,500,000 available over seven years). Table 4 demonstrates the required budget that is needed to increase the citywide weighted average PCI to a level of 80.5 after seven years (each scenario addresses arterial, local and alley streets). The revenues shown below only account for the cost of pavement maintenance, rehabilitation and reconstruction.

FY	Current Funding	Entire Network (PCI)	MPAH	Local	Deferred Backlog
Current PCI		78.3	82.6	77.2	\$8,405,600
2025-26	\$3,500,000	78.7	82.8	77.9	\$7,318,000
2026-27	\$3,500,000	79.0	82.9	78.2	\$6,209,000
2027-28	\$3,500,000	79.4	83.0	78.5	\$4,858,900
2028-29	\$3,500,000	79.7	83.1	78.7	\$4,108,100
2029-30	\$3,500,000	79.9	83.1	78.9	\$3,492,300
2030-31	\$3,500,000	79.2	82.8	78.0	\$6,503,600
2031-32	\$3,500,000	78.4	82.4	78.6	\$7,242,200
\$24,500,000					

Table 3 – Citywide Projection Utilizing \$24.5 Million Seven-Yr Budget

The City has planned for / allocated \$24.5 million in pavement maintenance & rehabilitation over the next seven years. Utilizing this projected budget, Bucknam is showing that a seven-year budget ranging from \$24.5 million to \$26.7 million is needed to sustain the conditions found within La Habra today. Moving forward, City staff should utilize the results found in Tables 3 & 4 to audit how annual funding is performing to future PCI inspection results (i.e. FY 2027 PMP, FY 2029 PMP studies).

FY	Increase PCI Funding	Entire Network (PCI)	MPAH	Local	Deferred Backlog
Current PCI		78.3	82.6	77.2	\$8,405,600
2025-26	\$3,500,000	78.7	82.8	77.9	\$7,318,000
2026-27	\$3,500,000	79.0	82.9	78.2	\$6,209,000
2027-28	\$3,500,000	79.4	83.0	78.5	\$4,858,900
2028-29	\$3,500,000	79.7	83.1	78.7	\$4,108,100
2029-30	\$3,889,000	80.0	83.2	79.5	\$3,105,600
2030-31	\$4,255,000	80.3	83.3	79.8	\$3,981,400
2031-32	\$4,561,000	80.5	83.4	80.3	\$4,264,700
\$26,705,000					

Table 4 – Necessary Annual Funding to Increase PCI to 80.5

Additional detail and breakdown of budget projections are demonstrated in Section IV of this report.
All work program budgets generated are presented in terms of current 2025 dollars. All repair activities were based on distresses observed at the time of the field survey.

These are recommendations and are to be used as “the best case scenario” for improving the City of La Habra street network.

F. QUALITY CONTROL EFFORTS

As indicated in our scope of work, we performed numerous quality control checks in the field during survey efforts. Field check efforts were performed at the end of each week of survey as well as a final effort once all required inspections were complete. 10% of the pavement inspection set was resurveyed by a second team to ensure the quantities and distress types were collected properly (approx. 12 miles).

During the project, Bucknam staff reviewed and assessed the existing MicroPAVER database, City centerline file, previous PMP – GIS map link and the previous street segmentation for La Habra. Typical segmentation updates were made to ensure that all sections across the network contain similar pavement type, age, and condition.

G. FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City and through our discussions with City staff the conditional data found across the network clearly shows that the City has applied strong, preventive maintenance strategies over the past decade. We continue to see an annual conditional “sustaining” within the Arterial and Local street programs (PCIs within the 78 to 83 range); this is a positive result for on-going, continuous long-term management of the PMP. Pavement management involves frequent preventive maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventive maintenances (such as slurry seal, stop gap, etc.) have limited benefits. More aggressive maintenance applications have to be used. Our study has shown that several MPAH and Local overlay projects will be needed over the next five years to maintain the network’s high level of condition.

Currently, the City’s four major streets networks (Arterial/Collector, Local & Alley) hold high weighted PCI values; it is our recommendation that a proactive, common sense overlay program be assessed and scheduled over the next several fiscal years. This will ensure that the citywide weighted PCI will sustain itself and allow for routine slurry seal maintenance to continue.

Through our analysis of the La Habra PMP we have found and recommend the following items which should be considered for a proactive approach to the PMP and future management of the program:

ARTERIAL/COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The recent 2025 MPAH inspections and PCI results have indicated that the La Habra MPAH network is currently in “Good” condition (weighted avg. PCI of 82.6). The City has been able to increase and sustain this average since 2017 and continues to apply proactive and timely maintenance/rehabilitation. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 19 and its corresponding Section IV Forecast Maint./Rehab (FMR) report recommendations to maintain a “Good” network weighted average PCI value.

Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 82.6;
- The MPAH network consists of 16.3 miles and 5,004,355 SF of pavement;
- Currently, 28% of the MPAH network (4.6 miles) qualify for rehabilitation/reconstruction; while 37% (6.0 miles) qualify for preventive/slurry seal maintenance;
- MPAH maintenance projects should focus on maintaining the current PCI above a weighted average of 83 over the next seven years;
- Develop a proactive fiscal and planned approach to identify MPAH overlay projects based on the deterioration modeling within MicroPAVER;

- At a minimum, maintain the MPAH revenues at the \$1,213,400/yr level for the term of the CIP to generate the projects identified on page 8; and
- Perform pavement inspections on the MPAH network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

LOCAL FINDINGS AND RECOMMENDATIONS

The recent 2025 Local inspections and PCI results have indicated that the La Habra Local network is currently in "Good" condition (weighted avg. PCI of 77.2). The City has been able to increase or sustain this average every year since 2011 and continues to apply proactive and timely maintenance which has stabilized conditions at 78 to 83 PCI levels. The cyclical nature of slurry seal ROI is showing with the current lower Local PCI compared to the 2023 results. If the Section IV recommendations are followed/applied, the Local PCI will again be in the low 80's.

At a minimum, to maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 19 and its corresponding spreadsheet reports to maintain a "Good" network weighted average PCI value.

Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 77.2;
- The Local network consists of 92.9 miles and 16,562,693 SF of pavement;
- Currently, 17% of the Local network (15.5 miles) qualify for rehabilitation/reconstruction; while 53% (49.8 miles) qualify for preventive/slurry seal maintenance;
- Local maintenance projects should focus on increasing the current PCI to a weighted average of 81 over the next seven years;
- Develop a proactive fiscal and planned approach to identify local overlay projects based on the deterioration modeling within MicroPAVER;
- At a minimum, maintain the Local revenues at the \$2,006,800 ,200/yr level for the term of the CIP to generate the projects identified on page 8;
- Perform pavement inspections on the Local network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2; and
- Continue to schedule and apply Local maintenance & rehabilitations within the City's defined Local Track/Zone boundaries; our Section IV reporting demonstrates these recommendations.

ALLEY FINDINGS AND RECOMMENDATIONS

The recent 2025 Alley inspections and PCI results have indicated that the network is currently in “Fair” condition (weighted avg. PCI of 72.2). The City has been able to sustain/increase this condition value every year since 2009 (78% increase) and continues to apply proactive and timely rehabilitation/overlays which have stabilized conditions at mid-70’s PCI level. Over the next 5+ years, to continue to see this annual improvement, it is critical that overlay activities are funded at the levels identified on page 19 and its corresponding spreadsheet reports to increase the weighted average PCI value to the Good range.

Our Alley network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Alley network has a weighted PCI of 72.2;
- The Alley network consists of 6.4 miles and 582,079 SF of pavement;
- Currently, 30% of the Alley network (1.9 miles) qualify for rehabilitation/reconstruction; while 17% (1.1 miles) qualify for preventive/slurry seal maintenance;
- Alley maintenance/rehabilitation projects should focus on increasing the current PCI to a weighted average of 77 over the next seven years;
- Develop a proactive fiscal and planned approach to identify Alley overlay projects based on the deterioration modeling within MicroPAVER;
- Maintain the Alley revenues at the \$280k to \$370k/yr level for the 7-yr term of the CIP to generate the projects identified on page 19; and
- Perform pavement inspections on the Alley network every two years to continue the City’s solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

SECTION II

PAVEMENT MANAGEMENT PROGRAM – CAPITAL IMPROVEMENT PROGRAM

Bucknam performed the following services in accordance with the scope of services that was contracted with the City of La Habra. As a quick overview, the following tasks were performed to complete the work over the past several months:

2025 Pavement Management Work Efforts:

- Task 1:** Project Kickoff-Data Management
- Task 2:** Update of Maintenance Activities
- Task 3:** Pavement Condition Survey (MPAH Citywide, Local-Alley Streets)
- Task 4:** Budgetary Analysis and Capital Improvement Reports
- Task 5:** Executive Summary and Final CIP Reports
- Task 6:** Mapping of the Pavement Network

Pavement Management Update 2025

As a part of the 2025 update of the pavement management program, a major element of work was to complete a comprehensive assessment of the existing street network and PMP data within the City. This included assessing the City's existing 2023 PMP report, GIS centerline, street naming conventions and work history information. From there, Bucknam worked with the City to confirm public and private street listings which set the foundation for accurate CIP reporting. All data was then updated into the City's current MicroPAVER database.

Work history information was provided by the City in the form of institutional knowledge, maps and Excel documents. This information was entered into the proper pavement segments that match the limits of those projects. From there, CIP pavement recommendations were performed (discussed and demonstrated below) where the pavement maintenance information the City provided (PMP material practices, unit costs, and capital budgets) were used to generate recommendations through the MicroPAVER system.

Table 5 demonstrates PCI ranges identified within MicroPAVER. Once a pavement inspection is complete, a PCI is calculated for each pavement section. Each PCI calculated falls within a defined PCI range category (Very Good, Poor, etc.). Furthermore, a weighted PCI was calculated for the each functional class within the network (arterials and locals).

The PCI is a condition rating that ranges from 100 (a new pavement section or recently overlaid or reconstructed) to 0 for a section that has structurally failed and deteriorated dramatically. Weighted average PCI of a given area/zone = pavement section PCI multiplied by its own area divided by the total square footage of the given area/zone. This information can also be represented through MicroPAVER to show how much square footage or percentage of area falls within a PCI range category.

PCI Range	Condition
86-100	Very Good
75-85	Good (2025 La Habra = 78.3)
60-74	Fair
41-59	Poor
0-40	Very Poor

Table 5 – Pavement Condition Index (PCI) Range

(Additionally, see page 25 for detailed description of PCI ranges)

These condition ranges are defined by the Army Corps of Engineers and defaulted within the OCTA guidelines. The summary of all roads condition data and their representative PCI's can be seen in the Pavement Condition Report in Section III.

A. MAINTENANCE / REHABILITATION STRATEGY ASSIGNMENT TABLE

Once the appropriate activities from the above listings were selected by the City, a Maintenance/Rehabilitation Strategy Table was defined within the system that allocated the appropriate actions to the specific repair needs of the street. In defining the maintenance strategy list, emphasis was placed on defining pavement condition thresholds and using the PCI for the specific maintenance activities within these categories.

Maintenance / Rehabilitation Strategy Assignment

All Streets		
PCI Range	Description	Unit Cost
20-100	Preventative, Stop Gap, Patching	Varies by Activity
Varies by Activity		
60-85	Type II Slurry (Locals)	\$0.50/SF
60-85	Type II Slurry (Arterials)	\$0.65/SF
Minimal Level of Service (65)		
20-65	Mill and AC Overlay (Local)	\$3.35/SF
20-65	Mill & ARHM Overlay	\$4.55/SF
0-20	Full AC/Base Remove & Replace (Local)	\$7.95/SF
0-20	Full AC/Base Remove & Replace (Arterial)	\$19.00/SF
0-20	PCC Reconstruction	\$26.50/SF
20-60	Alley (4" Mill and AC Overlay)	\$6.77/SF
<i>25% Contingency included within All Unit Costs</i>		

Table 6 – Maintenance / Rehabilitation Strategy Assignment Table

The Maintenance / Rehabilitation Strategy Assignments, shown in Table 6, was developed to identify the most critical segments in each of the work programs (Arterial, Collector and Local). Segment priorities were established by determining the range of PCI's requiring first attention based on the relative value of each segment's PCI, thus maximizing the annual maintenance budget. Also, distress quantity, area extent, type (load / climate) and distress severity levels were critical elements in the decision process for recommending maintenance. The assignment table is used as a guide within MicroPAVER to recommend maintenance, however, further assessment by City staff and/or outside parties can override maintenance recommendations. This can be done by reviewing and assessing distress extents and their weighted percentages.

Once the strategy assignments were set within the system, budgets and work assignments were generated for each work program on an annual basis. Using pavement deterioration curves for each type of pavement surface and class of road, both current year and future years work requirements for each pavement segment within the City were determined. In forecasting the maintenance requirements in future years, the current PCI value is reduced annually for each pavement segment based on the MicroPAVER deterioration curves within the City's database.

Likewise, maintenance activities performed in a given year increase the PCI value as they are applied to the segment. The overall program is dynamic in that each strategy consists of a cyclic series of actions that simulates the pavement anticipated life cycle.

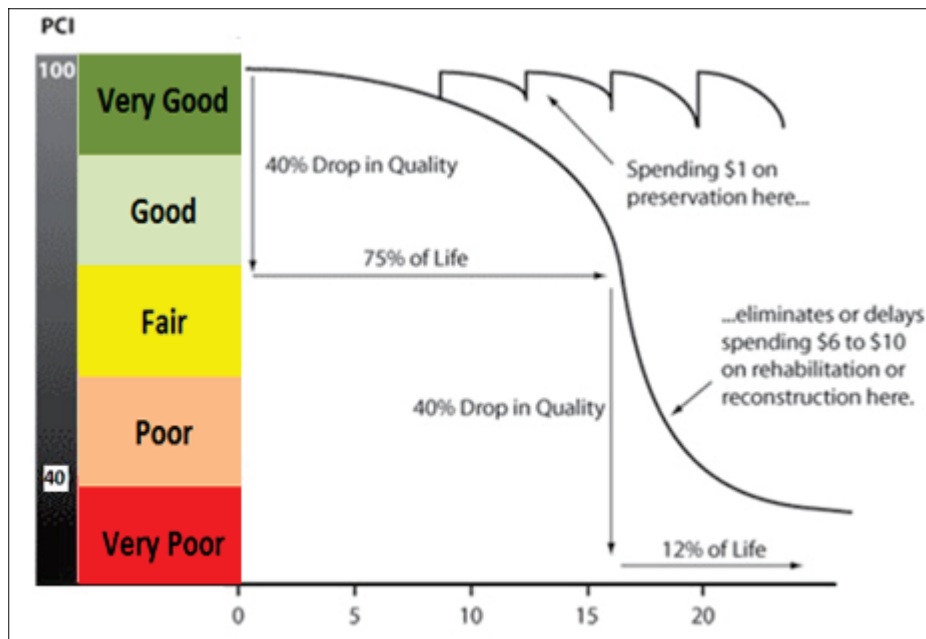


Figure 4 – Sample Pavement Life Cycle / Deterioration Rate

B. MULTI-YEAR ANNUAL WORK PROGRAM PROJECTIONS

The goal of these projections is to assist City policy makers in utilizing the recommendations of the MicroPAVER system. By using the City of La Habra's current budgets and maintenance practices the system will develop "section unique" improvements and strategies. Each segment will be tied to a specific fiscal year. As shown in the following pages, we have assessed the budgets that have been projected to meet the maintenance and rehabilitations needed to maximize the City's return on investment. The budget forecasting goal for the City network focused on:

- ❖ Establishing a proactive multi-year Maintenance & Rehabilitation Program;
- ❖ Developing a preventive maintenance program; and
- ❖ Selecting the most cost-effective repairs based on City strategies
- ❖ Spreading the annual M&R recommendations across all City Council Districts

ANNUAL \$24.5 MILLION BUDGET – A \$24.5 Million/seven-yr budget was generated for the City to demonstrate how its existing Public Works M&R/CIP budget allocation would perform against the current citywide conditions.

Plan Year	Measure M, General Fund, Gas Tax, SB1
2025-26	\$3,500,000
2026-27	\$3,500,000
2027-28	\$3,500,000
2028-29	\$3,500,000
2029-30	\$3,500,000
2030-31	\$3,500,000
2031-32	\$3,500,000
Total	\$24,500,000

Table 7 – Annual Public Works PMP Budget

City Public Works PMP funding is identified through:

- *Arterial: \$1,300,000 annually (SB1, M2, Gas Tax, General Fund);*
- *Local: \$1,500,000 annually for local rehabilitation (M2, Gas Tax, General Fund);*
- *Alley: \$700,000 annually (M2, Gas Tax, CDBG)*

INCREASE PCI BUDGET – A "increase" budget was generated for the City to demonstrate the necessary annual funding required to increase the current weighted PCI level of 78.3 to 80.5 after seven years.

****All multi-year budget projections include a 4% inflation rate for the term of the budget forecast.***

ARTERIAL-COLLECTOR / LOCAL / ALLEY BUDGET PROJECTIONS

The annual projected revenues shown below only account for the cost of pavement maintenance and rehabilitation activities. A 25% contingency was applied to the pavement costs. Additional soft costs not included within the cost of pavement maintenance include:

- Right-of-way, curb & gutter, ADA ramp improvements;
- Utility improvements;
- Design, construction management, inspection, testing;
- Tree removals;
- Striping and pavement markings

ACTUAL (\$24.5 Million, Seven-Year) – The first key step in developing a proactive PMP is to model the City’s existing conditions against an “actual” annual budget. In doing this, PCI performance, deferred maintenance and pavement application uses are able to benchmarked and demonstrated in a positive or negative result. Bucknam utilized the City’s \$24.5 Million, Seven-yr budget to establish a benchmark scenario for pavement funding; the City provided Bucknam with current 2025 unit costs for pavement maintenance applications currently being used by the City.

\$24.5 MILLION, SEVEN-YR BUDGET PROGRAM

This budget program incorporates pavement sections that have a functional class of Arterial (A, C), Local (E) and Alleys (O).

FY	Current Funding	Entire Network (PCI)	MPAH	Local	Deferred Backlog
Current PCI		78.3	82.6	77.2	\$8,405,600
2025-26	\$3,500,000	78.7	82.8	77.9	\$7,318,000
2026-27	\$3,500,000	79.0	82.9	78.2	\$6,209,000
2027-28	\$3,500,000	79.4	83.0	78.5	\$4,858,900
2028-29	\$3,500,000	79.7	83.1	78.7	\$4,108,100
2029-30	\$3,500,000	79.9	83.1	78.9	\$3,492,300
2030-31	\$3,500,000	79.2	82.8	78.0	\$6,503,600
2031-32	\$3,500,000	78.4	82.4	78.6	\$7,242,200
	\$24,500,000				

Table 8 – Citywide Projection Utilizing \$24.5 Million/ Seven-Yr Budget

By modeling the existing pavement conditions against \$24.5 Million/seven-yr funding, we have found that the weighted PCI for the entire network increases from a level of 78.3 to a level of 78.4 over the seven year CIP (See Figure 5 below). The allocated seven-year budget generates a sustaining/maintained weighted PCI by FY 2031-32; if the recommendations within Section IV are applied. As noted in the Executive Summary, the general goal of any pavement management program should be to achieve a citywide PCI between 82 to 84 and sustain that value for the long-term. La Habra is close to this goal and should be able to sustain these conditions over the next decade as long as the proper/adequate Arterial-Collector / Local funding is allocated.

Secondly, the resulting deferred maintenance backlog decreases from \$8.4 million to \$7.2 due to the life-cycle application schedules for slurry seals and overlays. By FY’s 2031-2035, deferred maintenance/rehabilitations is projected to come back into the system due to industry standard deterioration curves. This budget scenario indicates that an appropriated \$24.5 million/seven-yr pavement budget is ample enough to generate the desired results on the pavement network.

In order for these scenarios to produce these results, proactive and continued funding is necessary; on an annual basis, the City should monitor the management of overlay deferred rehabilitation. The potential delay in projects and the resulting buildup of more overlay work in the seven-year time frame is not a debt service the City will want to accept.

Through Bucknam’s analysis of the previous pavement database, work history dates and our experience with AC Overlay deterioration rates, it is important to point out that pavement sections that were overlaid in the mid-2010’s (FY’s 2014-2016) will need proper overlay rehabilitation

approximately around fiscal year 2029-30 and beyond.

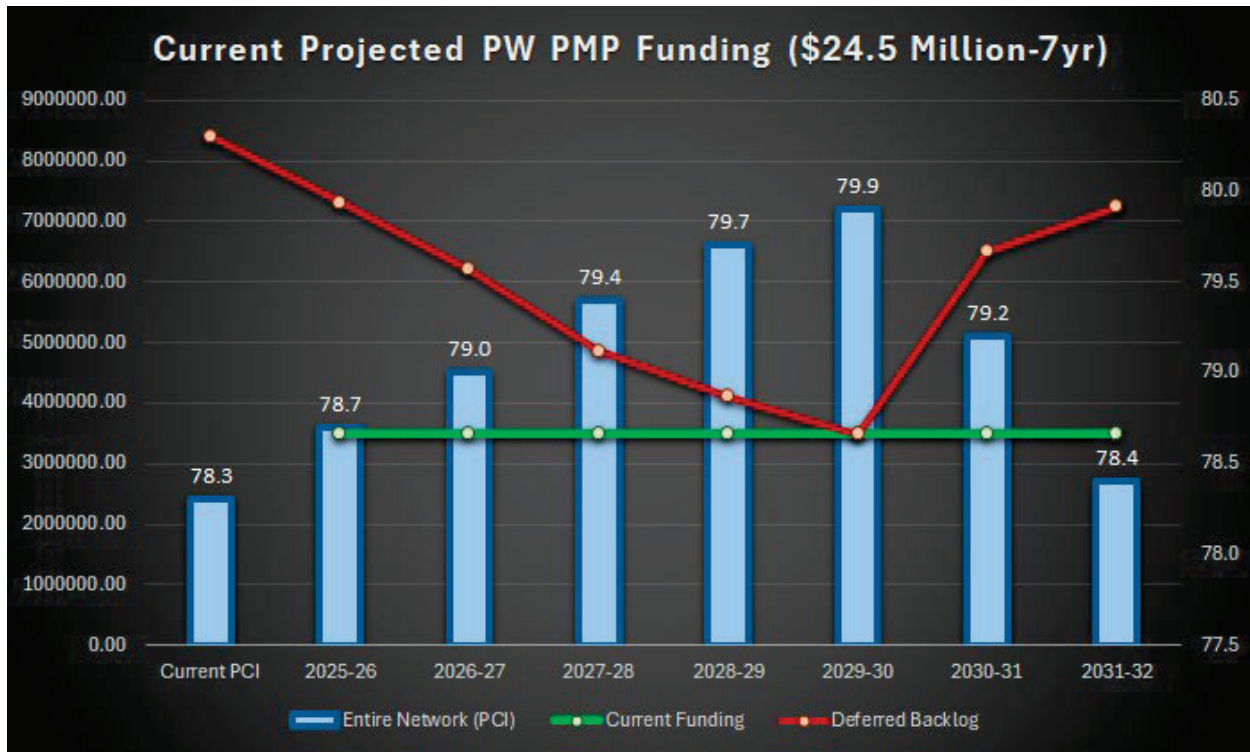


Figure 5 – Resulting Network PCI (\$24.5 Million/7yr Budget)

The resulting “increase” of the weighted PCI shown above for the entire network demonstrates how applying adequate capital funds to specific areas of the network allows the City’s pavement to improve at a rate that is conducive to a successful PMP (i.e. proper/timely application of preventive maintenance and extension of section life-cycles through timely overlays, decrease in deferred maintenance).

Additionally, even with an ample budget, the City should continue to implement stop gap/localized maintenance (i.e. deep patching, leveling courses, crack sealing, etc.) prior to any major slurry seal and/or overlay rehabilitation. By performing stop gap measures to individual pavement sections the overall performance of the sections condition will improve over time and sustain itself longer than if no preventive maintenance was performed.

On the flip side, if limited annual funding or low project square footages improvements are applied to the network over the next seven years (i.e. citywide budget of \$1,000,000/yr) a drop in overall weighted PCI to 72.0 will occur and deferred maintenance/CIP projects will exceed \$23.9 million. Limited funding equals deferred projects which does not allow necessary overlay projects to be completed in a timely manner on the arterial, collector and local networks.

INCREASE PCI PROGRAM (SEVEN YEAR MODEL)

With the previous maintenance strategy shown above we have demonstrated the proactive results of applying the necessary annual funding to sustain the City's weighted PCI at today's conditions. Our goal under this model is to increase the current 2025 weighted PCI of 78.3 to 80.5 through a seven-year program. This model will demonstrate the necessary annual funding to achieve this goal.

We used the previous model (shown above) as the basis for our modeling within the "increase" program. The "Increase PCI" budget incorporates pavement sections that have a functional class of Arterial (A, C), Local (E) and Alleys (O).

FY	Increase PCI Funding	Entire Network (PCI)	MPAH	Local	Deferred Backlog
Current PCI		78.3	82.6	77.2	\$8,405,600
2025-26	\$3,500,000	78.7	82.8	77.9	\$7,318,000
2026-27	\$3,500,000	79.0	82.9	78.2	\$6,209,000
2027-28	\$3,500,000	79.4	83.0	78.5	\$4,858,900
2028-29	\$3,500,000	79.7	83.1	78.7	\$4,108,100
2029-30	\$3,889,000	80.0	83.2	79.5	\$3,105,600
2030-31	\$4,255,000	80.3	83.3	79.8	\$3,981,400
2031-32	\$4,561,000	80.5	83.4	80.3	\$4,264,700
	\$26,705,000				

Table 9 – Necessary Annual Funding to Increase PCI to 80.5

Referring to Table 9, it is noted that the weighted PCI increases through the seven-year projection (78.3 to 80.5). Furthermore, the annual deferred maintenance total decreases from \$8.4 million to \$4.3 at the end of the seven-years. This is a sign that if the City applies annual average funding at \$3.7 million/yr over the next seven years (\$26.7 million investment), today's conditions will moderately increase thru FY 2032. The City will be able to "hold" the current conditions and will continue to see a moderate decrease in the amount of deferred maintenance (majority is overlay rehabilitation).

Once the City has performed the recommended pavement rehabilitation projects for FY 2025 through 2026; the City should continue to utilize a Local slurry maintenance "neighborhood" strategy for several reasons. First, preventive maintenance applications applied five plus (5+) years after rehabilitation, like those mentioned above, will help to sustain high levels of condition while reducing annual expenditures. Secondly, with a citywide maintenance neighborhood methodology established, four beneficial impacts occur:

- 1) Planned / Maintenance areas are addressed through a multi-yr maintenance cycle which creates a dedicated project schedule for City staff and constituent inquiries;
- 2) Deferred overlay rehabilitation can be addressed in a more effective manner due to accrued savings of revenues (reduced construction logistical costs, volume-based costs, etc.)
- 3) A preventive maintenance strategy is more cost-effective in a long-term PMP rather than implementing a maintenance approach that addresses only the "worst-first" streets.
- 4) All maintenance alternatives are available due to the increased funding and focused maintenance per year.

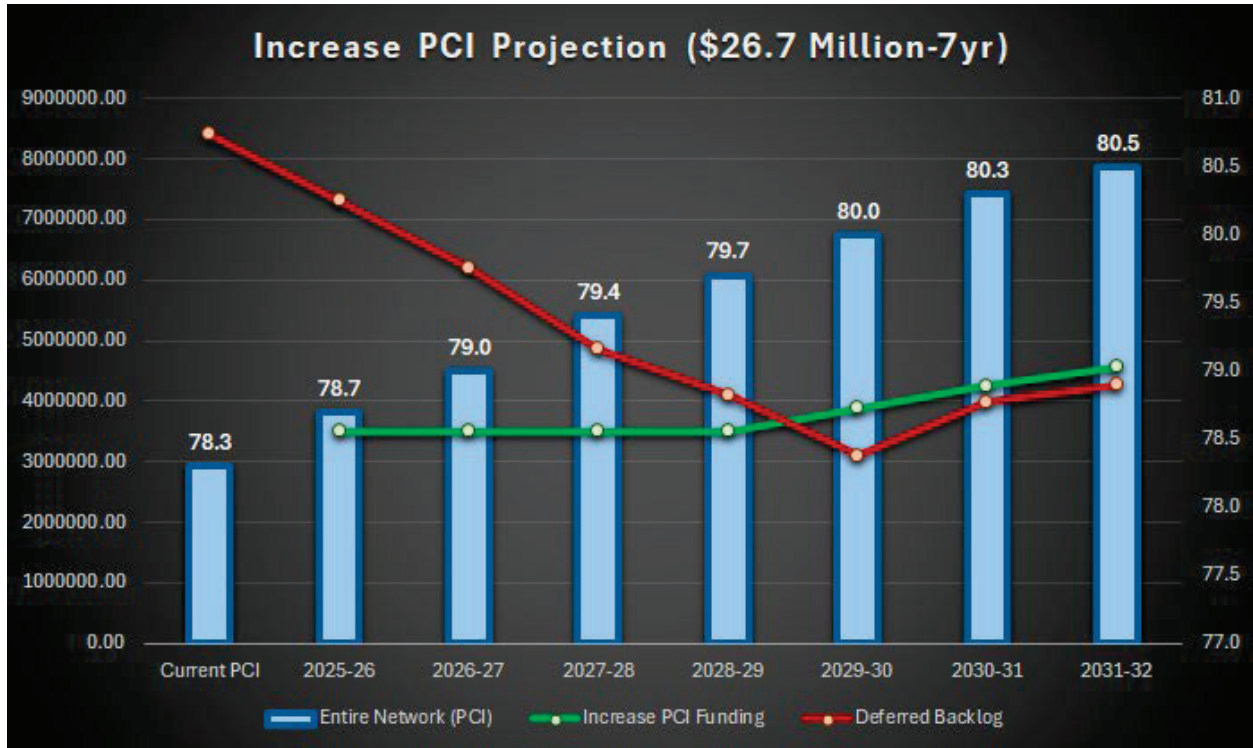


Figure 6 – Resulting Network PCI (Increase PCI Budget)

The Local maintenance model/budget that has been developed can be used as a benchmark to monitor the City’s annual PMP-CIP allocations as the network continues to mature and age; the proper amount of funding for overlay rehabilitation needs to be the City’s highest priority.

Again, it is recommended that the City continue to monitor the deterioration rates for the applications of Mill & Overlay and Type II slurry seal to ensure the City is generating the greatest return-on-investment and extend life-cycles; this should be done through frequent inspections and deterioration studies.

PAVEMENT MANAGEMENT PROGRAM REPORTS

In addition to the annual budget scenario, this report contains a comprehensive and complementary assemblage of pavement management reports ranging from summary reports to annual maintenance and rehabilitation schedules (Forecast Maintenance Report, Section IV). Collectively as well as individually, the reports represent reasonable projections of pavement maintenance needs and performance based on visual condition assessments, unit cost estimates, and pavement deterioration models.

It is important to note that pavement segment dimensions and surface area (recorded during 2006 thru 2023 and 2025 inspections), along with the action and repair costs, as presented within the reports are accurate within tolerable limits. This is noteworthy due to the "implied" accuracy of reporting length and width to the nearest foot, surface area to the nearest square foot, and action and repair unit costs and project estimates to the nearest penny and dollar, respectively.

NEXT STEPS

As with any infrastructure management software program, time investments need to be made by key Public Works staff to maintain the integrity of the data as well as the accuracy. Bucknam can perform training sessions in the use of the MicroPAVER system and demonstrate how to generate standard maintenance reports to assist City staff in developing yearly budgets, project level analysis, and CIP projections. This will be key to future staff management of the pavement program and reporting. City personnel need to maintain their commitment to the preventive maintenance system, while working toward reducing the City's present backlog of rehabilitation projects.

In order to ensure that report outputs are accurate and credible, it is essential that the integrity of all data files be maintained. This will require performing all necessary updates when changes are made to scheduling scenarios, unit cost information, historical data, etc. In addition, the entire pavement network will have to be re-inventoried at regular intervals. This typically includes surveying arterial and collectors every two years and Locals every two.

This will not only allow work to be scheduled based on the most current condition data available, but will provide City personnel with a means to monitor actual rates of pavement deterioration so appropriate modifications can be made to the system curves. To be compliant with the OCTA requirements, the City must generate a triennial Arterial and Collector network pavement management report indicating condition ratings.

Bucknam will be supporting the City with staff level support to assist in the continuous updates with the MicroPAVER system. This will include work history updates, generating reports from the system, unit cost updates, and future inspections.

C. LA HABRA MYROADS® PMP WEB-PORTAL

Bucknam's MyRoads® is a great match for the La Habra PMP today and the future. **MyRoads® brings your PMP data to life within a dynamic dashboard!** Bucknam now provides all our PMP clients with a unique and agency driven "MyRoads®" web-portal that provides instantaneous access to your pavement management database. This "dashboard" allows users to toggle through individual sections via GIS mapping selections, zone queries, rank selection, PCI ranges, etc. to review all section metrics, latest/previous inspections, work histories generate filtered PCI reports and identify potential maintenance / rehabilitation costs based upon your unique needs.

Bucknam has shown the current 2025 La Habra MyRoads® actively working! This tool can be accessed by simply through a Username/Password methodology. As changes are made to the La Habra's PMP database the MyRoads® dataset is changed to reflect work history edits, PCI inspections and section changes. We have activated the City's MyRoads® account and it can be utilized.

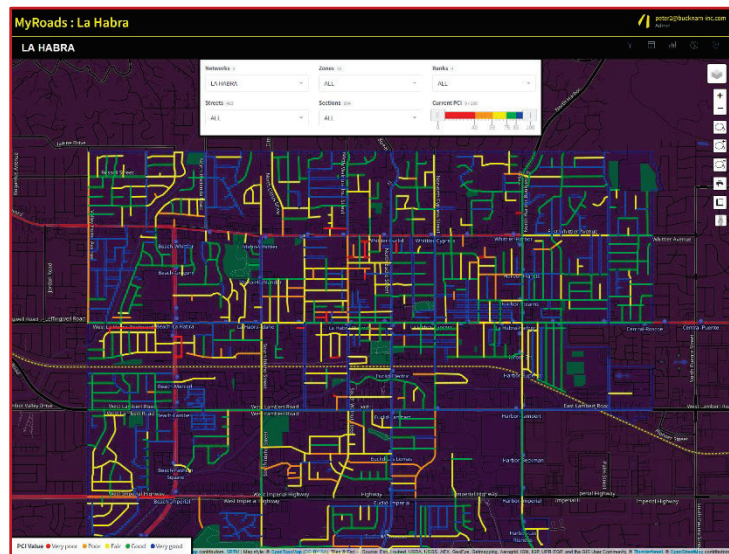


Figure 7 – La Habra MyRoads® PMP Web-Portal

In summary, MyRoads® allows the user perform the following dynamic functions:

- Query specific pavement segment(s) to view current/historic PCI, work history inspection;
- Filter for pavement sections within a defined zone, PCI range and/or functional class;
- Select a pavement section or grouping of section through the on-board GIS tool;
- Enter slurry, overlay & reconstruction unit costs to determine preliminary cost of maintenance and resulting citywide PCI
 - Display critical street / sidewalk / ROW assets along pavement section(s) that are critical to Engineering Bid development and solicitation (ADA ramps, utilities, manholes, trees, etc.
- Displays all final GIS project maps (PCI, work history, 5-yr forecasted maintenance, etc.)
- Bucknam will train La Habra staff on the simply use of the MyRoads® dashboard.

D. CONDITION DISTRIBUTION REPORT

This report depicts the distribution of the pavement condition throughout the street network and its functional classes by section mileage.

The PCI rating scale ranges from “Very Good” to “Very Poor”, with a “Very Good” condition corresponding to a pavement at the beginning of its life cycle, and a “Very Poor” condition representing a badly deteriorated pavement with virtually no remaining life.

The table below shows the general description for each pavement condition:

Condition Description – PCI Range – Description

Condition Description	PCI Range	Description
Very Good	86-100	Minor to low distress, no significant distress; Low severity distresses with expectation of utility patches in good condition or slight hairline cracks; minor weathering found
Good	75-85	Slight to moderately weathered, low to moderate distress severities, utility patching commonly found; moderate distress extents
Fair	60-74	Severely weathered or moderate levels of distress, generally limited to utility patching and climate related distress
Poor	41-59	Moderate to high distresses including load related types such as alligator cracking, greater distress extents
Very Poor	0-40	Severely distresses, large quantities of distortion or alligator cracking; Failure of the pavement, distress has surpassed tolerable rehabilitation limits

Table 10 – PCI Condition Description Table

E. CALCULATION OF PCI

In order to calculate a Pavement Condition Index (PCI) value within MicroPAVER, specific street section data needs to be inputted into MicroPAVER to define the survey limits, asphalt types, pavement age and metrics. Pavement “sections” are pavement segments within the defined branch that have consistent pavement street classifications, construction/maintenance histories and use. Representative inspection samples are then selected and visually surveyed to locate distress data. This data is used to calculate the pavement sections Pavement Condition Index (PCI) which includes distress type, extent of the distress and its severity.

The PCI is a condition rating that ranges from 100 (pavement section that is in perfect condition) to 0 for a section that has structurally failed and deteriorated dramatically. The PCI is calculated from three major data entries from our inspectors:

1. Distress Type (one of 20 AC or 19 PCC types); these include alligator cracking, bleeding, block cracking, corrugations, depressions, long/trans cracking, patch/utility cut, potholes, rutting, weathering, raveling, etc.
2. Distress Quantity (the square footage, length or count of a specific distress)
3. Distress Severity (the level of severity determined for each distress found; low, medium or high)

PAVER 6.1.2
File Tables Preferences Add-Ins Window Help

List Selector

Network: Arcadia City of Arcadia, CA
Branch: ALBERT WY
Section: 1000 From: PALM AVE To: WOODRUFF AVE

PCI: Arcadia-ALBERT WY-1000

Summary data at time of inspection
Branch Use: ROADWAY Section Surface Type: AC Section Length: 685 Ft Section True Area: 22,605.00 SqFt
Section Width: 33 Ft

Inspection Date: 4/1/2005 Edit Inspections Detailed Inspection Comments Calculate Conditions
Sample Unit: 1 Edit Sample Units
Sample Unit Size: 22605.00 SqFt No distresses found during inspection. Remaining Samples Have No Distress

Distress Type

☒ 01 ALLIGATOR CR ☐ 06 DEPRESSION ☐ 11 PATCH/UT CUT ☐ 16 SHOING
☐ 02 BLEEDING ☐ 07 EDGE CR ☐ 12 POLISHED AG ☐ 17 SLIPPAGE CR
☐ 03 BLOCK CR ☐ 08 JT REF. CR ☐ 13 POTHOLE ☐ 18 SWELL
☐ 04 BUMPS/SAGS ☐ 09 LANE SH DROP ☐ 14 RR CROSSING ☐ 19 WEATH/RAVEL
☐ 05 CORRUGATION ☐ 10 L_T CR ☐ 15 RUTTING

Distress Severity
☒ Low ☐ Medium ☐ High ☐ N/A

Distress Quantity
2825.98 SqFt

Distress	Description	Severity	Quantity	Units
1	ALLIGATOR	L	2,825.98	SqFt
1	ALLIGATOR	M	115	SqFt
1	ALLIGATOR	H	25	SqFt
3	BLOCK	L	12,432.9	SqFt
3	BLOCK	M	1,016.99	SqFt

Previous Sample Unit Next Sample Unit Smp Images (0) Insp Images (0) Close

Add Distress
Delete Distress
Replace Distress

Figure 8 – PCI Calculation Worksheet

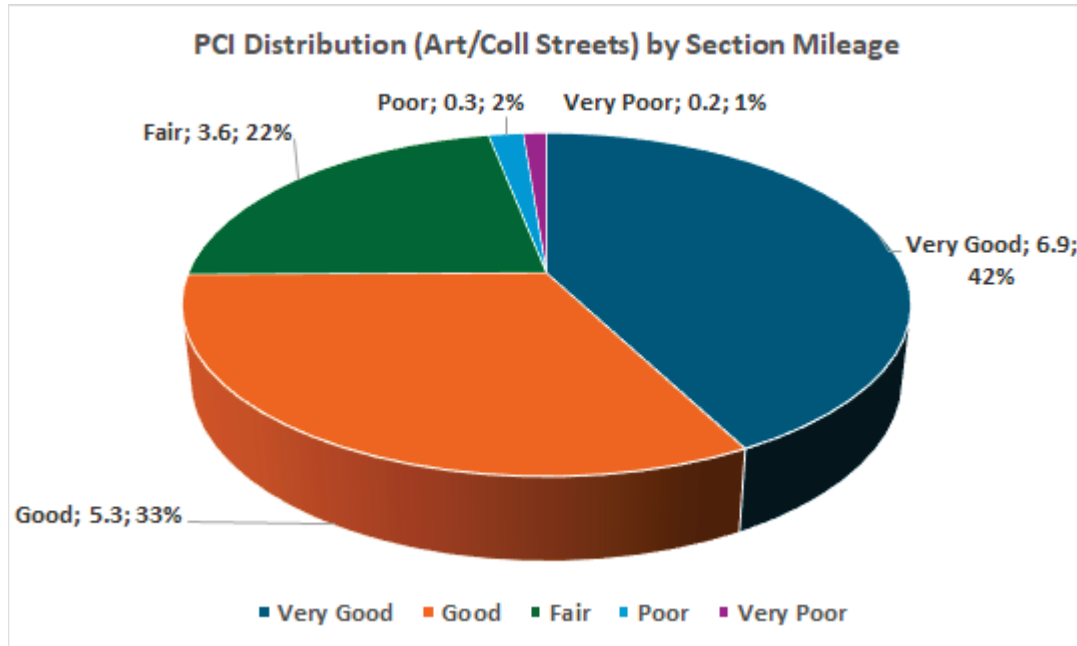


Figure 9 – Arterial/Collector Condition Distribution

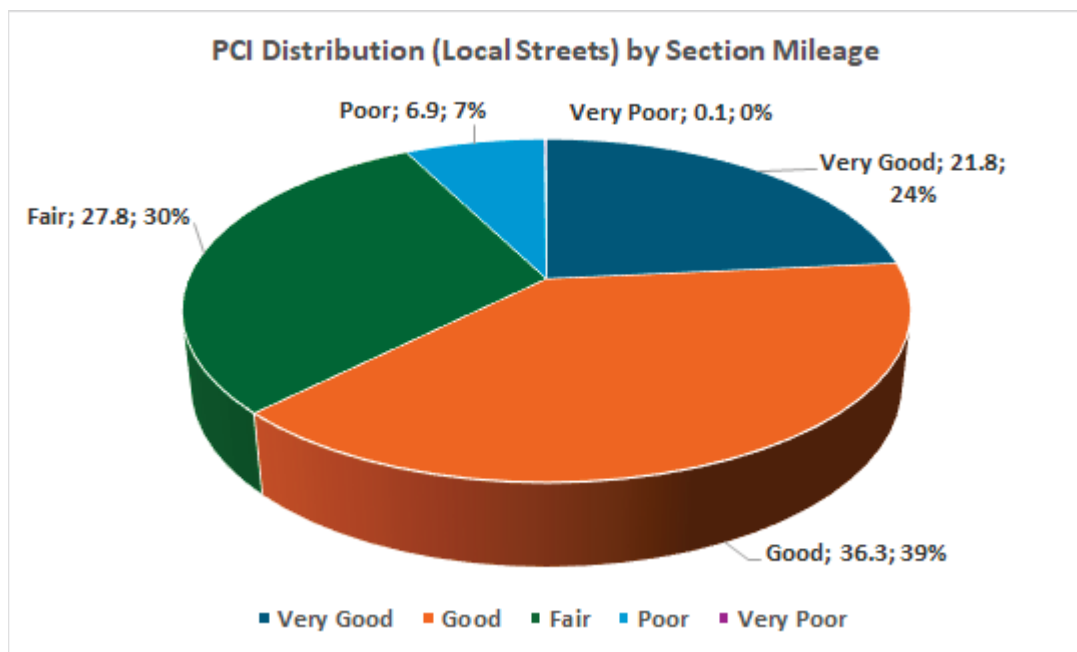


Figure 10 – Local Condition Distribution

APPENDIX IIA LA HABRA ALLEY NETWORK

F. LA HABRA ALLEY NETWORK

Per the request of the City, we have separated the City's Alley network within this appendix to demonstrate its unique conditional findings. Within the La Habra Alley network there are approximately 6.4 section miles of streets. The Alley network consists of approximately 582,079 SF of pavement which consists of 102 pavement sections.

The Alley network is broken down into manageable groups that have similar characteristics, such as pavement street classification, surface type and logical segmentation. Pavement segments are identified by their branch and section numbers. Pavement "branches" that have a common usage, such as Alley E/Corto, defines a "branch" within MicroPAVER. Pavement "sections" are pavement segments within the defined branch that have consistent pavement street classifications, construction/maintenance histories and use. Representative inspection samples are then selected and visually surveyed to locate distress data. This data is used to calculate the pavement sections Pavement Condition Index (PCI) which includes distress type, extent of the distress and its severity.

The PCI is a condition rating that ranges from 100 (a new pavement section or recently overlaid or reconstructed) to 0 for a section that has structurally failed and deteriorated dramatically. Weighted average PCI of a given area/zone = pavement section PCI * its own area divided by the total square footage of the given area/zone.

- **The weighted average PCI for the City of La Habra Alley network is 72.2**

Rank	Mileage	SF	2025 PCI	2023 PCI	2021 PCI	2019 PCI	2017 PCI	2015 PCI	2013 PCI	2011 PCI	2009 PCI	2006 PCI	2003 PCI
Alleys	6.4	582,079	72.2	73.5	69.5	64.8	50.7	47.5	43.4	46.2	40.6	40.6	40.6

Past and Present Alley PCI Results and Comparisons (FY 2003 - 2025)

Condition	PCI Range	Alleys	% of Network
Very Good	86-100	3.3	51.6%
Good	75-85	1.0	15.6%
Fair	60-74	0.5	7.8%
Poor	41-59	0.5	7.8%
Very Poor	0-40	1.1	17.2%
		6.4	

Alley Condition Distribution by Mileage

SECTION III
CITYWIDE
PAVEMENT CONDITION INDEX (PCI) REPORT

- A. 2025 Citywide PCI Maps
- B. Name Order (A-Z)
- C. PCI Order (0-100)

A. PAVEMENT CONDITION INDEX REPORTS – DATA DEFINITIONS

Listed alphabetically by street name or PCI, this report provides the City with a listing of pertinent inventory and pavement condition data for each inventory unit within the City's pavement network. The Pavement Condition Index (PCI) Report notes the names, limits, classification, dimension, surface type, and lane configuration of each inventory unit.

Detailed descriptions of the information appearing on this report are presented below:

BRANCH NAME - The name of each inventory unit appears in this column. Generally, the inventory unit name is taken directly from a street sign; however, where no street signs are posted, the name appearing on the network map is noted instead.

A sample set of street name suffix abbreviation definitions is presented below:

AV - Avenue	CT - Court	CIR - Circle	BLVD - Boulevard
DR - Drive	LN - Lane	RD - Road	HWY - Highway
ST - Street	WAY - Way	EB - East Bound	F – Frontage Road
NB - North Bound	SB - South Bound	WB - West Bound	TER – Terrace
PL - Place			

FROM - A description of the beginning limit of each inventory unit appears in this column. If the beginning limit exists between intersections, then the beginning limit description may be an address, post mile marker, or a distance from a known point of reference (e.g., "500' N/MAIN ST").

TO - A description of the ending limit of each inventory unit appears in this column. Like BEGIN limit, the END limit description may consist of a street name, an address, or a distance from a known point of reference. In the case of cul-de-sacs, or dead-ends, the END limit consists of an address, or a directional reference, such as "NORTH END," when no address is available.

STREET CLASSIFICATION - The codes for the four street classifications are represented below. Basically, units are classified according to the LA County MPAH and City classifications.

<u>CODE</u>	<u>DESCRIPTION</u>
A	Arterial
C	Collector / Secondary
E	Local
O	Alley

SURFACE TYPE - A code was assigned to each inventory unit to describe surface type.

<u>CODE</u>	<u>DESCRIPTION</u>
AC	Asphalt Concrete
PCC	Concrete



LENGTH - The length of the section within each branch.

UNITS - The unit of measurement for the section length, typically linear feet (LF).

AREA - The area of each section within a branch.

UNITS - The unit of measurement for the section area, typically square feet (SF).

PCI - Pavement Condition Indices were calculated for inventory units based on severity and extent of distress manifestations observed within the inventory unit. Ranging between 0 and 100, a PCI of "100" corresponds to a pavement at the beginning of its life cycle, while a PCI of "0" corresponds to a badly deteriorated pavement which is at or near the end of its life cycle.

PCI CLIMATE, LOAD AND OTHER – reflects “Section Extrapolated Distress”; these values are shown within the Sample Distresses tab within the PCI window. Distresses are aggregated based on the type and severity level. For random samples, distress quantities are adjusted to reflect the extrapolated value based on the sections total area. Extrapolated distress deducts are classified as resulting from Climate, Load and Other distresses. The Distress Classification portion of the tab shows the “percent” of extrapolated distress deduct belonging to Climate, Load and Other (these %’s are shown within the PCI reports herein). These values are beneficial in that they support the decision whether recommend slurry seal, overlay or reconstruction project for street sections.

Asphalt Distresses	Cause Classification	PCC Distresses	Cause Classification
Alligator cracking	Load	Blow up	Climate
Bleeding	Other	Corner break	Load
Block cracking	Climate	Divided Slab	Load
Bumps/Sags	Other	Durability cracking	Climate
Corrugation	Other	Faulting	Other
Depression	Other	Joint Seal cracking	Climate
Edge cracking	Load	Lane Shoulder Drop-off	Climate
Joint Reflection cracking	Climate	Linear cracking	Load
Lane Shoulder Drop-off	Climate	Small Patching	Other
L&T cracking	Climate	Large Patching	Other
Patch/Utility cut	Other	Polished Agg	Load
Polished Agg	Other	Popouts	Other
Pothole	Climate	Pumping	Other
RR Crossing	Other	Punchout	Load
Rutting	Load	RR Crossing	Other
Shoving	Other	Scaling/crazing	Other
Slippage cracking	Other	Shrinkage cracking	Other
Swell	Other	Corner Spall	Other
Raveling	Other	Joint Spall	Other
Weathering	Climate		

INSPECTION DATE – Represents the most recent inspection date performed on a given sections. PCI shown is historical in value and may not indicate what “today’s” PCI is due to variance in time. Pavement deterioration calculations can be performed on a section(s) to demonstrate a deteriorated PCI based upon a new current date.

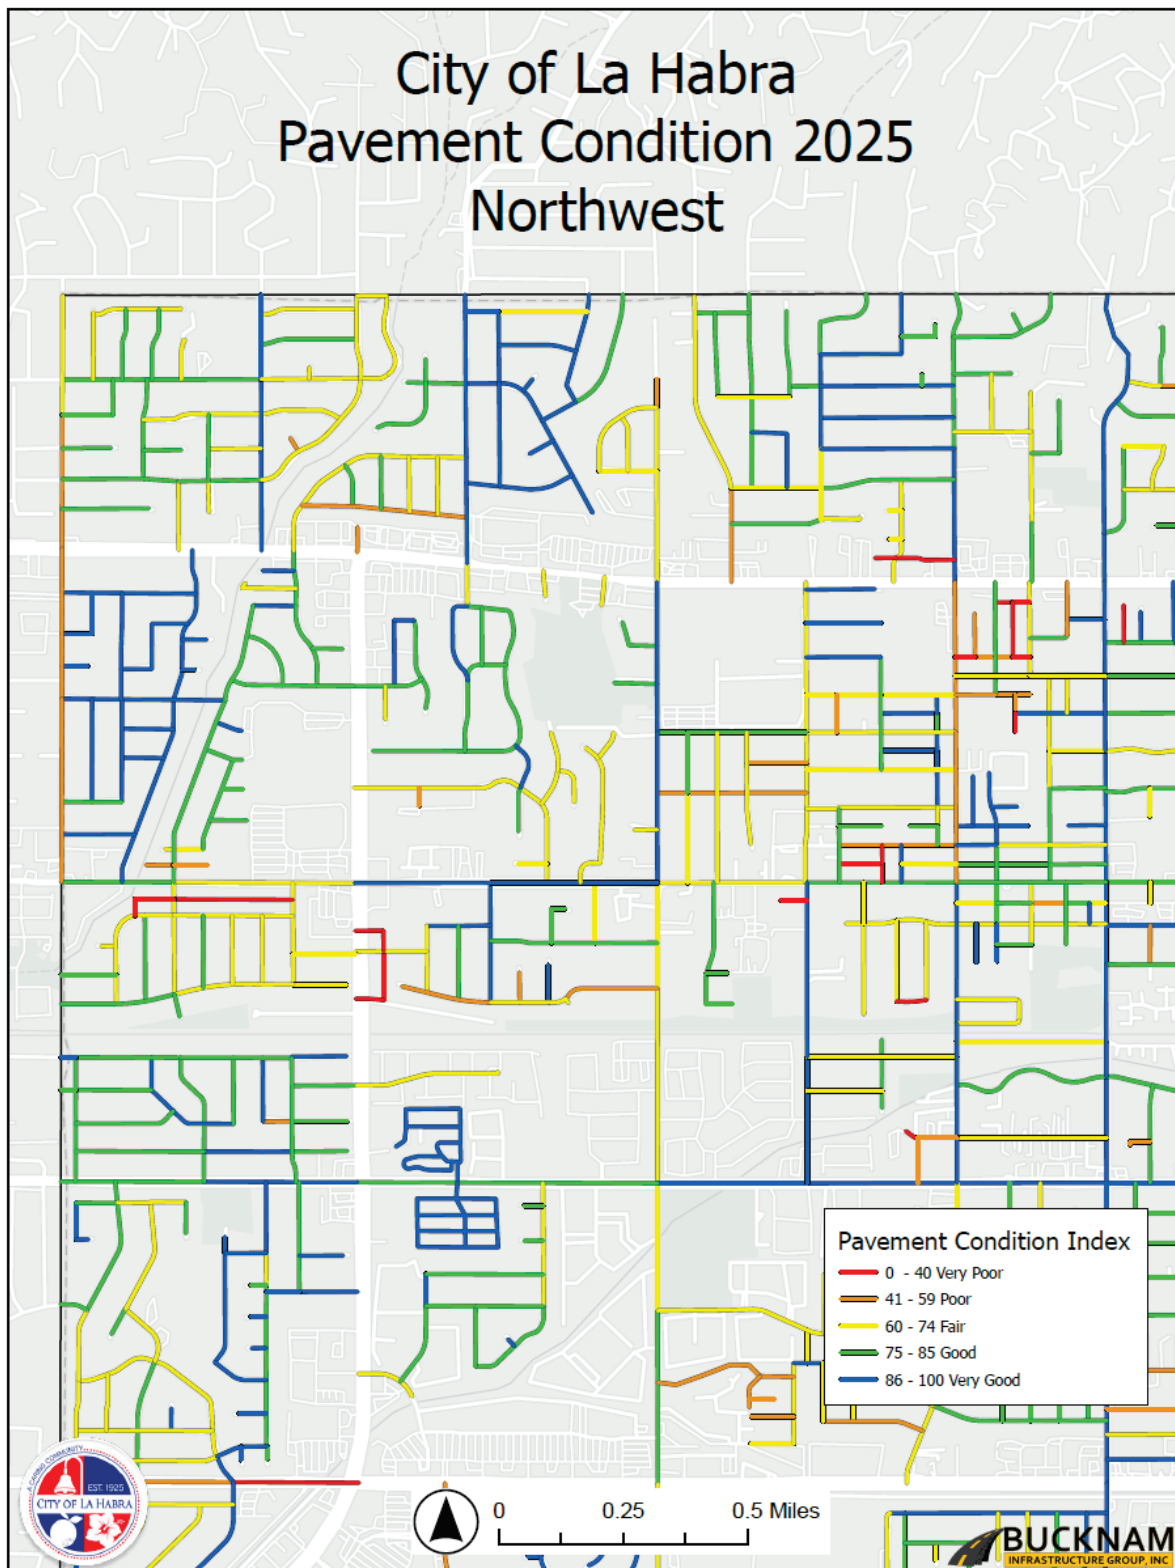


Figure 11 – La Habra 2025 PCI Map (NW Quadrant)

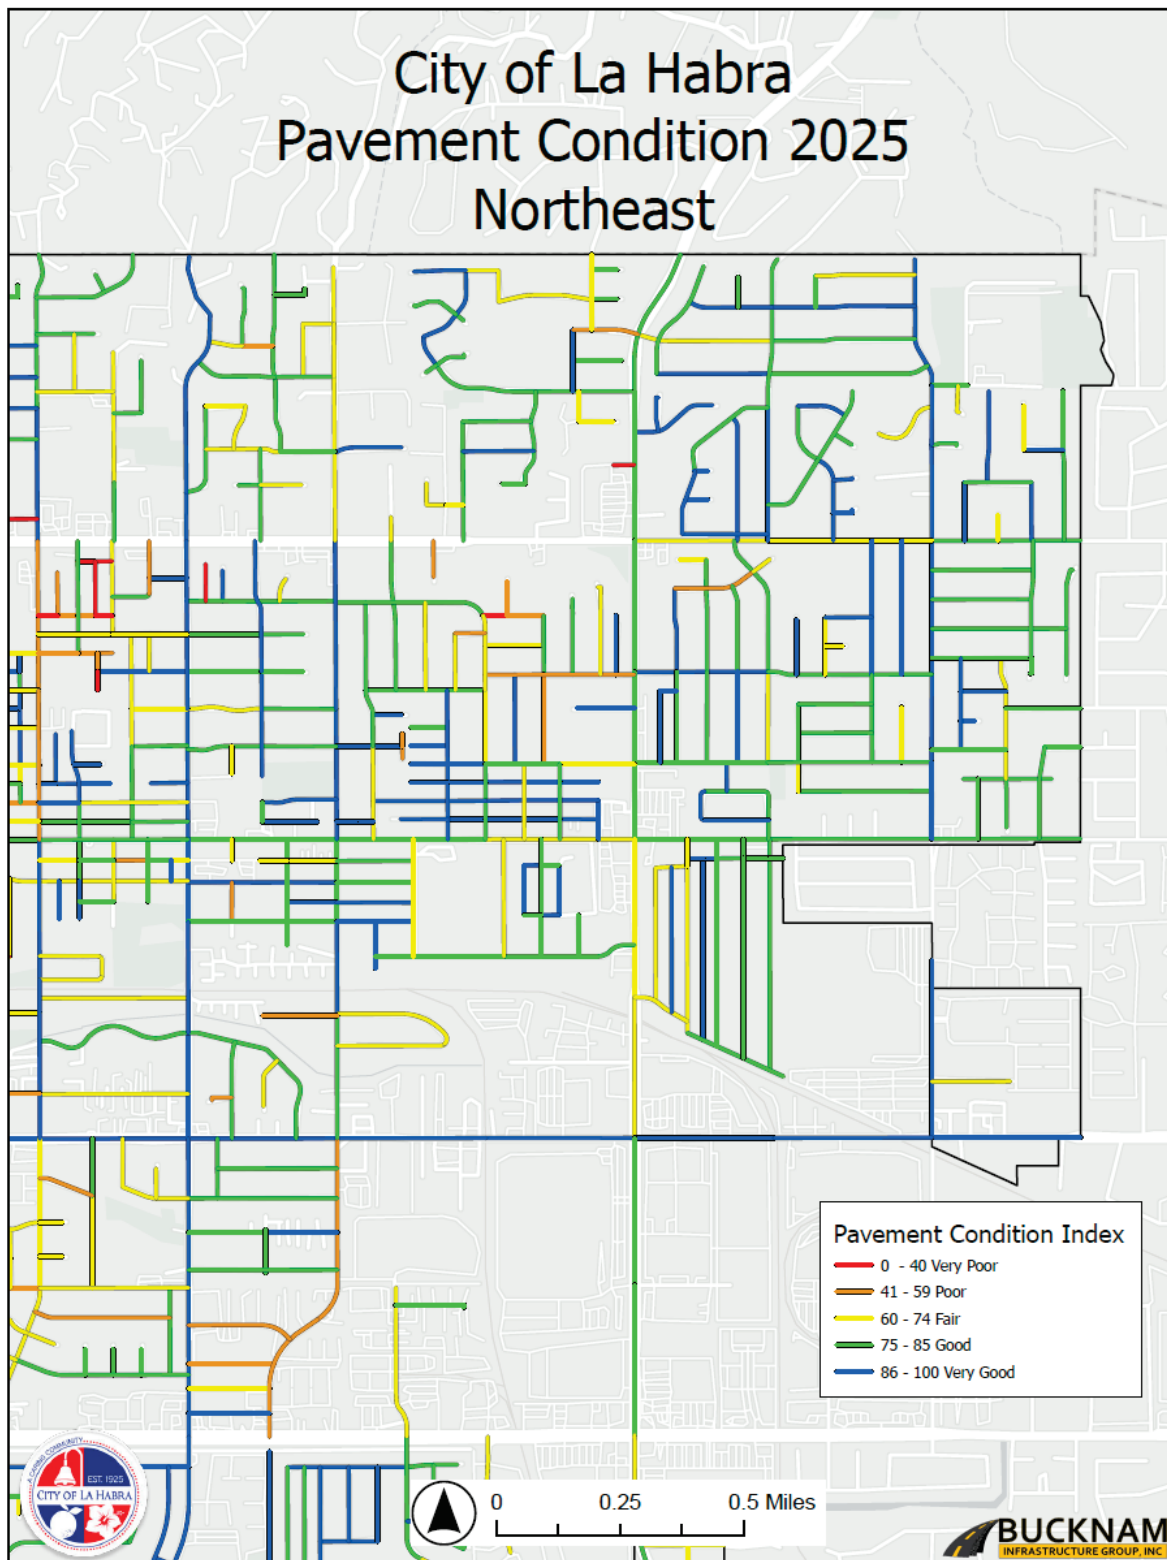


Figure 12 – La Habra 2025 PCI Map (NE Quadrant)

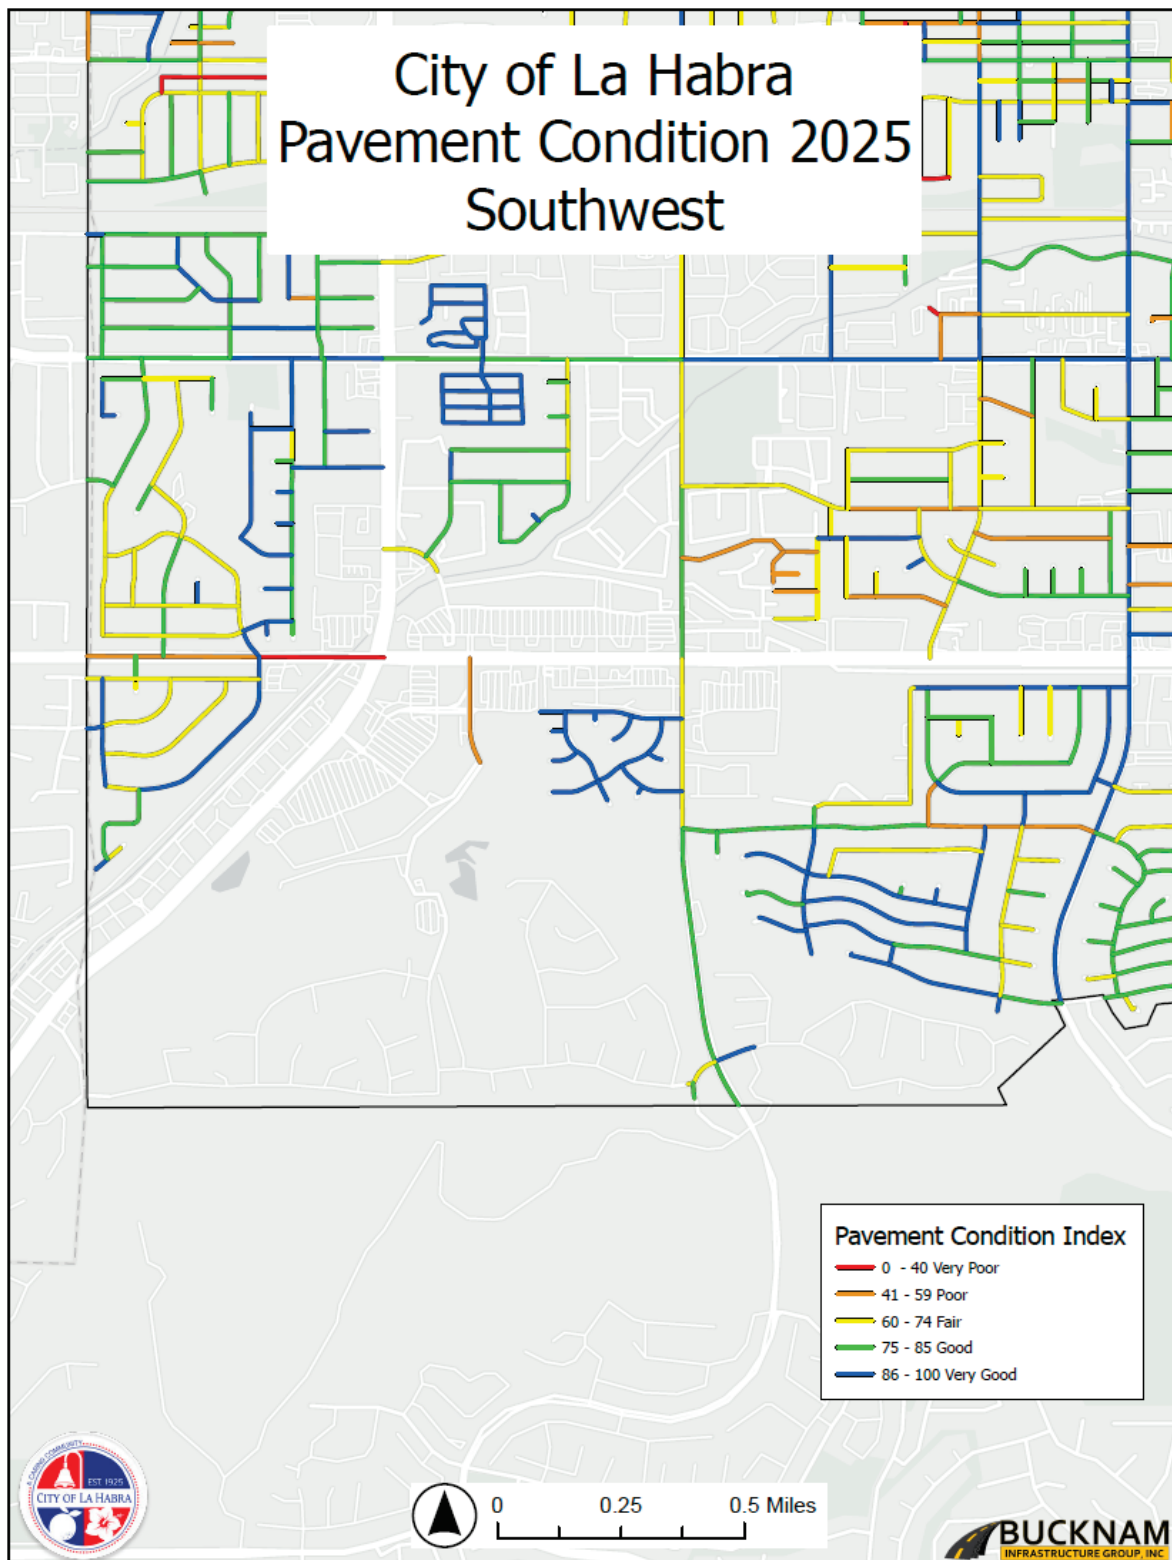


Figure 13 – La Habra 2025 PCI Map (SW Quadrant)

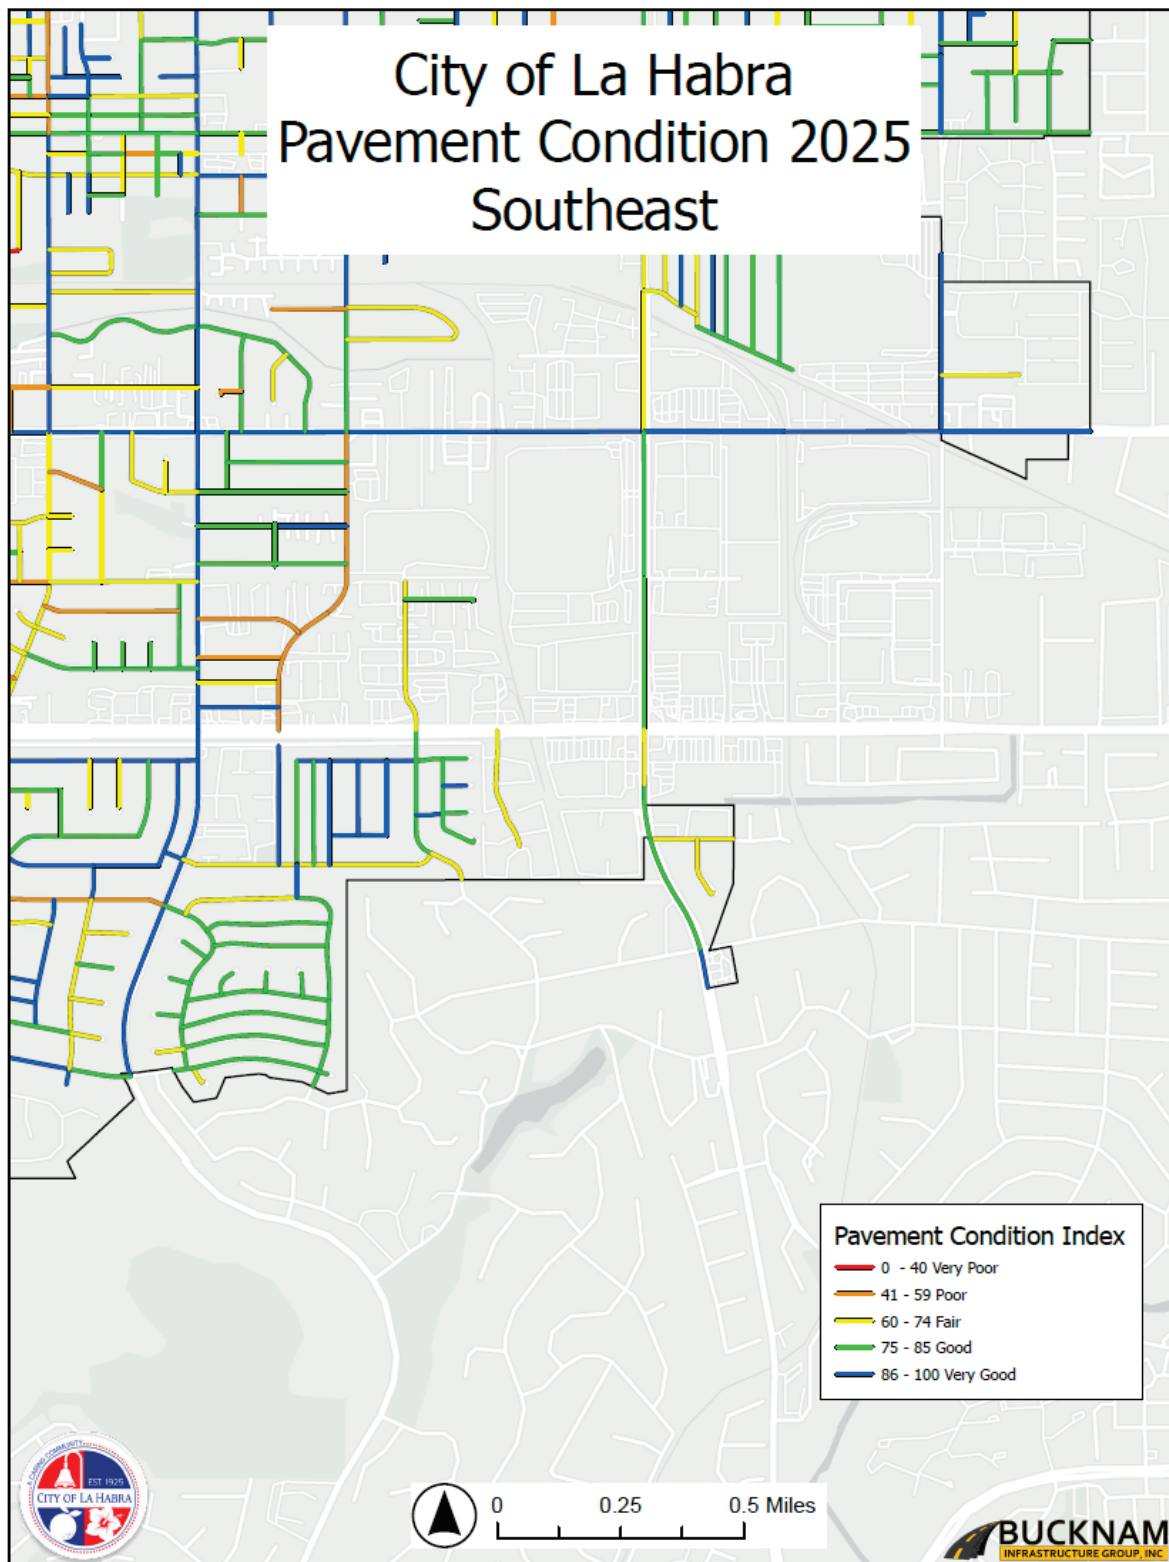


Figure 14 – La Habra 2025 PCI Map (SE Quadrant)

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
Arterials / Collectors (MPAH)																			
009	91	EUCUID ST	WHITTIER BLVD	FRANCIS AVE	Secondary	AC	A	2	~	1,449	35	52,200	99	0	61	39	2/13/25	Overlay - AC Rubber	2/1/25
009	92	EUCUID ST	FRANCIS ST	LA HABRA BLVD	Secondary	AC	A	2	~	1,115	52	49,425	96	0	30	70	2/13/25	Overlay - AC Rubber	2/1/25
009	93	EUCUID ST	LA HABRA BLVD	SECOND ST	Secondary	AC	A	4	~	710	60	42,600	79	13	63	24	5/9/25	New Construction - Initial	1/1/75
009	94	EUCUID ST	SECOND ST	OLIVE AVE	Secondary	AC	A	2	~	975	60	58,500	77	15	63	22	5/9/25	New Construction - Initial	1/1/75
009	95	EUCUID ST	OLIVE AVE	LAMBERT RD	Secondary	AC	A	4	~	935	60	56,100	79	27	73	0	5/9/25	New Construction - Initial	1/1/75
009	96	EUCUID ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	4	~	1,320	60	79,200	73	38	36	26	5/9/25	New Construction - Initial	1/1/75
009	97	EUCUID ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	4	~	1,320	60	74,580	76	31	38	31	5/9/25	New Construction - Initial	1/1/75
009	98	EUCUID ST	IMPERIAL HWY	SANDLEWOOD AVE	Major	AAC	A	4	~	1,600	80	128,000	87	37	63	0	5/9/25	Overlay - AC Structural	6/1/17
009	99	EUCUID ST	SANDLEWOOD AVE	CITY LIMIT	Major	AAC	A	4	~	1,580	80	126,400	84	13	80	7	5/9/25	Overlay - AC Structural	6/1/17
018	89	HACIENDA RD	WHITTIER BLVD	NORTH CITY LIMIT	Secondary	AAC	A	4	~	2,324	45	111,240	91	62	21	17	2/19/25	Overlay - AC Structural	1/1/21
061C	100	HARBOR BLVD	CITY LIMIT	BROOKDALE AVE	Primary	AC	A	4	~	1,315	80	89,075	84	38	42	20	4/23/25	New Construction - Initial	1/1/80
061C	101	HARBOR BLVD	BROOKDALE AVE	WHITTIER AVE	Primary	AC	A	2	~	1,320	80	103,600	78	15	38	47	4/23/25	New Construction - Initial	1/1/80
061C	102	HARBOR BLVD	WHITTIER AVE	FRANCIS AVE	Primary	AC	A	4	~	1,185	72	85,320	84	0	91	9	4/23/25	New Construction - Initial	1/1/80
061C	103	HARBOR BLVD	FRANCIS AVE	LA HABRA BLVD	Primary	AC	A	4	~	1,440	72	103,680	80	29	67	4	4/23/25	New Construction - Initial	1/1/80
061C	104	HARBOR BLVD	LA HABRA BLVD	SUPERIOR AVE	Primary	AC	A	6	~	1,400	72	102,000	61	32	56	12	5/5/25	New Construction - Initial	1/1/80
061C	105	HARBOR BLVD	SUPERIOR AVE	LAMBERT RD	Primary	AC	A	6	~	1,240	78	96,720	73	20	63	17	4/23/25	New Construction - Initial	1/1/80
061C	167	HARBOR BLVD	435' S/O IMPERIAL HWY	LAS RIENDAS	Major	AC	A	6	~	526	80	42,160	85	16	84	0	2/14/25	Overlay - AC Rubber	8/7/17
061B	109	HARBOR BLVD EAST SIDE	LAS RIENDAS DR	LAS PALMAS DR	Major	AC	A	2	~	1,075	32	34,400	80	11	58	31	2/14/25	Overlay - AC Rubber	8/7/17
061B	110	HARBOR BLVD EAST SIDE	LAS PALMAS DR	450' S/O LAS PALMAS DR	Major	AC	A	2	~	450	32	14,400	86	0	100	0	2/14/25	Overlay - AC Rubber	8/7/17
061B	106	HARBOR BLVD WEST SIDE	LAMBERT RD	EDWARDS DR	Major	AC	A	3	~	1,289	32	41,248	84	15	82	3	2/14/25	New Construction - Initial	1/1/80
061	107	HARBOR BLVD WEST SIDE	EDWARDS DR	IMPERIAL HWY	Major	AC	A	3	~	1,338	16	21,408	85	19	64	17	2/14/25	New Construction - Initial	1/1/80
061	108	HARBOR BLVD WEST SIDE	435' S/O IMPEIRAL HWY	IMPERIAL HWY	Major	AC	A	2	~	434	32	12,820	66	26	74	0	2/14/25	New Construction - Initial	1/1/80
001	1	IDAHO ST	WHITTIER BLVD	HIGHLANDER AVE	Secondary	AC	A	2	~	1,317	39	52,720	97	0	90	10	2/14/25	Surface Treatment - Slurry Seal	7/1/11
001	2	IDAHO ST	HIGHLANDER AVE	LA HABRA BLVD	Secondary	AC	A	2	~	1,283	39	51,360	96	0	85	15	2/14/25	New Construction - Initial	10/1/86
001	3	IDAHO ST	LA HABRA BLVD	HILLANDALE AVE	Secondary	AC	A	5	~	895	59	53,760	71	43	51	6	3/16/25	New Construction - Initial	1/1/78
001	4	IDAHO ST	HILLANDALE AVE	LAMBERT RD	Secondary	AC	A	5	~	1,713	59	102,840	65	36	43	21	3/12/25	New Construction - Initial	1/1/78
001	5	IDAHO ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	5	~	1,084	60	66,290	71	15	85	0	3/12/25	New Construction - Initial	1/1/78
001	6	IDAHO ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	5	~	1,525	59	91,560	79	0	100	0	3/12/25	New Construction - Initial	1/1/77
001	65	IDAHO ST	IMPERIAL HWY	SANDLEWOOD AVE	Secondary	AC	A	5	~	1,469	60	95,625	65	10	58	32	3/12/25	New Construction - Initial	1/1/80
001	66	IDAHO ST	SANDLEWOOD AVE	CITY LIMIT	Secondary	AC	A	4	~	2,549	66	168,234	76	12	80	8	3/11/25	New Construction - Initial	1/1/94
002	7	IMPERIAL HWY	W. CITY LIMIT	BRASS LANTERN DR	Primary	AC	A	6	~	1,549	64	101,136	45	47	52	1	3/12/25	New Construction - Initial	1/1/72
002	8	IMPERIAL HWY	BRASS LANTERN DR	BEACH BLVD	Primary	AC	A	6	~	1,051	64	72,264	37	38	51	11	3/12/25	New Construction - Initial	1/1/72
003	10	LA HABRA BLVD	DEXFORD ST	BEACH BLVD	Secondary	AC	A	4	~	1,540	55	86,296	73	24	32	44	2/25/25	New Construction - Initial	1/1/80
003	11	LA HABRA BLVD	BEACH BLVD	DEANNA ST	Secondary	AC	A	4	~	1,174	58	66,342	95	0	64	36	2/26/25	Complete Reconstruction - AC	1/1/20
003	12	LA HABRA BLVD	DEANNA ST	IDAHO ST	Secondary	AC	A	4	~	1,487	56	90,132	97	0	100	0	2/26/25	Complete Reconstruction - AC	1/1/20
003	13	LA HABRA BLVD	IDAHO ST	MONTE VISTA ST	Secondary	AC	A	4	~	1,309	55	70,745	69	54	38	8	2/26/25	New Construction - Initial	1/1/90
003	14	LA HABRA BLVD	MONTE VISTA ST	WALNUT ST	Secondary	AC	A	4	~	1,322	54	70,668	78	29	53	18	3/3/25	New Construction - Initial	1/1/90
003	15	LA HABRA BLVD	WALNUT ST	EUCUID ST	Secondary	AC	A	4	~	1,318	54	70,440	83	0	95	5	4/25/25	New Construction - Initial	1/1/90
003	16	LA HABRA BLVD	EUCUID ST	CYPRESS ST	Secondary	AC	A	4	~	1,325	60	77,580	74	23	74	3	5/5/25	New Construction - Initial	1/1/79
003	17	LA HABRA BLVD	CYPRESS ST	COLLEGE ST	Secondary	AC	A	4	~	1,318	60	76,655	77	15	64	21	5/5/25	New Construction - Initial	1/1/79
003	18	LA HABRA BLVD	COLLEGE ST	HARBOR BLVD	Secondary	AC	A	4	~	1,249	60	70,800	71	34	50	16	5/5/25	New Construction - Initial	1/1/79
003	19	LA HABRA BLVD	HARBOR BLVD	FONDA ST	Primary	AC	A	4	~	1,126	60	66,060	74	30	57	13	4/23/25	New Construction - Initial	1/1/79
003	20	LA HABRA BLVD	FONDA ST	PALM ST	Primary	AC	A	4	~	1,441	60	86,460	81	0	84	16	4/22/25	New Construction - Initial	1/1/76
003	21	LA HABRA BLVD	PALM ST	E. CITY LIMIT	Primary	AC	A	4	~	1,304	60	78,240	83	21	42	37	4/23/25	New Construction - Initial	1/1/76
003	9	LA HABRA BLVD	VALLEY HOME AVE	DEXFORD ST	Secondary	AC	A	4	~	1,002	56	56,112	79	16	76	8	2/25/25	New Construction - Initial	1/1/80
004	22	LAMBERT RD	PALM ST	CITY LIMIT	Major	AC	A	5	~	1,289	77	100,620	92	0	100	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	23	LAMBERT RD	RAILROAD	PALM ST	Major	AC	A	2	~	1,327	39	53,120	91	21	79	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	24	LAMBERT RD	HARBOR BLVD	RAILROAD	Major	AC	A	2	~	1,324	39	53,000	91	32	68	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	25	LAMBERT RD	RAIL ROAD	HARBOR BLVD	Primary	AC	A	5	~	1,320	79	105,680	88	15	58	27	2/14/25	Complete Reconstruction - AC	10/1/18
004	26	LAMBERT RD	CYPRESS ST	RAILROAD	Primary	AC	A	5	~	1,320	79	105,680	89	17	69	14	2/14/25	Complete Reconstruction - AC	10/1/18
004	27	LAMBERT RD	EUCUID ST	CYPRESS ST	Primary	AC	A	5	~	1,411	60	86,739	86	20	50	30	2/14/25	Complete Reconstruction - AC	10/1/18
004	28	LAMBERT RD	WALNUT ST	EUCUID ST	Primary	AC	A	4	~	1,316	64	85,605	92	27	73	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	29	LAMBERT RD	MONTE VISTA ST	WALNUT ST	Primary	AC	A	2	~	1,236	65	79,345	93	36	64	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	30	LAMBERT RD	IDAHO ST	MONTE VISTA ST	Primary	AC	A	4	~	1,310	64	91,850	93	0	100	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	31	LAMBERT RD	WHITEBOOK DR	IDAHO ST	Primary	AC	A	4	~	1,024	64	66,625	81	50	50	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	32	LAMBERT RD	BEACH BLVD	WHITEBOOK DR	Primary	AC	A	4	~	1,618	64	105,235	74	63	37	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	33	LAMBERT RD	MARTINEZ DR	BEACH BLVD	Primary	AC	A	5	~	1,294	70	98,960	85	28	62	10	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	34	LAMBERT RD	CITY LIMITS	MARTINEZ DR	Primary	AC	A	6	~	1,246	79	99,760	81	34	66	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
329	1101	MACY ST	WHITTIER BLVD	WALLACE AVE	Secondary	AC	A	2	~	869	45	40,020	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
329	1505	MACY ST	WALLACE AVE	RUSSELL ST	Secondary	AC	A	2	~	570	45	25,266	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
005	166	PALM ST	STEARNS AVE	LA HABRA BLVD	Collector	AAC	A	5	~	674	35	24,300	98	0	32	68	3/24/25	Overlay - AC Structural	5/1/23
005	35	PALM ST	WHITTIER BLVD	FRANCIS AVE	Collector	AAC	A	2	~	1,182	35	42,588	97	0	25	75	3/24/25	Overlay - AC Structural	5/1/23
005	36	PALM ST	FRANCIS AVE	STEARNS AVE	Collector	AAC	A	2	~	780	36	28,080	98	0	42	58	3/24/25	Overlay - AC Structural	5/1/23
005	37	PALM ST	TANGLEWOOD ST	LAMBERT RD	Secondary	AC	A	4	~	1,521	60	88,855	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
014	73	RUSSELL ST	VALLEY HOME AVE	MACY ST	Secondary	AC	A	2	~	1,757	42	79,744	79	23	55	22	2/18/25	Surface Treatment - Slurry Seal	8/4/23

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
006	38	WHITTIER BLVD	PALM ST	CITY LIMITS	Collector	AC	A	2	~	1,262	36	45,468	79	16	80	4	4/23/25	New Construction - Initial	1/1/91
006	39	WHITTIER BLVD	BRIGHTON ST	PALM ST	Collector	AC	A	5	~	1,456	58	83,948	69	32	68	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
006	40	WHITTIER BLVD	HARBOR BLVD	BRIGHTON ST	Collector	AC	A	4	~	1,187	56	66,472	68	10	90	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
										16.3		5,004,355							
		Locals																	
063	200	ACACIA ST	PORTOLA	LOMA VERDE	Local	AAC	E	2	22	171	31	5,801	64	0	74	26	3/16/25	Surface Treatment - Slurry Seal	4/1/13
007	49	ALDRICH ST	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	885	28	23,650	78	62	38	0	4/17/25	Surface Treatment - Slurry Seal	8/4/23
055	158	ALMONDWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	924	35	33,300	86	18	82	0	3/10/25	Surface Treatment - Slurry Seal	4/1/24
055	311	ALMONDWOOD ST	TEAKWOOD AVE	SOUTH END	Local	AC	E	2	26	236	36	10,643	92	29	71	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
055	313	ALMONDWOOD ST	SCHOOLWOOD DR	SANDLEWOOD AVE	Local	AC	E	2	26	169	35	6,120	83	53	47	0	3/11/25	Surface Treatment - Slurry Seal	11/30/10
103	315	ALPINE ST	W/O BEDFORD	N/O SUPERIOR	Local	AAC	E	2	39	1,409	31	45,120	74	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
104	316	ALTO LN	E/O ROANNE	E/END	Local	AAC	E	2	34	207	26	6,933	78	34	42	24	3/25/25	Overlay - AC Thin	4/1/13
105	317	AMANDA LN	EUCUID ST	BISHOP	Local	AC	E	2	27	456	30	14,930	75	49	41	10	3/5/25	Surface Treatment - Slurry Seal	1/1/20
105	318	AMANDA LN	BISHOP	VIEW	Local	AC	E	2	27	397	30	12,660	78	59	39	2	4/18/25	Surface Treatment - Slurry Seal	1/1/20
106	319	AMORITA AVE	VECINO ST	VERONA ST	Local	AC	E	2	40	575	30	17,280	84	57	34	9	3/17/25	New Construction - Initial	1/1/80
107	321	ANTOINETTE DR	CITY LIMIT	GREENVIEW DR	Local	AC	E	2	08	978	33	32,274	90	21	56	23	2/19/25	Surface Treatment - Slurry Seal	1/1/20
025	118	ARBOLITA DR	HARBOR BLVD	BRIGHTON ST	Local	AAC	E	2	37	1,195	36	42,520	72	63	23	14	3/24/25	Overlay - AC Thin	4/1/13
025	119	ARBOLITA DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,275	36	45,550	80	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
025	324	ARBOLITA DR	RODDY DR	HARBOR BLVD	Local	AC	E	2	34	582	35	20,988	52	70	13	17	3/25/25	Slurry Seal or Chip Seal	8/1/05
109	329	ASHLEY CIR	NORTH END	HILLDALE AVE	Local	AC	E	2	10	246	32	9,447	49	49	28	23	2/25/25	New Construction - Initial	1/1/80
110	330	AVENIDA SANTA ANITA	BURWOOD	CALLE DON JUAN	Local	AAC	E	2	33	244	36	9,284	83	40	57	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
110	331	AVENIDA SANTA ANITA	CALLE DON GUILLERMO	BURWOOD	Local	AAC	E	2	33	1,047	36	37,188	66	69	26	5	3/10/25	Surface Treatment - Slurry Seal	1/1/20
111	332	AVENIDA SANTA BARBARA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,075	32	33,440	78	51	45	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
112	333	AVENIDA SANTA CATALINA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	978	31	31,328	75	30	46	24	3/10/25	Surface Treatment - Slurry Seal	1/1/20
113	334	AVENIDA SANTA DOMINGO	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,246	32	38,912	80	48	52	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
114	338	AVENIDA SANTA DOROTEA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	1,293	32	41,376	80	4	96	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
115	339	AVENIDA SANTA ELENA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,255	32	40,160	82	7	93	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
116	340	BAJA AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	468	30	15,615	78	29	49	22	3/4/25	New Construction - Initial	1/1/80
116	341	BAJA AVE	KERN ST	MARIPOSA ST	Local	AC	E	2	04	255	32	8,910	51	84	16	0	3/4/25	New Construction - Initial	1/1/80
542	1735	BALDWIN ST	GORDON AVE	RANDALL AVE	Local	AC	E	2	01	545	31	18,011	79	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
542	1736	BALDWIN ST	RANDALL AVE	SOUTH END	Local	AC	E	2	01	255	31	11,792	71	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
117	342	BANCROFT AVE	KINLEY	RIGSBY ST	Local	AAC	E	2	02	335	29	10,080	95	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
118	343	BEA WAY	JOAN ST	EAST END	Local	AC	E	2	38	149	33	5,364	71	58	33	9	3/25/25	Surface Treatment - Slurry Seal	4/1/13
527	1507	BEACH ST	WHITTIER BLVD	NORTH END	Local	AC	E	2	07	221	36	9,531	56	82	13	5	2/19/25	Overlay - AC Rubber	4/1/13
119	344	BEDFORD ST	LA HABRA BLVD	ALPINE ST	Local	AAC	E	2	39	207	41	8,736	72	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
119	345	BEDFORD ST	ALPINE ST	SUPERIOR AVE	Local	AAC	E	2	39	1,473	31	47,168	72	28	72	0	4/2/25	Overlay - AC Thin	8/1/07
119	346	BEDFORD ST	ESSEX	FRANCIS AVE	Local	AC	E	2	38	742	29	22,290	93	0	100	0	3/24/25	Overlay - AC Rubber	4/1/13
119	347	BEDFORD ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	754	29	22,650	84	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
120	350	BERKLEY AVENUE	DEXFORD DR	UIME ST	Local	AAC	E	2	02	238	35	8,604	70	34	66	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
120	351	BERKLEY AVENUE	WEST END	DEXFORD ST	Local	AAC	E	2	02	59	36	1,303	69	39	47	14	2/24/25	Surface Treatment - Slurry Seal	11/15/21
121	352	BIRCH TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	84	60	5,719	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
122	353	BISHOP DR	AMANDA LN	ORANGE ST	Local	AC	E	2	27	589	30	17,700	66	71	28	1	4/17/25	Surface Treatment - Slurry Seal	1/1/20
122	354	BISHOP DR	CYPRESS ST	EAST END	Local	AC	E	2	34	587	30	20,237	89	45	55	0	4/17/25	Surface Treatment - Slurry Seal	4/1/13
122	7160	BISHOP DR	CYPRESS ST	ORANGE ST	Local	AAC	E	2	27	519	30	15,600	81	18	82	0	4/17/25	Overlay - AC Structural	1/1/20
123	358	BLAKE ST	WILSHIRE AVE	RAYMOND ST	Local	AC	E	2	04	1,089	32	35,214	85	26	74	0	3/9/25	New Construction - Initial	1/1/80
124	362	BOND AVE	KINLEY ST	RIGSBY ST	Local	AAC	E	2	02	421	30	12,450	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
125	363	BONNIE LN	CYPRESS ST	N/O CAPELLA	Local	AC	E	2	27	706	30	22,180	66	70	22	8	4/18/25	Surface Treatment - Slurry Seal	1/1/20
126	364	BRANFORD LN	WEST END	STURBRIDGE	Local	AC	E	2	05	223	26	7,373	86	16	84	0	2/26/25	Overlay - AC Rubber	4/1/13
049	153	BRASS LANTERN DR	IMPERIAL HWY	ZEKE & ELSIE AVE	Local	AC	E	2	06	1,774	35	63,900	86	26	74	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
049	365	BRASS LANTERN DR	RIDGEHAVEN DR	ZEKE & ELSIE AVE	Local	AC	E	2	06	295	36	11,370	68	32	68	0	2/18/25	Overlay - AC Rubber	4/1/13
128	368	BRIERCLIFF DR	CAJON DR	IMPERIAL HWY	Local	AC	E	2	05	1,083	36	38,556	76	29	44	27	2/25/25	Surface Treatment - Slurry Seal	8/4/23
128	9368	BRIERCLIFF DR	CAJON DR	CEDARWOOD DR	Local	AC	E	2	05	500	36	17,568	64	55	40	5	2/25/25	Surface Treatment - Slurry Seal	8/4/23
129	371	BRIGHT ST	SECOND ST	SOUTH END	Local	AC	E	2	36	402	32	15,331	86	0	89	11	4/17/25	Slurry Seal or Chip Seal	8/1/05
026	120	BRIGHTON ST	WHITTIER BLVD	CONCOURSE ST	Local	AC	E	2	37	1,174	35	42,300	85	42	58	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
026	121	BRIGHTON ST	CONCOURSE ST	CITY LIMIT	Local	AC	E	2	37	1,330	36	47,448	83	75	25	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
023	116	BROOKDALE AVE	LINDEN LN	HARBOR BLVD	Local	AC	E	2	34	1,844	35	66,420	82	0	80	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
023	1503	BROOKDALE AVE	PALM ST	EAST END	Local	AC	E	2	40	319	35	10,955	76	33	52	15	3/25/25	New Construction - Initial	1/1/80
023	379	BROOKDALE AVE	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,386	35	49,932	79	34	66	0	3/24/25	New Construction - Initial	1/1/80
023	382	BROOKDALE AVE	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	998	36	36,678	87	1	51	48	3/24/25	Surface Treatment - Slurry Seal	4/1/13
023	385	BROOKDALE AVE	FALLENLEAF ST	LINDEN LN	Local	AC	E	2	34	290	35	10,476	86	0	97	3	3/25/25	Slurry Seal or Chip Seal	8/1/05
521	386	BROOKFIELD AVE	SHELburne ST	NANTUCKET ST	Local	AC	E	2	37	404	36	15,150	88	47	53	0	3/25/25	New Construction - Initial	1/1/80
132	387	BROOKWOOD DR	NORTH END	ORCHID	Local	AC	E	2	40	408	36	17,236	71	78	14	8	3/17/25	New Construction - Initial	1/1/80
133	388	BRUCE LN	WEST END	W/O OAKLAND	Local	AAC	E	2	03	111	30	4,905	72	44	56	0	2/20/25	Overlay - AC Thin	8/1/08
134	389	BUENA VISTA AVE	W END	LA CASA AVE	Local	AC	E	2	19	1,210	36	43,128	53	71	17	12	4/25/25	Surface Treatment - Slurry Seal	7/1/12
134	390	BUENA VISTA AVE	LA CASA AVE	KEENE DR	Local	AC	E	2	19	871	36	31,356	88	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/11
134	395	BUENA VISTA AVE	WALNUT ST	ENCINITAS ST	Local	AAC	E	2	24	1,209	30	35,910	58	0	100	0	4/15/25	Surface Reconstruction - AC	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
135	396	BURCH WAY	NORTH END	PINEHURST	Local	AC	E	2	28	198	30	7,515	70	59	41	0	4/2/25	New Construction - Initial	1/1/80
136	397	BURWOOD ST	MONTWOOD AVE	PARKWOOD AVE	Local	AC	E	2	32	883	36	32,538	79	48	26	26	3/10/25	Surface Treatment - Slurry Seal	1/1/20
136	398	BURWOOD ST	MONTWOOD AVE	AVENIDA SANTA ANITA	Local	AC	E	2	32	257	35	9,288	92	0	92	8	3/10/25	Surface Treatment - Slurry Seal	1/1/20
045	147	CAJON DR	BRIERCLIFF DR	GREENBRIER LN	Local	AC	E	2	05	1,035	36	37,260	74	62	20	18	2/25/25	Surface Treatment - Slurry Seal	8/4/23
045	168	CAJON DR	GREENBRIER LN	IMPERIAL HWY	Local	AC	E	2	05	340	46	14,110	96	34	66	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
045	399	CAJON DR	RIDGEHAVEN DR	BRIERCLIFF DR	Local	AC	E	2	05	687	35	24,768	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
523	1460	CALIFORNIA ST	LA HABRA BLVD	SOUTH END	Local	AAC	E	2	22	635	30	18,790	62	56	44	0	4/21/25	Overlay - AC Thin	4/1/13
060	163	CALLE DON GUILLERMO	EUCUID ST	COUNTRY HILLS DR	Local	AAC	E	2	33	1,749	35	63,000	80	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
060	414	CALLE DON GUILLERMO	COUNTRY HILLS DR	SOUTH END	Local	AC	E	2	33	153	32	8,677	70	24	73	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
139	415	CALLE DON JUAN	AVENIDA SANTA ANITA	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	859	36	31,674	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
139	416	CALLE DON JUAN	AVENIDA SANTA DOMINGO	CITY LIMITS	Local	AC	E	2	33	737	36	26,532	85	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
140	422	CAMPBELL AVE	WALL ST	BLAKE ST	Local	AAC	E	2	04	871	31	27,904	84	41	59	0	3/9/25	Overlay - AC Thin	8/1/08
141	423	CANDACE LN	RODDY	EAST END	Local	AC	E	2	34	413	30	13,941	80	0	62	38	3/25/25	Slurry Seal or Chip Seal	8/1/05
142	424	CANDIA CIR	WEST END	KEENE DR	Local	AC	E	2	19	165	26	5,815	86	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
143	425	CANDLEWOOD DR	SILVERSPUR	S/O CANDLEWOOD	Local	AAC	E	2	05	369	26	11,094	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
144	426	CANDLEWOOD WAY	E/O CANDLEWOOD	E/END	Local	AAC	E	2	05	94	51	6,544	91	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
145	1723	CANFIELD DR	MACY ST	RANDALL AVE	Local	AC	E	1	01	817	32	27,246	70	8	69	23	2/17/25	Surface Treatment - Slurry Seal	8/4/23
145	427	CANFIELD DR	CARPENTER ST	EAST END	Local	AC	E	2	01	748	33	25,236	70	0	100	0	2/18/25	New Construction - Initial	1/1/80
146	430	CANTERBURY LN	GLENHAVEN	W/O STURBRIDGE	Local	AAC	E	2	05	465	36	17,346	92	0	84	16	2/26/25	Surface Reconstruction - AC	4/1/13
147	431	CAPELLA AVE	CYPRESS ST	ORANGE ST	Local	AAC	E	2	27	495	36	17,604	79	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
147	432	CAPELLA AVE	EUCUID ST	ORANGE ST	Local	AAC	E	2	27	692	36	24,696	76	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
148	434	CARLISLE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	114	26	4,539	93	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
149	435	CARMELA LN	HARBOR BLVD	EAST END	Local	AAC	E	2	37	749	35	27,984	88	0	97	3	3/17/25	Surface Reconstruction - AC	4/1/13
150	437	CAROL ST	CITY LIMIT	LA SERNA AVE	Local	AC	E	2	13	889	30	26,920	79	39	58	3	2/27/25	Surface Treatment - Slurry Seal	1/1/20
150	438	CAROL ST	LA SERNA AVE	N/O RYAN	Local	AC	E	2	13	767	30	23,010	84	1	45	54	2/27/25	Surface Treatment - Slurry Seal	1/1/20
151	441	CARPENTER ST	RUSSELL ST	NORTH END	Local	AC	E	2	01	534	33	15,235	67	0	98	2	2/18/25	Surface Treatment - Cape Seal	4/1/13
152	443	CEDARWOOD DR	BRIERCLIFF DR	SOUTH END	Local	AC	E	2	05	270	26	8,599	83	0	100	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
152	444	CEDARWOOD DR	SILVERSPUR LN	BRIERCLIFF DR	Local	AC	E	2	05	1,001	36	35,820	63	54	30	16	2/25/25	Surface Treatment - Slurry Seal	8/4/23
030	127	CHANTRY DR	FOXDALE DR	WHITTIER BLVD	Local	AAC	E	2	02	474	35	17,100	75	40	60	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
030	446	CHANTRY DR	FOXDALE DR	GREGORY LN	Local	AAC	E	2	02	715	33	23,397	79	31	69	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
154	450	CHERI DR	REBECCA	SILLIKER	Local	AAC	E	2	08	461	26	11,830	69	16	84	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
155	451	CHERRY TREE CIR	RAIN TREE	S/END	Local	AAC	E	2	12	82	50	4,100	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
156	452	CHERRYWOOD ST	TEAKWOOD AVE	COUNTRY HILLS DR	Local	AAC	E	2	26	151	32	4,640	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
157	453	CHESHAM AVE	WALNUT ST	DERRY ST	Local	AC	E	2	19	895	36	32,754	53	42	58	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
158	1506	CHESTNUT ST	CITY LIMIT NORTH	WHITTIER BLVD	Local	AC	E	2	35	153	36	5,698	69	58	42	0	4/22/25	New Construction - Initial	1/1/09
158	455	CHESTNUT ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	742	30	22,080	76	0	55	45	3/26/25	Surface Treatment - Slurry Seal	7/1/12
158	456	CHESTNUT ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	35	503	30	14,910	75	19	81	0	3/26/25	3 in AC OVERLAY	7/1/12
159	457	CHINCHILLA ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	660	30	20,300	63	52	38	10	3/4/25	Slurry Seal or Chip Seal	8/1/05
160	458	CIRCLE DR	CAROL	RYAN AVE	Local	AAC	E	2	13	761	30	24,080	87	21	79	0	2/13/25	Overlay - AC Structural	1/1/20
022	114	CITRUS DR	WHITTIER BLVD	RYAN AVE	Local	AAC	E	2	13	773	29	26,156	56	30	67	3	2/27/25	Surface Reconstruction - AC	7/1/11
022	115	CITRUS DR	RYAN AVE	CITY LIMITS 140' N/ENTRADA DR	Local	AAC	E	2	13	1,763	31	55,664	63	36	58	6	2/27/25	Surface Reconstruction - AC	7/1/11
534	1704	CIVIC CENTER PLAZA	LA HABRA BLVD	ALLEY N/O LA HABRA BLVD	Local	AC	E	2	28	341	34	15,594	100	0	0	0	4/25/25	Surface Treatment - Slurry Seal	8/4/23
534	1705	CIVIC CENTER PLAZA	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	214	39	7,878	72	0	100	0	4/18/25	Surface Treatment - Slurry Seal	4/1/13
162	462	CLIFTON ST	OLIVE AVE	LAMBERT RD	Local	AAC	E	2	30	826	36	29,736	76	3	78	19	4/21/25	Overlay - AC Thin	8/1/07
162	463	CLIFTON ST	LAMBERT RD	ROSECREST AVE	Local	AAC	E	2	31	496	30	14,880	81	23	77	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
056	159	COACHWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	1,134	35	40,860	87	0	70	30	3/10/25	Overlay - AC Structural	1/1/20
164	470	COBBLESTONE RD	GRAYVILLE DR	RIDGEHAVEN DR	Local	AC	E	2	06	1,384	36	49,392	68	64	36	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
165	471	COLE WAY	NORTH END	OLINDA	Local	AAC	E	2	20	157	36	7,227	84	0	100	0	2/13/25	Surface Reconstruction - AC	8/1/05
166	472	COLFAX CT	WEST END	COLFAX ST	Local	AC	E	2	38	217	30	9,006	74	38	31	31	3/24/25	Surface Treatment - Slurry Seal	4/1/13
167	474	COLFAX ST	COLFAX CT	ESSEX DR	Local	AC	E	2	38	254	30	8,190	80	1	40	59	3/24/25	Surface Treatment - Slurry Seal	4/1/13
167	475	COLFAX ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	706	30	21,000	85	22	78	0	3/24/25	New Construction - Initial	1/1/80
167	476	COLFAX ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	765	30	22,770	78	57	41	2	3/24/25	New Construction - Initial	1/1/80
167	477	COLFAX ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	1,802	32	57,376	75	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
168	478	COLLEEN ST	LA HABRA BLVD	LORELLA	Local	AAC	E	2	10	495	36	17,388	68	45	55	0	2/26/25	Surface Reconstruction - AC	8/1/08
169	479	COLLEGE ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,005	33	33,165	67	55	31	14	4/18/25	Overlay - AC Thin	8/1/05
169	480	COLLEGE ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	638	32	18,484	83	0	100	0	4/22/25	Surface Treatment - Slurry Seal	7/1/12
169	484	COLLEGE ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	664	38	25,232	69	33	43	24	4/22/25	Surface Treatment - Slurry Seal	7/1/12
169	485	COLLEGE ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	626	37	23,826	67	40	44	16	4/22/25	Surface Treatment - Slurry Seal	7/1/11
170	491	COMITY CIR	CONCOURSE ST	EAST END	Local	AAC	E	2	37	209	30	7,817	89	0	100	0	3/17/25	Overlay - AC Thin	4/1/13
524	1504	COMMERCIAL WY	CYPRESS AVE	PARK INDUSTRIAL DR	Local	AC	E	2	36	1,026	36	36,972	60	45	36	19	4/21/25	Slurry Seal or Chip Seal	8/1/05
171	492	CONCORD WAY	CAJON DR	N/O REDCOACH	Local	AC	E	2	05	464	26	11,752	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
172	493	CONCOURSE ST	BRIGHTON ST	DAVIT CIR	Local	AC	E	2	37	980	36	35,280	78	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
172	495	CONCOURSE ST	WHITTIER AVE (FRONTAGE)	DAVIT CIR	Local	AC	E	2	37	637	36	22,932	92	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
525	1509	CORTO WAY	WHITTIER BLVD	SOUTH END	Local	AAC	E	2	09	250	26	8,295	66	34	66	0	2/20/25	Surface Reconstruction - AC	7/1/11
173	497	COUNTRY HILLS DR	CITY LIMIT	CALLE DON JUAN	Local	AC	E	2	33	1,325	36	47,268	80	10	90	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	500	COUNTRY HILLS DR	CALLE DON JUAN	EAST END	Local	AC	E	2	33	62	32	3,259	76	6	94	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	501	COUNTRY HILLS DR	CHERRYWOOD	DORWOOD AVE	Local	AAC	E	2	26	991	35	35,712	88	24	61	15	3/10/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
173	502	COUNTRY HILLS DR	DORWOOD AVE	EUCLID ST	Local	AC	E	2	26	511	36	17,964	79	13	87	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	503	COUNTRY HILLS DR	WEST END	CHEERYWOOD	Local	AAC	E	2	26	383	32	14,051	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
174	504	COUNTRY LN	EAST END	MEADOWLARK	Local	AC	E	2	34	182	26	7,277	79	0	81	19	3/25/25	Slurry Seal or Chip Seal	8/1/05
539	1727	CREEK LN	JANISON DR	RUSSELL ST	Local	AC	E	1	01	749	29	21,456	69	16	84	0	2/17/25	New Construction - AC	1/1/18
008	171	CYPRESS ST	LA HABRA BLVD	SECOND ST	Local	AC	C	2	36	724	35	26,100	83	33	37	30	4/18/25	Slurry Seal or Chip Seal	8/1/05
008	1715	CYPRESS ST	CITY BOUNDARY	BONNIE LN	Local	AC	C	2	27	501	35	18,072	68	47	50	3	4/18/25	New Construction - AC	1/1/80
008	50	CYPRESS ST	305' N/O FOUNDATION	IMPERIAL HWY	Local	AC	C	2	31	1,201	35	43,272	41	42	55	3	2/14/25	New Construction - Initial	1/1/92
008	51	CYPRESS ST	LAMBERT RD	498' S/O PACIFIC	Local	AC	C	2	31	1,642	35	59,148	58	33	59	8	2/14/25	New Construction - Initial	1/1/92
008	52	CYPRESS ST	COMMERCIAL WAY	LAMBERT RD	Local	AC	C	2	36	1,094	35	39,420	79	43	37	20	4/21/25	New Construction - Initial	1/1/74
008	53	CYPRESS ST	SECOND ST	COMMERCIAL WAY	Local	AC	C	2	36	835	36	30,060	88	1	57	42	4/18/25	New Construction - Initial	1/1/74
008	54	CYPRESS ST	FRANCIS AVE	LA HABRA BLVD	Local	AAC	C	2	35	1,109	35	40,716	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
008	55	CYPRESS ST	WHITTIER BLVD	FRANCIS AVE	Local	AAC	C	2	35	1,475	34	51,660	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
008	56	CYPRESS ST	CAPELLA AVE	WHITTIER BLVD	Local	AAC	C	2	34	1,419	35	51,120	69	64	32	4	4/18/25	Overlay - AC Structural	2/1/24
008	57	CYPRESS ST	BONNIE LN	CAPELLA AVE	Local	AC	C	2	34	467	35	16,848	73	9	89	2	4/18/25	New Construction - Initial	1/1/75
176	506	DARBY CT	WEST END	CLIFTON	Local	AAC	E	2	30	183	26	6,333	51	63	25	12	4/21/25	Overlay - AC Thin	8/1/07
177	507	DAVID AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	619	30	18,390	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
178	508	DAVIT CIR	CONCOURSE ST	EAST END	Local	AC	E	2	37	128	30	5,467	88	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
039	140	DEANNA ST	LA HABRA BLVD	HILLDALE AVE	Local	AAC	E	2	10	1,049	35	37,800	87	22	78	0	2/25/25	Surface Reconstruction - AC	8/1/08
180	512	DEBWOOD PL	PARKWOOD AVE	S/END	Local	AC	E	2	25	392	26	11,717	68	48	36	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
181	513	DEL SUR AVE	WEST END	E/O LA CASA	Local	AC	E	2	19	349	22	7,700	59	57	20	23	4/15/25	Surface Treatment - Slurry Seal	7/1/12
182	514	DERRY ST	RYE AVE	N/O LAS LOMAS	Local	AC	E	2	19	520	36	19,220	63	62	19	19	4/15/25	Surface Treatment - Slurry Seal	7/1/02
182	516	DERRY ST	BUENA VISTA AVE	CHESHAM AVE	Local	AC	E	2	19	480	36	17,780	65	68	31	1	4/15/25	Surface Treatment - Slurry Seal	7/1/12
028	124	DEXFORD DR	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	82	46	54	0	2/24/25	Overlay - AC Structural	11/15/21
028	125	DEXFORD DR	GREGORY LN	FOXDALE DR	Local	AAC	E	2	02	877	35	31,608	75	56	44	0	2/24/25	Overlay - AC Structural	11/15/21
184	135	DEXFORD ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	984	35	35,460	71	60	40	0	2/20/25	Overlay - AC Thin	8/1/08
184	527	DEXFORD ST	STORY AVE	SOUTH END	Local	AAC	E	2	03	219	36	8,634	82	34	66	0	2/20/25	Overlay - AC Thin	8/1/08
185	528	DEXTER ST	ALLEY S/LA HABRA	SUPERIOR AVE	Local	AAC	E	2	39	1,762	32	56,256	76	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
185	529	DEXTER ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	734	30	21,840	80	50	25	25	3/24/25	New Construction - Initial	1/1/80
185	530	DEXTER ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	85	34	66	0	3/24/25	New Construction - Initial	1/1/80
185	531	DEXTER ST	LA HABRA BLVD	ALLEY S/LA HABRA	Local	AAC	E	2	39	145	31	4,672	75	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
186	532	DITWOOD PL	RONWOOD	SOUTH END	Local	AC	E	2	25	132	26	4,957	68	51	33	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
187	533	DOLORES ST	LINDAUER DR	N/O LAGUNA	Local	AC	E	2	07	433	29	13,020	77	36	64	0	2/19/25	New Construction - Initial	1/1/80
188	534	DONNYBROOK AVE	STONEWOOD	W/O MEADOWLARK	Local	AC	E	2	34	596	36	21,024	86	0	100	0	3/25/25	Slurry Seal or Chip Seal	8/1/05
054	164	DORWOOD AVE	GWYNWOOD AVE	STONEWOOD AVE	Local	AC	E	2	25	299	35	10,800	98	0	100	0	4/15/25	Surface Treatment - Slurry Seal	4/1/24
189	535	DORWOOD AVE	COUNTRY HILLS DR	SOUTH END	Local	AAC	E	2	26	158	36	7,835	94	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
189	536	DORWOOD AVE	COUNTRY HILL DR	COUNTRY HILL DR	Local	AAC	E	2	26	631	36	22,716	65	75	25	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
189	537	DORWOOD AVE	SANDLEWOOD AVE	LATCHWOOD LN	Local	AC	E	2	26	852	36	30,672	72	54	42	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
529	1530	DOT AVE	JOAN ST	JUANITA ST	Local	AC	E	2	38	414	32	13,695	91	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
190	542	DOVER DR	WALNUT ST	DURHAM	Local	AC	E	2	24	459	35	16,560	45	82	18	0	4/21/25	Surface Treatment - Slurry Seal	7/1/12
191	543	DURHAM ST	DOVER DR	LAS LOMAS AVE	Local	AC	E	2	24	817	36	29,196	71	51	30	19	4/15/25	Surface Treatment - Slurry Seal	7/1/12
191	544	DURHAM ST	LAMBERT RD	DOVER DR	Local	AC	E	2	24	471	36	16,740	84	0	95	5	4/15/25	Surface Treatment - Slurry Seal	7/1/12
192	545	EAGLEWOOD PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	66	32	3,139	78	52	48	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
193	546	EASTPARK DR	GREENTREE LN	FONDA ST	Local	AC	E	2	38	528	32	18,396	85	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
194	548	EDGEMONT ST	SANSINENA LN	N/O RUSSELL	Local	AAC	E	2	08	599	32	19,040	92	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
194	549	EDGEMONT ST	RUSSELL ST	SILLIKER AVE	Local	AAC	E	2	08	575	32	27,872	86	17	83	0	2/19/25	Overlay - AC Structural	1/1/20
195	551	EL CAMINO DR	SIERRA VISTA	WALNUT ST	Local	AC	E	2	13	1,143	30	33,930	89	22	78	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
196	552	EL DON DR	HACIENDA DR	EL RANCHO DR	Local	AAC	E	2	09	400	30	11,820	82	0	89	11	2/24/25	Overlay - AC Structural	1/1/20
197	554	EL DORADO AVE	HACIENDA	EL RANCHO	Local	AAC	E	2	09	432	29	12,990	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
197	555	EL DORADO AVE	WEST END	HACIENDA	Local	AAC	E	2	09	829	30	26,665	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
198	556	EL NIDO ST	NORTH END	ROSECREST	Local	AAC	E	2	24	246	30	8,955	69	0	99	1	4/21/25	Surface Reconstruction - AC	7/1/12
199	557	EL PORTAL CT	WEST END	EL PORTAL DR	Local	AAC	E	2	09	237	30	8,660	70	8	92	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
031	128	EL PORTAL DR	BEACH BLVD	GRANADA DR	Local	AAC	E	2	09	1,725	30	51,642	66	37	63	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
031	169	EL PORTAL DR	GRANADA DR	LA HABRA BLVD	Local	AAC	E	2	09	709	35	25,560	67	46	48	6	2/20/25	Surface Treatment - Slurry Seal	1/1/20
032	129	EL RANCHO DR	EL DORADO AVE	HACIENDA RD	Local	AAC	E	2	09	1,604	30	48,150	83	14	86	0	2/24/25	Overlay - AC Structural	1/1/20
032	1511	EL RANCHO DR	EL PORTAL	SOUTH END	Local	AC	E	2	09	370	30	12,675	85	16	84	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
032	7146	EL RANCHO DR	EL DORADO AVE	EL PORTAL DR	Local	AC	E	2	09	425	30	12,780	85	39	61	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
202	568	EL REY DR	EL RANCHO DR	EL RANCHO DR	Local	AAC	E	2	09	473	30	14,010	79	12	80	8	2/24/25	Overlay - AC Structural	1/1/20
203	569	ELECTRIC AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	30	38,610	74	25	60	15	3/4/25	Overlay - AC Thin	8/1/07
204	570	ELM ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	21	448	30	13,440	59	58	42	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
205	573	ELMCROFT CIR	MARIPOSA	EAST END	Local	AAC	E	2	05	371	32	13,667	88	0	35	65	5/6/25	Surface Reconstruction - AC	4/1/13
522	1440	ELMSFORD AVE	GLENCLIFF	WHITEBOOK	Local	AC	E	2	11	1,003	36	36,714	80	19	57	24	3/4/25	Slurry Seal or Chip Seal	8/1/05
206	575	EMBER LN	FALLENLEAF ST	EAST END	Local	AAC	E	2	34	67	47	4,399	83	16	57	27	3/26/25	Surface Reconstruction - AC	8/1/05
206	576	EMBER LN	WEST END	FALLENLEAF ST	Local	AAC	E	2	34	409	36	16,275	81	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
207	577	EMERY AVE	PALM ST	EAST END	Local	AAC	E	2	39	666	36	25,456	67	46	45	9	2/14/25	Overlay - AC Thin	8/1/07
208	578	ENCINITAS ST	LAS LOMAS DR	KEENE DR	Local	AC	E	2	24	698	36	24,912	77	37	47	16	4/15/25	Surface Treatment - Slurry Seal	7/1/12
209	580	ENTRADA DR	CITRUS DR	CAROL ST	Local	AAC	E	2	13	447	30	13,230	81	63	37	0	2/27/25	Overlay - AC Structural	1/1/20
210	582	ERNA AVE	COLLEGE ST	ALLEY W/HARBOR BLVD	Local	AC	E	2	35	996	30	29,910	85	0	100	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
210	583	ERNA AVE	WILLOW ST	WALNUT ST	Local	AC	E	2	16	1,000	32	31,616	47	66	26	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
210	586	ERNA AVE	WALNUT ST	HAZEL ST	Local	AAC	E	2	21	319	30	9,600	89	0	100	0	4/17/25	Overlay - AC Structural	1/1/20
210	587	ERNA AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	936	30	27,780	85	0	95	5	3/26/25	Surface Treatment - Slurry Seal	7/1/12
210	591	ERNA AVE	ORANGE ST	CYPRESS ST	Local	AC	E	2	28	628	50	29,650	86	17	83	0	2/13/25	New Construction - Initial	1/1/80
210	7155	ERNA AVE	HAZEL ST	EUCLID ST	Local	AC	E	2	21	924	30	27,000	69	54	34	12	4/18/25	Surface Treatment - Slurry Seal	1/1/20
211	596	ESSEX DR	BEDFORD ST	FONDA ST	Local	AC	E	2	38	739	30	22,170	59	60	16	24	3/24/25	New Construction - Initial	1/1/80
211	599	ESSEX DR	FONDA ST	NORTH END	Local	AC	E	2	38	172	30	6,906	72	0	100	0	3/24/25	New Construction - Initial	1/1/80
212	600	ESTATE DR	GREENTREE	FONDA ST	Local	AC	E	2	38	532	32	17,774	86	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
009	165	EUCLID ST	AMANDA DR	WHITTIER BLVD	Local	AAC	C	2	27	424	35	15,300	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24
009	58	EUCLID ST	NORTH CITY LIMITS	AMANDA DR	Local	AAC	C	2	27	2,240	36	67,603	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24
213	601	EUNICE CIR	NORTH END	N/O HILLDALE	Local	AAC	E	2	10	309	31	11,154	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/08
214	602	EXETER AVE	DERRY ST	NASHUA ST	Local	AC	E	2	19	910	26	23,507	76	13	87	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
215	603	EXETER CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	74	12	88	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
535	1707	FAHRINGER WY	IDAHO ST	WEST END	Local	AC	E	2	09	339	25	8,840	79	21	79	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
217	605	FALLENLEAF ST	WOODCREST AVE	BROOKDALE AVE	Local	AC	E	2	34	773	36	27,828	85	0	100	0	3/25/25	Surface Treatment - Slurry Seal	4/1/13
218	607	FARRINGTON DR	NORTH END	RUSSELL ST	Local	AAC	E	2	07	186	30	7,105	75	22	78	0	2/19/25	Surface Reconstruction - AC	4/1/13
218	608	FARRINGTON DR	RUSSELL ST	SOUTH END	Local	AAC	E	2	07	704	30	22,695	77	9	91	0	2/19/25	Overlay - AC Thin	4/1/13
010	59	FASHION SQUARE LN	BEACH BLVD	EAST END	Local	AC	E	4	11	518	56	29,555	65	0	87	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
219	609	FERN WY	RIGSBY ST	EAST END	Local	AAC	E	2	02	197	30	7,777	98	0	58	42	2/14/25	Surface Treatment - Slurry Seal	11/15/21
220	610	FIFTH AVE	MONTE VISTA ST	MCFADDEN ST	Local	AAC	E	2	18	657	24	15,624	60	64	29	7	3/4/25	Overlay - AC Thin	8/1/07
011	60	FIRST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	29	1,288	43	53,024	86	0	95	5	4/17/25	Slurry Seal or Chip Seal	8/1/05
011	611	FIRST AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	22	1,290	45	57,510	73	58	41	1	4/21/25	Surface Reconstruction - AC	8/1/05
011	614	FIRST AVE	CITY LIMIT	WALNUT ST	Local	AC	E	2	17	952	30	28,590	69	33	59	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
011	615	FIRST AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	640	44	27,896	82	0	90	10	4/15/25	Surface Treatment - Cape Seal	4/1/13
222	622	FLAMINGO WAY	NORTH END	AMORITA	Local	AC	E	2	40	789	36	30,202	88	20	47	33	3/17/25	Surface Treatment - Slurry Seal	4/1/13
223	623	FLORENCE AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,284	26	32,916	72	47	53	0	3/3/25	New Construction - Initial	1/1/80
223	624	FLORENCE AVE	CYPRESS ST	FLORENCE CT	Local	AC	E	2	35	584	30	17,520	85	58	41	1	3/26/25	Surface Treatment - Slurry Seal	7/1/12
223	625	FLORENCE AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,258	26	32,396	79	63	34	3	4/2/25	New Construction - Initial	1/1/81
223	628	FLORENCE AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	30	13,590	80	27	73	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
223	629	FLORENCE AVE	LYDIA ST	MONTE VISTA ST	Local	AC	E	2	14	493	30	14,430	57	53	26	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
223	633	FLORENCE AVE	WEST END	MCPHERSON ST	Local	AC	E	2	35	310	30	9,120	75	17	83	0	4/2/25	2 in Cold Mill & Overlay	7/1/12
224	1709	FLORENCE CT	FLORENCE AVE	SOUTH END	Local	AC	E	2	35	107	16	1,836	54	52	14	34	4/22/25	New Construction - Initial	1/1/80
224	634	FLORENCE CT	NORTH END	FLORENCE AVE	Local	AC	E	2	35	91	16	1,564	45	84	16	0	4/22/25	New Construction - Initial	1/1/80
012	61	FONDA ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	2,014	32	64,192	76	1	99	0	4/17/25	Overlay - AC Thin	8/1/07
012	62	FONDA ST	EASTPARK DR	LA HABRA BLVD	Local	AC	E	2	38	444	35	16,020	85	0	98	2	3/24/25	Surface Treatment - Cape Seal	4/1/13
012	635	FONDA ST	CONCOURSE	WHITTIER (FRONTAGE)	Local	AC	C	2	37	1,072	29	32,190	94	0	100	0	3/17/25	New Construction - Initial	1/1/80
012	637	FONDA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	64	75	18	7	3/24/25	Surface Treatment - Slurry Seal	4/1/13
012	638	FONDA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,187	30	35,370	80	62	36	2	3/17/25	New Construction - Initial	1/1/80
226	639	FOUNDATION AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	907	46	41,170	58	59	40	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
227	640	FOURTH AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	18	1,285	36	45,900	72	47	43	10	3/4/25	Overlay - AC Thin	8/1/07
227	642	FOURTH AVE	WEST END	CYPRESS ST	Local	AAC	E	2	30	642	26	16,536	55	63	31	6	4/21/25	Overlay - AC Thin	8/1/07
228	643	FOXDALE AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	1,158	30	34,560	91	72	28	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
029	126	FOXDALE DR	DEXFORD DR	CHANNTRY DR	Local	AAC	E	2	02	376	35	13,572	85	15	85	0	2/24/25	Overlay - AC Structural	11/15/21
033	131	FRANCIS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	36	41,580	90	0	100	0	3/24/25	Surface Treatment - Cape Seal	4/1/13
033	132	FRANCIS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,454	35	52,380	80	22	58	20	3/24/25	Overlay - AC Rubber	4/1/13
033	1501	FRANCIS AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	664	29	19,950	67	0	59	41	4/2/25	New Construction - Initial	1/1/80
033	1502	FRANCIS AVE	ORANGE ST	CYPRESS ST	Local	AC	E	2	28	658	29	19,770	77	0	83	17	4/2/25	New Construction - Initial	1/1/80
033	647	FRANCIS AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	35	1,229	26	33,562	52	9	91	0	4/18/25	Surface Reconstruction - AC	7/1/12
033	648	FRANCIS AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	1,008	30	30,270	81	12	88	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
033	651	FRANCIS AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	26	11,778	60	68	32	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
231	659	FRANTZ AVE	PALM	VERONA	Local	AC	E	2	41	864	36	30,960	78	0	100	0	3/17/25	New Construction - Initial	1/1/80
232	660	GALEN DR	KINLEY	RIGSBY	Local	AAC	E	2	02	958	30	31,990	85	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
233	661	GERRY ST	NORTH END	FRANCIS	Local	AC	E	2	38	467	30	15,577	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
234	662	GLENCLIFF ST	ELMSFORD	SHEFFIELD	Local	AC	E	2	11	282	36	10,902	91	0	100	0	3/4/25	Slurry Seal or Chip Seal	8/1/05
234	663	GLENCLIFF ST	SHEFFIELD	FASHION SQUARE	Local	AC	E	2	11	720	36	25,704	77	71	29	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
235	664	GLENHAVEN DR	NORTH END	WIMBLETON	Local	AC	E	2	05	124	36	4,248	93	0	100	0	2/26/25	New Construction - Initial	1/1/80
235	665	GLENHAVEN DR	WIMBLETON	CANTEBURY	Local	AAC	E	2	05	1,024	36	37,614	91	0	71	29	2/26/25	Surface Reconstruction - AC	4/1/13
236	1728	GORDON AVE	RANDALL AVE	MACY ST	Local	AC	E	1	01	674	32	22,640	67	11	89	0	2/17/25	Surface Treatment - Slurry Seal	8/4/23
236	1731	GORDON AVE	MACY ST	BALDWIN ST	Local	AC	E	2	01	413	33	13,678	67	31	66	3	2/17/25	Surface Treatment - Slurry Seal	8/4/23
236	1732	GORDON AVE	BALDWIN ST	SHARPLESS ST	Local	AC	E	2	01	551	30	17,891	74	11	89	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
236	666	GORDON AVE	VALLEY HOME	ROANOKE	Local	AAC	E	2	01	422	32	14,004	78	18	82	0	2/18/25	New Construction - Initial	4/24/15
237	667	GRACE AVE	EUCLID	LIBERTY	Local	AC	E	2	31	682	36	24,336	84	15	85	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
237	668	GRACE AVE	LIBERTY	CYPRESS	Local	AC	E	2	31	606	36	21,600	89	0	98	2	2/14/25	Surface Treatment - Slurry Seal	1/1/20
238	669	GRANADA CT	GRANADA DR	SOUTH END	Local	AAC	E	2	09	359	30	12,295	69	12	81	7	2/20/25	Surface Treatment - Slurry Seal	1/1/20
239	670	GRANADA DR	GRANADA CT	EL PORTAL	Local	AAC	E	2	09	297	30	8,730	66	45	55	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
239	671	GRANADA DR	HANLINE	GRANADA CT	Local	AAC	E	2	09	326	30	11,305	62	7	81	12	2/20/25	Surface Treatment - Slurry Seal	1/1/20
240	672	GRAYVILLE DR	SUMMERSHADE	BRASS LANTERN	Local	AAC	E	2	06	787	35	28,368	70	36	41	23	2/18/25	Surface Treatment - Slurry Seal	8/4/23

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
240	673	GRAYVILLE DR	WEST END	SUMMERSHADE	Local	AC	E	2	06	723	35	26,064	73	4	54	42	2/18/25	Surface Treatment - Slurry Seal	8/4/23
241	677	GREENBRIER LN	RIDGEHAVEN	CAJON	Local	AC	E	2	05	1,180	36	43,086	68	47	41	12	2/19/25	Surface Treatment - Slurry Seal	8/4/23
241	678	GREENBRIER LN	CAJON	STURBRIDGE	Local	AAC	E	2	05	405	36	14,148	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
242	681	GREENTREE LN	EASTPARK	ESTATE	Local	AC	E	2	38	297	36	12,192	90	0	92	8	3/24/25	Surface Treatment - Slurry Seal	4/1/13
243	682	GREENVIEW DR	CITY LIMIT	ANTOINETTE	Local	AAC	E	2	08	1,100	33	36,300	81	10	82	8	2/19/25	Overlay - AC Structural	1/1/20
243	683	GREENVIEW DR	ANTOINETTE	RUSSELL	Local	AAC	E	2	08	305	33	9,867	93	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
244	684	GREENWAY TER	HENSEL	STONEWOOD	Local	AC	E	2	34	116	32	3,520	66	53	21	26	3/26/25	Surface Treatment - Slurry Seal	8/4/23
244	685	GREENWAY TER	NORTH END	HENSEL	Local	AC	E	2	34	386	32	15,677	65	59	21	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
245	686	GREENWOOD AVE	LEORA	WALNUT ST	Local	AC	E	2	16	631	26	16,094	72	39	61	0	3/3/25	Surface Treatment - Cape Seal	4/1/13
245	687	GREENWOOD AVE	VALENCIA	SUNSET	Local	AC	E	2	35	299	28	8,400	57	53	28	19	4/25/25	Surface Treatment - Slurry Seal	7/1/12
245	688	GREENWOOD AVE	EUCLID ST	ORANGE	Local	AC	E	2	28	623	30	18,510	84	0	100	0	3/26/25	New Construction - Initial	1/1/80
245	689	GREENWOOD AVE	WALNUT ST	HILLSIDE ST	Local	AC	E	2	21	663	30	19,710	64	57	43	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
245	690	GREENWOOD AVE	COLLEGE	VALENCIA	Local	AC	E	2	35	185	28	5,208	37	76	10	14	4/18/25	Surface Treatment - Slurry Seal	7/1/12
245	692	GREENWOOD AVE	HILLSIDE ST	EUCLID ST	Local	AC	E	2	21	622	29	18,690	72	15	85	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
245	693	GREENWOOD AVE	MONTE VISTA	LEORA	Local	AC	E	2	16	596	30	17,520	62	38	35	27	3/3/25	Surface Treatment - Slurry Seal	4/1/13
245	694	GREENWOOD AVE	ORANGE	EAST END	Local	AC	E	2	28	357	30	12,505	85	0	100	0	3/26/25	New Construction - Initial	1/1/80
246	699	GREGORY LN	BEACH BLVD	RIDGEWAY LN	Local	AC	E	2	09	491	36	17,712	78	13	85	2	2/24/25	Surface Treatment - Slurry Seal	1/1/20
246	700	GREGORY LN	DEXFORD DR	BEACH BLVD	Local	AAC	E	2	02	1,022	31	32,736	78	61	39	0	2/24/25	Overlay - AC Structural	11/15/21
246	702	GREGORY LN	KINLEY ST	DEXFORD DR	Local	AAC	E	2	02	885	35	31,896	88	65	35	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
246	706	GREGORY LN	VALLEY HOME	KINLEY ST	Local	AAC	E	2	02	529	36	18,828	93	38	62	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
247	709	GWYNWOOD AVE	DORWOOD	VALWOOD	Local	AAC	E	2	25	576	36	21,486	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
247	710	GWYNWOOD AVE	DORWOOD	PATWOOD	Local	AAC	E	2	25	795	35	28,656	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
248	711	HACIENDA DR	EL DON	EL DORADO	Local	AC	E	2	09	591	30	17,550	84	17	83	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
248	712	HACIENDA DR	HACIENDA	EL DON	Local	AAC	E	2	09	829	29	24,900	89	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
018	130	HACIENDA DR	EL RANCHO DR	WHITTIER BLVD	Local	AC	E	2	09	324	50	16,295	60	38	61	1	2/24/25	Surface Treatment - Slurry Seal	1/1/20
250	714	HAZEL ST	NORTH END	ERNA AVE	Local	AC	E	2	21	658	36	25,483	87	0	94	6	4/22/25	Surface Treatment - Slurry Seal	1/1/20
250	715	HAZEL ST	LA HABRA BLVD	FIRST ST	Local	AC	E	2	22	308	38	11,488	79	10	53	37	4/22/25	Slurry Seal or Chip Seal	8/1/05
250	716	HAZEL ST	FIRST ST	SOUTH END	Local	AC	E	2	22	327	38	12,426	89	0	95	5	4/22/25	2 in overlay	10/1/12
250	717	HAZEL ST	WHITTIER BLVD	ALLEY S/GREENWOOD	Local	AC	E	2	21	946	36	34,696	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
250	719	HAZEL ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	21	300	36	10,584	84	16	73	11	4/22/25	Surface Treatment - Slurry Seal	1/1/20
251	727	HEATHER AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,303	29	37,247	73	39	46	15	3/3/25	Surface Treatment - Slurry Seal	8/4/23
251	728	HEATHER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,265	30	36,900	54	63	24	13	2/26/25	Surface Treatment - Slurry Seal	4/1/13
252	734	HEATHER WAY	HAZEL	EAST END	Local	AAC	E	2	21	209	30	7,350	89	0	90	10	4/17/25	Overlay - AC Structural	1/1/20
253	735	HENDERSON WAY	NORTH END	IDAHO ST	Local	AC	E	2	09	439	30	15,821	83	15	49	36	2/20/25	Surface Treatment - Slurry Seal	1/1/20
255	738	HIGHLAND CT	ORANGE ST	EAST END	Local	AC	E	2	27	347	30	11,935	62	76	22	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
255	739	HIGHLAND CT	WEST END	ORANGE ST	Local	AC	E	2	27	176	29	5,310	82	67	33	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
256	740	HIGHLANDER AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	16	1,283	26	39,226	74	27	73	0	3/3/25	Overlay - AC Thin	4/1/13
256	741	HIGHLANDER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,278	40	50,200	74	12	79	9	2/26/25	Surface Treatment - Cape Seal	4/1/13
257	748	HILL RD	VIEW	BISHOP	Local	AC	E	2	27	369	31	11,939	72	71	29	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
040	141	HILLDALE AVE	DEANNA ST	CDS E/ EUNICE CIR	Local	AC	E	2	10	759	36	31,035	65	65	34	1	2/25/25	Slurry Seal or Chip Seal	8/1/05
040	181	HILLDALE AVE	CDS E/ EUNICE CIR	IDAHO ST	Local	AC	E	2	10	725	36	25,315	46	72	15	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
040	753	HILLDALE AVE	WEST END	DEANNA ST	Local	AC	E	2	10	776	36	29,731	54	67	21	12	2/25/25	Slurry Seal or Chip Seal	8/1/05
260	757	HILLCREST ST	FIRST AVE	SOUTH END	Local	AC	E	2	17	815	33	29,282	59	59	24	17	3/4/25	Slurry Seal or Chip Seal	8/1/05
260	758	HILLCREST ST	LA HABRA BLVD	FIRST AVE	Local	AC	E	2	17	331	33	10,725	73	31	57	12	3/4/25	Surface Treatment - Slurry Seal	4/1/13
261	1520	HILLSIDE ST	HILLSIDE CT	N END	Local	AAC	E	2	20	1,165	35	38,420	71	40	41	19	4/21/25	Overlay - AC Thin	8/1/07
261	759	HILLSIDE ST	WHITTIER BLVD	GREENWOOD	Local	AC	E	2	21	786	36	27,356	67	40	58	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
261	761	HILLSIDE ST	HILLSIDE CT	WHITTIER BLVD	Local	AAC	E	2	20	480	36	14,255	80	0	89	11	4/21/25	Overlay - AC Thin	8/1/07
262	765	HODSON AVE	WEST END	EAST END	Local	AC	E	2	41	713	36	25,452	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
262	768	HODSON AVE	VALLEJO ST	PALM ST	Local	AC	E	2	38	1,184	36	43,158	82	0	96	4	3/24/25	New Construction - Initial	1/1/80
263	770	HOLGATE ST	HODSON AVE	SOUTH END	Local	AC	E	2	41	450	26	13,403	83	43	57	0	3/17/25	New Construction - Initial	1/1/80
263	771	HOLGATE ST	Vaquero St	HODSON AVE	Local	AC	E	2	41	1,076	29	32,310	73	53	47	0	3/17/25	New Construction - Initial	1/1/80
264	775	HOLLIS CIR	WALNUT ST	EAST END	Local	AC	E	2	24	247	26	7,947	71	29	71	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
264	776	HOLLIS CIR	WEST END	WALNUT ST	Local	AC	E	2	19	181	26	6,231	60	69	31	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
265	777	HOLLY AVE	VALLEY HOME	PARSONS	Local	AAC	E	2	02	274	32	9,268	90	59	41	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
266	778	HOLT DR	WILSON	HOLGATE	Local	AC	E	2	41	371	30	12,677	92	0	100	0	3/17/25	New Construction - Initial	1/1/80
267	779	HONEYWOOD LN	ALMONDWOOD	COACHWOOD	Local	AAC	E	2	26	1,497	32	47,136	87	18	82	0	3/10/25	Overlay - AC Structural	1/1/20
267	780	HONEYWOOD LN	WEST END	ALMONDWOOD	Local	AAC	E	2	26	526	32	13,816	83	33	65	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
001	63	IDAHO ST	END OF PVMNT	REBECCA DR	Local	AC	C	1	08	265	17	4,505	49	55	14	31	2/27/25	Surface Treatment - Slurry Seal	1/1/20
001	64	IDAHO ST	REBECCA DR	WHITTIER BLVD	Local	AC	C	2	08	1,492	36	64,276	67	45	51	4	2/14/25	Surface Treatment - Slurry Seal	1/1/20
268	781	INDUSTRY AVE	EUCLID	CYPRESS	Local	AAC	E	2	31	684	36	24,192	61	35	51	14	2/14/25	Surface Treatment - Slurry Seal	1/1/20
269	782	INOLA CT	NORTH END	WHITTIER BLVD	Local	AC	E	2	40	236	26	7,683	72	73	25	2	3/17/25	New Construction - Initial	1/1/80
270	783	IPSWICH ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	83	0	73	27	4/15/25	Surface Treatment - Slurry Seal	7/1/12
271	784	IRONWOOD ST	PARKWOOD AVE	MONTWOOD AVE	Local	AC	E	2	32	883	36	31,572	95	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
272	786	IVY PL	RIBSBY	EAST END	Local	AAC	E	2	02	92	30	3,760	86	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
273	787	JAFFREY ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	79	20	22	58	4/15/25	Surface Treatment - Slurry Seal	7/1/12
274	788	JAMIE AVE	LESUE	EAST END	Local	AAC	E	2	32	605	36	23,305	79	12	88	0	3/11/25	Overlay - AC Structural	1/1/20
538	1740	JANISON DR	RANDALL AVE	CREEK LN	Local	AC	E	2	01	245	26	6,535	61	54	46	0	2/17/25	New Construction - AC	1/1/18

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
275	789	JOAN ST	DOT AVE	FRANCIS AVE	Local	AC	E	2	38	503	30	14,910	68	67	18	15	3/17/25	New Construction - Initial	1/1/80
276	791	JOCELYN AVE	LEMON	WEST END	Local	AAC	E	2	35	239	26	7,739	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
277	792	JOHNSON AVE	VALLEY HOME AVE	KINLEY ST	Local	AAC	E	2	02	537	30	16,680	79	12	67	21	2/25/25	Surface Treatment - Slurry Seal	11/15/21
278	794	JOSEPH CT	NORTH END	RUSSELL	Local	AC	E	2	08	119	33	5,927	86	0	73	27	2/19/25	Surface Treatment - Slurry Seal	1/1/20
279	795	JUANITA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,149	29	34,500	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
279	796	JUANITA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	739	29	22,200	81	0	100	0	3/24/25	New Construction - Initial	1/1/80
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Overlay - AC Thin	4/1/13
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Surface Treatment - Slurry Seal	4/1/13
280	801	KEARNY LN	SOUTH END	O'MALLEY	Local	AAC	E	2	06	163	31	6,848	91	0	100	0	2/24/25	Overlay - AC Thin	4/1/13
281	802	KEENE DR	WALNUT ST	EUCALYPTUS ST	Local	AC	E	2	24	1,525	36	54,252	76	43	49	8	4/15/25	Surface Treatment - Slurry Seal	7/1/12
281	807	KEENE DR	LAS LOMAS DR	WALNUT ST	Local	AC	E	2	19	746	39	28,626	64	54	40	6	4/15/25	Surface Treatment - Slurry Seal	7/1/12
282	810	KENRICH CT	WEST END	CHANNERY	Local	AAC	E	2	02	262	26	8,387	94	0	100	0	5/6/25	Surface Treatment - Slurry Seal	11/15/21
283	811	KENWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	25	646	36	23,756	76	49	40	11	3/11/25	Surface Treatment - Slurry Seal	4/1/24
284	812	KERN ST	WILSHIRE	BAJA	Local	AC	E	2	04	524	32	17,518	86	15	78	7	3/4/25	New Construction - Initial	1/1/80
285	813	KERNER WAY	WEST END	HARBOR	Local	AAC	E	2	35	492	30	16,335	88	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
286	814	KINGSTON DR	NORTH END	LA PRESA	Local	AAC	E	2	20	447	36	18,637	81	0	100	0	4/18/25	Overlay - AC Thin	8/1/07
287	815	KINLEY ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	870	30	26,670	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
287	817	KINLEY ST	FOXDALE AVE	GREGORY LN	Local	AC	E	2	02	901	30	26,850	89	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
288	820	KIRBY DR	CITY LIMIT	LA VEREDA DR	Local	AAC	E	2	13	541	30	16,980	92	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
288	821	KIRBY DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	883	32	28,128	71	16	77	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
288	826	KIRBY DR	W/END	KIRBY (NORTH CDS)	Local	AAC	E	2	13	89	32	5,315	70	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
288	827	KIRBY DR	W/END	KIRBY (SOUTH CDS)	Local	AAC	E	2	13	89	32	5,315	68	0	76	24	2/27/25	Surface Treatment - Slurry Seal	1/1/20
289	828	KIRKWOOD LN	ALMONDWOOD ST	COACHWOOD ST	Local	AAC	E	2	26	1,483	36	52,428	89	21	79	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
289	832	KIRKWOOD LN	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	566	32	19,687	86	17	80	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
291	834	KNUDSON ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	678	30	20,840	64	42	36	22	3/4/25	Surface Treatment - Slurry Seal	4/1/13
531	1700	KOOPMANS WY	WHITTIER BLVD	RANDALL AVE	Local	AC	E	2	01	544	32	17,864	72	20	80	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
302	856	LA CADENA WAY	GREGORY LN	SOUTH END	Local	AC	E	2	09	276	36	11,511	62	66	34	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
292	835	LA CASA AVE	BUENA VISTA AVE	DEL SUR AVE	Local	AC	E	2	19	717	36	23,424	64	68	32	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
292	837	LA CASA AVE	LAS LOMAS AVE	BUENA VISTA AVE	Local	AC	E	2	19	260	36	9,120	60	79	21	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
532	1701	LA HABRA HILLS DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	12	943	46	37,757	54	70	29	1	3/12/25	Surface Treatment - Slurry Seal	4/1/13
293	839	LA MIRADA ST	LINDAVER	LAGUNA	Local	AC	E	2	07	345	29	10,380	76	51	49	0	2/19/25	New Construction - Initial	1/1/80
294	840	LA PLAZA CT	NORTH END	LA PLAZA DR	Local	AAC	E	2	09	128	30	5,635	66	12	77	11	2/20/25	Surface Treatment - Slurry Seal	1/1/20
295	841	LA PLAZA DR	N END	LA HABRA BLVD	Local	AAC	E	2	09	1,455	36	52,416	69	8	87	5	2/20/25	Surface Treatment - Slurry Seal	1/1/20
296	843	LA PRESA DR	HILLSIDE	KINGSTON	Local	AAC	E	2	20	224	33	7,650	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	7/1/11
296	844	LA PRESA DR	SIERRA VISTA	WALNUT ST	Local	AAC	E	2	13	1,144	30	33,960	90	0	99	1	2/13/25	Overlay - AC Structural	1/1/20
296	845	LA PRESA DR	WALNUT ST	HILLSIDE ST	Local	AC	E	2	20	635	36	22,680	65	0	99	1	4/18/25	New Construction - Initial	1/1/80
298	847	LA SERNA AVE	SIERRA VISTA DR	WALNUT ST	Local	AAC	E	2	13	1,142	30	33,900	88	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
298	848	LA SERNA AVE	MARLEI DR	LAUNER DR	Local	AC	E	2	13	616	36	24,012	72	26	74	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
298	849	LA SERNA AVE	LAUNER DR	SIERRA VISTA DR	Local	AAC	E	2	13	244	31	7,840	80	0	67	33	2/27/25	Overlay - AC Structural	1/1/20
299	852	LA SERNA DR	WALNUT ST	EAST END	Local	AAC	E	2	20	492	36	19,291	76	0	83	17	2/27/25	Overlay - AC Thin	8/1/07
300	854	LA VEREDA DR	SIERRA VISTA DR	KIRBY	Local	AAC	E	2	13	686	37	25,882	87	0	98	2	2/13/25	Overlay - AC Structural	1/1/20
301	855	LA VITA PL	NORTH END	LA SERNA AVE	Local	AC	E	2	13	80	29	3,895	84	0	100	0	2/13/25	Surface Treatment - Slurry Seal	7/1/11
303	857	LADERA TERR	LAS RIENDAS	SOUTH END	Local	AC	E	2	32	524	26	10,677	72	35	65	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
304	858	LAGUNA DRIVE	LINDAVER DR	HACIENDA RD	Local	AC	E	2	07	1,430	30	42,540	59	70	30	0	2/19/25	New Construction - Initial	1/1/80
058	161	LAKEVIEW AVE	MONTWOOD AVE	IMPERIAL HWY	Local	AAC	E	2	32	1,144	35	41,220	75	7	75	18	3/11/25	Surface Treatment - Slurry Seal	1/1/20
058	865	LAKEVIEW AVE	MONTWOOD AVE	CITY LIMITS	Local	AC	E	2	32	363	35	13,104	68	62	37	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
047	149	LAS LOMAS DR	IDAHO ST	DERRY ST	Local	AAC	E	2	19	1,514	35	54,540	60	0	100	0	4/23/25	Surface Reconstruction - AC	7/1/12
047	150	LAS LOMAS DR	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,169	35	42,120	59	67	30	3	4/23/25	Surface Treatment - Slurry Seal	7/1/12
047	151	LAS LOMAS DR	WALNUT ST	EUCALYPTUS ST	Local	AC	E	2	24	1,320	36	47,088	64	67	24	9	4/23/25	Surface Treatment - Slurry Seal	7/1/12
307	874	LAS RIENDAS DR	HARBOR BLVD	CITY LIMITS	Local	AC	E	2	32	723	36	26,028	73	36	64	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
308	876	LATCHWOOD LN	DORWOOD	EAST END	Local	AAC	E	2	26	267	26	8,467	59	61	29	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
309	877	LAUNER DR	NORTH END	LA SERNA AVE	Local	AAC	E	2	13	787	32	28,300	82	0	100	0	2/27/25	Overlay - AC Structural	1/1/20
310	878	LAURA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,151	32	36,704	87	0	100	0	3/17/25	New Construction - Initial	1/1/80
311	879	LEMON ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	35	800	30	23,820	63	65	27	8	4/22/25	Surface Treatment - Slurry Seal	7/1/12
311	882	LEMON ST	PINEHURST AVE	FLORENCE AVE	Local	AAC	E	2	35	1,247	30	37,050	76	0	90	10	3/26/25	Surface Reconstruction - AC	7/1/12
312	885	LEMON TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	400	36	16,195	97	0	1	99	3/12/25	Overlay - AC Structural	2/1/23
051	155	LEMON TREE DR	SMOKE TREE DR	OLIVE TREE DR	Local	AAC	E	2	12	851	35	30,672	100	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
314	889	LEMONWOOD DR	LAKEVIEW AVE	ORANGEWOOD ST	Local	AC	E	2	32	205	32	6,560	85	46	54	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
314	890	LEMONWOOD DR	ORANGEWOOD ST	EAST END	Local	AC	E	2	32	194	32	7,733	77	8	55	37	3/11/25	Surface Treatment - Slurry Seal	1/1/20
315	891	LEORA ST	PINEHURST AVE	FLORENCE AVE	Local	AC	E	2	16	994	30	30,014	78	29	59	12	3/3/25	Surface Treatment - Cape Seal	4/1/13
315	893	LEORA ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	16	299	30	8,850	90	49	51	0	3/3/25	New Construction - Initial	1/1/80
316	899	LESLIE ST	NORTH END	IMPERIAL HWY	Local	AAC	E	2	32	1,305	36	49,127	61	59	27	14	3/11/25	Overlay - AC Structural	1/1/20
317	901	LIBERTY ST	GRACE AVE	PACIFIC AVE	Local	AC	E	2	31	450	26	11,492	83	0	100	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
317	903	LIBERTY ST	OLIVE AVE	SOUTH END	Local	AAC	E	2	30	435	26	13,025	66	30	50	20	3/16/25	Overlay AC Thin	11/30/10
318	904	LIME ST	MORRIS AVE	BERKLEY AVE	Local	AAC	E	2	02	800	30	22,820	84	0	93	7	2/25/25	Surface Treatment - Slurry Seal	11/15/21
319	907	LINDA AVE	SIERRA VISTA DR	CITRUS DR	Local	AC	E	2	13	793	29	23,820	77	8	52	40	2/27/25	Surface Treatment - Slurry Seal	1/1/20
319	908	LINDA AVE	SIERRA VISTA DR	EAST END	Local	AAC	E	2	13	347	30	12,205	71	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
062	111	LINDAUER DR	WHITTIER BLVD	HACIENDA RD	Local	AC	E	2	07	2,034	30	62,620	60	64	36	0	2/19/25	New Construction - Initial	1/1/74
062	915	LINDAUER DR	WEST END	RUSSELL ST	Local	AC	E	2	08	204	33	8,582	94	3	97	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
322	916	LINDEN LN	BROOKDALE AVE	EAST END	Local	AAC	E	2	34	272	26	8,867	75	46	46	8	3/26/25	Surface Reconstruction - AC	8/1/05
322	917	LINDEN LN	WEST END	BROOKDALE AVE	Local	AAC	E	2	34	93	26	4,213	80	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
323	918	LOIS ST	GREENWOOD AVE	FLORENCE AVE	Local	AC	E	2	21	979	32	31,360	65	49	47	4	4/21/25	Surface Treatment - Slurry Seal	1/1/20
323	922	LOIS ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	21	785	31	25,152	78	1	99	0	4/21/25	Surface Treatment - Slurry Seal	1/1/20
526	1510	LOMA NORTE PL	BROOKDALE AVE	SOUTH END	Local	AC	E	2	40	235	28	8,207	73	47	43	10	3/25/25	Surface Treatment - Slurry Seal	4/1/13
324	925	LOMA VERDE AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	63	0	82	18	3/16/25	Slurry Seal or Chip Seal	8/1/05
325	926	LORAWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	623	36	22,928	92	0	81	19	3/10/25	Surface Treatment - Slurry Seal	1/1/20
326	927	LORELLA AVE	DEANNA ST	IDAHO ST	Local	AAC	E	2	10	1,428	36	51,192	77	9	91	0	2/26/25	Surface Reconstruction - AC	8/1/08
326	929	LORELLA AVE	MARIN ST	DEANNA ST	Local	AAC	E	2	10	562	36	20,766	87	17	83	0	2/25/25	Surface Reconstruction - AC	8/1/08
327	932	LYDIA ST	HIGHLANDER AVE	SOUTH END	Local	AC	E	2	14	963	30	30,685	71	44	45	11	2/26/25	Surface Treatment - Slurry Seal	8/4/23
328	935	LYNWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	622	29	18,690	90	0	38	62	3/10/25	Surface Treatment - Slurry Seal	1/1/20
329	937	MACY ST	RUSSELL ST	CITY LIMIT	Local	AC	E	2	01	743	35	26,784	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
330	940	MADONNA LN	PALM	EAST END	Local	AC	E	2	40	222	32	8,741	83	0	95	5	3/24/25	New Construction - Initial	1/1/80
331	941	MAIN ST	NORTH END	PINEHURST AVE	Local	AC	E	2	28	257	29	9,028	87	22	78	0	4/17/25	New Construction - Initial	1/1/80
331	942	MAIN ST	FIRST AVE	SECOND ST	Local	AC	E	2	29	306	46	13,800	56	77	23	0	4/17/25	Surface Treatment - Cape Seal	4/1/13
331	943	MAIN ST	FLORENCE AVE	SOUTH END	Local	AC	E	2	28	276	39	12,671	63	74	26	0	4/2/25	Surface Treatment - Slurry Seal	4/1/13
332	944	MAPLE ST	PINEHURST AVE	FRANCIS AVE	Local	AAC	E	2	35	743	30	22,110	69	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
332	945	MAPLE ST	WHITTIER BLVD	SOUTH END	Local	AC	E	2	35	296	32	11,267	41	74	22	4	4/22/25	Surface Treatment - Slurry Seal	7/1/12
333	946	MAPLE TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	263	36	11,043	92	0	81	19	3/12/25	Overlay - AC Structural	2/1/23
334	947	MARCIA DR	RUSSELL ST	NORTH END	Local	AC	E	2	01	337	32	8,317	69	7	93	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
335	948	MARCINE ST	NORTH END	CARMELA	Local	AAC	E	2	37	317	32	11,717	87	0	100	0	3/17/25	Surface Reconstruction - AC	4/1/13
336	949	MARDINA WAY	DEXFORD DR	GREGORY LN	Local	AAC	E	2	02	561	36	19,764	80	36	64	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
337	950	MARIAN ST	LA HABRA BLVD	WALKER AVE	Local	AAC	E	2	15	1,077	30	33,060	76	24	52	24	3/4/25	Overlay - AC Thin	8/1/08
337	951	MARIAN ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	E	2	14	1,277	30	39,060	61	43	36	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
338	954	MARIE ST	OAKLAND	STORY	Local	AAC	E	2	03	719	31	23,040	76	30	70	0	2/20/25	Overlay - AC Thin	8/1/08
339	955	MARIN ST	LORELLA AVE	HILLANDALE AVE	Local	AC	E	2	10	548	36	20,478	63	59	41	0	2/25/25	New Construction - Initial	1/1/80
038	139	MARIPOSA ST	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,100	36	36,420	74	46	52	2	3/5/25	New Construction - Initial	1/1/92
038	146	MARIPOSA ST	LAMBERT RD	SHEFFIELD DR	Local	AAC	E	2	05	965	36	34,524	81	0	20	80	2/26/25	Surface Reconstruction - AC	4/1/13
341	963	MARLBORO ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	84	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
342	964	MARLEI DR	ENTRADA DR	LA SERNA AVE	Local	AC	E	2	13	717	32	23,694	77	9	91	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
037	138	MARTINEZ DR	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,169	35	42,120	84	8	84	8	3/9/25	New Construction - Initial	1/1/92
344	968	MATEO AVE	VALLEJO	JUANITA	Local	AC	E	2	38	621	26	15,834	77	57	43	0	3/24/25	New Construction - Initial	1/1/80
345	969	MCCART AVE	ROSCOE	CITY LIMIT	Local	AC	E	2	41	334	36	12,774	85	0	100	0	3/17/25	New Construction - Initial	1/1/80
346	970	MCFADDEN ST	NORTH END	SOUTH END	Local	AAC	E	2	18	541	30	21,484	78	12	88	0	3/4/25	Overlay - AC Thin	8/1/07
347	973	MCPHERSON ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,007	44	43,876	65	67	33	0	4/22/25	Surface Treatment - Slurry Seal	8/4/23
347	977	MCPHERSON ST	STEARNS AVE	LA HABRA BLVD	Local	AAC	E	2	35	637	30	18,630	91	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
347	978	MCPHERSON ST	FRANCIS AVE	STEARNS AVE	Local	AAC	E	2	35	655	29	19,680	93	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
347	985	MCPHERSON ST	ROSE AVE	FRANCIS AVE	Local	AAC	E	2	35	474	30	14,720	63	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
348	987	MEADOW LARK ST	BROOKDALE AVE	COUNTRY LN	Local	AC	E	2	34	804	36	29,478	83	0	94	6	3/25/25	Slurry Seal or Chip Seal	8/1/05
041	142	MERCED AVE	BEACH BLVD	EAST END	Local	AAC	E	2	10	1,280	36	50,580	70	48	33	19	3/5/25	Overlay - AC Thin	8/1/05
041	996	MERCED AVE	MARIPOSA ST	BEACH BLVD	Local	AC	E	2	04	512	36	18,000	75	42	45	13	3/4/25	New Construction - Initial	1/1/80
354	1000	MIDDLETON ST	SHEFFIELD	WHITEBOOK	Local	AAC	E	2	11	494	36	18,534	80	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
355	1001	MIKINDA AVE	EDGEMONT	ANTOINETTE	Local	AC	E	2	08	656	32	20,736	95	4	96	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
355	1724	MIKINDA AVE	MACY ST	RANDALL AVE	Local	AC	E	1	01	813	31	26,815	75	13	86	1	2/17/25	Surface Treatment - Slurry Seal	8/4/23
035	136	MISSION ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	894	35	32,220	74	41	55	4	2/20/25	Overlay - AC Thin	8/1/08
013	67	MONTE VISTA ST	WHITTIER BLVD	HIGHLANDER AVE	Local	AAC	E	2	16	1,316	39	52,680	66	56	26	18	2/26/25	Overlay - AC Structural	8/1/05
013	68	MONTE VISTA ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AAC	C	2	16	1,289	40	49,084	70	59	17	24	2/26/25	Overlay - AC Structural	8/1/05
013	69	MONTE VISTA ST	LA HABRA BLVD	FOURTH AVE	Local	AAC	C	2	15	1,446	36	52,315	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
013	70	MONTE VISTA ST	FOURTH AVE	LAMBERT RD	Local	AAC	C	2	18	1,109	36	41,070	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
357	1006	MONTEREY ST	LINDAUER DR	LAGUNA DR	Local	AC	E	2	07	475	30	14,070	70	44	50	6	2/19/25	New Construction - Initial	1/1/80
057	1012	MONTWOOD AVE	VALWOOD ST	EUCLID ST	Local	AAC	E	2	25	138	35	5,004	92	0	40	60	4/15/25	Overlay - AC Structural	4/1/24
057	160	MONTWOOD AVE	EUCLID ST	LAKEVIEW AVE	Local	AC	E	2	32	2,259	35	81,360	69	64	35	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
360	1013	MORRIS AVE	DEXFORD DR	EAST END	Local	AAC	E	2	02	321	36	11,124	78	49	51	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
362	1015	MOUNTAIN VIEW AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	37	47,397	69	36	53	11	3/4/25	Overlay - AC Thin	8/1/07
362	1016	MOUNTAIN VIEW AVE	LAMBERT RD	WALNUT ST	Local	AC	E	2	18	713	37	27,631	57	66	33	1	3/16/25	New Construction - Initial	1/1/80
363	1018	MUIR WAY	WILSON	EAST END	Local	AC	E	2	41	108	32	5,093	86	0	100	0	3/17/25	New Construction - Initial	1/1/80
364	1019	NADA STREET	EL PORTAL	SOUTH END	Local	AAC	E	2	09	147	30	7,037	42	74	26	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
365	1020	NANTUCKET ST	SHELburne ST	NORTH END	Local	AC	E	2	37	704	36	27,142	75	46	32	22	3/25/25	New Construction - Initial	1/1/80
365	1022	NANTUCKET ST	BRIGHTON ST	SHELburne ST	Local	AC	E	2	37	619	36	22,140	77	59	39	2	3/25/25	New Construction - Initial	1/1/80
366	1024	NANWOOD ST	RONWOOD	PATWOOD	Local	AC	E	2	25	372	36	14,142	76	57	43	0	3/11/25	Surface Treatment - Slurry Seal	4/1/24
367	1025	NASHUA ST	RYE AVE	LAS LOMAS DR	Local	AC	E	2	19	447	35	16,128	70	43	32	25	4/15/25	Surface Treatment - Slurry Seal	7/1/12
368	1027	NORMA ST	LORELLA	HILLANDALE	Local	AAC	E	2	10	613	36	21,852	75	34	66	0	2/25/25	Overlay - AC Thin	8/1/08
369	1028	NORTH HILLS DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,236	36	44,352	85	60	37	3	3/24/25	Surface Treatment - Slurry Seal	4/1/13
369	1029	NORTH HILLS DR	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	739	36	26,316	87	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
370	1032	NORTHGATE WAY	STEARNS AVE	EASTPARK	Local	AC	E	2	38	223	32	6,944	89	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
371	1033	OAK TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	93	38	5,329	91	0	0	100	3/12/25	Overlay - AC Structural	2/1/23
372	1034	OAKLAND DR	DEXFORD ST	STORY AVE	Local	AAC	E	2	03	1,172	36	41,760	71	47	53	0	2/20/25	Overlay - AC Thin	8/1/08
372	1036	OAKLAND DR	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,014	36	35,640	73	31	62	7	2/20/25	Overlay - AC Thin	8/1/08
373	1043	OLINDA AVE	WALNUT ST	N/END	Local	AAC	E	2	20	1,058	36	39,397	85	0	77	23	2/13/25	Surface Reconstruction - AC	8/1/05
373	1044	OLINDA AVE	KIRBY DR	NORTH END	Local	AAC	E	2	13	380	30	12,925	76	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
519	1417	OLIVE AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,415	35	45,025	74	7	72	21	3/4/25	Overlay - AC Thin	8/1/07
042	143	OLIVE AVE	EUCLID ST	LAMBERT RD	Local	AAC	E	2	30	1,619	35	58,320	83	51	49	0	3/16/25	Overlay - AC Thin	8/1/07
050	1053	OLIVE TREE DR	WEST END	SMOKE TREE DR	Local	AAC	E	2	12	238	36	6,421	97	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
050	154	OLIVE TREE DR	SMOKE TREE DR	IDAHO ST	Local	AAC	E	2	12	1,044	35	37,620	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
376	1054	O'MALLEY LN	PENDLETON	KEARNEY	Local	AC	E	2	06	313	36	11,802	75	0	99	1	2/18/25	Surface Treatment - Slurry Seal	4/1/13
377	1055	ORANGE ST	CITY LIMIT	STEVENS AVE	Local	AAC	E	2	27	823	30	25,062	78	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
377	1056	ORANGE ST	BISHOP DR	WHITTIER BLVD	Local	AC	E	2	27	774	30	23,040	83	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
377	1057	ORANGE ST	STEVENS AVE	BISHOP DR	Local	AAC	E	2	27	916	29	27,510	79	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
377	1058	ORANGE ST	ROSE AVE	SOUTH END	Local	AC	E	2	28	944	36	33,935	85	17	83	0	3/26/25	New Construction - Initial	1/1/80
377	1061	ORANGE ST	WHITTIER BLVD	ROSE AVE	Local	AC	E	2	28	1,156	36	40,968	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
377	1745	ORANGE ST	ERNA AVE	ALLEY	Local	AC	E	2	28	191	34	6,720	75	58	29	13	4/22/25	New Construction - Initial	1/1/80
378	1068	ORANGEWOOD ST	PARKWOOD AVE	SOUTH END	Local	AC	E	2	32	907	32	30,627	76	32	41	27	3/11/25	Surface Treatment - Slurry Seal	1/1/20
379	1072	ORCHARD PL	MONTTE VISTA	WEST END	Local	AC	E	2	16	638	30	20,715	89	22	78	0	3/3/25	Surface Treatment - Slurry Seal	4/1/13
380	1073	ORCHID AVE	BROOKWOOD	TROPICANA	Local	AC	E	2	40	314	36	11,910	92	0	98	2	3/17/25	New Construction - Initial	1/1/80
381	1074	OTIS AVE	LIME	EAST END	Local	AAC	E	2	02	164	32	5,056	75	25	75	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
382	1075	PACIFIC AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	31	1,289	33	39,165	80	13	77	10	2/14/25	Surface Treatment - Slurry Seal	1/1/20
383	1077	PAINTER ST	STORY AVE	OAKLAND	Local	AAC	E	2	03	600	32	19,008	75	31	66	3	2/20/25	Surface Reconstruction - AC	8/1/08
384	1078	PALERMO WAY	NORTH END	SOUTH END	Local	AC	E	2	41	1,010	26	29,562	75	15	55	30	3/17/25	New Construction - Initial	1/1/80
005	1738	PALM ST	BROOKDALE AVE	MADONNA LN	Local	AAC	E	2	40	487	26	14,100	97	0	16	84	3/24/25	Overlay - AC Structural	3/1/23
005	71	PALM ST	CITY LIMIT	BROOKDALE AVE	Local	AAC	C	2	37	1,200	36	43,200	97	0	35	65	3/24/25	Overlay - AC Structural	3/1/23
005	72	PALM ST	MADONNA LN	WHITTIER AVE	Local	AAC	C	2	40	928	35	33,444	96	0	23	77	3/24/25	Overlay - AC Structural	3/1/23
385	1080	PAMELA LN	NORTH END	NORTH HILLS	Local	AC	E	2	37	248	26	8,047	84	53	47	0	3/24/25	New Construction - Initial	1/1/80
386	1081	PARK AVE	BUENA VISTA	SOUTH END	Local	AC	E	2	19	240	27	7,824	49	28	68	4	4/21/25	3 in AC OVERLAY	7/1/12
387	1082	PARK INDUSTRIAL DR	CYPRESS ST	COMMERCIAL	Local	AC	E	2	36	985	36	33,300	68	45	50	5	4/21/25	Surface Treatment - Slurry Seal	4/1/13
550	997	PARK LA HABRA MOBILE HOMES	LAMBERT RD	NORTH END	Local	AC	E	2	10	3,244	19	77,550	94	0	78	22	3/4/25	Complete Reconstruction - AC	8/15/22
388	1083	PARK PL	GREENWOOD	ROSE	Local	AC	E	2	21	299	26	7,622	74	55	45	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
389	1084	PARK WAY	PARK AVE	EAST END	Local	AC	E	2	19	204	26	5,535	51	66	16	18	4/25/25	Surface Treatment - Slurry Seal	7/1/12
052	1085	PARKWOOD AVE	BURWOOD CT	LAKEVIEW AVE	Local	AC	E	2	32	1,060	36	38,910	85	0	97	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
052	1090	PARKWOOD AVE	LAKEVIEW AVE	EAST END	Local	AC	E	2	32	434	32	15,491	84	1	87	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
052	1094	PARKWOOD AVE	SCHOOLWOOD DR	VIVIWOOD PL	Local	AAC	E	2	25	988	35	35,604	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
052	156	PARKWOOD AVE	EUCLID ST	VIVIWOOD PL	Local	AAC	E	2	25	959	35	34,560	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
391	1098	PARSONS ST	FOXDALE AVE	HOLLY AVE	Local	AAC	E	2	02	330	32	11,310	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
391	1099	PARSONS ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	872	30	25,980	91	22	70	8	2/25/25	Surface Treatment - Slurry Seal	11/15/21
053	1100	PATWOOD DR	IRONWOOD ST	LORAWOOD ST	Local	AC	E	2	32	507	36	18,786	90	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
053	1102	PATWOOD DR	WALNUT ST	KENWOOD ST	Local	AC	E	2	25	1,235	36	44,994	75	52	36	12	3/11/25	Surface Treatment - Slurry Seal	4/1/24
053	157	PATWOOD DR	GWYNWOOD AVE	SANDLEWOOD AVE	Local	AC	E	2	25	404	35	14,580	58	78	16	6	4/15/25	Surface Treatment - Slurry Seal	4/1/24
393	1105	PENDLETON LN	O'MALLEY	ZEKE AND ELSIE	Local	AC	E	2	06	290	32	10,780	77	0	93	7	2/18/25	Surface Treatment - Slurry Seal	4/1/13
394	1106	PENMAR AVE	CLIFTON	CYPRESS ST	Local	AAC	E	2	31	1,028	30	30,660	84	25	74	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
395	1107	PINE TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	222	38	10,231	96	0	25	75	3/12/25	Overlay - AC Structural	2/1/23
396	1108	PINEHURST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,247	30	36,990	77	45	53	2	3/26/25	New Construction - Initial	1/1/80
396	1110	PINEHURST AVE	CYPRESS ST	GREENWOOD AVE	Local	AC	E	2	35	1,350	38	50,844	83	44	41	15	3/26/25	Surface Treatment - Slurry Seal	7/1/12
396	1112	PINEHURST AVE	ELM ST	EUCLID ST	Local	AC	E	2	21	295	30	8,490	87	31	69	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
396	1114	PINEHURST AVE	HILLSIDE ST	ELM ST	Local	AC	E	2	21	287	29	8,640	75	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
396	1118	PINEHURST AVE	MONTTE VISTA ST	LEORA ST	Local	AC	E	2	16	625	30	19,100	91	25	62	13	3/3/25	Surface Treatment - Slurry Seal	4/1/13
397	1120	PINEWOOD PL	SANDLEWOOD	SOUTH END	Local	AC	E	2	26	169	33	7,102	77	27	53	20	3/10/25	Surface Treatment - Slurry Seal	1/1/20
398	1121	PORTOLA AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	66	0	76	24	3/16/25	Slurry Seal or Chip Seal	8/1/05
399	1122	RADCLIFF PL	NORTH END	REDCOACH	Local	AAC	E	2	05	182	26	6,283	94	0	100	0	2/19/25	Overlay - AC Rubber	4/1/13
400	1123	RAIN TREE DR	LEMON TREE CT	IDAHO ST	Local	AAC	E	2	12	578	35	20,844	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
401	1125	RAINIER WY	VALLEY HOME	EAST END	Local	AAC	E	2	02	218	26	7,193	88	41	59	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
402	1126	RAMONA AVE	PALM	PALERMO	Local	AC	E	2	41	1,123	36	40,284	76	22	71	7	3/17/25	New Construction - Initial	1/1/80
528	1508	RANDALL AVE	VALLEY HOME AVE	KOOPMANS WAY	Local	AC	E	2	01	983	31	30,995	77	23	50	27	2/18/25	Surface Treatment - Slurry Seal	8/4/23
528	1720	RANDALL AVE	KOOPMANS WAY	MACY ST	Local	AC	E	2	01	681	32	22,520	77	55	43	2	2/18/25	Surface Treatment - Slurry Seal	8/4/23
528	1721	RANDALL AVE	MACY ST	RUSSELL ST	Local	AC	E	2	01	1,274	32	42,858	64	56	43	1	2/17/25	New Construction - AC	1/1/18
528	1722	RANDALL AVE	RUSSELL ST	JANISON DR	Local	AC	E	2	01	718	35	25,569	62	64	36	0	2/17/25	New Construction - AC	1/1/18
540	1729	RANDALL ST	RANDALL AVE	END	Local	AC	E	2	01	119	31	6,126	59	19	77	4	2/17/25	New Construction - AC	1/1/18
403	1128	RAYMOND ST	OAKLAND	STORY	Local	AAC	E	2	03	605	32	19,168	73	37	61	2	2/20/25	Overlay - AC Thin	8/1/08
403	1129	RAYMOND ST	WILSHIRE	BLAKE	Local	AAC	E	2	04	547	32	18,062	80	57	43	0	3/9/25	Overlay - AC Thin	8/1/08
404	1130	REBECCA DR	SILLIKER	IDAHO ST	Local	AAC	E	2	08	862	36	31,782	67	33	62	5	2/14/25	Surface Treatment - Slurry Seal	1/1/20
405	1132	RED COACH LN	RIDGEHAVEN DR	CAJON DR	Local	AC	E	2	05	1,167	26	29,718	70	29	51	20	2/19/25	Surface Treatment - Slurry Seal	8/4/23
406	1136	REDWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	299	26	9,299	77	17	81	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
407	1137	RIDGEHAVEN DR	CAJON DR	GREENBRIER LN	Local	AC	E	2	05	708	36	26,238	71	54	46	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
407	1138	RIDGEHAVEN DR	GRAYVILLE DR	BRASS LANTERN DR	Local	AAC	E	2	06	988	36	36,318	89	0	100	0	2/18/25	Surface Reconstruction - AC	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
407	1141	RIDGEHAVEN DR	LAMBERT RD	WOODBRIER DR	Local	AC	E	2	05	1,169	35	42,120	78	13	87	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
407	1144	RIDGEHAVEN DR	WOODBRIER DR	CAJON DR	Local	AC	E	2	05	632	35	22,788	69	78	22	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
408	1146	RIDGEWAY LN	ALLEY NORTH END	SOUTH END	Local	AC	E	2	09	729	38	29,497	77	8	87	5	2/24/25	Surface Treatment - Slurry Seal	1/1/20
027	122	RIGSBY ST	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	90	24	76	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
027	123	RIGSBY ST	GREGORY LN	WHITTIER BLVD	Local	AAC	E	2	02	1,324	35	47,700	87	23	77	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
410	1152	RIO VERDE DRIVE	CHANNY	EAST END	Local	AAC	E	2	02	250	33	9,825	83	29	71	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
533	1703	RISNER WY	IDAHO ST	WESTHILLS ESTATE GATE	Local	AAC	E	2	26	340	51	13,834	87	24	60	16	3/11/25	Overlay - AC Structural	3/1/23
533	1713	RISNER WY	IDAHO ST	WESTRIDGE GATE	Local	AC	E	2	26	274	50	14,025	74	25	54	21	3/11/25	New Construction - AC	1/1/80
533	1714	RISNER WY	CROSS GUTTER	BARRIER	Local	AC	E	2	26	113	50	5,814	77	0	75	25	3/11/25	New Construction - AC	1/1/80
412	1154	ROANNE DR	CITY LIMIT	ARBOLITA DR	Local	AC	E	2	34	651	35	23,472	73	19	81	0	3/26/25	Slurry Seal or Chip Seal	8/1/05
413	1158	ROANOKE AVE	RUSSELL	GORDON	Local	AAC	E	2	01	267	32	9,044	81	0	100	0	2/18/25	Overlay - AC Thin	4/1/13
414	1159	ROANOKE ST	CANFIELD	RUSSELL	Local	AC	E	2	01	577	32	19,074	77	8	92	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
415	1160	ROBIN WAY	WEST END	IDAHO ST	Local	AC	E	2	09	178	26	6,453	68	19	81	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
416	1161	ROCKINGHORSE LN	NORTH END	BROOKDALE AVE	Local	AC	E	2	37	1,031	37	40,824	85	57	37	6	3/24/25	New Construction - Initial	1/1/80
417	1164	RODDY DR	ARBOLITA DR	BROOKDALE AVE	Local	AC	E	2	34	509	36	19,074	86	0	100	0	3/25/25	New Construction - Initial	1/1/80
417	1165	RODDY DR	BROOKDALE AVE	RODDY WAY	Local	AC	E	2	34	229	36	8,028	72	31	60	9	3/25/25	New Construction - Initial	1/1/80
418	1167	RODDY WAY	RODDY DR	EAST END	Local	AC	E	2	34	326	27	11,645	74	20	73	7	3/25/25	New Construction - Initial	1/1/80
419	1168	RONWOOD AVE	WALNUT ST	NANWOOD ST	Local	AC	E	2	25	569	36	21,018	81	48	47	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
420	1170	ROSCOE ST	MCCART AVE	LA HABRA BLVD	Local	AC	E	2	41	776	36	28,686	80	13	82	5	3/17/25	New Construction - Initial	1/1/80
421	1172	ROSE AVE	COLLEGE ST	SUNSET ST	Local	AC	E	2	35	489	26	12,558	64	13	46	41	4/18/25	Surface Treatment - Slurry Seal	7/11/12
421	1173	ROSE AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	623	30	18,510	78	0	68	32	3/26/25	New Construction - Initial	1/1/80
421	1174	ROSE AVE	ORANGE ST	EAST END	Local	AC	E	2	28	348	26	10,843	80	6	94	0	3/26/25	New Construction - Initial	1/1/80
421	1175	ROSE AVE	ALLEY W/LOIS	EUCLID ST	Local	AC	E	2	21	771	26	19,742	85	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
421	1176	ROSE AVE	MCPHERSON ST	COLLEGE ST	Local	AAC	E	2	35	260	30	8,300	58	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
423	1179	ROSECREST AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	1,292	30	38,580	81	13	87	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
423	1180	ROSECREST AVE	LAMBERT RD	EUCLID ST	Local	AC	E	2	24	1,001	30	31,280	70	0	100	0	4/21/25	2 in overlay	7/1/12
424	1183	ROSEWOOD LN	ORANGEWOOD	EAST END	Local	AC	E	2	32	194	32	7,783	85	17	83	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
425	1184	ROXBURY TERR	GREENBRIER	SOUTH END	Local	AAC	E	2	05	96	28	4,483	93	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
014	1185	RUSSELL ST	HACIENDA RD	GREENVIEW DR	Local	AC	E	2	08	841	32	26,720	87	19	80	1	2/19/25	Surface Treatment - Slurry Seal	1/1/20
014	1188	RUSSELL ST	GREENVIEW DR	SOUTH END	Local	AC	E	2	08	902	32	31,331	86	15	85	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
014	1191	RUSSELL ST	WEST END	FARRINGTON DR	Local	AC	E	2	07	191	36	8,380	77	28	64	8	2/19/25	Overlay - AC Rubber	4/1/13
014	1512	RUSSELL ST	HACIENDA RD	FARRINGTON DR	Local	AAC	E	2	07	355	36	12,564	76	17	76	7	2/19/25	Overlay - AC Thin	4/1/13
014	1725	RUSSELL ST	MACY ST	CREEK LN	Local	AC	E	2	01	1,114	34	39,952	71	15	83	2	2/17/25	Surface Treatment - Slurry Seal	8/4/23
014	1726	RUSSELL ST	CUL-DE-SAC		Local	AC	E	2	01	93	71	5,715	68	0	100	0	2/17/25	New Construction - AC	1/1/18
427	1192	RYAN AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	762	29	22,890	68	24	69	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
427	1195	RYAN AVE	WALNUT ST	SIERRA VISTA DR	Local	AC	E	2	13	1,151	30	34,170	76	52	35	13	2/27/25	Surface Treatment - Slurry Seal	1/1/20
428	1198	RYE AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,144	36	41,718	60	59	23	18	4/15/25	Surface Treatment - Slurry Seal	7/1/12
429	1199	RYE CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	70	50	50	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
430	1200	SAN JOSE AVE	BEACH BLVD	MARIN ST	Local	AC	E	2	10	583	36	20,556	62	43	57	0	2/25/25	New Construction - Initial	1/1/80
430	1201	SAN JOSE AVE	MISSION ST	BEACH BLVD	Local	AAC	E	2	03	493	36	17,316	74	0	90	10	5/6/25	Overlay - AC Thin	8/1/08
015	74	SANDLEWOOD AVE	IDAHO ST	ALMONDWOOD ST	Local	AC	E	2	25	1,156	35	41,652	82	15	55	30	3/10/25	Surface Treatment - Slurry Seal	1/1/20
015	75	SANDLEWOOD AVE	ALMONDWOOD ST	PATWOOD DR	Local	AC	E	2	25	1,013	35	36,504	79	20	70	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
015	76	SANDLEWOOD AVE	EUCLID ST	PATWOOD DR	Local	AC	E	2	25	1,449	35	52,200	56	71	17	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
431	1203	SANDOWN ST	NORTH END	CHESHAM	Local	AC	E	2	19	188	26	6,413	65	36	36	28	4/15/25	Surface Treatment - Slurry Seal	7/1/12
020	112	SANSINENA LN	HACIENDA RD	EDGE MONT ST	Local	AAC	E	2	08	280	33	9,273	87	18	74	8	2/19/25	Overlay - AC Structural	1/1/20
020	7150	SANSINENA LN	EDGE MONT ST	ANTOINETTE DR	Local	AC	E	2	08	747	33	24,684	68	55	35	10	2/19/25	Surface Treatment - Slurry Seal	1/1/20
433	1207	SCHOOLWOOD DR	ALMONDWOOD ST	PARKWOOD AVE	Local	AC	E	2	25	1,809	30	56,480	74	35	45	20	3/11/25	Surface Treatment - Slurry Seal	4/1/24
434	1208	SECOND AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	29	1,288	34	43,588	82	40	51	9	4/17/25	Overlay - AC Structural	1/1/15
434	1209	SECOND AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	641	30	19,050	86	0	87	13	4/15/25	Surface Treatment - Slurry Seal	4/1/13
435	1213	SHADY VALLEY	VALLEY HOME AVE	EAST END	Local	AAC	E	2	01	420	34	15,855	80	31	69	0	2/18/25	Overlay - AC Thin	4/1/13
546	1737	SHADYCREST LN	PALM ST	END	Local	AC	E	2	40	614	11	10,838	63	64	22	14	5/5/25	New Construction - AC	1/1/18
543	1739	SHARON WAY	VALLEY HOME AVE	END	Local	AC	E	2	01	774	31	27,001	80	28	72	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
436	1214	SHARPLESS ST	CANFIELD	RUSSELL	Local	AC	E	2	01	592	33	19,338	74	0	100	0	2/18/25	New Construction - Initial	1/1/80
436	1734	SHARPLESS ST	RUSSELL ST	RANDALL AVE	Local	AC	E	2	01	837	31	26,528	79	12	88	0	2/18/25	New Construction - AC	1/1/18
437	1215	SHEFFIELD DR	GLENCLIFF ST	MIDDLETON DR	Local	AC	E	2	11	439	35	15,840	83	0	94	6	2/26/25	Surface Treatment - Slurry Seal	8/4/23
437	1216	SHEFFIELD DR	MARIPOSA ST	BEACH BL	Local	AC	E	2	05	459	36	16,308	86	9	57	34	2/26/25	New Construction - Initial	1/1/80
437	1217	SHEFFIELD DR	MIDDLETON DR	WHITEBOOK DR	Local	AC	E	2	11	565	35	20,376	83	0	100	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
437	1218	SHEFFIELD DR	STURBRIDGE DR	MARIPOSA ST	Local	AC	E	2	05	290	36	10,224	91	0	100	0	2/26/25	New Construction - Initial	1/1/80
438	1219	SHELBURNE ST	BROOKFIELD AVE	NANTUCKET ST	Local	AC	E	2	37	550	36	20,406	82	41	59	0	3/25/25	New Construction - Initial	1/1/80
438	1220	SHELBURNE ST	NANTUCKET ST	WHITTIER BLVD	Local	AC	E	2	37	739	36	26,460	93	0	100	0	3/25/25	New Construction - Initial	1/1/80
439	1223	SIDON AVE	MARIPOSA ST	EAST END	Local	AAC	E	2	04	469	30	15,865	82	14	86	0	3/4/25	Surface Reconstruction - AC	8/1/08
439	1224	SIDON AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	741	31	23,744	90	12	88	0	3/5/25	Overlay - AC Thin	8/1/08
439	1225	SIDON AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	1,099	32	34,784	83	35	63	2	3/5/25	Overlay - AC Thin	8/1/08
440	1226	SIERRA VISTA DR	CITY LIMITS	LA VEREDA DR	Local	AAC	E	2	13	860	30	35,908	75	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
440	1228	SIERRA VISTA DR	LA VEREDA DR	LA PRESA DR	Local	AC	E	2	13	831	35	29,952	89	0	98	2	2/13/25	Surface Treatment - Slurry Seal	1/1/20
440	1229	SIERRA VISTA DR	LA PRESA DR	LUNDA AVE	Local	AAC	E	2	13	596	36	21,240	72	0	82	18	2/27/25	Surface Treatment - Slurry Seal	1/1/20
021	113	SILLIKER AVE	HACIENDA RD	EDGE MONT ST	Local	AC	E	2	08	294	35	10,620	87	0	100	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
021	1233	SILLIKER AVE	REBECCA DR	IDAHO ST	Local	AAC	E	2	08	522	36	18,792	73	0	88	12	2/27/25	Surface Treatment - Slurry Seal	1/1/20
021	1234	SILLIKER AVE	EDGE MONT ST	RUSSELL ST	Local	AC	E	2	08	633	32	20,064	92	2	98	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
442	1237	SILVERSPUR LN	CANDLEWOOD DR	RIDGEHAVEN DR	Local	AC	E	2	05	332	26	9,382	77	0	26	74	2/25/25	Surface Treatment - Cape Seal	4/1/13
442	1238	SILVERSPUR LN	RIDGEHAVEN DR	SILVERSPUR WAY	Local	AC	E	2	05	573	36	21,378	63	62	18	20	2/25/25	Surface Treatment - Slurry Seal	8/4/23
444	1240	SILVERSPUR WAY	SILVERSPUR LN	SOUTH END	Local	AC	E	2	05	258	26	9,253	75	43	57	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
444	1241	SMOKE TREE CT	LEMON TREE	SOUTH END	Local	AAC	E	2	12	210	32	8,515	97	0	6	94	3/12/25	Overlay - AC Structural	2/1/23
445	1242	SMOKE TREE DR	OLIVE TREE DR	LEMON TREE CT	Local	AAC	E	2	12	681	36	24,300	94	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
446	1245	SONORA AVE	WEST END	LA CASA	Local	AC	E	2	19	355	27	10,815	48	40	60	0	4/15/25	3 in AC OVERLAY	7/1/12
447	1246	SONORA PL	NORTH END	STEARNS	Local	AC	E	2	38	468	26	13,758	68	54	45	1	3/25/25	New Construction - Initial	1/1/80
048	1247	SPRING MEADOW LN	GRAYVILLE	SOUTH END	Local	AC	E	2	06	67	60	5,570	69	0	64	36	2/19/25	Surface Treatment - Slurry Seal	8/4/23
048	152	SPRING MEADOW LN	GRAYVILLE DR	IMPERIAL HWY	Local	AC	E	2	06	195	36	6,732	81	34	66	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
449	1249	SPRING TREE CT	LEMON TREE CT	EAST END	Local	AAC	E	2	12	120	32	5,365	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
450	1250	STANFORD ST	OAKLAND	STORY	Local	AAC	E	2	03	565	32	18,112	74	31	56	13	2/20/25	Overlay - AC Thin	8/1/08
451	1251	STANTON AVE	WEST END	OAKLAND	Local	AC	E	2	03	466	29	14,010	74	25	36	39	2/20/25	New Construction - Initial	1/1/80
452	1252	STARLAND DR	NORTH END	STEVENS	Local	AAC	E	2	27	516	30	17,480	75	0	100	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
453	1253	STEARNS AVE	COLLEGE ST	SUNSET ST	Local	AAC	E	2	35	714	26	19,070	76	0	82	18	4/18/25	Surface Reconstruction - AC	7/1/12
453	1254	STEARNS AVE	WEST END	COLLEGE ST	Local	AAC	E	2	35	649	25	16,900	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
453	1256	STEARNS AVE	SUNSET ST	HARBOR BL	Local	AAC	E	2	35	627	33	20,493	66	12	87	1	4/18/25	Surface Reconstruction - AC	7/1/12
453	1260	STEARNS AVE	PALM ST	HOLGATE ST	Local	AC	E	2	41	626	30	18,660	84	0	100	0	3/17/25	New Construction - Initial	1/1/80
34	133	STEARNS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	32	31,995	79	0	76	24	3/25/25	New Construction - Initial	1/1/88
34	134	STEARNS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,455	30	43,650	82	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
530	1600	STEVENS AVE	STARLAND ST	ORANGE ST	Local	AAC	E	2	27	240	30	7,020	59	57	43	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
530	1601	STEVENS AVE	EUCLID ST	STARLAND ST	Local	AAC	E	2	27	299	30	8,790	71	33	62	5	3/4/25	Surface Treatment - Slurry Seal	1/1/20
454	1264	STONEHAM WAY	WEST END	WHITEBOOK DR	Local	AAC	E	2	11	147	32	6,254	82	0	100	0	3/4/25	Surface Treatment - Slurry Seal	8/4/23
024	117	STONEWOOD ST	WHITTIER BLVD	SYCAMORE AVE	Local	AC	E	2	34	1,055	36	38,730	83	46	52	2	3/25/25	Surface Treatment - Slurry Seal	4/1/13
457	1268	STORY AVE	MISSION ST	EAST END	Local	AAC	E	2	03	451	30	15,325	68	41	59	0	2/20/25	Overlay - AC Thin	8/1/08
457	1269	STORY AVE	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,058	35	38,124	68	38	44	18	2/20/25	Overlay - AC Thin	8/1/08
457	1270	STORY AVE	CITY LIMITS	DEXFORD ST	Local	AAC	E	2	03	989	36	37,751	77	35	65	0	2/20/25	Overlay - AC Thin	8/1/08
044	1276	STURBRIDGE DR	WIMBLETON LN	WOODMERE CT	Local	AC	E	2	05	271	35	9,792	67	45	55	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
044	1277	STURBRIDGE DR	CANTEBURY LN	GREENBRIER LN	Local	AC	E	2	05	584	35	21,060	85	0	100	0	2/26/25	New Construction - Initial	1/1/80
044	1279	STURBRIDGE DR	CANTEBURY LN	WOODMERE CT	Local	AC	E	2	05	845	35	30,456	83	0	70	30	2/26/25	Surface Treatment - Slurry Seal	4/1/13
044	1280	STURBRIDGE DR	GREENBRIER LN	SOUTH END	Local	AC	E	2	05	135	27	5,495	74	0	100	0	2/25/25	New Construction - Initial	1/1/80
044	145	STURBRIDGE DR	LAMBERT RD	WIMBLETON LN	Local	AC	E	2	05	619	35	22,320	89	0	100	0	2/26/25	New Construction - Initial	1/1/90
459	1285	SUMMER SHADE DR	GRAYVILLE DR	RIDGEHAVEN DR	Local	AC	E	2	06	811	35	29,232	59	55	31	14	2/18/25	Surface Treatment - Slurry Seal	8/4/23
459	1286	SUMMER SHADE DR	CITY LIMIT	RIDGEHAVEN DR	Local	AAC	E	2	06	123	35	4,464	95	0	100	0	5/6/25	Surface Reconstruction - AC	4/1/13
460	1287	SUNSET ST	NORTH END	THIRD AVE	Local	AC	E	2	36	340	32	10,688	75	57	30	13	4/2/25	Slurry Seal or Chip Seal	8/1/05
460	1288	SUNSET ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	523	26	13,692	83	0	100	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
460	1289	SUNSET ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	634	32	20,096	81	35	65	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
460	1292	SUNSET ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	54	78	22	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
043	1298	SUPERIOR AVE	BEDFORD ST	EAST END	Local	AAC	E	2	39	930	32	30,370	75	12	88	0	4/17/25	Overlay - AC Thin	8/1/07
043	144	SUPERIOR AVE	HARBOR BLVD	BEDFORD ST	Local	AAC	E	2	39	464	33	15,345	73	0	86	14	4/17/25	Overlay - AC Thin	8/1/07
462	1301	SUSAN LN	WOODCREST	NORTH HILLS	Local	AC	E	2	37	280	36	10,686	81	0	83	17	3/24/25	Surface Treatment - Slurry Seal	4/1/13
463	1302	SWANSEA CIR	NANTUCKET	EAST END	Local	AC	E	2	37	202	26	6,799	76	51	43	6	3/25/25	Surface Treatment - Slurry Seal	4/1/13
464	1303	SYCAMORE AVE	STONEWOOD	MEADOWLARK	Local	AC	E	2	34	609	36	22,494	80	0	72	28	3/25/25	Slurry Seal or Chip Seal	8/1/05
465	1304	TEAKWOOD AVE	ALMONDWOOD ST	CHERRYWOOD	Local	AC	E	2	26	834	32	26,208	92	27	71	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
465	1305	TEAKWOOD AVE	CHERRYWOOD	DORWOOD AVE	Local	AC	E	2	26	935	36	33,064	78	61	18	21	3/10/25	Surface Treatment - Slurry Seal	1/1/20
465	1307	TEAKWOOD AVE	DORWOOD AVE	EAST END	Local	AC	E	2	26	239	26	7,739	61	58	29	13	3/10/25	Surface Treatment - Slurry Seal	1/1/20
465	1308	TEAKWOOD AVE	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	422	32	15,029	90	23	77	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
466	1309	TERRAZA SAN ANGELO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	251	32	9,557	83	16	84	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
467	1310	TERRAZA SAN BENITO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	173	32	7,331	84	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
520	1311	TERRAZA SAN CARLOS	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	208	32	8,181	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
469	1312	TERRAZA SANTA ELENA	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	232	32	9,891	74	33	61	6	3/10/25	Surface Treatment - Slurry Seal	1/1/20
470	1313	TERRY WAY	ORANGE ST	NORTH END	Local	AAC	E	2	27	351	30	10,350	79	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
471	1314	THIRD AVE	BRIGHT ST	COLLEGE ST	Local	AAC	E	2	36	1,142	40	48,188	85	46	49	5	4/17/25	Overlay - AC Thin	4/1/13
471	1315	THIRD AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	36	1,152	33	39,202	80	58	39	3	4/17/25	Surface Treatment - Slurry Seal	4/1/13
471	1316	THIRD AVE	MARIAN ST	EAST END	Local	AAC	E	2	15	165	26	5,540	79	29	71	0	3/4/25	Overlay - AC Thin	8/1/08
471	1320	THIRD AVE	KNUDSON ST	CHINCHILLA ST	Local	AC	E	2	17	293	30	10,040	37	48	18	34	3/4/25	Surface Treatment - Slurry Seal	4/1/13
472	1321	THORNE AVE	LIME	EAST END	Local	AAC	E	2	02	308	32	11,431	84	19	81	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
473	1322	TOPAZ AVE	PALM	VERONA	Local	AC	E	2	41	846	36	30,312	80	1	99	0	3/17/25	New Construction - Initial	1/1/80
474	1323	TROPICANA WAY	NORTH END	ORCHID AVE	Local	AC	E	2	40	538	36	21,166	81	78	22	0	3/17/25	New Construction - Initial	1/1/80
474	1324	TROPICANA WAY	ORCHID AVE	WHITTIER BLVD	Local	AC	E	2	40	765	36	27,396	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
475	1325	UNION AVE	WALL ST	BLAKE ST	Local	AC	E	2	04	634	31	20,320	77	25	75	0	3/9/25	New Construction - Initial	1/1/80
475	1326	UNION AVE	CITY LIMIT	WALL ST	Local	AC	E	2	04	113	32	3,424	78	9	91	0	3/9/25	New Construction - Initial	1/1/80
476	1327	URELL DR	LA SERNA AVE	LA PRESA DR	Local	AAC	E	2	20	474	25	12,350	73	18	81	1	2/27/25	Overlay - AC Thin	8/1/07
477	1328	VALENCIA ST	NORTH END	GREENWOOD AVE	Local	AAC	E	2	35	285	30	10,075	56	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
477	1329	VALENCIA ST	LA HABRA BLVD	THIRD AVE	Local	AC	E	2	36	1,006	36	36,000	77	52	48	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
477	1331	VALENCIA ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	639	32	20,256	69	51	29	20	3/26/25	Surface Treatment - Slurry Seal	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
477	1334	VALENCIA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	86	0	100	0	3/26/25	3 in AC OVERLAY	7/1/12
478	1337	VALLEJO ST	VERDUGO AVE	STEARNS AVE	Local	AC	E	2	38	514	36	19,038	81	11	84	5	3/24/25	New Construction - Initial	1/1/80
478	1339	VALLEJO ST	STEARNS AVE	HODSON AVE	Local	AC	E	2	38	221	36	8,490	69	79	21	0	3/24/25	New Construction - Initial	1/1/80
016	77	VALLEY HOME AVE	CITY LIMIT	GORDON AVE	Local	AC	C	1	01	1,056	16	16,912	65	77	23	0	2/18/25	New Construction - Initial	1/1/81
016	78	VALLEY HOME AVE	GORDON AVE	WHITTIER AVE	Local	AC	C	2	01	1,135	15	18,176	53	81	16	3	2/18/25	New Construction - Initial	1/1/94
016	79	VALLEY HOME AVE	WHITTIER AVE	GREGORY LN	Local	AAC	C	2	02	1,311	17	23,616	50	57	28	15	2/25/25	Overlay - AC Thin	10/1/06
016	80	VALLEY HOME AVE	GREGORY LN	LA HABRA BLVD	Local	AAC	C	2	02	1,579	18	28,422	47	68	24	8	2/25/25	Overlay - AC Thin	10/1/06
479	1340	VALWOOD ST	PARKWOOD AVE	GWYNWOOD AVE	Local	AAC	E	2	25	921	36	33,690	97	0	75	25	4/15/25	Overlay - AC Structural	4/1/24
480	1342	VAQUERO AVE	PALM ST	VERONA ST	Local	AC	E	2	41	847	36	30,348	77	20	74	6	3/17/25	New Construction - Initial	1/1/80
481	1345	VECINO ST	AMORITA	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	94	0	81	19	3/17/25	New Construction - Initial	1/1/80
482	1346	VERDUGO AVE	VALLEJO ST	JUANITA	Local	AC	E	2	38	621	36	22,892	75	47	53	0	3/24/25	New Construction - Initial	1/1/80
483	1347	VERNON ST	LINDAUER	LAGUNA	Local	AC	E	2	07	455	30	13,470	69	49	51	0	2/19/25	New Construction - Initial	1/1/80
484	1348	VERONA ST	AMORITA AVE	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	87	53	47	0	3/17/25	New Construction - Initial	1/1/80
484	1349	VERONA ST	WHITTIER BLVD	VAQUERO AVE	Local	AC	E	2	41	1,040	35	37,476	77	5	82	13	3/17/25	New Construction - Initial	1/1/80
484	1352	VERONA ST	VAQUERO AVE	SOUTH END	Local	AC	E	2	41	155	26	5,681	78	13	60	27	3/17/25	Surface Treatment - Slurry Seal	4/1/13
486	1355	VIA LOS ALTOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	226	32	8,807	82	32	68	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
487	1356	VIA LOS BONITOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	154	32	6,503	77	25	61	14	3/10/25	Surface Treatment - Slurry Seal	1/1/20
485	1354	VIA LOS COYOTES	NORTH END	AVENDIA SANTA DOMINGO	Local	AC	E	2	33	201	32	8,007	82	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
488	1357	VIEW DR	AMANDA	HILL	Local	AC	E	2	27	358	31	12,598	61	60	27	13	4/18/25	Surface Treatment - Slurry Seal	1/1/20
552	998	VIEW PARK MOBILE ESTATES	LAMBERT RD	SOUTH END	Local	AC	E	2	11	4,079	24	103,500	98	0	100	0	2/26/25	Complete Reconstruction - AC	8/15/22
059	162	VILLAGE DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	32	1,075	32	34,400	66	41	59	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
489	1358	VIRGINIA ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	14	751	30	22,350	74	30	63	7	2/26/25	Surface Treatment - Slurry Seal	4/1/13
489	1359	VIRGINIA ST	HIGHLANDER AVE	HEATHER AVE	Local	AC	E	2	14	525	29	15,780	78	12	88	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
490	1360	VIVIWOOD PL	PARKWOOD AVE	SOUTH END	Local	AC	E	2	25	392	26	11,717	74	45	26	29	3/11/25	Surface Treatment - Slurry Seal	4/1/24
491	1361	WADE ST	HODSON	LA HABRA BLVD	Local	AC	E	2	41	492	36	17,496	83	0	100	0	3/17/25	New Construction - Initial	1/1/80
492	1362	WALKER AVE	MARIAN	EAST END	Local	AAC	E	2	15	218	30	7,040	75	33	65	2	3/4/25	Overlay - AC Thin	8/1/08
036	137	WALL ST	WILSHIRE AVE	LAMBERT RD	Local	AAC	E	2	04	1,089	35	39,240	82	0	100	0	3/5/25	Overlay - AC Thin	8/1/08
541	1730	WALLACE AVE	MACY ST	BALDWIN ST	Local	AC	E	1	01	406	32	13,722	70	12	88	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
541	1733	WALLACE AVE	SHARPLESS ST	END	Local	AC	E	2	01	333	31	13,605	78	6	94	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
494	1367	WALLACE ST	LA HABRA BLVD	ALLEY S/FIRST AVE	Local	AAC	E	2	22	495	41	19,885	78	22	78	0	4/21/25	Surface Reconstruction - AC	8/1/05
495	1370	WALLING AVE	HOLGATE	CITY LIMIT	Local	AC	E	2	41	646	31	20,704	78	44	56	0	3/17/25	New Construction - Initial	1/1/80
017	1371	WALNUT ST	PARKWOOD AVE	PATWOOD DR	Local	AC	E	2	25	812	35	29,268	76	57	38	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
017	81	WALNUT ST	CITY LIMIT	LA PRESA DR	Local	AAC	C	2	13	1,386	36	46,215	84	15	79	6	2/13/25	Overlay - AC Structural	1/1/20
017	82	WALNUT ST	WHITTIER AVE	WHITTIER AVE	Local	AAC	C	2	13	1,135	35	40,896	98	0	100	0	2/13/25	Overlay - AC Structural	5/1/23
017	83	WALNUT ST	WHITTIER AVE	HIGHLANDER AVE	Local	AC	C	2	21	1,284	29	38,550	48	38	48	14	3/3/25	New Construction - Initial	1/1/81
017	84	WALNUT ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	C	2	21	1,285	29	38,580	49	42	46	12	3/3/25	New Construction - Initial	1/1/81
017	85	WALNUT ST	LA HABRA BLVD	LOMA VERDE AVE	Local	AAC	C	2	22	1,206	33	41,038	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
017	86	WALNUT ST	LOMA VERDE AVE	LAMBERT RD	Local	AAC	C	2	23	1,403	36	50,180	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
017	87	WALNUT ST	LAMBERT RD	LAS LOMAS AVE	Local	AC	C	2	24	1,287	35	46,368	64	36	53	11	4/22/25	Slurry Seal or Chip Seal	8/1/05
017	88	WALNUT ST	LAS LOMAS AVE	IMPERIAL HWY	Local	AC	C	2	24	1,407	35	50,688	66	30	55	15	4/22/25	Slurry Seal or Chip Seal	8/1/05
497	1373	WALTHAM WAY	SHELburne	EAST END	Local	AC	E	2	37	188	26	6,435	94	0	100	0	3/25/25	New Construction - Initial	1/1/80
498	1374	WARD ST	NORTH END	FRANCIS AVE	Local	AAC	E	2	35	658	26	18,858	74	40	58	2	4/2/25	Surface Reconstruction - AC	7/1/12
499	1375	WARNE ST	NORTH END	FRANCIS	Local	AAC	E	2	35	783	26	23,052	70	0	99	1	4/2/25	Surface Reconstruction - AC	7/1/12
500	1376	WATERBURY WAY	WEST END	WHITEBOOK	Local	AAC	E	2	11	149	32	6,318	76	0	100	0	3/4/25	Surface Reconstruction - AC	8/1/05
501	1377	WAVERLY TERR	WEST END	STURBRIDGE	Local	AAC	E	2	05	110	26	4,435	94	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
502	1378	WEDGEWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	365	26	10,995	65	66	34	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
502	1379	WEDGEWOOD LN	KIRKWOOD	COACHWOOD	Local	AAC	E	2	26	1,541	32	50,312	69	40	32	28	3/10/25	Surface Treatment - Slurry Seal	1/1/20
503	1380	WESTFIELD WAY	SHELburne	EAST END	Local	AC	E	2	37	189	26	6,461	92	0	93	7	3/25/25	New Construction - Initial	1/1/80
046	1382	WHITEBOOK DR	SHEFFIELD DR	MIDDLETON ST	Local	AAC	E	2	11	922	32	30,254	79	0	84	16	2/26/25	Surface Reconstruction - AC	8/1/05
046	148	WHITEBOOK DR	LAMBERT RD	SHEFFIELD DR	Local	AC	E	2	11	1,085	36	43,560	64	69	25	6	3/4/25	Surface Treatment - Slurry Seal	8/4/23
505	1387	WHITTIER BLVD (FRONT RD)	CONCOURSE ST	BRIGHTON ST	Local	AC	E	2	37	715	28	20,020	88	0	100	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
505	1389	WHITTIER BLVD (FRONT RD)	MONTE VISTA ST	EAST END	Local	AC	E	2	16	657	26	23,652	88	41	59	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
506	1390	WILGAR DR	EAST END	LORELLA	Local	AC	E	2	10	401	30	14,480	77	49	51	0	2/26/25	New Construction - Initial	1/1/80
507	1391	WILLOW ST	GREENWOOD AVE	HIGHLANDER AVE	Local	AC	E	2	16	327	30	9,630	58	70	29	1	3/3/25	Surface Treatment - Slurry Seal	4/1/13
507	1392	WILLOW ST	LA HABRA BLVD	HEATHER AVE	Local	AC	E	2	16	616	30	18,300	82	35	42	23	3/3/25	New Construction - Initial	1/1/80
508	1396	WILSHIRE AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	927	36	33,156	82	0	100	0	3/5/25	Surface Reconstruction - AC	8/1/08
508	1397	WILSHIRE AVE	MARIPOSA DR	MARIPOSA ST	Local	AAC	E	2	04	979	35	35,280	79	32	68	0	3/5/25	Surface Reconstruction - AC	8/1/08
508	1398	WILSHIRE AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	479	30	15,920	87	0	76	24	3/4/25	New Construction - Initial	1/1/80
508	1402	WILSHIRE AVE	WEST END	WALL ST	Local	AAC	E	2	04	148	35	5,364	91	16	84	0	3/9/25	Surface Reconstruction - AC	8/1/08
510	1403	WILSON ST	VAQUERO AVE	STEARNS AVE	Local	AC	E	2	41	778	32	24,768	91	0	100	0	3/17/25	New Construction - Initial	1/1/80
511	1406	WILTON WAY	NORTH END	WHITEBOOK	Local	AAC	E	2	11	69	34	3,896	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
512	1407	WIMBELTON LN	GLENHAVEN	STURBRIDGE	Local	AC	E	2	05	330	36	11,664	95	0	100	0	2/26/25	New Construction - Initial	1/1/80
513	1408	WOODBRIER DR	WEST END	RIDGEHAVEN	Local	AC	E	2	05	227	36	7,956	74	87	13	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
514	1409	WOODCREST AVE	FALLENLEAF ST	ROANNE DR	Local	AC	E	2	34	1,369	36	52,284	72	48	43	9	3/25/25	Slurry Seal or Chip Seal	8/1/05
514	1410	WOODCREST AVE	ROANNE DR	EAST END	Local	AC	E	2	34	207	26	6,933	82	36	64	0	3/25/25	Surface Treatment - Cape Seal	4/1/13
514	1411	WOODCREST AVE	SUSAN LN	PALM ST	Local	AC	E	2	37	846	36	31,062	70	27	59	14	3/25/25	Surface Treatment - Slurry Seal	4/1/13
514	1412	WOODCREST AVE	WEST END	FALLENLEAF ST	Local	AC	E	2	34	478	36	19,005	92	19	81	0	3/26/25	Surface Treatment - Slurry Seal	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
515	1413	WOODMERE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	119	26	4,669	82	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
516	1414	WOODMONT PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	106	32	4,917	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
517	1415	WORTH AVE	DEXFORD	EAST END	Local	AAC	E	2	02	225	32	7,008	88	0	100	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
518	1416	ZEKE AND ELSIE DR	BRASS LANTERN	PENDLETON	Local	AC	E	2	06	252	36	9,606	77	35	65	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
										92.9		16,562,693							
		Alleys																	
065	1716	ALLEY E/BEACH BLVD	SAN JOSE AVE	ALLEY N/SAN JOSE	Alley	AC	O	1	10	179	19	3,600	11	64	16	20	2/25/25	New Construction - AC	1/1/80
065	1717	ALLEY E/BEACH BLVD	ALLEY S/SAN JOSE	SAN JOSE AVE	Alley	AC	O	1	10	428	19	8,580	14	47	10	43	2/25/25	New Construction - AC	1/1/80
065	204	ALLEY E/BEACH BLVD	ALLEY S/WHITTIER	GREGORY	Alley	AAC	O	1	09	614	14	9,225	99	0	100	0	2/25/25	Overlay - AC Structural	6/1/24
066	206	ALLEY E/BEDFORD ST	ALLEY S/ LA HABRA BL	SUPERIOR	Alley	AC	O	1	39	1,579	15	25,280	94	0	56	44	4/2/25	New Construction - Initial	1/1/80
067	0207	ALLEY E/BURWOOD	PARKWOOD	MONTWOOD	Alley	AC	O	1	32	882	19	17,660	85	57	43	0	3/10/25	New Construction - Initial	1/1/80
068	0208	ALLEY E/CORTO	WHITTIER BL	SOUTH END	Alley	AC	O	1	09	226	19	4,540	60	74	24	2	2/20/25	New Construction - Initial	1/1/80
069	209	ALLEY E/EUCLID STREET	N/END	N/O PINEHURST	Alley	AC	O	1	28	313	19	6,280	19	24	52	24	4/25/25	New Construction - Initial	1/1/80
070	210	ALLEY E/HARBOR-W/BEDFOR	N/O BEDFORD	N/O STEARNS	Alley	AAC	O	1	38	745	16	9,685	99	0	100	0	3/25/25	Overlay - AC Structural	12/1/21
071	211	ALLEY E/HAZEL-W/HILLSID	S/O ALLEY S/WHITTIER	N/O ALLEY N/GREENWOOD	Alley	PCC	O	1	21	481	10	4,810	19	69	4	27	5/5/25	New Construction - Initial	1/1/80
073	213	ALLEY E/VALENCIA ST	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	O	1	36	434	19	8,700	94	40	60	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
074	214	ALLEY E/WALNUT STREET	N/END	N/O ALLEY N/ERNA	Alley	AC	O	1	21	429	19	8,600	92	0	100	0	4/17/25	New Construction - Initial	1/1/80
074	215	ALLEY E/WALNUT STREET	FIRST ST	SOUTH END	Alley	AC	O	1	22	309	18	5,890	94	0	71	29	4/21/25	New Construction - Initial	1/1/80
074	216	ALLEY E/WALNUT STREET	NORTH END	ALLY N/GREENWOOD AVE	Alley	AC	O	1	21	372	10	4,103	52	36	51	13	4/25/25	New Construction - Initial	1/1/80
076	1706	ALLEY N/ERNA STREET	WILLOW ST	EAST END	Alley	AC	O	1	16	335	16	3,965	81	6	83	11	3/4/25	New Construction - Initial	1/1/80
076	1708	ALLEY N/ERNA STREET	WEST END	ALLEY W/O WALNUT ST	Alley	AC	O	1	16	240	20	4,080	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
076	217	ALLEY N/ERNA STREET	E/O ALLEY E/WALNUT	N/O HAZEL	Alley	AC	O	1	21	174	19	3,500	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
076	218	ALLEY N/ERNA STREET	HAZEL	E/END	Alley	AC	O	1	21	255	20	5,100	89	0	100	0	4/17/25	New Construction - Initial	1/1/80
076	219	ALLEY N/ERNA STREET	WALNUT ST	E/O ALLEY E/WALNUT	Alley	AC	O	1	21	144	19	2,900	90	0	95	5	4/17/25	New Construction - Initial	1/1/80
076	220	ALLEY N/ERNA STREET	WEST END	EUCLID ST	Alley	AC	O	1	21	315	14	4,740	87	0	100	0	4/18/25	New Construction - Initial	1/1/80
078	221	ALLEY N/GREENWOOD AVE	E/O ALLEY E/O WALNUT	W/O HAZEL	Alley	AC	O	1	21	162	15	2,608	47	39	61	0	4/25/25	New Construction - Initial	1/1/80
078	222	ALLEY N/GREENWOOD AVE	E/O HAZEL	MID ALLEY E/HAZEL-W/HILLSIDE	Alley	AC	O	1	21	136	12	1,781	45	60	14	26	4/25/25	New Construction - Initial	1/1/80
078	223	ALLEY N/GREENWOOD AVE	E/O WALNUT	E/O ALLEY E/WALNUT-W/HAZEL	Alley	AC	O	1	21	166	15	2,672	39	64	36	0	4/25/25	New Construction - Initial	1/1/80
078	224	ALLEY N/GREENWOOD AVE	MID ALLEY E/HAZEL-W/HILLSIDE	W/O HILLSIDE	Alley	PCC	O	1	21	150	10	1,500	21	83	0	17	4/25/25	New Construction - Initial	1/1/80
079	225	ALLEY N/INDUSTRY AVE	E/O EUCLID	W/O CYPRESS	Alley	AC	O	1	31	724	19	14,500	42	64	31	5	2/14/25	New Construction - Initial	1/1/80
080	226	ALLEY N/LA HABRA BLVD	E/O ALLEY E/CYPRESS	W/O LEMON	Alley	AC	O	1	35	144	14	2,175	89	0	74	26	4/2/25	New Construction - Initial	1/1/80
080	227	ALLEY N/LA HABRA BLVD	CYPRESS ST	E/O ALLEY E/CYPRESS	Alley	AC	O	1	35	146	14	2,205	91	0	100	0	4/2/25	New Construction - Initial	1/1/80
080	228	ALLEY N/LA HABRA BLVD	DEXFORD ST	E/END	Alley	AC	O	1	02	275	19	5,520	50	21	53	26	2/24/25	New Construction - Initial	1/1/80
080	229	ALLEY N/LA HABRA BLVD	EUCLID ST	CIVIC CENTER DR	Alley	AC	O	1	28	351	19	7,040	100	0	0	0	4/25/25	New Construction - Initial	1/1/80
080	230	ALLEY N/LA HABRA BLVD	ORANGE ST	EAST END	Alley	AAC	O	1	28	467	13	6,552	99	0	0	100	2/13/25	Overlay - AC Structural	4/4/24
080	231	ALLEY N/LA HABRA BLVD	WEST END	DEXFORD ST	Alley	AC	O	1	02	226	19	4,540	50	45	55	0	2/24/25	New Construction - Initial	1/1/80
081	232	ALLEY N/LAMBERT	N/END	W/O MOUNTAIN VIEW	Alley	AC	O	1	18	105	19	2,120	27	79	21	0	3/16/25	New Construction - Initial	1/1/80
097	290	ALLEY N/O WHITTIER	WEST END	HARBOR BL	Alley	AC	O	1	34	172	16	2,941	32	64	19	17	4/22/25	New Construction - Initial	1/1/80
536	1718	ALLEY N/SAN JOSE AVE	BEACH BLVD	ALLEY E/BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	15	70	25	5	2/25/25	New Construction - AC	1/1/80
082	1712	ALLEY N/THIRD ST	ALLEY W/O VALENCIA	VALENCIA ST	Alley	AC	O	1	36	153	20	2,091	84	0	15	85	4/2/25	New Construction - Initial	1/1/80
082	235	ALLEY N/THIRD ST	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	147	19	2,960	97	0	100	0	4/2/25	New Construction - Initial	1/1/80
083	236	ALLEY N/WHITTIER BLVD	KIRBY DR	WALNUT ST	Alley	AC	O	1	13	484	19	9,700	14	55	23	22	2/27/25	New Construction - Initial	1/1/80
083	237	ALLEY N/WHITTIER BLVD	WEST END	KIRBY DR	Alley	AC	O	1	13	167	19	3,360	31	44	53	3	5/6/25	New Construction - Initial	1/1/80
084	238	ALLEY S/ERNA	MCPHERSON ST	COLLEGE ST	Alley	AC	O	1	35	304	14	4,575	88	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	239	ALLEY S/ERNA	HAZEL ST	LOIS ST	Alley	AC	O	1	21	434	14	6,525	80	1	60	39	4/17/25	New Construction - Initial	1/1/80
084	240	ALLEY S/ERNA	LEORA ST	WALNUT ST	Alley	AC	O	1	16	454	19	9,100	63	32	26	42	3/3/25	New Construction - Initial	1/1/80
084	241	ALLEY S/ERNA	WILLOW ST	ALLEY W/LEORA ST	Alley	AC	O	1	16	359	14	5,400	15	55	22	23	3/4/25	New Construction - Initial	1/1/80
084	242	ALLEY S/ERNA	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	319	19	6,400	82	22	49	29	4/17/25	New Construction - Initial	1/1/80
084	243	ALLEY S/ERNA	SUNSET ST	ALLEY W/HARBOR BL	Alley	AC	O	1	35	308	15	4,635	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	244	ALLEY S/ERNA	COLLEGE ST	VALENCIA ST	Alley	AC	O	1	35	312	14	4,695	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	245	ALLEY S/ERNA	LOIS ST	EUCLID ST	Alley	AC	O	1	21	464	24	11,625	80	0	95	5	4/21/25	New Construction - Initial	1/1/80
084	247	ALLEY S/ERNA	VALENCIA ST	SUNSET ST	Alley	AC	O	1	35	283	9	2,840	92	0	53	47	3/26/25	New Construction - Initial	1/1/80
084	248	ALLEY S/ERNA	WEST END	MCPHERSON ST	Alley	AAC	O	1	35	402	14	6,045	93	0	62	38	3/26/25	Overlay - AC Structural	12/1/21
085	1710	ALLEY S/FIRST AVE	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	305	14	2,783	76	0	100	0	4/21/25	New Construction - Initial	1/1/80
085	249	ALLEY S/FIRST AVE	ALDRICH ST	CYPRESS ST	Alley	AAC	O	1	29	408	16	6,528	99	0	100	0	4/17/25	Overlay - AC Structural	3/4/23
085	250	ALLEY S/FIRST AVE	CYPRESS ST	MCPHERSON ST	Alley	AC	O	1	36	640	16	10,240	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
086	251	ALLEY S/FLORENCE AVENUE	WEST END	MCPHERSON ST	Alley	AAC	O	1	35	310	14	4,665	99	0	100	0	4/2/25	Overlay - AC Structural	12/1/21
087	252	ALLEY S/GREENWOOD AVE	ALLEY W/LOIS ST	EAST END	Alley	AC	O	1	21	122	20	2,440	55	0	100	0	4/25/25	New Construction - Initial	1/1/80
087	253	ALLEY S/GREENWOOD AVE	HAZEL ST	ALLEY W/LOIS ST	Alley	AC	O	1	21	164	19	3,300	45	44	53	3	4/25/25	New Construction - Initial	1/1/80
087	254	ALLEY S/GREENWOOD AVE	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	321	19	6,440	44	66	33	1	4/25/25	New Construction - Initial	1/1/80
087	255	ALLEY S/GREENWOOD AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	470	19	9,420	91	27	73	0	3/3/25	New Construction - Initial	1/1/80
088	256	ALLEY S/HIGHLANDER AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	471	15	7,552	88	19	55	26	3/3/25	New Construction - Initial	1/1/80
089	257	ALLEY S/INDUSTRY AVE	EUCLID ST	CYPRESS ST	Alley	AC	O	1	31	683	19	13,680	93	0	49	51	2/14/25	Complete Reconstruction - AC	8/17/17
090	258	ALLEY S/KENRICH COURT	W/END	W/O CHANTRY	Alley	AC	O	1	02	510	14	7,665	67	34	49	17	2/24/25	New Construction - Initial	1/1/80
091	259	ALLEY S/LA HABRA BLVD	ALDRICH ST	CYPRESS ST	Alley	AC	O	1	29	408	14	6,135	60	56	38	6	4/17/25	New Construction - Initial	1/1/80
091	260	ALLEY S/LA HABRA BLVD	ALLEY E/BEDFORD ST	COLFAX ST	Alley	AC	O	1	39	96	19	1,940	87	0	100	0	4/22/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
091	261	ALLEY S/LA HABRA BLVD	ALLEY W/EUCLID ST	EUCLID ST	Alley	AC	0	1	22	126	14	1,905	68	0	30	70	4/22/25	New Construction - Initial	11/1/80
091	262	ALLEY S/LA HABRA BLVD	ALLEY W/VALENCIA ST	VALENCIA ST	Alley	AC	0	1	36	125	19	2,520	98	0	100	0	4/2/25	New Construction - Initial	1/1/80
091	263	ALLEY S/LA HABRA BLVD	BEDFORD ST	ALLEY E/BEDFORD ST	Alley	AC	0	1	39	133	19	2,680	90	0	100	0	4/22/25	New Construction - Initial	1/1/80
091	264	ALLEY S/LA HABRA BLVD	CALIFORNIA ST	WALLACE ST	Alley	AC	0	1	22	268	14	4,035	58	57	23	20	4/22/25	New Construction - Initial	1/1/80
091	265	ALLEY S/LA HABRA BLVD	BANK OF AMERICA PARKING LOT	ALDRICH ST	Alley	AC	0	1	29	255	14	3,840	74	39	33	28	4/17/25	New Construction - Initial	1/1/80
091	266	ALLEY S/LA HABRA BLVD	COLFAX ST	DEXTER ST	Alley	AC	0	1	39	202	19	4,060	80	7	93	0	4/22/25	New Construction - Initial	1/1/80
091	267	ALLEY S/LA HABRA BLVD	CYPRESS ST	MCPHERSON ST	Alley	AC	0	1	36	640	14	9,615	79	0	66	34	4/15/25	New Construction - Initial	1/1/80
091	268	ALLEY S/LA HABRA BLVD	DEXFORD ST	MISSION ST	Alley	AC	0	1	03	1,013	19	20,280	12	68	26	6	2/20/25	New Construction - Initial	1/1/80
091	269	ALLEY S/LA HABRA BLVD	DEXTER ST	FONDA ST	Alley	AC	0	1	39	202	19	4,060	82	20	78	2	4/22/25	New Construction - Initial	1/1/80
091	271	ALLEY S/LA HABRA BLVD	FONDA ST	EAST END	Alley	AC	0	1	39	101	19	2,040	78	0	100	0	4/22/25	New Construction - Initial	1/1/80
091	272	ALLEY S/LA HABRA BLVD	HAZEL ST	CALIFORNIA ST	Alley	AC	0	1	22	269	19	5,400	76	25	37	38	4/22/25	New Construction - Initial	1/1/80
091	273	ALLEY S/LA HABRA BLVD	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	0	1	36	138	16	2,363	82	74	18	8	4/2/25	New Construction - Initial	1/1/80
091	274	ALLEY S/LA HABRA BLVD	WALLACE ST	ALLEY W/EUCLID ST	Alley	AC	0	1	22	192	14	2,895	82	0	64	36	4/25/25	New Construction - Initial	1/1/80
091	275	ALLEY S/LA HABRA BLVD	WALNUT ST	HAZEL ST	Alley	AC	0	1	22	318	19	6,380	70	42	25	33	4/22/25	New Construction - Initial	1/1/80
091	276	ALLEY S/LA HABRA BLVD	OAKLAND ST	DEXFORD ST	Alley	AC	0	1	03	446	19	8,940	33	62	28	10	2/20/25	New Construction - Initial	1/1/80
091	277	ALLEY S/LA HABRA BLVD	W/END	W/O MONTE VISTA	Alley	AC	0	1	15	211	19	4,240	11	82	12	6	3/4/25	New Construction - Initial	1/1/80
537	1719	ALLEY S/SAN JOSE AVE	ALLEY E/BEACH BLVD	BEACH BLVD	Alley	AC	0	1	10	139	19	2,800	38	69	31	0	2/25/25	New Construction - AC	1/1/80
092	278	ALLEY S/STEARNS AVENUE	E/O COLLEGE	W/O VALENCIA	Alley	AC	0	1	35	312	14	4,695	89	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	279	ALLEY S/STEARNS AVENUE	E/O MCPHERSON	W/O COLLEGE	Alley	AC	0	1	35	304	14	4,575	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	280	ALLEY S/STEARNS AVENUE	SUNSET ST	EAST END	Alley	AC	0	1	35	343	14	3,509	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	281	ALLEY S/STEARNS AVENUE	E/O VALENCIA	W/O SUNSET	Alley	AC	0	1	35	283	14	4,260	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	282	ALLEY S/STEARNS AVENUE	WEST END	MCPHERSON ST	Alley	AC	0	1	35	309	14	4,650	98	0	100	0	3/26/25	Complete Reconstruction - AC	12/1/21
093	284	ALLEY S/WHITTIER BLVD	ALLEY E/HAZEL ST	HILLSIDE ST	Alley	AC	0	1	21	121	12	1,586	12	48	14	38	5/5/25	New Construction - Initial	1/1/80
093	285	ALLEY S/WHITTIER BLVD	HAZEL ST	ALLEY E/HAZEL ST	Alley	AC	0	1	21	146	19	2,940	18	46	14	40	4/25/25	New Construction - Initial	1/1/80
093	286	ALLEY S/WHITTIER BLVD	W/O ALLEY E/BEACH	W/O RIDGEWAY	Alley	AC	0	1	09	162	19	3,260	99	0	100	0	5/5/25	New Construction - Initial	1/1/80
094	287	ALLEY W/BEDFORD STREET	S/O ALPINE	N/O SUPERIOR	Alley	AC	0	1	39	1,252	19	25,060	93	0	100	0	4/2/25	Complete Reconstruction - AC	4/2/18
095	288	ALLEY W/BURWOOD ST	NORTH END	MONTWOOD AVE	Alley	AC	0	1	32	1,035	20	21,756	92	0	100	0	4/15/25	New Construction - Initial	1/1/80
096	289	ALLEY W/EUCLID	ALLEY S/LA HABRA BL	FIRST ST	Alley	AAC	0	1	22	152	11	1,836	99	0	100	0	4/21/25	Overlay - AC Structural	4/1/24
098	294	ALLEY W/LEORA STREET	ALLEY S/ERNA ST	LA HABRA BL	Alley	AC	0	1	16	145	9	1,460	13	77	23	0	3/4/25	New Construction - Initial	1/1/80
098	295	ALLEY W/LEORA STREET	ERNA ST	ALLEY S/ERNA ST	Alley	AC	0	1	16	153	9	1,540	15	41	14	45	5/6/25	New Construction - Initial	1/1/80
099	296	ALLEY W/LOIS STREET	ALLEY S/GREENWOOD ST	ROSE AVE	Alley	AC	0	1	21	168	19	3,380	43	67	20	13	4/25/25	New Construction - Initial	1/1/80
099	297	ALLEY W/LOIS STREET	ROSE AVE	ALLEY S/ROSE AVE	Alley	AC	0	1	21	156	19	3,140	36	63	8	29	4/25/25	New Construction - Initial	1/1/80
102	307	ALLEY W/O HARBOR BLVD	ERNA AVE	LA HABRA BLVD	Alley	AC	0	1	35	343	19	6,880	86	0	100	0	3/26/25	New Construction - Initial	1/1/80
102	308	ALLEY W/O HARBOR BLVD	FRANCIS AVE	NORTH END	Alley	AC	0	1	35	524	20	8,908	94	0	100	0	4/2/25	New Construction - Initial	1/1/80
100	299	ALLEY W/VALENCIA	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	0	1	36	414	19	8,300	96	0	100	0	4/2/25	New Construction - Initial	1/1/80
101	300	ALLEY W/WALNUT STREET	ALLEY S/GREENWOOD AVE	HIGHLANDER AVE	Alley	AC	0	1	16	142	15	2,288	81	0	39	61	3/3/25	New Construction - Initial	1/1/80
101	301	ALLEY W/WALNUT STREET	ALLEY S/HEATHER AVE	ERNA ST	Alley	AC	0	1	16	141	15	2,272	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
101	302	ALLEY W/WALNUT STREET	ALLEY S/HIGHLANDER AVE	FLORENCE AVE	Alley	AC	0	1	16	146	15	2,352	87	0	57	43	3/3/25	New Construction - Initial	1/1/80
101	303	ALLEY W/WALNUT STREET	FLORENCE AVE	HEATHER AVE	Alley	AC	0	1	16	301	15	4,832	89	32	60	8	3/4/25	New Construction - Initial	1/1/80
101	304	ALLEY W/WALNUT STREET	GREENWOOD AVE	ALLEY S/GREENWOOD AVE	Alley	AC	0	1	16	160	15	2,576	90	24	68	8	3/3/25	New Construction - Initial	1/1/80
101	305	ALLEY W/WALNUT STREET	HEATHER AVE	ALLEY S/HEATHER AVE	Alley	AC	0	1	16	157	15	2,528	60	48	52	0	3/4/25	New Construction - Initial	1/1/80
101	306	ALLEY W/WALNUT STREET	HIGHLANDER AVE	ALLEY S/HIGHLANDER AVE	Alley	AC	0	1	16	156	15	2,512	92	0	100	0	3/3/25	New Construction - Initial	1/1/80
										6.4		582,079							

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
		Arterials / Collectors (MPAH)																	
002	8	IMPERIAL HWY	BRASS LANTERN DR	BEACH BLVD	Primary	AC	A	6	~	1,051	64	72,264	37	38	51	11	3/12/25	New Construction - Initial	1/1/72
002	7	IMPERIAL HWY	W. CITY LIMIT	BRASS LANTERN DR	Primary	AC	A	6	~	1,549	64	101,136	45	47	52	1	3/12/25	New Construction - Initial	1/1/72
061C	104	HARBOR BLVD	LA HABRA BLVD	SUPERIOR AVE	Primary	AC	A	6	~	1,400	72	102,000	61	32	56	12	5/5/25	New Construction - Initial	1/1/80
001	65	IDAHO ST	IMPERIAL HWY	SANDLEWOOD AVE	Secondary	AC	A	5	~	1,469	60	95,625	65	10	58	32	3/12/25	New Construction - Initial	1/1/80
001	4	IDAHO ST	HILLANDALE AVE	LAMBERT RD	Secondary	AC	A	5	~	1,713	59	102,840	65	36	43	21	3/12/25	New Construction - Initial	1/1/78
061	108	HARBOR BLVD WEST SIDE	IMPERIAL HWY	435' S/O IMPERIAL HWY	Major	AC	A	2	~	434	32	12,820	66	26	74	0	2/14/25	New Construction - Initial	1/1/80
006	40	WHITTIER BLVD	HARBOR BLVD	BRIGHTON ST	Collector	AC	A	4	~	1,187	56	66,472	68	10	90	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
003	13	LA HABRA BLVD	IDAHO ST	MONTE VISTA ST	Secondary	AC	A	4	~	1,309	55	70,745	69	54	38	8	2/26/25	New Construction - Initial	1/1/90
006	39	WHITTIER BLVD	BRIGHTON ST	PALM ST	Collector	AC	A	5	~	1,456	58	83,948	69	32	68	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
003	18	LA HABRA BLVD	COLLEGE ST	HARBOR BLVD	Secondary	AC	A	4	~	1,249	60	70,800	71	34	50	16	5/5/25	New Construction - Initial	1/1/79
001	3	IDAHO ST	LA HABRA BLVD	HILLANDALE AVE	Secondary	AC	A	5	~	895	59	53,760	71	43	51	6	3/16/25	New Construction - Initial	1/1/78
001	5	IDAHO ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	5	~	1,084	60	66,290	71	15	85	0	3/12/25	New Construction - Initial	1/1/78
009	96	EUCUID ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	4	~	1,320	60	79,200	73	38	36	26	5/9/25	New Construction - Initial	1/1/75
061C	105	HARBOR BLVD	SUPERIOR AVE	LAMBERT RD	Primary	AC	A	6	~	1,240	78	96,720	73	20	63	17	4/23/25	New Construction - Initial	1/1/80
003	10	LA HABRA BLVD	DEXFORD ST	BEACH BLVD	Secondary	AC	A	4	~	1,540	55	86,296	73	24	32	44	2/25/25	New Construction - Initial	1/1/80
003	19	LA HABRA BLVD	HARBOR BLVD	FONDA ST	Primary	AC	A	4	~	1,126	60	66,060	74	30	57	13	4/23/25	New Construction - Initial	1/1/79
004	32	LAMBERT RD	BEACH BLVD	WHITEBOOK DR	Primary	AC	A	4	~	1,618	64	105,235	74	63	37	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
003	16	LA HABRA BLVD	EUCUID ST	CYPRESS ST	Secondary	AC	A	4	~	1,325	60	77,580	74	23	74	3	5/5/25	New Construction - Initial	1/1/79
001	66	IDAHO ST	SANDLEWOOD AVE	CITY LIMIT	Secondary	AC	A	4	~	2,549	66	168,234	76	12	80	8	3/11/25	New Construction - Initial	1/1/94
009	97	EUCUID ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	4	~	1,320	60	74,580	76	31	38	31	5/9/25	New Construction - Initial	1/1/75
009	94	EUCUID ST	SECOND ST	OLIVE AVE	Secondary	AC	A	2	~	975	60	58,500	77	15	63	22	5/9/25	New Construction - Initial	1/1/75
003	17	LA HABRA BLVD	CYPRESS ST	COLLEGE ST	Secondary	AC	A	4	~	1,318	60	76,655	77	15	64	21	5/5/25	New Construction - Initial	1/1/79
003	14	LA HABRA BLVD	MONTE VISTA ST	WALNUT ST	Secondary	AC	A	4	~	1,322	54	70,668	78	29	53	18	3/3/25	New Construction - Initial	1/1/90
061C	101	HARBOR BLVD	BROOKDALE AVE	WHITTIER AVE	Primary	AC	A	2	~	1,320	80	103,600	78	15	38	47	4/23/25	New Construction - Initial	1/1/80
003	9	LA HABRA BLVD	VALLEY HOME AVE	DEXFORD ST	Secondary	AC	A	4	~	1,002	56	56,112	79	16	76	8	2/25/25	New Construction - Initial	1/1/80
006	38	WHITTIER BLVD	PALM ST	CITY LIMITS	Collector	AC	A	2	~	1,262	36	45,468	79	16	80	4	4/23/25	New Construction - Initial	1/1/91
009	93	EUCUID ST	LA HABRA BLVD	SECOND ST	Secondary	AC	A	4	~	710	60	42,600	79	13	63	24	5/9/25	New Construction - Initial	1/1/75
009	95	EUCUID ST	OLIVE AVE	LAMBERT RD	Secondary	AC	A	4	~	935	60	56,100	79	27	73	0	5/9/25	New Construction - Initial	1/1/75
001	6	IDAHO ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	5	~	1,525	59	91,560	79	0	100	0	3/12/25	New Construction - Initial	1/1/77
014	73	RUSSELL ST	VALLEY HOME AVE	MACY ST	Secondary	AC	A	2	~	1,757	42	79,744	79	23	55	22	2/18/25	Surface Treatment - Slurry Seal	8/4/23
061C	103	HARBOR BLVD	FRANCIS AVE	LA HABRA BLVD	Primary	AC	A	4	~	1,440	72	103,680	80	29	67	4	4/23/25	New Construction - Initial	1/1/80
061B	109	HARBOR BLVD EAST SIDE	LAS RIENDAS DR	LAS PALMAS DR	Major	AC	A	2	~	1,075	32	34,400	80	11	58	31	2/14/25	Overlay - AC Rubber	8/7/17
004	31	LAMBERT RD	WHITEBOOK DR	IDAHO ST	Primary	AC	A	4	~	1,024	64	66,625	81	50	50	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	34	LAMBERT RD	CITY LIMITS	MARTINEZ DR	Primary	AC	A	6	~	1,246	79	99,760	81	34	66	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
003	20	LA HABRA BLVD	FONDA ST	PALM ST	Primary	AC	A	4	~	1,441	60	86,460	81	0	84	16	4/22/25	New Construction - Initial	1/1/76
003	15	LA HABRA BLVD	WALNUT ST	EUCUID ST	Secondary	AC	A	4	~	1,318	54	70,440	83	0	95	5	4/25/25	New Construction - Initial	1/1/90
003	21	LA HABRA BLVD	PALM ST	E. CITY LIMIT	Primary	AC	A	4	~	1,304	60	78,240	83	21	42	37	4/23/25	New Construction - Initial	1/1/76
061C	102	HARBOR BLVD	WHITTIER AVE	FRANCIS AVE	Primary	AC	A	4	~	1,185	72	85,320	84	0	91	9	4/23/25	New Construction - Initial	1/1/80
009	99	EUCUID ST	SANDLEWOOD AVE	CITY LIMIT	Major	AAC	A	4	~	1,580	80	126,400	84	13	80	7	5/9/25	Overlay - AC Structural	6/1/17
061	106	HARBOR BLVD WEST SIDE	LAMBERT RD	EDWARDS DR	Primary	AC	A	3	~	1,289	32	41,248	84	15	82	3	2/14/25	New Construction - Initial	1/1/80
061C	100	HARBOR BLVD	CITY LIMIT	BROOKDALE AVE	Primary	AC	A	4	~	1,315	80	89,075	84	38	42	20	4/23/25	New Construction - Initial	1/1/80
061	107	HARBOR BLVD WEST SIDE	EDWARDS DR	IMPERIAL HWY	Major	AC	A	3	~	1,338	16	21,408	85	19	64	17	2/14/25	New Construction - Initial	1/1/80
061C	167	HARBOR BLVD	435' S/O IMPERIAL HWY	LAS RIENDAS	Major	AC	A	6	~	526	80	42,160	85	16	84	0	2/14/25	Overlay - AC Rubber	8/7/17
004	33	LAMBERT RD	MARTINEZ DR	BEACH BLVD	Primary	AC	A	5	~	1,294	70	98,960	85	28	62	10	3/16/25	Surface Treatment - Slurry Seal	10/1/18
061B	110	HARBOR BLVD EAST SIDE	LAS PALMAS DR	450' S/O LAS PALMAS DR	Major	AC	A	2	~	450	32	14,400	86	0	100	0	2/14/25	Overlay - AC Rubber	8/7/17
004	27	LAMBERT RD	EUCUID ST	CYPRESS ST	Primary	AC	A	5	~	1,411	60	86,739	86	20	50	30	2/14/25	Complete Reconstruction - AC	10/1/18
009	98	EUCUID ST	IMPERIAL HWY	SANDLEWOOD AVE	Major	AAC	A	4	~	1,600	80	128,000	87	37	63	0	5/9/25	Overlay - AC Structural	6/1/17
004	25	LAMBERT RD	RAIL ROAD	HARBOR BLVD	Primary	AC	A	5	~	1,320	79	105,680	88	15	58	27	2/14/25	Complete Reconstruction - AC	10/1/18
004	26	LAMBERT RD	CYPRESS ST	RAILROAD	Primary	AC	A	5	~	1,320	79	105,680	89	17	69	14	2/14/25	Complete Reconstruction - AC	10/1/18
018	89	HACIENDA RD	WHITTIER BLVD	NORTH CITY LIMIT	Secondary	AAC	A	4	~	2,324	45	111,240	91	62	21	17	2/19/25	Overlay - AC Structural	1/1/21
004	23	LAMBERT RD	RAILROAD	PALM ST	Major	AC	A	2	~	1,327	39	53,120	91	21	79	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	24	LAMBERT RD	HARBOR BLVD	RAILROAD	Major	AC	A	2	~	1,324	39	53,000	91	32	68	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	22	LAMBERT RD	PALM ST	CITY LIMIT	Major	AC	A	5	~	1,289	77	100,620	92	0	100	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	28	LAMBERT RD	WALNUT ST	EUCUID ST	Primary	AC	A	4	~	1,316	64	85,605	92	27	73	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	30	LAMBERT RD	IDAHO ST	MONTE VISTA ST	Primary	AC	A	4	~	1,310	64	91,850	93	0	100	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	29	LAMBERT RD	MONTE VISTA ST	WALNUT ST	Primary	AC	A	2	~	1,236	65	79,345	93	36	64	0	3/16/25	Complete Reconstruction - AC	10/1/18
003	11	LA HABRA BLVD	BEACH BLVD	DEANNA ST	Secondary	AC	A	4	~	1,174	58	66,342	95	0	64	36	2/26/25	Complete Reconstruction - AC	1/1/20
009	92	EUCUID ST	FRANCIS ST	LA HABRA BLVD	Secondary	AC	A	2	~	1,115	52	49,425	96	0	30	70	2/13/25	Overlay - AC Rubber	2/1/25
001	2	IDAHO ST	HIGHLANDER AVE	LA HABRA BLVD	Secondary	AC	A	2	~	1,283	39	51,360	96	0	85	15	2/14/25	New Construction - Initial	10/1/86
001	1	IDAHO ST	WHITTIER BLVD	HIGHLANDER AVE	Secondary	AC	A	2	~	1,317	39	52,720	97	0	90	10	2/14/25	Surface Treatment - Slurry Seal	7/1/11
003	12	LA HABRA BLVD	DEANNA ST	IDAHO ST	Secondary	AC	A	4	~	1,487	56	90,132	97	0	100	0	2/26/25	Complete Reconstruction - AC	1/1/20
005	35	PALM ST	WHITTIER BLVD	FRANCIS AVE	Collector	AAC	A	2	~	1,182	35	42,588	97	0	25	75	3/24/25	Overlay - AC Structural	5/1/23
005	166	PALM ST	STEARNS AVE	LA HABRA BLVD	Collector	AAC	A	5	~	674	35	24,300	98	0	32	68	3/24/25	Overlay - AC Structural	5/1/23
005	36	PALM ST	FRANCIS AVE	STEARNS AVE	Collector	AAC	A	2	~	780	36	28,080	98	0	42	58	3/24/25	Overlay - AC Structural	5/1/23
009	91	EUCUID ST	WHITTIER BLVD	FRANCIS AVE	Secondary	AC	A	2	~	1,449	35	52,200	99	0	61	39	2/13/25	Overlay - AC Rubber	2/1/25

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
329	1101	MACY ST	WHITTIER BLVD	WALLACE AVE	Secondary	AC	A	2	~	869	45	40,020	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
329	1505	MACY ST	WALLACE AVE	RUSSELL ST	Secondary	AC	A	2	~	570	45	25,266	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
005	37	PALM ST	TANGLEWOOD ST	LAMBERT RD	Secondary	AC	A	4	~	1,521	60	88,855	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
										16.3		5,004,355							
		Locals																	
245	690	GREENWOOD AVE	COLLEGE	VALENCIA	Local	AC	E	2	35	185	28	5,208	37	76	10	14	4/18/25	Surface Treatment - Slurry Seal	7/1/12
471	1320	THIRD AVE	KNUDSON ST	CHINCHILLA ST	Local	AC	E	2	17	293	30	10,040	37	48	18	34	3/4/25	Surface Treatment - Slurry Seal	4/1/13
008	50	CYPRESS ST	305' N/O FOUNDATION	IMPERIAL HWY	Local	AC	C	2	31	1,201	35	43,272	41	42	55	3	2/14/25	New Construction - Initial	1/1/92
332	945	MAPLE ST	WHITTIER BLVD	SOUTH END	Local	AC	E	2	35	296	32	11,267	41	74	22	4	4/22/25	Surface Treatment - Slurry Seal	7/1/12
364	1019	NADA STREET	EL PORTAL	SOUTH END	Local	AAC	E	2	09	147	30	7,037	42	74	26	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
190	542	DOVER DR	WALNUT ST	DURHAM	Local	AC	E	2	24	459	35	16,560	45	82	18	0	4/21/25	Surface Treatment - Slurry Seal	7/1/12
224	634	FLORENCE CT	NORTH END	FLORENCE AVE	Local	AC	E	2	35	91	16	1,564	45	84	16	0	4/22/25	New Construction - Initial	1/1/80
040	181	HILLDALE AVE	CDS E/ EUNICE CIR	IDAHO ST	Local	AC	E	2	10	725	36	25,315	46	72	15	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
210	583	ERNA AVE	WILLOW ST	WALNUT ST	Local	AC	E	2	16	1,000	32	31,616	47	66	26	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
016	80	VALLEY HOME AVE	GREGORY LN	LA HABRA BLVD	Local	AAC	C	2	02	1,579	18	28,422	47	68	24	8	2/25/25	Overlay - AC Thin	10/1/06
446	1245	SONORA AVE	WEST END	LA CASA	Local	AC	E	2	19	355	27	10,815	48	40	60	0	4/15/25	3 in AC OVERLAY	7/1/12
017	83	WALNUT ST	WHITTIER AVE	HIGHLANDER AVE	Local	AC	C	2	21	1,284	29	38,550	48	38	48	14	3/3/25	New Construction - Initial	1/1/81
386	1081	PARK AVE	BUENA VISTA	SOUTH END	Local	AC	E	2	19	240	27	7,824	49	28	68	4	4/21/25	3 in AC OVERLAY	7/1/12
017	84	WALNUT ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	C	2	21	1,285	29	38,580	49	42	46	12	3/3/25	New Construction - Initial	1/1/81
001	63	IDAHO ST	END OF PVMNT	REBECCA DR	Local	AC	C	1	08	265	17	4,505	49	55	14	31	2/27/25	Surface Treatment - Slurry Seal	1/1/20
109	329	ASHLEY CIR	NORTH END	HILLDALE AVE	Local	AC	E	2	10	246	32	9,447	49	49	28	23	2/25/25	New Construction - Initial	1/1/80
016	79	VALLEY HOME AVE	WHITTIER AVE	GREGORY LN	Local	AAC	C	2	02	1,311	17	23,616	50	57	28	15	2/25/25	Overlay - AC Thin	10/1/06
176	506	DARBY CT	WEST END	CLIFTON	Local	AAC	E	2	30	183	26	6,333	51	63	25	12	4/21/25	Overlay - AC Thin	8/1/07
116	341	BAJA AVE	KERN ST	MARIPOSA ST	Local	AC	E	2	04	255	32	8,910	51	84	16	0	3/4/25	New Construction - Initial	1/1/80
389	1084	PARK WAY	PARK AVE	EAST END	Local	AC	E	2	19	204	26	5,535	51	66	16	18	4/25/25	Surface Treatment - Slurry Seal	7/1/12
025	324	ARBOLITA DR	RODDY DR	HARBOR BLVD	Local	AC	E	2	34	582	35	20,988	52	70	13	17	3/25/25	Slurry Seal or Chip Seal	8/1/05
033	647	FRANCIS AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	35	1,229	26	33,562	52	9	91	0	4/18/25	Surface Reconstruction - AC	7/1/12
157	453	CHESHAM AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	895	36	32,754	53	42	58	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
016	78	VALLEY HOME AVE	GORDON AVE	WHITTIER AVE	Local	AC	C	2	01	1,135	15	18,176	53	81	16	3	2/18/25	New Construction - Initial	1/1/94
134	389	BUENA VISTA AVE	W END	LA CASA	Local	AC	E	2	19	1,210	36	43,128	53	71	17	12	4/25/25	Surface Treatment - Slurry Seal	7/1/12
251	728	HEATHER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,265	30	36,900	54	63	24	13	2/26/25	Surface Treatment - Slurry Seal	4/1/13
040	753	HILLDALE AVE	WEST END	DEANNA ST	Local	AC	E	2	10	776	36	29,731	54	67	21	12	2/25/25	Slurry Seal or Chip Seal	8/1/05
532	1701	LA HABRA HILLS DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	12	943	46	37,757	54	70	29	1	3/12/25	Surface Treatment - Slurry Seal	4/1/13
224	1709	FLORENCE CT	FLORENCE AVE	SOUTH END	Local	AC	E	2	35	107	16	1,836	54	52	14	34	4/22/25	New Construction - Initial	1/1/80
460	1292	SUNSET ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	54	78	22	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
227	642	FOURTH AVE	WEST END	CYPRESS ST	Local	AAC	E	2	30	642	26	16,536	55	63	31	6	4/21/25	Overlay - AC Thin	8/1/07
331	942	MAIN ST	FIRST AVE	SECOND ST	Local	AC	E	2	29	306	46	13,800	56	77	23	0	4/17/25	Surface Treatment - Cape Seal	4/1/13
015	76	SANDLEWOOD AVE	PATWOOD DR	EUCUID ST	Local	AC	E	2	25	1,449	35	52,200	56	71	17	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
527	1507	BEACH ST	WHITTER BLVD	NORTH END	Local	AC	E	2	07	221	36	9,531	56	82	13	5	2/19/25	Overlay - AC Rubber	4/1/13
022	114	CITRUS DR	WHITTIER BLVD	RYAN AVE	Local	AAC	E	2	13	773	29	26,156	56	30	67	3	2/27/25	Surface Reconstruction - AC	7/1/11
477	1328	VALENCIA ST	NORTH END	GREENWOOD AVE	Local	AAC	E	2	35	285	30	10,075	56	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
362	1016	MOUNTAIN VIEW AVE	LAMBERT RD	WALNUT ST	Local	AC	E	2	18	713	37	27,631	57	66	33	1	3/16/25	New Construction - Initial	1/1/80
245	687	GREENWOOD AVE	VALENCIA	SUNSET	Local	AC	E	2	35	299	28	8,400	57	53	28	19	4/25/25	Surface Treatment - Slurry Seal	7/1/12
223	629	FLORENCE AVE	LYDIA ST	MONTE VISTA ST	Local	AC	E	2	14	493	30	14,430	57	53	26	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
421	1176	ROSE AVE	MCPHERSON ST	COLLEGE ST	Local	AAC	E	2	35	260	30	8,300	58	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
507	1391	WILLOW ST	GREENWOOD AVE	HIGHLANDER AVE	Local	AC	E	2	16	327	30	9,630	58	70	29	1	3/3/25	Surface Treatment - Slurry Seal	4/1/13
008	51	CYPRESS ST	LAMBERT RD	498' S/O PACIFIC	Local	AC	C	2	31	1,642	35	59,148	58	33	59	8	2/14/25	New Construction - Initial	1/1/92
053	157	PATWOOD DR	GWYNWOOD AVE	SANDLEWOOD AVE	Local	AC	E	2	25	404	35	14,580	58	78	16	6	4/15/25	Surface Treatment - Slurry Seal	4/1/24
134	395	BUENA VISTA AVE	WALNUT ST	ENCINITAS ST	Local	AAC	E	2	24	1,209	30	35,910	58	0	100	0	4/15/25	Surface Reconstruction - AC	7/1/12
226	639	FOUNDATION AVE	EUCUID ST	CYPRESS ST	Local	AAC	E	2	31	907	46	41,170	58	59	40	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
047	150	LAS LOMAS DR	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,169	35	42,120	59	67	30	3	4/23/25	Surface Treatment - Slurry Seal	7/1/12
540	1729	RANDALL ST	RANDALL AVE	END	Local	AC	E	2	01	119	31	6,126	59	19	77	4	2/17/25	New Construction - AC	1/1/18
204	570	ELM ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	21	448	30	13,440	59	58	42	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
304	858	LAGUNA DRIVE	LINDAUER DR	HACIENDA RD	Local	AC	E	2	07	1,430	30	42,540	59	70	30	0	2/19/25	New Construction - Initial	1/1/80
530	1600	STEVENS AVE	STARLAND ST	ORANGE ST	Local	AAC	E	2	27	240	30	7,020	59	57	43	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
211	596	ESSEX DR	BEDFORD ST	FONDA ST	Local	AC	E	2	38	739	30	22,170	59	60	16	24	3/24/25	New Construction - Initial	1/1/80
260	757	HILLCREST ST	FIRST AVE	SOUTH END	Local	AC	E	2	17	815	33	29,282	59	59	24	17	3/4/25	Slurry Seal or Chip Seal	8/1/05
181	513	DEL SUR AVE	WEST END	E/O LA CASA	Local	AC	E	2	19	349	22	7,700	59	57	20	23	4/15/25	Surface Treatment - Slurry Seal	7/1/12
308	876	LATCHWOOD LN	DORWOOD	EAST END	Local	AAC	E	2	26	267	26	8,467	59	61	29	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
459	1285	SUMMERSHADE DR	RIDGEHAVEN DR	GRAVYVILLE DR	Local	AC	E	2	06	811	35	29,232	59	55	31	14	2/18/25	Surface Treatment - Slurry Seal	8/4/23
264	776	HOLLIS CIR	WEST END	WALNUT ST	Local	AC	E	2	19	181	26	6,231	60	69	31	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
220	610	FIFTH AVE	MONTE VISTA ST	MCFADDEN ST	Local	AAC	E	2	18	657	24	15,624	60	64	29	7	3/4/25	Overlay - AC Thin	8/1/07
018	130	HACIENDA RD	EL RANCHO DR	WHITTIER BLVD	Local	AC	E	2	09	324	50	16,295	60	38	61	1	2/24/25	Surface Treatment - Slurry Seal	1/1/20
033	651	FRANCIS AVE	LOIS ST	EUCUID ST	Local	AC	E	2	21	459	26	11,778	60	68	32	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
428	1198	RYE AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,144	36	41,718	60	59	23	18	4/15/25	Surface Treatment - Slurry Seal	7/1/12
292	837	LA CASA AVE	LAS LOMAS AVE	BUENA VISTA AVE	Local	AC	E	2	19	260	36	9,120	60	79	21	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
524	1504	COMMERCIAL WY	CYPRESS AVE	PARK INDUSTRIAL DR	Local	AC	E	2	36	1,026	36	36,972	60	45	36	19	4/21/25	Slurry Seal or Chip Seal	8/1/05
062	111	LINDAUER DR	WHITTIER BLVD	HACIENDA RD	Local	AC	E	2	07	2,034	30	62,620	60	64	36	0	2/19/25	New Construction - Initial	1/1/74
047	149	LAS LOMAS DR	IDAHO ST	DERRY ST	Local	AAC	E	2	19	1,514	35	54,540	60	0	100	0	4/23/25	Surface Reconstruction - AC	7/1/12
538	1740	JANISON DR	RANDALL AVE	CREEK LN	Local	AC	E	2	01	245	26	6,535	61	54	46	0	2/17/25	New Construction - AC	1/1/18
488	1357	VIEW DR	AMANDA	HILL	Local	AC	E	2	27	358	31	12,598	61	60	27	13	4/18/25	Surface Treatment - Slurry Seal	1/1/20
316	899	LESLIE ST	NORTH END	IMPERIAL HWY	Local	AAC	E	2	32	1,305	36	49,127	61	59	27	14	3/11/25	Overlay - AC Structural	1/1/20
268	781	INDUSTRY AVE	EUCUID	CYPRESS	Local	AAC	E	2	31	684	36	24,192	61	35	51	14	2/14/25	Surface Treatment - Slurry Seal	1/1/20
465	1307	TEAKWOOD AVE	DORWOOD AVE	EAST END	Local	AC	E	2	26	239	26	7,739	61	58	29	13	3/10/25	Surface Treatment - Slurry Seal	1/1/20
337	951	MARIAN ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	E	2	14	1,277	30	39,060	61	43	36	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
523	1460	CALIFORNIA ST	LA HABRA BLVD	SOUTH END	Local	AAC	E	2	22	635	30	18,790	62	56	44	0	4/21/25	Overlay - AC Thin	4/1/13
245	693	GREENWOOD AVE	MONTE VISTA	LEORA	Local	AC	E	2	16	596	30	17,520	62	38	35	27	3/3/25	Surface Treatment - Slurry Seal	4/1/13
528	1722	RANDALL AVE	RUSSELL ST	JANISON DR	Local	AC	E	2	01	718	35	25,569	62	64	36	0	2/17/25	New Construction - AC	1/1/18
430	1200	SAN JOSE AVE	BEACH BLVD	MARIN ST	Local	AC	E	2	10	583	36	20,556	62	43	57	0	2/25/25	New Construction - Initial	1/1/80
255	738	HIGHLAND CT	ORANGE ST	EAST END	Local	AC	E	2	27	347	30	11,935	62	76	22	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
239	671	GRANADA DR	HANLINE	GRANADA CT	Local	AAC	E	2	09	326	30	11,305	62	7	81	12	2/20/25	Surface Treatment - Slurry Seal	1/1/20
302	856	LA CADENA WAY	GREGORY LN	SOUTH END	Local	AC	E	2	09	276	36	11,511	62	66	34	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
045	399	CAJON DR	RIDGEHAVEN DR	BRIERCLIFF DR	Local	AC	E	2	05	687	35	24,768	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
171	492	CONCORD WAY	CAJON DR	N/O REDCOACH	Local	AC	E	2	05	464	26	11,752	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
152	444	CEDARWOOD DR	SILVERSPUR LN	BRIERCLIFF DR	Local	AC	E	2	05	1,001	36	35,820	63	54	30	16	2/25/25	Surface Treatment - Slurry Seal	8/4/23
022	115	CITRUS DR	RYAN AVE	CITY LIMITS 140' N/ENTRADA DR	Local	AAC	E	2	13	1,763	31	55,664	63	36	58	6	2/27/25	Surface Reconstruction - AC	7/1/11
311	879	LEMON ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	35	800	30	23,820	63	65	27	8	4/22/25	Surface Treatment - Slurry Seal	7/1/12
324	925	LOMA VERDE AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	63	0	82	18	3/16/25	Slurry Seal or Chip Seal	8/1/05
331	943	MAIN ST	FLORENCE AVE	SOUTH END	Local	AC	E	2	28	276	39	12,671	63	74	26	0	4/2/25	Surface Treatment - Slurry Seal	4/1/13
182	514	DERRY ST	RYE AVE	N/O LAS LOMAS	Local	AC	E	2	19	520	36	19,220	63	62	19	19	4/15/25	Surface Treatment - Slurry Seal	7/1/02
546	1737	SHADYCREST LN	PALM ST	END	Local	AC	E	2	40	614	11	10,838	63	64	22	14	5/5/25	New Construction - AC	1/1/18
159	457	CHINCHILLA ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	660	30	20,300	63	52	38	10	3/4/25	Slurry Seal or Chip Seal	8/1/05
442	1238	SILVERSPUR LN	RIDGEHAVEN DR	SILVERSPUR WAY	Local	AC	E	2	05	573	36	21,378	63	62	18	20	2/25/25	Surface Treatment - Slurry Seal	8/4/23
339	955	MARIN ST	LORELLA AVE	HILLDALE AVE	Local	AC	E	2	10	548	36	20,478	63	59	41	0	2/25/25	New Construction - Initial	1/1/80
347	985	MCPHERSON ST	ROSE AVE	FRANCIS AVE	Local	AAC	E	2	35	474	30	14,720	63	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
017	87	WALNUT ST	LAMBERT RD	LAS LOMAS AVE	Local	AC	C	2	24	1,287	35	46,368	64	36	53	11	4/22/25	Slurry Seal or Chip Seal	8/1/05
047	151	LAS LOMAS DR	WALNUT ST	EUCUID ST	Local	AC	E	2	24	1,320	36	47,088	64	67	24	9	4/23/25	Surface Treatment - Slurry Seal	7/1/12
063	200	ACACIA ST	PORTOLA	LOMA VERDE	Local	AAC	E	2	22	171	31	5,801	64	0	74	26	3/16/25	Surface Treatment - Slurry Seal	4/1/13
128	9368	BRIERCLIFF DR	CAJON DR	CEDARWOOD DR	Local	AC	E	2	05	500	36	17,568	64	55	40	5	2/25/25	Surface Treatment - Slurry Seal	8/4/23
046	148	WHITEBOOK DR	LAMBERT RD	SHEFIELD DR	Local	AC	E	2	11	1,085	36	43,560	64	69	25	6	3/4/25	Surface Treatment - Slurry Seal	8/4/23
291	834	KNUDSON ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	678	30	20,840	64	42	36	22	3/4/25	Surface Treatment - Slurry Seal	4/1/13
421	1172	ROSE AVE	SUNSET ST	COLLEGE ST	Local	AC	E	2	35	489	26	12,558	64	13	46	41	4/18/25	Surface Treatment - Slurry Seal	7/11/12
245	689	GREENWOOD AVE	WALNUT ST	HILLSIDE ST	Local	AC	E	2	21	663	30	19,710	64	57	43	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
528	1721	RANDALL AVE	RUSSELL ST	MACY ST	Local	AC	E	2	01	1,274	32	42,858	64	56	43	1	2/17/25	New Construction - AC	1/1/18
012	637	FONDA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	64	75	18	7	3/24/25	Surface Treatment - Slurry Seal	4/1/13
281	807	KEENE DR	LAS LOMAS DR	WALNUT ST	Local	AC	E	2	19	746	39	28,626	64	54	40	6	4/15/25	Surface Treatment - Slurry Seal	7/1/12
292	835	LA CASA AVE	BUENA VISTA AVE	DEL SUR AVE	Local	AC	E	2	19	717	36	23,424	64	68	32	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
502	1378	WEDGEWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	365	26	10,995	65	66	34	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
010	59	FASHION SQUARE LN	BEACH BLVD	EAST END	Local	AC	E	4	11	518	56	29,555	65	0	87	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
347	973	MCPHERSON ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,007	44	43,876	65	67	33	0	4/22/25	Surface Treatment - Slurry Seal	8/4/23
016	77	VALLEY HOME AVE	CITY LIMIT	GORDON AVE	Local	AC	C	1	01	1,056	16	16,912	65	77	23	0	2/18/25	New Construction - Initial	1/1/81
189	536	DORWOOD AVE	LATCHWOOD LN	COUNTRY HILL DR	Local	AAC	E	2	26	631	36	22,716	65	75	25	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
040	141	HILLDALE AVE	DEANNA ST	CDS E/ EUNICE CIR	Local	AC	E	2	10	759	36	31,035	65	65	34	1	2/25/25	Slurry Seal or Chip Seal	8/1/05
296	845	LA PRESA DR	WALNUT ST	HILLSIDE ST	Local	AC	E	2	20	635	36	22,680	65	0	99	1	4/18/25	New Construction - Initial	1/1/80
323	918	LOIS ST	GREENWOOD AVE	FLORENCE AVE	Local	AC	E	2	21	979	32	31,360	65	49	47	4	4/21/25	Surface Treatment - Slurry Seal	1/1/20
182	516	DERRY ST	BUENA VISTA AVE	CHESHAM AVE	Local	AC	E	2	19	480	36	17,780	65	68	31	1	4/15/25	Surface Treatment - Slurry Seal	7/1/12
244	685	GREENWAY TER	NORTH END	HENSEL	Local	AC	E	2	34	386	32	15,677	65	59	21	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
431	1203	SANDOWN ST	NORTH END	CHESHAM	Local	AC	E	2	19	188	26	6,413	65	36	36	28	4/15/25	Surface Treatment - Slurry Seal	7/1/12
013	67	MONTE VISTA ST	WHITTIER BLVD	HIGHLANDER AVE	Local	AAC	E	2	16	1,316	39	52,680	66	56	26	18	2/26/25	Overlay - AC Structural	8/1/05
453	1256	STEARNS AVE	SUNSET ST	HARBOR BL	Local	AAC	E	2	35	627	33	20,493	66	12	87	1	4/18/25	Surface Reconstruction - AC	7/1/12
525	1509	CORTO WAY	WHITTIER BLVD	SOUTH END	Local	AAC	E	2	09	250	26	8,295	66	34	66	0	2/20/25	Surface Reconstruction - AC	7/1/11
122	353	BISHOP DR	AMANDA LN	ORANGE ST	Local	AC	E	2	27	589	30	17,700	66	71	28	1	4/17/25	Surface Treatment - Slurry Seal	1/1/20
031	128	EL PORTAL DR	BEACH BLVD	GRANADA DR	Local	AAC	E	2	09	1,725	30	51,642	66	37	63	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
059	162	VILLAGE DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	32	1,075	32	34,400	66	41	59	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
110	331	AVENIDA SANTA ANITA	CALLE DON GUILLERMO	BURWOOD	Local	AAC	E	2	33	1,047	36	37,188	66	69	26	5	3/10/25	Surface Treatment - Slurry Seal	1/1/20
125	363	BONNIE LN	CYPRESS ST	N/O CAPELLA	Local	AC	E	2	27	706	30	22,180	66	70	22	8	4/18/25	Surface Treatment - Slurry Seal	1/1/20
239	670	GRANADA DR	GRANADA CT	EL PORTAL	Local	AAC	E	2	09	297	30	8,730	66	45	55	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
244	684	GREENWAY TER	HENSEL	STONEWOOD	Local	AC	E	2	34	116	32	3,520	66	53	21	26	3/26/25	Surface Treatment - Slurry Seal	8/4/23
017	88	WALNUT ST	LAS LOMAS AVE	IMPERIAL HWY	Local	AC	C	2	24	1,407	35	50,688	66	30	55	15	4/22/25	Slurry Seal or Chip Seal	8/1/05
294	840	LA PLAZA CT	NORTH END	LA PLAZA DR	Local	AAC	E	2	09	128	30	5,635	66	12	77	11	2/20/25	Surface Treatment - Slurry Seal	1/1/20
317	903	LIBERTY ST	SOUTH END	OLIVE AVE	Local	AAC	E	2	30	435	26	13,105	66	30	50	20	3/16/25	Overlay AC Thin	11/30/10
398	1121	PORTOLA AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	66	0	76	24	3/16/25	Slurry Seal or Chip Seal	8/1/05
001	64	IDAHO ST	REBECCA DR	WHITTIER BLVD	Local	AC	C	2	08	1,492	36	64,276	67	45	51	4	2/14/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
404	1130	REBECCA DR	SILLIKER	IDAHO ST	Local	AAC	E	2	08	862	36	31,782	67	33	62	5	4/18/25	Surface Treatment - Slurry Seal	1/1/20
169	479	COLLEGE ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,005	33	33,165	67	55	31	14	4/18/25	Overlay - AC Thin	8/1/05
044	1276	STURBRIDGE DR	WIMBLETON LN	WOODMERE CT	Local	AC	E	2	05	271	35	9,792	67	45	55	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
236	1731	GORDON AVE	MACY ST	BALDWIN ST	Local	AC	E	2	01	413	33	13,678	67	31	66	3	2/17/25	Surface Treatment - Slurry Seal	8/4/23
236	1728	GORDON AVE	RANDALL AVE	MACY ST	Local	AC	E	1	01	674	32	22,640	67	11	89	0	2/17/25	Surface Treatment - Slurry Seal	8/4/23
031	169	EL PORTAL DR	GRANADA DR	LA HABRA BLVD	Local	AAC	E	2	09	709	35	25,660	67	46	48	6	2/20/25	Surface Treatment - Slurry Seal	1/1/20
261	759	HILLSIDE ST	WHITTIER BLVD	GREENWOOD	Local	AC	E	2	21	786	36	27,356	67	40	58	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
169	485	COLLEGE ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	626	37	23,826	67	40	44	16	4/22/25	Surface Treatment - Slurry Seal	7/1/11
151	441	CARPENTER ST	RUSSELL ST	NORTH END	Local	AC	E	2	01	534	33	15,235	67	0	98	2	2/18/25	Surface Treatment - Cape Seal	4/1/13
207	577	EMERY AVE	PALM ST	EAST END	Local	AAC	E	2	39	666	36	25,456	67	46	45	9	2/14/25	Overlay - AC Thin	8/1/07
033	1501	FRANCIS AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	664	29	19,950	67	0	59	41	4/2/25	New Construction - Initial	1/1/80
447	1246	SONORA PL	NORTH END	STEARNS	Local	AC	E	2	38	468	26	13,758	68	54	45	1	3/25/25	New Construction - Initial	1/1/80
427	1192	RYAN AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	762	29	22,890	68	24	69	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
049	365	BRASS LANTERN DR	RIDGEHAVEN DR	ZEKE & ELSIE AVE	Local	AC	E	2	06	295	36	11,370	68	32	68	0	2/18/25	Overlay - AC Rubber	4/1/13
387	1082	PARK INDUSTRIAL DR	CYPRESS ST	COMMERCIAL	Local	AC	E	2	36	985	36	33,300	68	45	50	5	4/21/25	Surface Treatment - Slurry Seal	4/1/13
457	1268	STORY AVE	MISSION ST	EAST END	Local	AAC	E	2	03	451	30	15,325	68	41	59	0	2/20/25	Overlay - AC Thin	8/1/08
186	532	DITWOOD PL	RONWOOD	SOUTH END	Local	AC	E	2	25	132	26	4,957	68	51	33	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
457	1269	STORY AVE	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,058	35	38,124	68	38	44	18	2/20/25	Overlay - AC Thin	8/1/08
008	1715	CYPRESS ST	CITY BOUNDARY	BONNIE LN	Local	AC	C	2	27	501	35	18,072	68	47	50	3	4/18/25	New Construction - AC	1/1/80
180	512	DEBWOOD PL	PARKWOOD AVE	S/END	Local	AC	E	2	25	392	26	11,717	68	48	36	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
275	789	JOAN ST	DOT AVE	FRANCIS AVE	Local	AC	E	2	38	503	30	14,910	68	67	18	15	3/17/25	New Construction - Initial	1/1/80
164	470	COBBLESTONE RD	GRAYVILLE DR	RIDGEHAVEN DR	Local	AC	E	2	06	1,384	36	49,392	68	64	36	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
168	478	COLLEEN ST	LA HABRA BLVD	LORELLA	Local	AAC	E	2	10	495	36	17,388	68	45	55	0	2/26/25	Surface Reconstruction - AC	8/1/08
020	7150	SANSINENA LN	EDGEMONT ST	ANTOINETTE DR	Local	AC	E	2	08	747	33	24,684	68	55	35	10	2/19/25	Surface Treatment - Slurry Seal	1/1/20
241	677	GREENBRIER LN	RIDGEHAVEN	CAJON	Local	AC	E	2	05	1,180	36	43,086	68	47	41	12	2/19/25	Surface Treatment - Slurry Seal	8/4/23
288	827	KIRBY DR	W/END	KIRBY (SOUTH CDS)	Local	AAC	E	2	13	89	32	5,315	68	0	76	24	2/27/25	Surface Treatment - Slurry Seal	1/1/20
058	865	LAKEVIEW AVE	MONTWOOD AVE	CITY LIMITS	Local	AC	E	2	32	363	35	13,104	68	62	37	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
415	1160	ROBIN WAY	WEST END	IDAHO ST	Local	AC	E	2	09	178	26	6,453	68	19	81	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
014	1726	RUSSELL ST	RUSSELL ST	CUL-DE-SAC	Local	AC	E	2	01	93	71	5,715	68	0	100	0	2/17/25	New Construction - AC	1/1/18
198	556	EL NIDO ST	NORTH END	ROSECREST	Local	AAC	E	2	24	246	30	8,955	69	0	99	1	4/21/25	Surface Reconstruction - AC	7/1/12
478	1339	VALLEJO ST	STEARNS AVE	HODSON AVE	Local	AC	E	2	38	221	36	8,490	69	79	21	0	3/24/25	New Construction - Initial	1/1/80
210	7155	ERNA AVE	HAZEL ST	EUCLID ST	Local	AC	E	2	21	924	30	27,000	69	54	34	12	4/18/25	Surface Treatment - Slurry Seal	1/1/20
008	56	CYPRESS ST	CAPELLA AVE	WHITTIER BLVD	Local	AAC	C	2	34	1,419	35	51,120	69	64	32	4	4/18/25	Overlay - AC Structural	2/1/24
238	669	GRANADA CT	GRANADA DR	SOUTH END	Local	AAC	E	2	09	359	30	12,295	69	12	81	7	2/20/25	Surface Treatment - Slurry Seal	1/1/20
332	944	MAPLE ST	PINEHURST AVE	FRANCIS AVE	Local	AAC	E	2	35	743	30	22,110	69	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
483	1347	VERNON ST	LINDAUER	LAGUNA	Local	AC	E	2	07	455	30	13,470	69	49	51	0	2/19/25	New Construction - Initial	1/1/80
158	1506	CHESTNUT ST	CITY LIMIT NORTH	WHITTIER BLVD	Local	AC	E	2	35	153	36	5,698	69	58	42	0	4/22/25	New Construction - Initial	1/1/09
048	1247	SPRING MEADOW LN	GRAYVILLE	SOUTH END	Local	AC	E	2	06	67	60	5,570	69	0	64	36	2/19/25	Surface Treatment - Slurry Seal	8/4/23
539	1727	CREEK LN	JANISON DR	RUSSELL ST	Local	AC	E	1	01	749	29	21,456	69	16	84	0	2/17/25	New Construction - AC	1/1/18
295	841	LA PLAZA DR	N END	LA HABRA BLVD	Local	AAC	E	2	09	1,455	36	52,416	69	8	87	5	2/20/25	Surface Treatment - Slurry Seal	1/1/20
057	160	MONTWOOD AVE	EUCLID ST	LAKEVIEW AVE	Local	AC	E	2	32	2,259	35	81,360	69	64	35	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
169	484	COLLEGE ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	664	38	25,232	69	33	43	24	4/22/25	Surface Treatment - Slurry Seal	7/1/12
407	1144	RIDGEHAVEN DR	WOODBRIER DR	CAJON DR	Local	AC	E	2	05	632	35	22,788	69	78	22	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
120	351	BERKLEY AVENUE	WEST END	DEXFORD ST	Local	AAC	E	2	02	59	36	1,303	69	39	47	14	2/24/25	Surface Treatment - Slurry Seal	11/15/21
154	450	CHERI DR	REBECCA	SILLIKER	Local	AAC	E	2	08	461	26	11,830	69	16	84	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
011	614	FIRST AVE	CITY LIMIT	WALNUT ST	Local	AC	E	2	17	952	30	28,590	69	33	59	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Overlay - AC Thin	4/1/13
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Surface Treatment - Slurry Seal	4/1/13
334	947	MARCIA DR	RUSSELL ST	NORTH END	Local	AC	E	2	01	337	32	8,317	69	7	93	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
502	1379	WEDGEWOOD LN	KIRKWOOD	COACHWOOD	Local	AAC	E	2	26	1,541	32	50,312	69	40	32	28	3/10/25	Surface Treatment - Slurry Seal	1/1/20
362	1015	MOUNTAIN VIEW AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	37	47,397	69	36	53	11	3/4/25	Overlay - AC Thin	8/1/07
477	1331	VALENCIA ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	639	32	20,256	69	51	29	20	3/26/25	Surface Treatment - Slurry Seal	7/1/12
120	350	BERKLEY AVENUE	DEXFORD DR	LIME ST	Local	AAC	E	2	02	238	35	8,604	70	34	66	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
199	557	EL PORTAL CT	WEST END	EL PORTAL DR	Local	AAC	E	2	09	237	30	8,660	70	8	92	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
423	1180	ROSECREST AVE	LAMBERT RD	EUCLID ST	Local	AC	E	2	24	1,001	30	31,280	70	0	100	0	4/21/25	2 in overlay	7/1/12
541	1730	WALLACE AVE	MACY ST	BALDWIN ST	Local	AC	E	1	01	406	32	13,722	70	12	88	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
145	427	CANFIELD DR	CARPENTER ST	EAST END	Local	AC	E	2	01	748	33	25,236	70	0	100	0	2/18/25	New Construction - Initial	1/1/80
357	1006	MONTEREY ST	LINDAUER DR	LAGUNA DR	Local	AC	E	2	07	475	30	14,070	70	44	50	6	2/19/25	New Construction - Initial	1/1/80
240	672	GRAYVILLE DR	SUMMERSHADE	BRASS LANTERN	Local	AAC	E	2	06	787	35	28,368	70	36	41	23	2/18/25	Surface Treatment - Slurry Seal	8/4/23
013	68	MONTE VISTA ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AAC	C	2	16	1,289	40	49,084	70	59	17	24	2/26/25	Overlay - AC Structural	8/1/05
135	396	BURCH WAY	NORTH END	PINEHURST	Local	AC	E	2	28	198	30	7,515	70	59	41	0	4/2/25	New Construction - Initial	1/1/80
041	142	MERCED AVE	BEACH BLVD	EAST END	Local	AAC	E	2	10	1,280	36	50,580	70	48	33	19	3/5/25	Overlay - AC Thin	8/1/05
367	1025	NASHUA ST	RYE AVE	LAS LOMAS DR	Local	AC	E	2	19	447	35	16,128	70	43	32	25	4/15/25	Surface Treatment - Slurry Seal	7/1/12
145	1723	CANFIELD DR	MACY ST	RANDALL AVE	Local	AC	E	1	01	817	32	27,246	70	8	69	23	2/17/25	Surface Treatment - Slurry Seal	8/4/23
514	1411	WOODCREST AVE	SUSAN LN	PALM ST	Local	AC	E	2	37	846	36	31,062	70	27	59	14	3/25/25	Surface Treatment - Slurry Seal	4/1/13
405	1132	RED COACH LN	RIDGEHAVEN DR	CAJON DR	Local	AC	E	2	05	1,167	26	29,718	70	29	51	20	2/19/25	Surface Treatment - Slurry Seal	8/4/23
499	1375	WARNE ST	NORTH END	FRANCIS	Local	AAC	E	2	35	783	26	23,052	70	0	99	1	4/2/25	Surface Reconstruction - AC	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
060	414	CALLE DON GUILLERMO	COUNTRY HILLS DR	SOUTH END	Local	AC	E	2	33	153	32	8,677	70	24	73	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
288	826	KIRBY DR	W/END	KIRBY (NORTH CDS)	Local	AAC	E	2	13	89	32	5,315	70	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
429	1199	RYE CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	70	50	50	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
542	1736	BALDWIN ST	RANDALL AVE	SOUTH END	Local	AC	E	2	01	255	31	11,792	71	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
184	135	DEXFORD ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	984	35	35,460	71	60	40	0	2/20/25	Overlay - AC Thin	8/1/08
118	343	BEA WAY	JOAN ST	EAST END	Local	AC	E	2	38	149	33	5,364	71	58	33	9	3/25/25	Surface Treatment - Slurry Seal	4/1/13
407	1137	RIDGEHAVEN DR	CAJON DR	GREENBRIER LN	Local	AC	E	2	05	708	36	26,238	71	54	46	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
261	1520	HILLSIDE ST	HILLSIDE CT	N END	Local	AAC	E	2	20	1,165	35	38,420	71	40	41	19	4/21/25	Overlay - AC Thin	8/1/07
319	908	LINDA AVE	SIERRA VISTA DR	EAST END	Local	AAC	E	2	13	347	30	12,205	71	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
372	1034	OAKLAND DR	DEXFORD ST	STORY AVE	Local	AAC	E	2	03	1,172	36	41,760	71	47	53	0	2/20/25	Overlay - AC Thin	8/1/08
264	775	HOLLIS CIR	WALNUT ST	EAST END	Local	AC	E	2	24	247	26	7,947	71	29	71	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
327	932	LYDIA ST	HIGHLANDER AVE	SOUTH END	Local	AC	E	2	14	963	30	30,685	71	44	45	11	2/26/25	Surface Treatment - Slurry Seal	8/4/23
014	1725	RUSSELL ST	MACY ST	CREEK LN	Local	AC	E	2	01	1,114	34	39,952	71	15	83	2	2/17/25	Surface Treatment - Slurry Seal	8/4/23
132	387	BROOKWOOD DR	NORTH END	ORCHID	Local	AC	E	2	40	408	36	17,236	71	78	14	8	3/17/25	New Construction - Initial	1/1/80
191	543	DURHAM ST	DOVER DR	LAS LOMAS AVE	Local	AC	E	2	24	817	36	29,196	71	51	30	19	4/15/25	Surface Treatment - Slurry Seal	7/1/12
530	1601	STEVENS AVE	EUCLID ST	STARLAND ST	Local	AAC	E	2	27	299	30	8,790	71	33	62	5	3/4/25	Surface Treatment - Slurry Seal	1/1/20
288	821	KIRBY DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	883	32	28,128	71	16	77	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
211	599	ESSEX DR	FONDA ST	NORTH END	Local	AC	E	2	38	172	30	6,906	72	0	100	0	3/24/25	New Construction - Initial	1/1/80
531	1700	KOOPMANS WY	WHITTIER BLVD	RANDALL AVE	Local	AC	E	2	01	544	32	17,864	72	20	80	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
440	1229	SIERRA VISTA DR	LA PRESA DR	LINDA AVE	Local	AAC	E	2	13	596	36	21,240	72	0	82	18	2/27/25	Surface Treatment - Slurry Seal	1/1/20
119	344	BEDFORD ST	LA HABRA BLVD	ALPINE ST	Local	AAC	E	2	39	207	41	8,736	72	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
223	623	FLORENCE AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,284	26	32,916	72	47	53	0	3/3/25	New Construction - Initial	1/1/80
245	686	GREENWOOD AVE	LEORA	WALNUT ST	Local	AC	E	2	16	631	26	16,094	72	39	61	0	3/3/25	Surface Treatment - Cape Seal	4/1/13
269	782	INOLA CT	NORTH END	WHITTIER BLVD	Local	AC	E	2	40	236	26	7,683	72	73	25	2	3/17/25	New Construction - Initial	1/1/80
303	857	LADERA TERR	LAS RIENDAS	SOUTH END	Local	AC	E	2	32	524	26	10,677	72	35	65	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
514	1409	WOODCREST AVE	FALLENLEAF ST	ROANNE DR	Local	AC	E	2	34	1,369	36	52,284	72	48	43	9	3/25/25	Slurry Seal or Chip Seal	8/1/05
119	345	BEDFORD ST	ALPINE ST	SUPERIOR AVE	Local	AAC	E	2	39	1,473	31	47,168	72	28	72	0	4/2/25	Overlay - AC Thin	8/1/07
133	388	BRUCE LN	WEST END	W/O OAKLAND	Local	AAC	E	2	03	111	30	4,905	72	44	56	0	2/20/25	Overlay - AC Thin	8/1/08
189	537	DORWOOD AVE	SANDLEWOOD AVE	LATCHWOOD LN	Local	AC	E	2	26	852	36	30,672	72	54	42	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
025	118	ARBOLITA DR	HARBOR BLVD	BRIGHTON ST	Local	AAC	E	2	37	1,195	36	42,520	72	63	23	14	3/24/25	Overlay - AC Thin	4/1/13
245	692	GREENWOOD AVE	HILLSIDE ST	EUCLID ST	Local	AC	E	2	21	622	29	18,690	72	15	85	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
257	748	HILL RD	VIEW	BISHOP	Local	AC	E	2	27	369	31	11,939	72	71	29	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
298	848	LA SERNA AVE	MARLEI DR	LAUNER DR	Local	AC	E	2	13	616	36	24,012	72	26	74	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
534	1705	CIVIC CENTER PLAZA	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	214	39	7,878	72	0	100	0	4/18/25	Surface Treatment - Slurry Seal	4/1/13
227	640	FOURTH AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	18	1,285	36	45,900	72	47	43	10	3/4/25	Overlay - AC Thin	8/1/07
417	1165	RODDY DR	BROOKDALE AVE	RODDY WAY	Local	AC	E	2	34	229	36	8,028	72	31	60	9	3/25/25	New Construction - Initial	1/1/80
011	611	FIRST AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	22	1,290	45	57,510	73	58	41	1	4/21/25	Surface Reconstruction - AC	8/1/05
476	1327	URELL DR	LA SERNA AVE	LA PRESA DR	Local	AAC	E	2	20	474	25	12,350	73	18	81	1	2/27/25	Overlay - AC Thin	8/1/07
403	1128	RAYMOND ST	OAKLAND	STORY	Local	AAC	E	2	03	605	32	19,168	73	37	61	2	2/20/25	Overlay - AC Thin	8/1/08
240	673	GRAYVILLE DR	WEST END	SUMMERSHADE	Local	AC	E	2	06	723	35	26,064	73	4	54	42	2/18/25	Surface Treatment - Slurry Seal	8/4/23
251	727	HEATHER AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,303	29	37,247	73	39	46	15	3/3/25	Surface Treatment - Slurry Seal	8/4/23
412	1154	ROANNE DR	CITY LIMIT	ARBOLITA DR	Local	AC	E	2	34	651	35	23,472	73	19	81	0	3/26/25	Slurry Seal or Chip Seal	8/1/05
307	874	LAS RIENDAS DR	HARBOR BLVD	CITY LIMITS	Local	AC	E	2	32	723	36	26,028	73	36	64	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
260	758	HILLCREST ST	LA HABRA BLVD	FIRST AVE	Local	AC	E	2	17	331	33	10,725	73	31	57	12	3/4/25	Surface Treatment - Slurry Seal	4/1/13
526	1510	LOMA NORTE PL	BROOKDALE AVE	SOUTH END	Local	AC	E	2	40	235	28	8,207	73	47	43	10	3/25/25	Surface Treatment - Slurry Seal	4/1/13
372	1036	OAKLAND DR	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,014	36	35,640	73	31	62	7	2/20/25	Overlay - AC Thin	8/1/08
008	57	CYPRESS ST	BONNIE LN	CAPELLA AVE	Local	AC	C	2	34	467	35	16,848	73	9	89	2	4/18/25	New Construction - Initial	1/1/75
263	771	HOLGATE ST	VAQUERO ST	HODSON AVE	Local	AC	E	2	41	1,076	29	32,310	73	53	47	0	3/17/25	New Construction - Initial	1/1/80
021	1233	SILLIKER AVE	REBECCA DR	IDAHO ST	Local	AAC	E	2	08	522	36	18,792	73	0	88	12	2/27/25	Surface Treatment - Slurry Seal	1/1/20
043	144	SUPERIOR AVE	HARBOR BLVD	BEDFORD ST	Local	AAC	E	2	39	464	33	15,345	73	0	86	14	4/17/25	Overlay - AC Thin	8/1/07
490	1360	VINIWOOD PL	PARKWOOD AVE	SOUTH END	Local	AC	E	2	25	392	26	11,717	74	45	26	29	3/11/25	Surface Treatment - Slurry Seal	4/1/24
103	315	ALPINE ST	W/O BEDFORD	N/O SUPERIOR	Local	AAC	E	2	39	1,409	31	45,120	74	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
166	472	COLFAX CT	WEST END	COLFAX ST	Local	AC	E	2	38	217	30	9,006	74	38	31	31	3/24/25	Surface Treatment - Slurry Seal	4/1/13
035	136	MISSION ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	894	35	32,220	74	41	55	4	2/20/25	Overlay - AC Thin	8/1/08
450	1250	STANFORD ST	OAKLAND	STORY	Local	AAC	E	2	03	565	32	18,112	74	31	56	13	2/20/25	Overlay - AC Thin	8/1/08
045	147	CAJON DR	BRIERCLIFF DR	GREENBRIER LN	Local	AC	E	2	05	1,035	36	37,260	74	62	20	18	2/25/25	Surface Treatment - Slurry Seal	8/4/23
215	603	EXETER CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	74	12	88	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
430	1201	SAN JOSE AVE	MISSION ST	BEACH BLVD	Local	AAC	E	2	03	493	36	17,316	74	0	90	10	5/6/25	Overlay - AC Thin	8/1/08
236	1732	GORDON AVE	BALDWIN ST	SHARPLESS ST	Local	AC	E	2	01	551	30	17,891	74	11	89	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
433	1207	SCHOOLWOOD DR	ALMONDWOOD ST	PARKWOOD AVE	Local	AC	E	2	25	1,809	30	56,480	74	35	45	20	3/11/25	Surface Treatment - Slurry Seal	4/1/24
469	1312	TERRAZA SANTA ELENA	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	232	32	9,891	74	33	61	6	3/10/25	Surface Treatment - Slurry Seal	1/1/20
256	740	HIGHLANDER AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	16	1,283	26	39,226	74	27	73	0	3/3/25	Overlay - AC Thin	4/1/13
388	1083	PARK PL	GREENWOOD	ROSE	Local	AC	E	2	21	299	26	7,622	74	55	45	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
533	1713	RISNER WY	IDAHO ST	WESTRIDGE GATE	Local	AC	E	2	26	274	50	14,025	74	25	54	21	3/11/25	New Construction - AC	1/1/80
203	569	ELECTRIC AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	30	38,610	74	25	60	15	3/4/25	Overlay - AC Thin	8/1/07
418	1167	RODDY WAY	RODDY DR	EAST END	Local	AC	E	2	34	326	27	11,645	74	20	73	7	3/25/25	New Construction - Initial	1/1/80
489	1358	VIRGINIA ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	14	751	30	22,350	74	30	63	7	2/26/25	Surface Treatment - Slurry Seal	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
256	741	HIGHLANDER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,278	40	50,200	74	12	79	9	2/26/25	Surface Treatment - Cape Seal	4/1/13
519	1417	OLIVE AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,415	35	45,025	74	7	72	21	3/4/25	Overlay - AC Thin	8/1/07
451	1251	STANTON AVE	WEST END	OAKLAND	Local	AC	E	2	03	466	29	14,010	74	25	36	39	2/20/25	New Construction - Initial	1/1/80
444	1280	STURBRIDGE DR	GREENBRIER LN	SOUTH END	Local	AC	E	2	05	135	27	5,495	74	0	100	0	2/25/25	New Construction - Initial	1/1/80
498	1374	WARD ST	NORTH END	FRANCIS AVE	Local	AAC	E	2	35	658	26	18,858	74	40	58	2	4/2/25	Surface Reconstruction - AC	7/1/12
038	139	MARIPOSA ST	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,100	36	36,420	74	46	52	2	3/5/25	New Construction - Initial	1/1/92
436	1214	SHARPLESS ST	CANFIELD	RUSSELL	Local	AC	E	2	01	592	33	19,338	74	0	100	0	2/18/25	New Construction - Initial	1/1/80
513	1408	WOODBRIER DR	WEST END	RIDGEHAVEN	Local	AC	E	2	05	227	36	7,956	74	87	13	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
355	1724	MIKINDA AVE	MACY ST	RANDALL AVE	Local	AC	E	1	01	813	31	26,815	75	13	86	1	2/17/25	Surface Treatment - Slurry Seal	8/4/23
158	456	CHESTNUT ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	35	503	30	14,910	75	19	81	0	3/26/25	3 in AC OVERLAY	7/1/12
167	477	COLFAX ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	1,802	32	57,376	75	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
368	1027	NORMA ST	LORELLA	HILLDALE	Local	AAC	E	2	10	613	36	21,852	75	34	66	0	2/25/25	Overlay - AC Thin	8/1/08
376	1054	O'MALLEY LN	PENDLETON	KEARNEY	Local	AC	E	2	06	313	36	11,802	75	0	99	1	2/18/25	Surface Treatment - Slurry Seal	4/1/13
381	1074	OTIS AVE	LIME	EAST END	Local	AAC	E	2	02	164	32	5,056	75	25	75	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
043	1298	SUPERIOR AVE	BEDFORD ST	EAST END	Local	AAC	E	2	39	930	32	30,370	75	12	88	0	4/17/25	Overlay - AC Thin	8/1/07
492	1362	WALKER AVE	MARIAN	EAST END	Local	AAC	E	2	15	218	30	7,040	75	33	65	2	3/4/25	Overlay - AC Thin	8/1/08
028	125	DEXFORD DR	GREGORY LN	FOXDALE DR	Local	AAC	E	2	02	877	35	31,608	75	56	44	0	2/24/25	Overlay - AC Structural	11/15/21
482	1346	VERDUGO AVE	VALLEJO ST	JUANITA	Local	AC	E	2	38	621	36	22,892	75	47	53	0	3/24/25	New Construction - Initial	1/1/80
030	127	CHANTRY DR	FOXDALE DR	WHITTIER BLVD	Local	AAC	E	2	02	474	35	17,100	75	40	60	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
218	607	FARRINGTON DR	RUSSELL ST	NORTH END	Local	AAC	E	2	07	186	30	7,105	75	22	78	0	2/19/25	Surface Reconstruction - AC	4/1/13
384	1078	PALERMO WAY	NORTH END	SOUTH END	Local	AC	E	2	41	1,010	26	29,562	75	15	55	30	3/17/25	New Construction - Initial	1/1/80
452	1252	STARLAND DR	NORTH END	STEVENS	Local	AAC	E	2	27	516	30	17,480	75	0	100	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
377	1745	ORANGE ST	ERNA AVE	ALLEY	Local	AC	E	2	28	191	34	6,720	75	58	29	13	4/22/25	New Construction - Initial	1/1/80
105	317	AMANDA LN	EUCLID ST	BISHOP	Local	AC	E	2	27	456	30	14,930	75	49	41	10	3/5/25	Surface Treatment - Slurry Seal	1/1/20
112	333	AVENIDA SANTA CATALINA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	978	31	31,328	75	30	46	24	3/10/25	Surface Treatment - Slurry Seal	1/1/20
185	531	DEXTER ST	LA HABRA BLVD	ALLEY S/LA HABRA	Local	AAC	E	2	39	145	31	4,672	75	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
223	633	FLORENCE AVE	WEST END	MC PHERSON ST	Local	AC	E	2	35	310	30	9,120	75	17	83	0	4/2/25	2 in Cold Mill & Overlay	7/1/12
058	161	LAKEVIEW AVE	MONTWOOD AVE	IMPERIAL HWY	Local	AAC	E	2	32	1,144	35	41,220	75	7	75	18	3/11/25	Surface Treatment - Slurry Seal	1/1/20
365	1020	NANTUCKET ST	SHELburne ST	NORTH END	Local	AC	E	2	37	704	36	27,142	75	46	32	22	3/25/25	New Construction - Initial	1/1/80
383	1077	PAINTER ST	OAKLAND	STORY AVE	Local	AAC	E	2	03	600	32	19,008	75	31	66	3	2/20/25	Surface Reconstruction - AC	8/1/08
440	1226	SIERRA VISTA DR	CITY LIMITS	LA VEREDA DR	Local	AAC	E	2	13	860	30	35,908	75	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
443	1240	SILVERSPUR WAY	SILVERSPUR LN	SOUTH END	Local	AC	E	2	05	258	26	9,253	75	43	57	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
322	916	LINDEN LN	BROOKDALE AVE	EAST END	Local	AAC	E	2	34	272	26	8,867	75	46	46	8	3/26/25	Surface Reconstruction - AC	8/1/05
041	996	MERCED AVE	MARIPOSA ST	BEACH BLVD	Local	AC	E	2	04	512	36	18,000	75	42	45	13	3/4/25	New Construction - Initial	1/1/80
053	1102	PATWOOD DR	WALNUT ST	KENWOOD ST	Local	AC	E	2	25	1,235	36	44,994	75	52	36	12	3/11/25	Surface Treatment - Slurry Seal	4/1/24
396	1114	PINEHURST AVE	HILLSIDE ST	ELM ST	Local	AC	E	2	21	287	29	8,640	75	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
460	1287	SUNSET ST	NORTH END	THIRD AVE	Local	AC	E	2	36	340	32	10,688	75	57	30	13	4/2/25	Slurry Seal or Chip Seal	8/1/05
262	765	HODSON AVE	WEST END	EAST END	Local	AC	E	2	41	713	36	25,452	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
337	950	MARIAN ST	LA HABRA BLVD	WALKER AVE	Local	AAC	E	2	15	1,077	30	33,060	76	24	52	24	3/4/25	Overlay - AC Thin	8/1/08
281	802	KEENE DR	WALNUT ST	EUCLID ST	Local	AC	E	2	24	1,525	36	54,252	76	43	49	8	4/15/25	Surface Treatment - Slurry Seal	7/1/12
311	882	LEMON ST	PINEHURST AVE	FLORENCE AVE	Local	AAC	E	2	35	1,247	30	37,050	76	0	90	10	3/26/25	Surface Reconstruction - AC	7/1/12
128	368	BRIERCLIFF DR	CAJON DR	IMPERIAL HWY	Local	AC	E	2	05	1,083	36	38,556	76	29	44	27	2/25/25	Surface Treatment - Slurry Seal	8/4/23
185	528	DEXTER ST	ALLEY S/LA HABRA	SUPERIOR AVE	Local	AAC	E	2	39	1,762	32	56,256	76	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
378	1068	ORANGWOOD ST	PARKWOOD AVE	SOUTH END	Local	AC	E	2	32	907	32	30,627	76	32	41	27	3/11/25	Surface Treatment - Slurry Seal	1/1/20
463	1302	SWANSEA CIR	NANTUCKET	EAST END	Local	AC	E	2	37	202	26	6,799	76	51	43	6	3/25/25	Surface Treatment - Slurry Seal	4/1/13
017	1371	WALNUT ST	PARKWOOD AVE	PATWOOD DR	Local	AC	E	2	25	812	35	29,268	76	57	38	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
500	1376	WATERBURY WAY	WEST END	WHITEBOOK	Local	AAC	E	2	11	149	32	6,318	76	0	100	0	3/4/25	Surface Reconstruction - AC	8/1/05
023	1503	BROOKDALE AVE	PALM ST	EAST END	Local	AC	E	2	40	319	35	10,955	76	33	52	15	3/25/25	New Construction - Initial	1/1/80
173	500	COUNTRY HILLS DR	CALLE DON JUAN	EAST END	Local	AC	E	2	33	62	32	3,259	76	6	94	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
293	839	LA MIRADA ST	LINDAUER	LAGUNA	Local	AC	E	2	07	345	29	10,380	76	51	49	0	2/19/25	New Construction - Initial	1/1/80
338	954	MARIE ST	OAKLAND	STORY	Local	AAC	E	2	03	719	31	23,040	76	30	70	0	2/20/25	Overlay - AC Thin	8/1/08
147	432	CAPELLA AVE	EUCLID ST	ORANGE ST	Local	AAC	E	2	27	692	36	24,696	76	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
299	852	LA SERNA DR	WALNUT ST	EAST END	Local	AAC	E	2	20	492	36	19,291	76	0	83	17	2/27/25	Overlay - AC Thin	8/1/07
474	1324	TROPICANA WAY	ORCHID AVE	WHITTIER BLVD	Local	AC	E	2	40	765	36	27,396	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
214	602	EXETER AVE	DERRY ST	NASHUA ST	Local	AC	E	2	19	910	26	23,507	76	13	87	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
366	1024	NANWOOD ST	RONWOOD	PATWOOD	Local	AC	E	2	25	372	36	14,142	76	57	43	0	3/11/25	Surface Treatment - Slurry Seal	4/1/24
158	455	CHESTNUT ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	742	30	22,080	76	0	55	45	3/26/25	Surface Treatment - Slurry Seal	7/1/12
162	462	CLIFTON ST	OLIVE AVE	LAMBERT RD	Local	AAC	E	2	30	826	36	29,736	76	3	78	19	4/21/25	Overlay - AC Thin	8/1/07
012	61	FONDA ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	2,014	32	64,192	76	1	99	0	4/17/25	Overlay - AC Thin	8/1/07
283	811	KENWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	25	646	36	23,756	76	49	40	11	3/11/25	Surface Treatment - Slurry Seal	4/1/24
427	1195	RYAN AVE	SIERRA VISTA DR	WALNUT ST	Local	AC	E	2	13	1,151	30	34,170	76	52	35	13	2/27/25	Surface Treatment - Slurry Seal	1/1/20
373	1044	OLINDA AVE	KIRBY DR	NORTH END	Local	AAC	E	2	13	380	30	12,925	76	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
402	1126	RAMONA ST	PALM	PALERMO	Local	AC	E	2	41	1,123	36	40,284	76	22	71	7	3/17/25	New Construction - Initial	1/1/80
014	1512	RUSSELL ST	HACIENDA RD	FARRINGTON DR	Local	AAC	E	2	07	355	36	12,564	76	17	76	7	2/19/25	Overlay - AC Thin	4/1/13
453	1253	STEARNS AVE	COLLEGE ST	SUNSET ST	Local	AAC	E	2	35	714	26	19,070	76	0	82	18	4/18/25	Surface Reconstruction - AC	7/1/12
208	578	ENCINITAS ST	LAS LOMAS DR	KEENE DR	Local	AC	E	2	24	698	36	24,912	77	37	47	16	4/15/25	Surface Treatment - Slurry Seal	7/1/12
533	1714	RISNER WY	CROSS GUTTER	BARRIER	Local	AC	E	2	26	113	50	5,814	77	0	75	25	3/11/25	New Construction - AC	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
457	1270	STORY AVE	CITY LIMITS	DEXFORD ST	Local	AAC	E	2	03	989	36	37,751	77	35	65	0	2/20/25	Overlay - AC Thin	8/1/08
218	608	FARRINGTON DR	RUSSELL ST	SOUTH END	Local	AAC	E	2	07	704	30	22,695	77	9	91	0	2/19/25	Overlay - AC Thin	4/1/13
326	927	LORELLA AVE	DEANNA ST	IDAHO ST	Local	AAC	E	2	10	1428	36	51,192	77	9	91	0	2/26/25	Surface Reconstruction - AC	8/1/08
414	890	LEMONWOOD DR	ORANGEWOOD ST	EAST END	Local	AC	E	2	32	194	32	7,733	77	8	55	37	3/11/25	Surface Treatment - Slurry Seal	1/1/20
365	1022	NANTUCKET ST	BRIGHTON ST	SHELburne ST	Local	AC	E	2	37	619	36	22,140	77	59	39	2	3/25/25	New Construction - Initial	1/1/80
528	1720	RANDALL AVE	KOOPMANS WAY	MACY ST	Local	AC	E	2	01	681	32	22,520	77	55	43	2	2/18/25	Surface Treatment - Slurry Seal	8/4/23
528	1508	RANDALL AVE	VALLEY HOME AVE	KOOPMANS WAY	Local	AC	E	2	01	983	31	30,995	77	23	50	27	2/18/25	Surface Treatment - Slurry Seal	8/4/23
484	1349	VERONA ST	WHITTIER BLVD	VAQUERO AVE	Local	AC	E	2	41	1,040	35	37,476	77	5	82	13	3/17/25	New Construction - Initial	1/1/80
475	1325	UNION AVE	WALL ST	BLAKE ST	Local	AC	E	2	04	634	31	20,320	77	25	75	0	3/9/25	New Construction - Initial	1/1/80
408	1146	RIDGEWAY LN	ALLEY NORTH END	SOUTH END	Local	AC	E	2	09	729	38	29,497	77	8	87	5	2/24/25	Surface Treatment - Slurry Seal	1/1/20
480	1342	VAQUERO AVE	PALM ST	VERONA ST	Local	AC	E	2	41	847	36	30,348	77	20	74	6	3/17/25	New Construction - Initial	1/1/80
187	533	DOLORES ST	LINDAUR DR	N/O LAGUNA	Local	AC	E	2	07	433	29	13,020	77	36	64	0	2/19/25	New Construction - Initial	1/1/80
033	1502	FRANCIS AVE	CYPRESS ST	ORANGE ST	Local	AC	E	2	28	658	29	19,770	77	0	83	17	4/2/25	New Construction - Initial	1/1/80
397	1120	PINEWOOD PL	SANDLEWOOD	SOUTH END	Local	AC	E	2	26	169	33	7,102	77	27	53	20	3/10/25	Surface Treatment - Slurry Seal	1/1/20
477	1329	VALENCIA ST	LA HABRA BLVD	THIRD AVE	Local	AC	E	2	36	1,006	36	36,000	77	52	48	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
344	968	MATEO AVE	VALLEJO	JUANITA	Local	AC	E	2	38	621	26	15,834	77	57	43	0	3/24/25	New Construction - Initial	1/1/80
406	1136	REDWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	299	26	9,299	77	17	81	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
442	1237	SILVERS PUR LN	CANDLEWOOD DR	RIDGEHAVEN DR	Local	AC	E	2	05	332	26	9,382	77	0	26	74	2/25/25	Surface Treatment - Cape Seal	4/1/13
319	907	LINDA AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	793	29	23,820	77	8	52	40	2/27/25	Surface Treatment - Slurry Seal	1/1/20
342	964	MARLEI DR	ENTRADA DR	LA SERNA AVE	Local	AC	E	2	13	717	32	23,694	77	9	91	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
414	1159	ROANOKE ST	CANFIELD	RUSSELL	Local	AC	E	2	01	577	32	19,074	77	8	92	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
487	1356	VIA LOS BONITOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	154	32	6,503	77	25	61	14	3/10/25	Surface Treatment - Slurry Seal	1/1/20
506	1390	WILGAR DR	EAST END	LORELLA	Local	AC	E	2	10	401	30	14,480	77	49	51	0	2/26/25	New Construction - Initial	1/1/80
393	1105	PENDELTON LN	O'MALLEY	ZEKE AND ELSIE	Local	AC	E	2	06	290	32	10,780	77	0	93	7	2/18/25	Surface Treatment - Slurry Seal	4/1/13
396	1108	PINEHURST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,247	30	36,990	77	45	53	2	3/26/25	New Construction - Initial	1/1/80
518	1416	ZEKE AND ELSIE DR	BRASS LANTERN	PENDELTON	Local	AC	E	2	06	252	36	9,606	77	35	65	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
234	663	GLENCLIFF ST	SHEFFIELD	FASHION SQUARE	Local	AC	E	2	11	720	36	25,704	77	71	29	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
014	1191	RUSSELL ST	WEST END	FARRINGTON DR	Local	AC	E	2	07	191	36	8,380	77	28	64	8	2/19/25	Overlay - AC Rubber	4/1/13
007	49	ALDRICH ST	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	885	28	23,650	78	62	38	0	4/17/25	Surface Treatment - Slurry Seal	8/4/23
495	1370	WALLING AVE	HOLGATE	QTY LIMIT	Local	AC	E	2	41	646	31	20,704	78	44	56	0	3/17/25	New Construction - Initial	1/1/80
484	1352	VERONA ST	VAQUERO AVE	SOUTH END	Local	AC	E	2	41	155	26	5,681	78	13	60	27	3/17/25	Surface Treatment - Slurry Seal	4/1/13
116	340	BAJA AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	468	30	15,615	78	29	49	22	3/4/25	New Construction - Initial	1/1/80
231	659	FRANTZ AVE	PALM	VERONA	Local	AC	E	2	41	864	36	30,960	78	0	100	0	3/17/25	New Construction - Initial	1/1/80
246	700	GREGORY LN	DEXFORD DR	BEACH BLVD	Local	AAC	E	2	02	1,022	31	32,736	78	61	39	0	2/24/25	Overlay - AC Structural	11/15/21
407	1141	RIDGEHAVEN DR	LAMBERT RD	WOODBRIER DR	Local	AC	E	2	05	1,169	35	42,120	78	13	87	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
465	1305	TEAKWOOD AVE	CHERRYWOOD	DORWOOD AVE	Local	AC	E	2	26	935	36	33,064	78	61	18	21	3/10/25	Surface Treatment - Slurry Seal	1/1/20
111	332	AVENIDA SANTA BARBARA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AAC	E	2	33	1,075	32	33,440	78	51	45	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
541	1733	WALLACE AVE	SHARPLESS ST	END	Local	AC	E	2	01	333	31	13,605	78	6	94	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
494	1367	WALLACE ST	LA HABRA BLVD	ALLEY S/FIRST AVE	Local	AAC	E	2	22	495	41	19,885	78	22	78	0	4/21/25	Surface Reconstruction - AC	8/1/05
172	493	CONCOURSE ST	DAVIT CIR	BRIGHTON ST	Local	AC	E	2	37	980	36	35,280	78	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
246	699	GREGORY LN	BEACH BLVD	RIDGEWAY LN	Local	AC	E	2	09	491	36	17,712	78	13	85	2	2/24/25	Surface Treatment - Slurry Seal	1/1/20
421	1173	ROSE AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	623	30	18,510	78	0	68	32	3/26/25	New Construction - Initial	1/1/80
192	545	EAGLEWOOD PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	66	32	3,139	78	52	48	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
360	1013	MORRIS AVE	DEXFORD DR	EAST END	Local	AAC	E	2	02	321	36	11,124	78	49	51	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
377	1055	ORANGE ST	CITY LIMIT	STEVENS AVE	Local	AAC	E	2	27	823	30	25,062	78	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
236	666	GORDON AVE	VALLEY HOME	ROANOKE	Local	AAC	E	2	01	422	32	14,004	78	18	82	0	2/18/25	New Construction - Initial	4/24/15
323	922	LOIS ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	21	785	31	25,152	78	1	99	0	4/21/25	Surface Treatment - Slurry Seal	1/1/20
346	970	MCFADDEN ST	NORTH END	SOUTH END	Local	AAC	E	2	18	541	30	21,484	78	12	88	0	3/4/25	Overlay - AC Thin	8/1/07
475	1326	UNION AVE	CITY LIMIT	WALL ST	Local	AC	E	2	04	113	32	3,424	78	9	91	0	3/9/25	New Construction - Initial	1/1/80
105	318	AMANDA LN	BISHOP	VIEW	Local	AC	E	2	27	397	30	12,660	78	59	39	2	4/18/25	Surface Treatment - Slurry Seal	1/1/20
167	476	COLFAX ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	765	30	22,770	78	57	41	2	3/24/25	New Construction - Initial	1/1/80
489	1359	VIRGINIA ST	HIGHLANDER AVE	HEATHER AVE	Local	AC	E	2	14	525	29	15,780	78	12	88	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
104	316	ALTO LN	E/O ROANNE	E/END	Local	AAC	E	2	34	207	26	6,933	78	34	42	24	3/25/25	Overlay - AC Thin	4/1/13
315	891	LEORA ST	PINEHURST AVE	FLORENCE AVE	Local	AC	E	2	16	994	30	30,014	78	29	59	12	3/3/25	Surface Treatment - Cape Seal	4/1/13
150	437	CAROL ST	CITY LIMIT	LA SERNA AVE	Local	AC	E	2	13	889	30	26,920	79	39	58	3	2/27/25	Surface Treatment - Slurry Seal	1/1/20
273	787	JAFFREY ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	79	20	22	58	4/15/25	Surface Treatment - Slurry Seal	7/1/12
015	75	SANDLEWOOD AVE	ALMONDWOOD ST	PAWWOOD DR	Local	AC	E	2	25	1,013	35	36,504	79	20	70	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
535	1707	FAHRINGER WY	IDAHO ST	WEST END	Local	AC	E	2	09	339	25	8,840	79	21	79	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
470	1313	TERRY WAY	ORANGE ST	NORTH END	Local	AAC	E	2	27	351	30	10,350	79	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
542	1735	BALDWIN ST	GORDON AVE	RANDALL AVE	Local	AC	E	2	01	545	31	18,011	79	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
174	504	COUNTRY LN	EAST END	MEADOWLARK	Local	AC	E	2	34	182	26	7,277	79	0	81	19	3/25/25	Slurry Seal or Chip Seal	8/1/05
202	568	EL REY DR	EL RANCHO DR	EL DON DR	Local	AAC	E	2	09	473	30	14,010	79	12	80	8	2/24/25	Overlay - AC Structural	1/1/20
223	625	FLORENCE AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,258	26	32,396	79	63	34	3	4/2/25	New Construction - Initial	1/1/81
377	1057	ORANGE ST	STEVENS AVE	BISHOP DR	Local	AAC	E	2	27	916	29	27,510	79	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
136	397	BURWOOD ST	MONTWOOD AVE	PARKWOOD AVE	Local	AC	E	2	32	883	36	32,538	79	48	26	26	3/10/25	Surface Treatment - Slurry Seal	1/1/20
030	446	CHANTRY DR	FOXDALE DR	GREGORY LN	Local	AAC	E	2	02	715	33	23,397	79	31	69	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
023	379	BROOKDALE AVE	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,386	35	49,932	79	34	66	0	3/24/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
147	431	CAPELLA AVE	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	495	36	17,604	79	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
471	1316	THIRD AVE	MARIAN ST	EAST END	Local	AAC	E	2	15	165	26	5,540	79	29	71	0	3/4/25	Overlay - AC Thin	8/1/08
008	52	CYPRESS ST	COMMERCIAL WAY	LAMBERT RD	Local	AC	C	2	36	1,094	35	39,420	79	43	37	20	4/21/25	New Construction - Initial	1/1/74
436	1734	SHARPLESS ST	RUSSELL ST	RANDALL AVE	Local	AC	E	2	01	837	31	26,528	79	12	88	0	2/18/25	New Construction - AC	1/1/18
34	133	STEARNS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	32	31,995	79	0	76	24	3/25/25	New Construction - Initial	1/1/88
250	715	HAZEL ST	LA HABRA BLVD	FIRST ST	Local	AC	E	2	22	308	38	11,488	79	10	53	37	4/22/25	Slurry Seal or Chip Seal	8/1/05
173	502	COUNTRY HILLS DR	DORWOOD AVE	EUCLID ST	Local	AC	E	2	26	511	36	17,964	79	13	87	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
274	788	JAMIE AVE	LESUE	EAST END	Local	AAC	E	2	32	605	36	23,305	79	12	88	0	3/11/25	Overlay - AC Structural	1/1/20
277	792	JOHNSON AVE	VALLEY HOME AVE	KINLEY ST	Local	AAC	E	2	02	537	30	16,680	79	12	67	21	2/25/25	Surface Treatment - Slurry Seal	11/15/21
046	1382	WHITEBOOK DR	SHEFFIELD DR	MIDDLETON ST	Local	AAC	E	2	11	922	32	30,254	79	0	84	16	2/26/25	Surface Reconstruction - AC	8/1/05
508	1397	WILSHIRE AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	979	35	35,280	79	32	68	0	3/5/25	Surface Reconstruction - AC	8/1/08
060	163	CALLE DON GUILLERMO	EUCLID ST	COUNTRY HILLS DR	Local	AAC	E	2	33	1,749	35	63,000	80	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
185	529	DEXTER ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	734	30	21,840	80	50	25	25	3/24/25	New Construction - Initial	1/1/80
522	1440	ELMSFORD AVE	GLENCLIFF	WHITEBOOK	Local	AC	E	2	11	1,003	36	36,714	80	19	57	24	3/4/25	Slurry Seal or Chip Seal	8/1/05
261	761	HILLSIDE ST	HILLSIDE CT	WHITTIER BLVD	Local	AAC	E	2	20	480	36	14,255	80	0	89	11	4/21/25	Overlay - AC Thin	8/1/07
322	917	LINDEN LN	WEST END	BROOKDALE AVE	Local	AAC	E	2	34	93	26	4,213	80	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
012	638	FONDA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,187	30	35,370	80	62	36	2	3/17/25	New Construction - Initial	1/1/80
298	849	LA SERNA AVE	LAUNER DR	SIERRA VISTA DR	Local	AAC	E	2	13	244	31	7,840	80	0	67	33	2/27/25	Overlay - AC Structural	1/1/20
173	497	COUNTRY HILLS DR	CITY LIMIT	CALLE DON JUAN	Local	AC	E	2	33	1,325	36	47,268	80	10	90	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
296	843	LA PRESA DR	HILLSIDE	KINGSTON	Local	AAC	E	2	20	224	33	7,650	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	7/1/11
420	1170	ROSCOE ST	MCCART AVE	LA HABRA BLVD	Local	AC	E	2	41	776	36	28,686	80	13	82	5	3/17/25	New Construction - Initial	1/1/80
435	1213	SHADY VALLEY	VALLEY HOME AVE	EAST END	Local	AAC	E	2	01	420	34	15,855	80	31	69	0	2/18/25	Overlay - AC Thin	4/1/13
464	1303	SYCAMORE AVE	STONEWOOD	MEADOWLARK	Local	AC	E	2	34	609	36	22,494	80	0	72	28	3/25/25	Slurry Seal or Chip Seal	8/1/05
113	334	AVENIDA SANTA DOMINGO	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,246	32	38,912	80	48	52	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
141	423	CANDACE LN	RODDY	EAST END	Local	AC	E	2	34	413	30	13,941	80	0	62	38	3/25/25	Slurry Seal or Chip Seal	8/1/05
167	474	COLFAX ST	COLFAX CT	ESSEX DR	Local	AC	E	2	38	254	30	8,190	80	1	40	59	3/24/25	Surface Treatment - Slurry Seal	4/1/13
473	1322	TOPAZ AVE	PALM	VERONA	Local	AC	E	2	41	846	36	30,312	80	1	99	0	3/17/25	New Construction - Initial	1/1/80
025	119	ARBOLITA DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,275	36	45,550	80	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
354	1000	MIDDLETON ST	SHEFFIELD	WHITEBOOK	Local	AAC	E	2	11	494	36	18,534	80	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
382	1075	PACIFIC AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	31	1,289	33	39,165	80	13	77	10	2/14/25	Surface Treatment - Slurry Seal	1/1/20
223	628	FLORENCE AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	30	13,590	80	27	73	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
033	132	FRANCIS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,454	35	52,380	80	22	58	20	3/24/25	Overlay - AC Rubber	4/1/13
250	717	HAZEL ST	WHITTIER BLVD	ALLEY S/GREENWOOD	Local	AC	E	2	21	946	36	34,696	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
403	1129	RAYMOND ST	WILSHIRE	BLAKE	Local	AAC	E	2	04	547	32	18,062	80	57	43	0	3/9/25	Overlay - AC Thin	8/1/08
114	338	AVENIDA SANTA DOROTEA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	1,293	32	41,376	80	4	96	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
421	1174	ROSE AVE	ORANGE ST	EAST END	Local	AC	E	2	28	348	26	10,843	80	6	94	0	3/26/25	New Construction - Initial	1/1/80
336	949	MARDINA WAY	DEXFORD DR	GREGORY LN	Local	AAC	E	2	02	561	36	19,764	80	36	64	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
543	1739	SHARON WAY	VALLEY HOME AVE	END	Local	AC	E	2	01	774	31	27,001	80	28	72	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
471	1315	THIRD AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	36	1,152	33	39,202	80	58	39	3	4/17/25	Surface Treatment - Slurry Seal	4/1/13
279	796	JUANITA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	739	29	22,200	81	0	100	0	3/24/25	New Construction - Initial	1/1/80
209	580	ENTRADA DR	CITRUS DR	CAROL ST	Local	AAC	E	2	13	447	30	13,230	81	63	37	0	2/27/25	Overlay - AC Structural	1/1/20
460	1289	SUNSET ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	634	32	20,096	81	35	65	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
243	682	GREENVIEW DR	CITY LIMIT	ANTOINETTE	Local	AAC	E	2	08	1,100	33	36,300	81	10	82	8	2/19/25	Overlay - AC Structural	1/1/20
419	1168	RONWOOD AVE	WALNUT ST	NANWOOD ST	Local	AC	E	2	25	569	36	21,018	81	48	47	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
423	1179	ROSECREST AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	1,292	30	38,580	81	13	87	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
048	152	SPRING MEADOW LN	GRAYVILLE DR	IMPERIAL HWY	Local	AC	E	2	06	195	36	6,732	81	34	66	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
286	814	KINGSTON DR	NORTH END	LA PRESA	Local	AAC	E	2	20	447	36	18,637	81	0	100	0	4/18/25	Overlay - AC Thin	8/1/07
033	648	FRANCIS AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	1,008	30	30,270	81	12	88	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
162	463	CLIFTON ST	LAMBERT RD	ROSECREST AVE	Local	AAC	E	2	31	496	30	14,880	81	23	77	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
462	1301	SUSAN LN	WOODCREST	NORTH HILLS	Local	AC	E	2	37	280	36	10,686	81	0	83	17	3/24/25	Surface Treatment - Slurry Seal	4/1/13
520	1311	TERRAZA SAN CARLOS	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	208	32	8,181	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
474	1323	TROPICANA WAY	NORTH END	ORCHID AVE	Local	AC	E	2	40	538	36	21,166	81	78	22	0	3/17/25	New Construction - Initial	1/1/80
038	146	MARIPOSA ST	LAMBERT RD	SHEFFIELD DR	Local	AAC	E	2	05	965	36	34,524	81	0	20	80	2/26/25	Surface Reconstruction - AC	4/1/13
122	7160	BISHOP DR	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	519	30	15,600	81	18	82	0	4/17/25	Overlay - AC Structural	1/1/20
139	415	CALLE DON JUAN	AVENIDA SANTA ANITA	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	859	36	31,674	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
206	576	EMBER LN	WEST END	FALLENLEAF ST	Local	AAC	E	2	34	409	36	16,275	81	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
413	1158	ROANOKE AVE	GORDON	RUSSELL	Local	AAC	E	2	01	267	32	9,044	81	0	100	0	2/18/25	Overlay - AC Thin	4/1/13
478	1337	VALLEJO ST	VERDUGO AVE	STEARNS AVE	Local	AC	E	2	38	514	36	19,038	81	11	84	5	3/24/25	New Construction - Initial	1/1/80
262	768	HODSON AVE	VALLEJO ST	PALM ST	Local	AC	E	2	38	1,184	36	43,158	82	0	96	4	3/24/25	New Construction - Initial	1/1/80
486	1355	VIA LOS ALTOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	226	32	8,807	82	32	68	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
036	137	WALL ST	WILSHIRE AVE	LAMBERT RD	Local	AAC	E	2	04	1,089	35	39,240	82	0	100	0	3/5/25	Overlay - AC Thin	8/1/08
434	1208	SECOND AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	29	1,288	34	43,588	82	40	51	9	4/17/25	Overlay - AC Structural	1/1/15
184	527	DEXFORD ST	STORY AVE	SOUTH END	Local	AAC	E	2	03	219	36	8,634	82	34	66	0	2/20/25	Overlay - AC Thin	8/1/08
011	615	FIRST AVE	MCPHERSON ST	AC	Local	AC	E	2	36	640	44	27,896	82	0	90	10	4/15/25	Surface Treatment - Cape Seal	4/1/13
255	739	HIGHLAND CT	WEST END	ORANGE ST	Local	AC	E	2	27	176	29	5,310	82	67	33	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
309	877	LAUNER DR	NORTH END	LA SERNA AVE	Local	AAC	E	2	13	787	32	28,300	82	0	100	0	2/27/25	Overlay - AC Structural	1/1/20
196	552	EL DON DR	HACIENDA DR	EL RANCHO DR	Local	AAC	E	2	09	400	30	11,820	82	0	89	11	2/24/25	Overlay - AC Structural	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
34	134	STEARNS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,455	30	43,650	82	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
514	1410	WOODCREST AVE	ROANNE DR	EAST END	Local	AC	E	2	34	207	26	6,933	82	36	64	0	3/25/25	Surface Treatment - Cape Seal	4/1/13
454	1264	STONEHAM WAY	WEST END	WHITEBOOK DR	Local	AAC	E	2	11	147	32	6,254	82	0	100	0	3/4/25	Surface Treatment - Slurry Seal	8/4/23
439	1223	SIDON AVE	MARIPOSA ST	EAST END	Local	AAC	E	2	04	469	30	15,865	82	14	86	0	3/4/25	Surface Reconstruction - AC	8/1/08
485	1354	VIA LOS COYOTES	NORTH END	AVENDIA SANTA DOMINGO	Local	AC	E	2	33	201	32	8,007	82	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
507	1392	WILLOW ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	16	616	30	18,300	82	35	42	23	3/3/25	New Construction - Initial	1/1/80
015	74	SANDLEWOOD AVE	IDAHO ST	ALMONDWOOD ST	Local	AC	E	2	25	1,156	35	41,652	82	15	55	30	3/10/25	Surface Treatment - Slurry Seal	1/1/20
438	1219	SHELBURNE ST	BROOKFIELD AVE	NANTUCKET ST	Local	AC	E	2	37	550	36	20,406	82	41	59	0	3/25/25	New Construction - Initial	1/1/80
023	116	BROOKDALE AVE	LINDEN LN	HARBOR BLVD	Local	AC	E	2	34	1,844	35	66,420	82	0	80	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
028	124	DEXFORD DR	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	82	46	54	0	2/24/25	Overlay - AC Structural	11/15/21
508	1396	WILSHIRE AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	927	36	33,156	82	0	100	0	3/5/25	Surface Reconstruction - AC	8/1/08
515	1413	WOODMERE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	119	26	4,669	82	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
115	339	AVENIDA SANTA ELENA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,255	32	40,160	82	7	93	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
152	443	CEDARWOOD DR	BRIERCLIFF DR	SOUTH END	Local	AC	E	2	05	270	26	8,599	83	0	100	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
437	1217	SHEFFIELD DR	MIDDLETON DR	WHITEBOOK DR	Local	AC	E	2	11	565	35	20,376	83	0	100	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
206	575	EMBER LN	FALLENLEAF ST	EAST END	Local	AAC	E	2	34	67	47	4,399	83	16	57	27	3/26/25	Surface Reconstruction - AC	8/1/05
253	735	HENDERSON WAY	NORTH END	IDAHO ST	Local	AC	E	2	09	439	30	15,821	83	15	49	36	2/20/25	Surface Treatment - Slurry Seal	1/1/20
317	901	LIBERTY ST	GRACE AVE	PACIFIC AVE	Local	AC	E	2	31	450	26	11,492	83	0	100	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
110	330	AVENIDA SANTA ANITA	BURWOOD	CALLE DON JUAN	Local	AAC	E	2	33	244	36	9,284	83	40	57	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
267	780	HONEYWOOD LN	WEST END	ALMONDWOOD	Local	AAC	E	2	26	526	32	13,816	83	33	65	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
330	940	MADONNA LN	PALM	EAST END	Local	AC	E	2	40	222	32	8,741	83	0	95	5	3/24/25	New Construction - Initial	1/1/80
491	1361	WADE ST	HODSON	LA HABRA BLVD	Local	AC	E	2	41	492	36	17,496	83	0	100	0	3/17/25	New Construction - Initial	1/1/80
026	121	BRIGHTON ST	CONCOURSE ST	QTY LIMIT	Local	AC	E	2	37	1,330	36	47,448	83	75	25	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
032	129	EL RANCHO DR	EL DORADO AVE	HACIENDA RD	Local	AAC	E	2	09	1,604	30	48,150	83	14	86	0	2/24/25	Overlay - AC Structural	1/1/20
055	313	ALMONDWOOD ST	SCHOOLWOOD DR	SANDLEWOOD AVE	Local	AC	E	2	26	169	35	6,120	83	53	47	0	3/11/25	Surface Treatment - Slurry Seal	11/30/10
270	783	IPSWICH ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	83	0	73	27	4/15/25	Surface Treatment - Slurry Seal	7/1/12
377	1056	ORANGE ST	BISHOP DR	WHITTIER BLVD	Local	AC	E	2	27	774	30	23,040	83	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
263	770	HOLGATE ST	HODSON AVE	SOUTH END	Local	AC	E	2	41	450	26	13,403	83	43	57	0	3/17/25	New Construction - Initial	1/1/80
439	1225	SIDON AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	1,099	32	34,784	83	35	63	2	3/5/25	Overlay - AC Thin	8/1/08
044	1279	STURBRIDGE DR	WOODMERE CT	CANTEBURY LN	Local	AC	E	2	05	845	35	30,456	83	0	70	30	2/26/25	Surface Treatment - Slurry Seal	4/1/13
460	1288	SUNSET ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	523	26	13,692	83	0	100	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
348	987	MEADOW LARK ST	BROOKDALE AVE	COUNTRY LN	Local	AC	E	2	34	804	36	29,478	83	0	94	6	3/25/25	Slurry Seal or Chip Seal	8/1/05
042	143	OLIVE AVE	EUCUID ST	LAMBERT RD	Local	AAC	E	2	30	1,619	35	58,320	83	51	49	0	3/16/25	Overlay - AC Thin	8/1/07
008	171	CYPRESS ST	LA HABRA BLVD	SECOND ST	Local	AC	C	2	36	724	35	26,100	83	33	37	30	4/18/25	Slurry Seal or Chip Seal	8/1/05
396	1110	PINEHURST AVE	CYPRESS ST	GREENWOOD AVE	Local	AC	E	2	35	1,350	38	50,844	83	44	41	15	3/26/25	Surface Treatment - Slurry Seal	7/1/12
437	1215	SHEFFIELD DR	GLENCLIFF ST	MIDDLETON DR	Local	AC	E	2	11	439	35	15,840	83	0	94	6	2/26/25	Surface Treatment - Slurry Seal	8/4/23
169	480	COLLEGE ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	638	32	18,484	83	0	100	0	4/22/25	Surface Treatment - Slurry Seal	7/1/12
410	1152	RIO VERDE DRIVE	CHANTRY	EAST END	Local	AAC	E	2	02	250	33	9,825	83	29	71	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
024	117	STONEWOOD ST	WHITTIER BLVD	SYCAMORE AVE	Local	AC	E	2	34	1,055	36	38,730	83	46	52	2	3/25/25	Surface Treatment - Slurry Seal	4/1/13
466	1309	TERRAZA SAN ANGELO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	251	32	9,557	83	16	84	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
017	81	WALNUT ST	CITY LIMIT	LA PRESA DR	Local	AAC	C	2	13	1,386	36	46,215	84	15	79	6	2/13/25	Overlay - AC Structural	1/1/20
119	347	BEDFORD ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	754	29	22,650	84	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
237	667	GRACE AVE	EUCUID	LIBERTY	Local	AC	E	2	31	682	36	24,336	84	15	85	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
052	1090	PARKWOOD AVE	LAKEVIEW AVE	EAST END	Local	AC	E	2	32	434	32	15,491	84	1	87	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
472	1321	THORNE AVE	EAST END	LIME	Local	AAC	E	2	02	308	32	11,431	84	19	81	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
140	422	CAMPBELL AVE	WALL ST	BLAKE ST	Local	AAC	E	2	04	871	31	27,904	84	41	59	0	3/9/25	Overlay - AC Thin	8/1/08
150	438	CAROL ST	LA SERNA AVE	N/O RYAN	Local	AC	E	2	13	767	30	23,010	84	1	45	54	2/27/25	Surface Treatment - Slurry Seal	1/1/20
245	688	GREENWOOD AVE	EUCUID ST	ORANGE	Local	AC	E	2	28	623	30	18,510	84	0	100	0	3/26/25	New Construction - Initial	1/1/80
250	719	HAZEL ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	21	300	36	10,584	84	16	73	11	4/22/25	Surface Treatment - Slurry Seal	1/1/20
301	855	LA VITA PL	NORTH END	LA SERNA AVE	Local	AC	E	2	13	80	29	3,895	84	0	100	0	2/13/25	Surface Treatment - Slurry Seal	7/1/11
385	1080	PAMELA LN	NORTH END	NORTH HILLS	Local	AC	E	2	37	248	26	8,047	84	53	47	0	3/24/25	New Construction - Initial	1/1/80
197	554	EL DORADO AVE	HACIENDA	EL RANCHO	Local	AAC	E	2	09	432	29	12,990	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
037	138	MARTINEZ DR	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,169	35	42,120	84	8	84	8	3/9/25	New Construction - Initial	1/1/92
165	471	COLE WAY	NORTH END	OLINDA	Local	AAC	E	2	20	157	36	7,227	84	0	100	0	2/13/25	Surface Reconstruction - AC	8/1/05
318	904	LIME ST	MORRIS AVE	BERKLEY AVE	Local	AAC	E	2	02	800	30	22,820	84	0	93	7	2/25/25	Surface Treatment - Slurry Seal	11/15/21
467	1310	TERRAZA SAN BENITO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	173	32	7,331	84	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
106	319	AMORITA AVE	VECINO ST	VERONA ST	Local	AC	E	2	40	575	30	17,280	84	57	34	9	3/17/25	New Construction - Initial	1/1/80
191	544	DURHAM ST	LAMBERT RD	DOVER DR	Local	AC	E	2	24	471	36	16,740	84	0	95	5	4/15/25	Surface Treatment - Slurry Seal	7/1/12
248	711	HACIENDA DR	EL DON	EL DORADO	Local	AC	E	2	09	591	30	17,550	84	17	83	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
197	555	EL DORADO AVE	WEST END	HACIENDA	Local	AAC	E	2	09	829	30	26,665	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
341	963	MARLBORO ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	84	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
394	1106	PENMAR AVE	CLIFTON	CYPRESS ST	Local	AAC	E	2	31	1,028	30	30,660	84	25	74	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
453	1260	STEARNS AVE	PALM ST	HOLGATE ST	Local	AC	E	2	41	626	30	18,660	84	0	100	0	3/17/25	New Construction - Initial	1/1/80
032	1511	EL RANCHO DR	EL PORTAL	SOUTH END	Local	AC	E	2	09	370	30	12,675	85	16	84	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
345	969	MCCART AVE	ROSCOE	QTY LIMIT	Local	AC	E	2	41	334	36	12,774	85	0	100	0	3/17/25	New Construction - Initial	1/1/80
167	475	COLFAX ST	FRANCIS AVE	ESSEX DR	Local	AC	E	2	38	706	30	21,000	85	22	78	0	3/24/25	New Construction - Initial	1/1/80
245	694	GREENWOOD AVE	ORANGE	EAST END	Local	AC	E	2	28	357	30	12,505	85	0	100	0	3/26/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
471	1314	THIRD AVE	BRIGHT ST	COLLEGE ST	Local	AAC	E	2	36	1,142	40	48,188	85	46	49	5	4/17/25	Overlay - AC Thin	4/1/13
044	1277	STURBRIDGE DR	CANTEBURY LN	GREENBRIER LN	Local	AC	E	2	05	584	35	21,060	85	0	100	0	2/26/25	New Construction - Initial	1/1/80
416	1161	ROCKINGHORSE LN	NORTH END	BROOKDALE AVE	Local	AC	E	2	37	1,031	37	40,824	85	57	37	6	3/24/25	New Construction - Initial	1/1/80
139	416	CALLE DON JUAN	AVENIDA SANTA DOMINGO	CITY LIMITS	Local	AC	E	2	33	737	36	26,532	85	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
193	546	EASTPARK DR	GREENTREE LN	FONDA ST	Local	AC	E	2	38	528	32	18,396	85	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
012	62	FONDA ST	EASTPARK DR	LA HABRA BLVD	Local	AC	E	2	38	444	35	16,020	85	0	98	2	3/24/25	Surface Treatment - Cape Seal	4/1/13
373	1043	OLINDA AVE	WALNUT ST	N/END	Local	AAC	E	2	20	1,058	36	39,397	85	0	77	23	2/13/25	Surface Reconstruction - AC	8/1/05
185	530	DEXTER ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	85	34	66	0	3/24/25	New Construction - Initial	1/1/80
032	7146	EL RANCHO DR	EL DORADO AVE	EL PORTAL DR	Local	AC	E	2	09	425	30	12,780	85	39	61	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
232	660	GALEN DR	KINLEY	RIGSBY	Local	AAC	E	2	02	958	30	31,990	85	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
123	358	BLAKE ST	WILSHIRE AVE	RAYMOND ST	Local	AC	E	2	04	1,089	32	35,214	85	26	74	0	3/9/25	New Construction - Initial	1/1/80
029	126	FOXDALE DR	DEXFORD DR	CHANNY DR	Local	AAC	E	2	02	376	35	13,572	85	15	85	0	2/24/25	Overlay - AC Structural	11/15/21
314	889	LEMONWOOD DR	LAKEVIEW AVE	ORANGEWOOD ST	Local	AC	E	2	32	205	32	6,560	85	46	54	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
217	605	FALLENLEAF ST	WOODCREST AVE	BROOKDALE AVE	Local	AC	E	2	34	773	36	27,828	85	0	100	0	3/25/25	Surface Treatment - Slurry Seal	4/1/13
377	1058	ORANGE ST	ROSE AVE	SOUTH END	Local	AC	E	2	28	944	36	33,935	85	17	83	0	3/26/25	New Construction - Initial	1/1/80
424	1183	ROSEWOOD LN	ORANGEWOOD	EAST END	Local	AC	E	2	32	194	32	7,783	85	17	83	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
026	120	BRIGHTON ST	WHITTIER BLVD	CONCOURSE ST	Local	AC	E	2	37	1,174	35	42,300	85	42	58	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
210	587	ERNA AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	936	30	27,780	85	0	95	5	3/26/25	Surface Treatment - Slurry Seal	7/1/12
210	582	ERNA AVE	COLLEGE ST	ALLEY W/HARBOR BLVD	Local	AC	E	2	35	996	30	29,910	85	0	100	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
223	624	FLORENCE AVE	CYPRESS ST	FLORENCE CT	Local	AC	E	2	35	584	30	17,520	85	58	41	1	3/26/25	Surface Treatment - Slurry Seal	7/1/12
369	1028	NORTH HILLS DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,236	36	44,352	85	60	37	3	3/24/25	Surface Treatment - Slurry Seal	4/1/13
052	1085	PARKWOOD AVE	BURWOOD CT	LAKEVIEW AVE	Local	AC	E	2	32	1,060	36	38,910	85	0	97	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
421	1175	ROSE AVE	ALLEY W/LOIS	EUCLID ST	Local	AC	E	2	21	771	26	19,742	85	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
284	812	KERN ST	WILSHIRE	BAJA	Local	AC	E	2	04	524	32	17,518	86	15	78	7	3/4/25	New Construction - Initial	1/1/80
126	364	BRANFORD LN	WEST END	STURBRIDGE	Local	AC	E	2	05	223	26	7,373	86	16	84	0	2/26/25	Overlay - AC Rubber	4/1/13
142	424	CANDIA CIR	WEST END	KEENE DR	Local	AC	E	2	19	165	26	5,815	86	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
188	534	DONNYBROOK AVE	STONEWOOD	W/O MEADOWLARK	Local	AC	E	2	34	596	36	21,024	86	0	100	0	3/25/25	Slurry Seal or Chip Seal	8/1/05
437	1216	SHEFFIELD DR	MARIPOSA ST	BEACH BL	Local	AC	E	2	05	459	36	16,308	86	9	57	34	2/26/25	New Construction - Initial	1/1/80
194	549	EDGEMONT ST	RUSSELL ST	SILLIKER AVE	Local	AAC	E	2	08	875	32	27,872	86	17	83	0	2/19/25	Overlay - AC Structural	1/1/20
213	601	EUNICE CIR	NORTH END	N/O HILLDALE	Local	AAC	E	2	10	309	31	11,154	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/08
289	832	KIRKWOOD LN	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	566	32	19,687	86	17	80	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
453	1254	STEARNS AVE	WEST END	COLLEGE ST	Local	AAC	E	2	35	649	25	16,900	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
511	1406	WILTON WAY	NORTH END	WHITEBOOK	Local	AAC	E	2	11	69	34	3,896	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
055	158	ALMONDWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	924	35	33,300	86	18	82	0	3/10/25	Surface Treatment - Slurry Seal	4/1/24
210	591	ERNA AVE	CYPRESS ST	WEST END	Local	AC	E	2	28	628	50	29,650	86	17	83	0	2/13/25	New Construction - Initial	1/1/80
276	791	JOCELYN AVE	LEMON	WEST END	Local	AAC	E	2	35	239	26	7,739	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
434	1209	SECOND AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	641	30	19,050	86	0	87	13	4/15/25	Surface Treatment - Slurry Seal	4/1/13
129	371	BRIGHT ST	SECOND ST	SOUTH END	Local	AC	E	2	36	402	32	15,331	86	0	89	11	4/17/25	Slurry Seal or Chip Seal	8/1/05
023	385	BROOKDALE AVE	FALLENLEAF ST	LINDEN LN	Local	AC	E	2	34	290	35	10,476	86	0	97	3	3/25/25	Slurry Seal or Chip Seal	8/1/05
278	794	JOSEPH CT	NORTH END	RUSSELL	Local	AC	E	2	08	119	33	5,927	86	0	73	27	2/19/25	Surface Treatment - Slurry Seal	1/1/20
014	1188	RUSSELL ST	GREENVIEW DR	SOUTH END	Local	AC	E	2	08	902	32	31,331	86	15	85	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
011	60	FIRST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	29	1,288	43	53,024	86	0	95	5	4/17/25	Slurry Seal or Chip Seal	8/1/05
363	1018	MUIR WAY	WILSON	EAST END	Local	AC	E	2	41	108	32	5,093	86	0	100	0	3/17/25	New Construction - Initial	1/1/80
417	1164	RODDY DR	ARBOLITA DR	BROOKDALE AVE	Local	AC	E	2	34	509	36	19,074	86	0	100	0	3/25/25	New Construction - Initial	1/1/80
049	153	BRASS LANTERN DR	IMPERIAL HWY	ZEKE & ELSIE AVE	Local	AC	E	2	06	1,774	35	63,900	86	26	74	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
212	600	ESTATE DR	GREENTREE	FONDA ST	Local	AC	E	2	38	532	32	17,774	86	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
272	786	IVY PL	RIBSBY	EAST END	Local	AAC	E	2	02	92	30	3,760	86	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
477	1334	VALENCIA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	86	0	100	0	3/26/25	3 in AC OVERLAY	7/1/12
039	140	DEANNA ST	LA HABRA BLVD	HILLDALE AVE	Local	AAC	E	2	10	1,049	35	37,800	87	22	78	0	2/25/25	Surface Reconstruction - AC	8/1/08
250	714	HAZEL ST	NORTH END	ERNA AVE	Local	AC	E	2	21	658	36	25,483	87	0	94	6	4/22/25	Surface Treatment - Slurry Seal	1/1/20
331	941	MAIN ST	NORTH END	PINEHURST AVE	Local	AC	E	2	28	257	29	9,028	87	22	78	0	4/17/25	New Construction - Initial	1/1/80
335	948	MARCINE ST	NORTH END	CARMELA	Local	AAC	E	2	37	317	32	11,717	87	0	100	0	3/17/25	Surface Reconstruction - AC	4/1/13
021	113	SILLIKER AVE	HACIENDA RD	EDGEMONT ST	Local	AC	E	2	08	294	35	10,620	87	0	100	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
377	1061	ORANGE ST	WHITTIER BLVD	ROSE AVE	Local	AC	E	2	28	1,156	36	40,968	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
533	1703	RISNER WY	IDAHO ST	WESTHILLS ESTATE GATE	Local	AAC	E	2	26	340	51	13,834	87	24	60	16	3/11/25	Overlay - AC Structural	3/1/23
056	159	COACHWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	1,134	35	40,860	87	0	70	30	3/10/25	Overlay - AC Structural	1/1/20
326	929	LORELLA AVE	DEANNA ST	MARIN ST	Local	AAC	E	2	10	562	36	20,766	87	17	83	0	2/25/25	Surface Reconstruction - AC	8/1/08
508	1398	WILSHIRE AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	479	30	15,920	87	0	76	24	3/4/25	New Construction - Initial	1/1/80
014	1185	RUSSELL ST	HACIENDA RD	GREENVIEW DR	Local	AC	E	2	08	841	32	26,720	87	19	80	1	2/19/25	Surface Treatment - Slurry Seal	1/1/20
023	382	BROOKDALE AVE	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	998	36	36,678	87	1	51	48	3/24/25	Surface Treatment - Slurry Seal	4/1/13
300	854	LA VEREDA DR	SIERRA VISTA DR	KIRBY	Local	AAC	E	2	13	686	37	25,882	87	0	98	2	2/13/25	Overlay - AC Structural	1/1/20
369	1029	NORTH HILLS DR	BRIGHTON ST	ROCKING HORSE LN	Local	AC	E	2	37	739	36	26,316	87	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
396	1112	PINEHURST AVE	ELM ST	EUCLID ST	Local	AC	E	2	21	295	30	8,490	87	31	69	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
160	458	CIRCLE DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	761	30	24,080	87	21	79	0	2/13/25	Overlay - AC Structural	1/1/20
027	123	RIGSBY ST	GREGORY LN	WHITTIER BLVD	Local	AAC	E	2	02	1,324	35	47,700	87	23	77	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
020	112	SANSINENA LN	HACIENDA RD	EDGEMONT ST	Local	AAC	E	2	08	280	33	9,273	87	18	74	8	2/19/25	Overlay - AC Structural	1/1/20
267	779	HONEYWOOD LN	ALMONDWOOD	COACHWOOD	Local	AAC	E	2	26	1,497	32	47,136	87	18	82	0	3/10/25	Overlay - AC Structural	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
310	878	LAURA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,151	32	36,704	87	0	100	0	3/17/25	New Construction - Initial	1/1/80
484	1348	VERONA ST	AMORITA AVE	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	87	53	47	0	3/17/25	New Construction - Initial	1/1/80
279	795	JUANITA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,149	29	34,500	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
401	1125	RAINIER WY	VALLEY HOME	EAST END	Local	AAC	E	2	02	218	26	7,193	88	41	59	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
178	508	DAVID CIR	CONCOURSE ST	EAST END	Local	AC	E	2	37	128	30	5,467	88	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
008	53	CYPRESS ST	SECOND ST	COMMERCIAL WAY	Local	AC	C	2	36	835	36	30,060	88	1	57	42	4/18/25	New Construction - Initial	1/1/74
246	702	GREGORY LN	KINLEY ST	DEXFORD DR	Local	AAC	E	2	02	885	35	31,896	88	65	35	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
285	813	KERNER WAY	WEST END	HARBOR	Local	AAC	E	2	35	492	30	16,335	88	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
505	1389	WHITTIER BLVD (FRONT RD)	MONTE VISTA ST	EAST END	Local	AC	E	2	16	657	26	23,652	88	41	59	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
517	1415	WORTH AVE	DEXFORD	EAST END	Local	AAC	E	2	02	225	32	7,008	88	0	100	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
173	501	COUNTRY HILLS DR	CHERRYWOOD	DORWOOD AVE	Local	AAC	E	2	26	991	35	35,712	88	24	61	15	3/10/25	Surface Treatment - Slurry Seal	1/1/20
134	390	BUENA VISTA AVE	LA CASA AVE	KEENE DR	Local	AC	E	2	19	871	36	31,356	88	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/11
298	847	LA SERNA AVE	SIERRA VISTA DR	WALNUT ST	Local	AAC	E	2	13	1,142	30	33,900	88	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
521	386	BROOKFIELD AVE	SHELburne ST	NANTUCKET ST	Local	AC	E	2	37	404	36	15,150	88	47	53	0	3/25/25	New Construction - Initial	1/1/80
233	661	GERRY ST	NORTH END	FRANCIS	Local	AC	E	2	38	467	30	15,577	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
505	1387	WHITTIER BLVD (FRONT RD)	CONCOURSE ST	BRIGHTON ST	Local	AC	E	2	37	715	28	20,020	88	0	100	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
149	435	CARMELA LN	HARBOR BLVD	EAST END	Local	AAC	E	2	37	749	35	27,984	88	0	97	3	3/17/25	Surface Reconstruction - AC	4/1/13
205	573	ELMCROFT CIR	MARIPOSA	EAST END	Local	AAC	E	2	05	371	32	13,667	88	0	35	65	5/6/25	Surface Reconstruction - AC	4/1/13
222	622	FLAMINGO WAY	NORTH END	AMORITA	Local	AC	E	2	40	789	36	30,202	88	20	47	33	3/17/25	Surface Treatment - Slurry Seal	4/1/13
237	668	GRACE AVE	LIBERTY	CYPRESS	Local	AC	E	2	31	606	36	21,600	89	0	98	2	2/14/25	Surface Treatment - Slurry Seal	1/1/20
122	354	BISHOP DR	CYPRESS ST	EAST END	Local	AC	E	2	34	587	30	20,237	89	45	55	0	4/17/25	Surface Treatment - Slurry Seal	4/1/13
379	1072	ORCHARD PL	MONTE VISTA	WEST END	Local	AC	E	2	16	638	30	20,715	89	22	78	0	3/3/25	Surface Treatment - Slurry Seal	4/1/13
044	145	STURBRIDGE DR	LAMBERT RD	WIMBLETON LN	Local	AC	E	2	05	619	35	22,320	89	0	100	0	2/26/25	New Construction - Initial	1/1/90
195	551	EL CAMINO DR	SIERRA VISTA	WALNUT ST	Local	AC	E	2	13	1,143	30	33,930	89	22	78	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
252	734	HEATHER WAY	HAZEL	EAST END	Local	AAC	E	2	21	209	30	7,350	89	0	90	10	4/17/25	Overlay - AC Structural	1/1/20
210	586	ERNA AVE	WALNUT ST	HAZEL ST	Local	AAC	E	2	21	319	30	9,600	89	0	100	0	4/17/25	Overlay - AC Structural	1/1/20
289	828	KIRKWOOD LN	ALMONDWOOD ST	COACHWOOD ST	Local	AAC	E	2	26	1,483	36	52,428	89	21	79	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
370	1032	NORTHGATE WAY	STEARNS AVE	EASTPARK	Local	AC	E	2	38	223	32	6,944	89	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
440	1228	SIERRA VISTA DR	LA VEREDA DR	LA PRESA DR	Local	AC	E	2	13	835	35	29,952	89	0	98	2	2/13/25	Surface Treatment - Slurry Seal	1/1/20
250	716	HAZEL ST	FIRST ST	SOUTH END	Local	AC	E	2	22	327	38	12,426	89	0	95	5	4/22/25	2 in overlay	10/1/12
287	817	KINLEY ST	FOXDALE AVE	GREGORY LN	Local	AC	E	2	02	901	30	26,850	89	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
170	491	COMITY CIR	CONCOURSE ST	EAST END	Local	AAC	E	2	37	209	30	7,817	89	0	100	0	3/17/25	Overlay - AC Thin	4/1/13
248	712	HACIENDA DR	HACIENDA	EL DON	Local	AAC	E	2	09	828	29	24,900	89	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
407	1138	RIDGEHAVEN DR	GRAYVILLE DR	BRASS LANTERN DR	Local	AAC	E	2	06	989	36	36,318	89	0	100	0	2/18/25	Surface Reconstruction - AC	4/1/13
328	935	LYNWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	622	29	18,690	90	0	38	62	3/10/25	Surface Treatment - Slurry Seal	1/1/20
027	122	RIGSBY ST	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	90	24	76	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
439	1224	SIDON AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	741	31	23,744	90	12	88	0	3/5/25	Overlay - AC Thin	8/1/08
107	321	ANTOINETTE DR	CITY LIMIT	GREENVIEW DR	Local	AC	E	2	08	978	33	32,274	90	21	56	23	2/19/25	Surface Treatment - Slurry Seal	1/1/20
242	681	GREENTREE LN	EASTPARK	ESTATE	Local	AC	E	2	38	297	36	12,192	90	0	92	8	3/24/25	Surface Treatment - Slurry Seal	4/1/13
315	893	LEORA ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	16	299	30	8,850	90	49	51	0	3/3/25	New Construction - Initial	1/1/80
296	844	LA PRESA DR	SIERRA VISTA	WALNUT ST	Local	AAC	E	2	13	1,144	30	33,960	90	0	99	1	2/13/25	Overlay - AC Structural	1/1/20
053	1100	PATWOOD DR	IRONWOOD ST	LORAWOOD ST	Local	AC	E	2	32	507	36	18,786	90	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
033	131	FRANCIS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	36	41,580	90	0	100	0	3/24/25	Surface Treatment - Cape Seal	4/1/13
265	777	HOLLY AVE	VALLEY HOME	PARSONS	Local	AAC	E	2	02	274	32	9,268	90	59	41	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
465	1308	TEAKWOOD AVE	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	422	32	15,029	90	23	77	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
124	362	BOND AVE	KINLEY ST	RIGSBY ST	Local	AAC	E	2	02	421	30	12,450	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
228	643	FOXDALE AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	1,158	30	34,560	91	72	28	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
510	1403	WILSON ST	VAQUERO AVE	STEARNS AVE	Local	AC	E	2	41	778	32	24,768	91	0	100	0	3/17/25	New Construction - Initial	1/1/80
177	507	DAVID AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	619	30	18,390	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
287	815	KINLEY ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	870	30	26,670	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
347	977	MCPHERSON ST	STEARNS AVE	LA HABRA BLVD	Local	AAC	E	2	35	637	30	18,630	91	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
234	662	GLENCLIFF ST	ELMSFORD	SHEFFIELD	Local	AC	E	2	11	282	36	10,902	91	0	100	0	3/4/25	Slurry Seal or Chip Seal	8/1/05
437	1218	SHEFFIELD DR	STURBRIDGE DR	MARIPOSA ST	Local	AC	E	2	05	290	36	10,224	91	0	100	0	2/26/25	New Construction - Initial	1/1/80
391	1099	PARSONS ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	872	30	25,980	91	22	70	8	2/25/25	Surface Treatment - Slurry Seal	11/15/21
508	1402	WILSHIRE AVE	WEST END	WALL ST	Local	AAC	E	2	04	148	35	5,364	91	16	84	0	3/9/25	Surface Reconstruction - AC	8/1/08
444	426	CANDLEWOOD WAY	E/O CANDLEWOOD	E/END	Local	AAC	E	2	05	94	51	6,544	91	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
235	665	GLENHAVEN DR	WIMBLETON	CANTEBURY	Local	AAC	E	2	05	1,024	36	37,614	91	0	71	29	2/26/25	Surface Reconstruction - AC	4/1/13
371	1033	OAK TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	93	38	5,329	91	0	0	100	3/12/25	Overlay - AC Structural	2/1/23
396	1118	PINERHURST AVE	MONTE VISTA ST	LEORA ST	Local	AC	E	2	16	625	30	19,100	91	25	62	13	3/3/25	Surface Treatment - Slurry Seal	4/1/13
529	1530	DOT AVE	JOAN ST	JUANITA ST	Local	AC	E	2	38	414	32	13,695	91	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
280	801	KEARNY LN	SOUTH END	O'MALLEY	Local	AAC	E	2	06	163	31	6,848	91	0	100	0	2/24/25	Overlay - AC Thin	4/1/13
391	1098	PARSONS ST	FOXDALE AVE	HOLLY AVE	Local	AAC	E	2	02	330	32	11,310	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
465	1304	TEAKWOOD AVE	ALMONDWOOD ST	CHERRYWOOD	Local	AC	E	2	26	834	32	26,208	92	27	71	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
516	1414	WOODMONT PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	106	32	4,917	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
136	398	BURWOOD ST	MONTWOOD AVE	AVENIDA SANTA ANITA	Local	AC	E	2	32	257	35	9,288	92	0	92	8	3/10/25	Surface Treatment - Slurry Seal	1/1/20
156	452	CHERRYWOOD ST	TEAKWOOD AVE	COUNTRY HILLS DR	Local	AAC	E	2	26	151	32	4,640	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	503	COUNTRY HILLS DR	WEST END	CHERRYWOOD	Local	AAC	E	2	26	383	32	14,051	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
266	778	HOLT DR	WILSON	HOLGATE	Local	AC	E	2	41	371	30	12,677	92	0	100	0	3/17/25	New Construction - Initial	1/1/80
146	430	CANTERBURY LN	GLENHAVEN	W/O STURBRIDGE	Local	AAC	E	2	05	465	36	17,346	92	0	84	16	2/26/25	Surface Reconstruction - AC	4/1/13
172	495	CONCOURSE ST	WHITTIER AVE (FRONTAGE)	DAVIT CIR	Local	AC	E	2	37	637	36	22,932	92	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
333	946	MAPLE TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	263	36	11,043	92	0	81	19	3/12/25	Overlay - AC Structural	2/1/23
514	1412	WOODCREST AVE	WEST END	FALLENLEAF ST	Local	AC	E	2	34	478	36	19,005	92	19	81	0	3/26/25	Surface Treatment - Slurry Seal	4/1/13
057	1012	MONTWOOD AVE	VALWOOD ST	EUCLID ST	Local	AAC	E	2	25	138	35	5,004	92	0	40	60	4/15/25	Overlay - AC Structural	4/1/24
021	1234	SILLIKER AVE	EDGEMONT ST	RUSSELL ST	Local	AC	E	2	08	633	32	20,064	92	2	98	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
380	1073	ORCHID AVE	BROOKWOOD	TROPICANA	Local	AC	E	2	40	314	36	11,910	92	0	98	2	3/17/25	New Construction - Initial	1/1/80
194	548	EDGEMONT ST	SANSINENA LN	N/O RUSSELL	Local	AAC	E	2	08	599	32	19,040	92	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
503	1380	WESTFIELD WAY	SHELBURNE	EAST END	Local	AC	E	2	37	189	26	6,461	92	0	93	7	3/25/25	New Construction - Initial	1/1/80
055	311	ALMONDWOOD ST	TEAKWOOD AVE	SOUTH END	Local	AC	E	2	26	236	36	10,643	92	29	71	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
288	820	KIRBY DR	CITY LIMIT	LA VEREDA DR	Local	AAC	E	2	13	541	30	16,980	92	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
325	926	LORAWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	623	36	22,928	92	0	81	19	3/10/25	Surface Treatment - Slurry Seal	1/1/20
235	664	GLENHAVEN DR	NORTH END	WIMBLETON	Local	AC	E	2	05	124	36	4,248	93	0	100	0	2/26/25	New Construction - Initial	1/1/80
243	683	GREENVIEW DR	ANTOINETTE	RUSSELL	Local	AAC	E	2	08	305	33	9,867	93	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
119	346	BEDFORD ST	ESSEX	FRANCIS AVE	Local	AC	E	2	38	742	29	22,290	93	0	100	0	3/24/25	Overlay - AC Rubber	4/1/13
148	434	CARLISLE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	114	26	4,539	93	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
246	706	GREGORY LN	KINLEY ST	VALLEY HOME	Local	AAC	E	2	02	529	36	18,828	93	38	62	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
425	1184	ROXBURY TERR	GREENBRIER	SOUTH END	Local	AAC	E	2	05	96	28	4,483	93	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
347	978	MCPHERSON ST	FRANCIS AVE	STEARNS AVE	Local	AAC	E	2	35	655	29	19,680	93	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
438	1220	SHELBURNE ST	NANTUCKET ST	WHITTIER BLVD	Local	AC	E	2	37	739	36	26,460	93	0	100	0	3/25/25	New Construction - Initial	1/1/80
282	810	KENRICH CT	WEST END	CHANNTRY	Local	AAC	E	2	02	262	26	8,387	94	0	100	0	5/6/25	Surface Treatment - Slurry Seal	11/15/21
481	1345	VECINO ST	AMORITA	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	94	0	81	19	3/17/25	New Construction - Initial	1/1/80
062	915	LINDAUER DR	WEST END	RUSSELL ST	Local	AC	E	2	08	204	33	8,582	94	3	97	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
445	1242	SMOKE TREE DR	OLIVE TREE DR	LEMON TREE CT	Local	AAC	E	2	12	681	36	24,300	94	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
189	535	DORWOOD AVE	COUNTRY HILLS DR	SOUTH END	Local	AAC	E	2	26	158	36	7,835	94	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
550	997	PARK LA HABRA MOBILE HOMES	LAMBERT RD	NORTH END	Local	AC	E	2	10	3,244	19	77,550	94	0	78	22	3/4/25	Complete Reconstruction - AC	8/15/22
399	1122	RADCLIFF PL	NORTH END	REDCOACH	Local	AAC	E	2	05	182	26	6,283	94	0	100	0	2/19/25	Overlay - AC Rubber	4/1/13
497	1373	WALTHAM WAY	SHELBURNE	EAST END	Local	AC	E	2	37	188	26	6,435	94	0	100	0	3/25/25	New Construction - Initial	1/1/80
012	635	FONDA ST	CONCOURSE	WHITTIER (FRONTAGE)	Local	AC	C	2	37	1,072	29	32,190	94	0	100	0	3/17/25	New Construction - Initial	1/1/80
501	1377	WAVERLY TERR	WEST END	STURBRIDGE	Local	AAC	E	2	05	110	26	4,435	94	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
355	1001	MIKINDA AVE	EDGEMONT	ANTOINETTE	Local	AC	E	2	08	656	32	20,736	95	4	96	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
117	342	BANCROFT AVE	KINLEY	RIGSBY ST	Local	AAC	E	2	02	335	29	10,080	95	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
512	1407	WIMBELTON LN	GLENHAVEN	STURBRIDGE	Local	AC	E	2	05	330	36	11,664	95	0	100	0	2/26/25	New Construction - Initial	1/1/80
271	784	IRONWOOD ST	PARKWOOD AVE	MONTWOOD AVE	Local	AC	E	2	32	883	36	31,572	95	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
143	425	CANDLEWOOD DR	SILVERSPUR	S/O CANDLEWOOD	Local	AAC	E	2	05	369	26	11,094	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
241	678	GREENBRIER LN	CAJON	STURBRIDGE	Local	AAC	E	2	05	405	36	14,148	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
459	1286	SUMMERSHADE DR	CITY LIMIT	RIDGEHAVEN DR	Local	AAC	E	2	06	123	35	4,464	95	0	100	0	5/6/25	Surface Reconstruction - AC	4/1/13
045	168	CAJON DR	GREENBRIER LN	IMPERIAL HWY	Local	AC	E	2	05	340	46	14,110	96	34	66	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
395	1107	PINE TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	222	38	10,231	96	0	25	75	3/12/25	Overlay - AC Structural	2/1/23
005	72	PALM ST	MADONNA LN	WHITTIER AVE	Local	AAC	C	2	40	928	35	33,444	96	0	23	77	3/24/25	Overlay - AC Structural	3/1/23
479	1340	VALWOOD ST	PARKWOOD AVE	GWYNWOOD AVE	Local	AAC	E	2	25	921	36	33,690	97	0	75	25	4/15/25	Overlay - AC Structural	4/1/24
312	885	LEMON TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	400	36	16,195	97	0	1	99	3/12/25	Overlay - AC Structural	2/1/23
050	1053	OLIVE TREE DR	WEST END	SMOKE TREE DR	Local	AAC	E	2	12	238	36	6,421	97	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
005	1738	PALM ST	BROOKDALE AVE	MADONNA LN	Local	AAC	E	2	40	487	26	14,100	97	0	16	84	3/24/25	Overlay - AC Structural	3/1/23
444	1241	SMOKE TREE CT	LEMON TREE	SOUTH END	Local	AAC	E	2	12	210	32	8,515	97	0	6	94	3/12/25	Overlay - AC Structural	2/1/23
005	71	PALM ST	CITY LIMIT	BROOKDALE AVE	Local	AAC	C	2	37	1,200	36	43,200	97	0	35	65	3/24/25	Overlay - AC Structural	3/1/23
017	82	WALNUT ST	LA PRESA DR	WHITTIER AVE	Local	AAC	C	2	13	1,135	35	40,896	98	0	100	0	2/13/25	Overlay - AC Structural	5/1/23
054	164	DORWOOD AVE	GWYNWOOD AVE	SANDLEWOOD AVE	Local	AC	E	2	25	299	35	10,800	98	0	100	0	4/15/25	Surface Treatment - Slurry Seal	4/1/24
247	710	GWYNWOOD AVE	PATWOOD	DORWOOD	Local	AAC	E	2	25	795	35	28,656	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
247	709	GWYNWOOD AVE	DORWOOD	VALWOOD	Local	AAC	E	2	25	576	36	21,486	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
017	86	WALNUT ST	LOMA VERDE AVE	LAMBERT RD	Local	AAC	C	2	23	1,403	36	50,180	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
400	1123	RAIN TREE DR	LEMON TREE CT	IDAHO ST	Local	AAC	E	2	12	578	35	20,844	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
017	85	WALNUT ST	LA HABRA BLVD	LOMA VERDE AVE	Local	AAC	C	2	22	1,206	33	41,038	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
552	998	VIEW PARK MOBILE ESTATES	LAMBERT RD	SOUTH END	Local	AC	E	2	11	4,079	24	103,500	98	0	100	0	2/26/25	Complete Reconstruction - AC	8/15/22
219	609	FERN WY	RIGSBY ST	EAST END	Local	AAC	E	2	02	197	30	7,777	98	0	58	42	2/14/25	Surface Treatment - Slurry Seal	11/15/21
050	154	OLIVE TREE DR	SMOKE TREE DR	IDAHO ST	Local	AAC	E	2	12	1,044	35	37,620	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
155	451	CHERRY TREE CIR	RAIN TREE	S/END	Local	AAC	E	2	12	82	50	4,100	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
008	54	CYPRESS ST	FRANCIS AVE	LA HABRA BLVD	Local	AAC	C	2	35	1,109	35	40,716	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
008	55	CYPRESS ST	WHITTIER BLVD	FRANCIS AVE	Local	AAC	C	2	35	1,475	34	51,660	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
052	156	PARKWOOD AVE	VIVIWOOD PL	EUCLID ST	Local	AAC	E	2	25	959	35	34,560	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
052	1094	PARKWOOD AVE	SCHOOLWOOD DR	VIVIWOOD PL	Local	AAC	E	2	25	988	35	35,604	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
013	69	MONTE VISTA ST	LA HABRA BLVD	FOURTH AVE	Local	AAC	C	2	15	1,446	36	52,315	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
013	70	MONTE VISTA ST	FOURTH AVE	LAMBERT RD	Local	AAC	C	2	18	1,109	36	41,070	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
051	155	LEMON TREE DR	SMOKE TREE DR	OLIVE TREE DR	Local	AAC	E	2	12	851	35	30,672	100	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
329	937	MACY ST	RUSSELL ST	CITY LIMIT	Local	AC	E	2	01	743	35	26,784	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
009	58	EUCLID ST	NORTH CITY LIMITS	AMANDA DR	Local	AAC	C	2	27	2,240	36	67,603	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
009	165	EUCUID ST	AMANDA DR	WHITTIER BLVD	Local	AAC	C	2	27	424	35	15,300	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24
121	352	BIRCH TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	84	60	5,719	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
534	1704	CIVIC CENTER PLAZA	LA HABRA BLVD	ALLEY N/O LA HABRA BLVD	Local	AAC	E	2	28	341	34	15,594	100	0	0	0	4/25/25	Surface Treatment - Slurry Seal	8/4/23
449	1249	SPRING TREE CT	LEMON TREE CT	EAST END	Local	AAC	E	2	12	120	32	5,365	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
		Alleys								92.9		16,562,693							
065	1716	ALLEY E/BEACH BLVD	SAN JOSE AVE	ALLEY N/SAN JOSE	Alley	AC	O	1	10	179	19	3,600	11	64	16	20	2/25/25	New Construction - AC	1/1/80
091	277	ALLEY S/LA HABRA BLVD	W/END	W/O MONTE VISTA	Alley	AC	O	1	15	211	19	4,240	11	82	12	6	3/4/25	New Construction - Initial	1/1/80
093	284	ALLEY S/WHITTIER BLVD	ALLEY E/HAZEL ST	HILLSIDE ST	Alley	AC	O	1	21	121	12	1,586	12	48	14	38	5/5/25	New Construction - Initial	1/1/80
091	268	ALLEY S/LA HABRA BLVD	DEXFORD ST	MISSION ST	Alley	AC	O	1	03	1,013	19	20,280	12	68	26	6	2/20/25	New Construction - Initial	1/1/80
098	294	ALLEY W/LEORA STREET	ALLEY S/ERNA ST	LA HABRA BL	Alley	AC	O	1	16	145	9	1,460	13	77	23	0	3/4/25	New Construction - Initial	1/1/80
065	1717	ALLEY E/BEACH BLVD	ALLEY S/SAN JOSE	SAN JOSE AVE	Alley	AC	O	1	10	428	19	8,580	14	47	10	43	2/25/25	New Construction - AC	1/1/80
083	236	ALLEY N/WHITTIER BLVD	KIRBY DR	WALNUT ST	Alley	AC	O	1	13	484	19	9,700	14	55	23	22	2/27/25	New Construction - Initial	1/1/80
084	241	ALLEY S/ERNA	WILLOW ST	ALLEY W/LEORA ST	Alley	AC	O	1	16	359	14	5,400	15	55	22	23	3/4/25	New Construction - Initial	1/1/80
098	295	ALLEY W/LEORA STREET	ERNA ST	ALLEY S/ERNA ST	Alley	AC	O	1	16	153	9	1,540	15	41	14	45	5/6/25	New Construction - Initial	1/1/80
536	1718	ALLEY N/SAN JOSE AVE	BEACH BLVD	ALLEY E/BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	15	70	25	5	2/25/25	New Construction - AC	1/1/80
093	285	ALLEY S/WHITTIER BLVD	HAZEL ST	ALLEY E/HAZEL ST	Alley	AC	O	1	21	146	19	2,940	18	46	14	40	4/25/25	New Construction - Initial	1/1/80
069	209	ALLEY E/EUCUID STREET	N/END	N/O PINEHURST	Alley	AC	O	1	28	313	19	6,280	19	24	52	24	4/25/25	New Construction - Initial	1/1/80
071	211	ALLEY E/HAZEL-W/HILLSID	S/O ALLEY S/WHITTIER	N/O ALLEY N/GREENWOOD	Alley	PCC	O	1	21	481	10	4,810	19	69	4	27	5/5/25	New Construction - Initial	1/1/80
078	224	ALLEY N/GREENWOOD AVE	MID ALLEY E/HAZEL-W/HILLSIDE	W/O HILLSIDE	Alley	PCC	O	1	21	150	10	1,500	21	83	0	17	4/25/25	New Construction - Initial	1/1/80
081	232	ALLEY N/LAMBERT	N/END	W/O MOUNTAIN VIEW	Alley	AC	O	1	18	105	19	2,120	27	79	21	0	3/16/25	New Construction - Initial	1/1/80
083	237	ALLEY N/WHITTIER BLVD	WEST END	KIRBY DR	Alley	AC	O	1	13	167	19	3,360	31	44	53	3	5/6/25	New Construction - Initial	1/1/80
097	290	ALLEY N/O WHITTIER	WEST END	HARBOR BL	Alley	AC	O	1	34	172	16	2,941	32	64	19	17	4/22/25	New Construction - Initial	1/1/80
091	276	ALLEY S/LA HABRA BLVD	OAKLAND ST	DEXFORD ST	Alley	AC	O	1	03	446	19	8,940	33	62	28	10	2/20/25	New Construction - Initial	1/1/80
099	297	ALLEY W/LOIS STREET	ROSE AVE	ALLEY S/ROSE AVE	Alley	AC	O	1	21	156	19	3,140	36	63	8	29	4/25/25	New Construction - Initial	1/1/80
537	1719	ALLEY S/SAN JOSE AVE	ALLEY E/BEACH BLVD	BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	38	69	31	0	2/25/25	New Construction - AC	1/1/80
078	223	ALLEY N/GREENWOOD AVE	E/O WALNUT	E/O ALLEY E/WALNUT-W/HAZEL	Alley	AC	O	1	21	166	15	2,672	39	64	36	0	4/25/25	New Construction - Initial	1/1/80
079	225	ALLEY N/INDUSTRY AVE	E/O EUCUID	W/O CYPRESS	Alley	AC	O	1	31	724	19	14,500	42	64	31	5	2/14/25	New Construction - Initial	1/1/80
099	296	ALLEY W/LOIS STREET	ALLEY S/GREENWOOD ST	ROSE AVE	Alley	AC	O	1	21	168	19	3,380	43	67	20	13	4/25/25	New Construction - Initial	1/1/80
087	254	ALLEY S/GREENWOOD AVE	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	321	19	6,440	44	66	33	1	4/25/25	New Construction - Initial	1/1/80
078	222	ALLEY N/GREENWOOD AVE	E/O HAZEL	MID ALLEY E/HAZEL-W/HILLSIDE	Alley	AC	O	1	21	136	12	1,781	45	60	14	26	4/25/25	New Construction - Initial	1/1/80
087	253	ALLEY S/GREENWOOD AVE	HAZEL ST	ALLEY W/LOIS ST	Alley	AC	O	1	21	164	19	3,300	45	44	53	3	4/25/25	New Construction - Initial	1/1/80
078	221	ALLEY N/GREENWOOD AVE	E/O ALLEY E/O WALNUT	W/O HAZEL	Alley	AC	O	1	21	162	15	2,608	47	39	61	0	4/25/25	New Construction - Initial	1/1/80
080	231	ALLEY N/LA HABRA BLVD	WEST END	DEXFORD ST	Alley	AC	O	1	02	226	19	4,540	50	45	55	0	2/24/25	New Construction - Initial	1/1/80
080	228	ALLEY N/LA HABRA BLVD	DEXFORD ST	E/END	Alley	AC	O	1	02	275	19	5,520	50	21	53	26	2/24/25	New Construction - Initial	1/1/80
074	216	ALLEY E/WALNUT STREET	NORTH END	ALLY N/GREENWOOD AVE	Alley	AC	O	1	21	372	10	4,103	52	36	51	13	4/25/25	New Construction - Initial	1/1/80
087	252	ALLEY S/GREENWOOD AVE	ALLEY W/LOIS ST	EAST END	Alley	AC	O	1	21	122	20	2,440	55	0	100	0	4/25/25	New Construction - Initial	1/1/80
091	264	ALLEY S/LA HABRA BLVD	CALIFORNIA ST	WALLACE ST	Alley	AC	O	1	22	268	14	4,035	58	57	23	20	4/22/25	New Construction - Initial	1/1/80
091	259	ALLEY S/LA HABRA BLVD	ALDRICH ST	CYPRESS ST	Alley	AC	O	1	29	408	14	6,135	60	56	38	6	4/17/25	New Construction - Initial	1/1/80
068	0208	ALLEY E/CORTO	WHITTIER BL	SOUTH END	Alley	AC	O	1	09	226	19	4,540	60	74	24	2	2/20/25	New Construction - Initial	1/1/80
101	305	ALLEY W/WALNUT STREET	HEATHER AVE	ALLEY S/HEATHER AVE	Alley	AC	O	1	16	157	15	2,528	60	48	52	0	3/4/25	New Construction - Initial	1/1/80
084	240	ALLEY S/ERNA	LEORA ST	WALNUT ST	Alley	AC	O	1	16	454	19	9,100	63	32	26	42	3/3/25	New Construction - Initial	1/1/80
090	258	ALLEY S/KENRICH COURT	W/END	W/O CHANTRY	Alley	AC	O	1	02	510	14	7,665	67	34	49	17	2/24/25	New Construction - Initial	1/1/80
091	261	ALLEY S/LA HABRA BLVD	ALLEY W/EUCUID ST	EUCUID ST	Alley	AC	O	1	22	126	14	1,905	68	0	30	70	4/22/25	New Construction - Initial	11/1/80
091	275	ALLEY S/LA HABRA BLVD	WALNUT ST	HAZEL ST	Alley	AC	O	1	22	318	19	6,380	70	42	25	33	4/22/25	New Construction - Initial	1/1/80
091	265	ALLEY S/LA HABRA BLVD	BANK OF AMERICA PARKING LOT	ALDRICH ST	Alley	AC	O	1	29	255	14	3,840	74	39	33	28	4/17/25	New Construction - Initial	1/1/80
085	1710	ALLEY S/FIRST AVE	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	305	14	2,783	76	0	100	0	4/21/25	New Construction - Initial	1/1/80
091	272	ALLEY S/LA HABRA BLVD	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	269	19	5,400	76	25	37	38	4/22/25	New Construction - Initial	1/1/80
091	271	ALLEY S/LA HABRA BLVD	FONDA ST	EAST END	Alley	AC	O	1	39	101	19	2,040	78	0	100	0	4/22/25	New Construction - Initial	1/1/80
091	267	ALLEY S/LA HABRA BLVD	CYPRESS ST	MCPHERSON ST	Alley	AC	O	1	36	640	14	9,615	79	0	66	34	4/15/25	New Construction - Initial	1/1/80
084	239	ALLEY S/ERNA	HAZEL ST	LOIS ST	Alley	AC	O	1	21	434	14	6,525	80	1	60	39	4/17/25	New Construction - Initial	1/1/80
091	266	ALLEY S/LA HABRA BLVD	COLFAX ST	DEXTER ST	Alley	AC	O	1	39	202	19	4,060	80	7	93	0	4/22/25	New Construction - Initial	1/1/80
084	245	ALLEY S/ERNA	LOIS ST	EUCUID ST	Alley	AC	O	1	21	464	24	11,625	80	0	95	5	4/21/25	New Construction - Initial	1/1/80
076	1706	ALLEY N/ERNA STREET	WILLOW ST	EAST END	Alley	AC	O	1	16	335	16	3,965	81	6	83	11	3/4/25	New Construction - Initial	1/1/80
101	300	ALLEY W/WALNUT STREET	ALLEY S/GREENWOOD AVE	HIGHLANDER AVE	Alley	AC	O	1	16	142	15	2,288	81	0	39	61	3/3/25	New Construction - Initial	1/1/80
084	242	ALLEY S/ERNA	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	319	19	6,400	82	22	49	29	4/17/25	New Construction - Initial	1/1/80
091	269	ALLEY S/LA HABRA BLVD	DEXTER ST	FONDA ST	Alley	AC	O	1	39	202	19	4,060	82	20	78	2	4/22/25	New Construction - Initial	1/1/80
091	273	ALLEY S/LA HABRA BLVD	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	138	16	2,363	82	74	18	8	4/2/25	New Construction - Initial	1/1/80
101	301	ALLEY W/WALNUT STREET	ALLEY S/HEATHER AVE	ERNA ST	Alley	AC	O	1	16	141	15	2,272	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
076	1708	ALLEY N/ERNA STREET	WEST END	ALLEY W/O WALNUT ST	Alley	AC	O	1	16	240	20	4,080	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
091	274	ALLEY S/LA HABRA BLVD	WALLACE ST	ALLEY W/EUCUID ST	Alley	AC	O	1	22	192	14	2,895	82	0	64	36	4/25/25	New Construction - Initial	1/1/80
082	1712	ALLEY N/THIRD ST	ALLEY W/O VALENCIA	VALENCIA ST	Alley	AC	O	1	36	153	20	2,091	84	0	15	85	4/2/25	New Construction - Initial	1/1/80
067	0207	ALLEY E/BURWOOD	PARKWOOD	MONTWOOD	Alley	AC	O	1	32	882	19	17,660	85	57	43	0	3/10/25	New Construction - Initial	1/1/80
102	307	ALLEY W/O HARBOR BLVD	ERNA AVE	LA HABRA BLVD	Alley	AC	O	1	35	343	19	6,880	86	0	100	0	3/26/25	New Construction - Initial	1/1/80
091	260	ALLEY S/LA HABRA BLVD	ALLEY E/BEDFORD ST	COLFAX ST	Alley	AC	O	1	39	96	19	1,940	87	0	100	0	4/22/25	New Construction - Initial	1/1/80
076	220	ALLEY N/ERNA STREET	WEST END	EUCUID ST	Alley	AC	O	1	21	315	14	4,740	87	0	100	0	4/18/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
101	302	ALLEY W/WALNUT STREET	ALLEY S/HIGHLANDER AVE	FLORENCE AVE	Alley	AC	0	1	16	146	15	2,352	87	0	57	43	3/3/25	New Construction - Initial	1/1/80
092	280	ALLEY S/STEARNS AVENUE	SUNSET ST	EAST END	Alley	AC	0	1	35	343	14	3,509	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
088	256	ALLEY S/HIGHLANDER AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	0	1	16	471	15	7,552	88	19	55	26	3/3/25	New Construction - Initial	1/1/80
084	238	ALLEY S/ERNA	MCPHERSON ST	COLLEGE ST	Alley	AC	0	1	35	304	14	4,575	88	0	100	0	3/26/25	New Construction - Initial	1/1/80
101	303	ALLEY W/WALNUT STREET	FLORENCE AVE	HEATHER AVE	Alley	AC	0	1	16	301	15	4,832	89	32	60	8	3/4/25	New Construction - Initial	1/1/80
092	278	ALLEY S/STEARNS AVENUE	E/O COLLEGE	W/O VALENCIA	Alley	AC	0	1	35	312	14	4,695	89	0	100	0	3/26/25	New Construction - Initial	1/1/80
076	218	ALLEY N/ERNA STREET	HAZEL	E/END	Alley	AC	0	1	21	255	20	5,100	89	0	100	0	4/17/25	New Construction - Initial	1/1/80
080	226	ALLEY N/LA HABRA BLVD	E/O ALLEY E/CYPRESS	W/O LEMON	Alley	AC	0	1	35	144	14	2,175	89	0	74	26	4/2/25	New Construction - Initial	1/1/80
101	304	ALLEY W/WALNUT STREET	GREENWOOD AVE	ALLEY S/GREENWOOD AVE	Alley	AC	0	1	16	160	15	2,576	90	24	68	8	3/3/25	New Construction - Initial	1/1/80
091	263	ALLEY S/LA HABRA BLVD	BEDFORD ST	ALLEY E/BEDFORD ST	Alley	AC	0	1	39	133	19	2,680	90	0	100	0	4/22/25	New Construction - Initial	1/1/80
076	219	ALLEY N/ERNA STREET	WALNUT ST	E/O ALLEY E/WALNUT	Alley	AC	0	1	21	144	19	2,900	90	0	95	5	4/17/25	New Construction - Initial	1/1/80
080	227	ALLEY N/LA HABRA BLVD	CYPRESS ST	E/O ALLEY E/CYPRESS	Alley	AC	0	1	35	146	14	2,205	91	0	100	0	4/2/25	New Construction - Initial	1/1/80
087	255	ALLEY S/GREENWOOD AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	0	1	16	470	19	9,420	91	27	73	0	3/3/25	New Construction - Initial	1/1/80
076	217	ALLEY N/ERNA STREET	E/O ALLEY E/WALNUT	W/O HAZEL	Alley	AC	0	1	21	174	19	3,500	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
085	250	ALLEY S/FIRST AVE	CYPRESS ST	MCPHERSON ST	Alley	AC	0	1	36	640	16	10,240	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
074	214	ALLEY E/WALNUT STREET	N/END	N/O ALLEY N/ERNA	Alley	AC	0	1	21	429	19	8,600	92	0	100	0	4/17/25	New Construction - Initial	1/1/80
092	279	ALLEY S/STEARNS AVENUE	E/O MCPHERSON	W/O COLLEGE	Alley	AC	0	1	35	304	14	4,575	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
101	306	ALLEY W/WALNUT STREET	HIGHLANDER AVE	ALLEY S/HIGHLANDER AVE	Alley	AC	0	1	16	156	15	2,512	92	0	100	0	3/3/25	New Construction - Initial	1/1/80
095	288	ALLEY W/BURWOOD ST	NORTH END	MONTWOOD AVE	Alley	AC	0	1	32	1,035	20	21,756	92	0	100	0	4/15/25	New Construction - Initial	1/1/80
084	244	ALLEY S/ERNA	COLLEGE ST	VALENCIA ST	Alley	AC	0	1	35	312	14	4,695	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	247	ALLEY S/ERNA	VALENCIA ST	SUNSET ST	Alley	AC	0	1	35	283	9	2,840	92	0	53	47	3/26/25	New Construction - Initial	1/1/80
092	281	ALLEY S/STEARNS AVENUE	E/O VALENCIA	W/O SUNSET	Alley	AC	0	1	35	283	14	4,260	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
094	287	ALLEY W/BEDFORD STREET	S/O ALPINE	N/O SUPERIOR	Alley	AC	0	1	39	1,252	19	25,060	93	0	100	0	4/2/25	Complete Reconstruction - AC	4/2/18
089	257	ALLEY S/INDUSTRY AVE	EUCLID ST	CYPRESS ST	Alley	AC	0	1	31	683	19	13,680	93	0	49	51	2/14/25	Complete Reconstruction - AC	8/17/17
084	248	ALLEY S/ERNA	WEST END	MCPHERSON ST	Alley	AAC	0	1	35	402	14	6,045	93	0	62	38	3/26/25	Overlay - AC Structural	12/1/21
084	243	ALLEY S/ERNA	SUNSET ST	ALLEY W/HARBOR BL	Alley	AC	0	1	35	308	15	4,635	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
066	206	ALLEY E/BEDFORD ST	ALLEY S/ LA HABRA BL	SUPERIOR	Alley	AC	0	1	39	1,579	15	25,280	94	0	56	44	4/2/25	New Construction - Initial	1/1/80
074	215	ALLEY E/WALNUT STREET	FIRST ST	SOUTH END	Alley	AC	0	1	22	309	18	5,890	94	0	71	29	4/21/25	New Construction - Initial	1/1/80
102	308	ALLEY W/O HARBOR BLVD	FRANCIS AVE	NORTH END	Alley	AC	0	1	35	524	20	8,908	94	0	100	0	4/2/25	New Construction - Initial	1/1/80
073	213	ALLEY E/VALENCIA ST	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	0	1	36	434	19	8,700	94	40	60	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
100	299	ALLEY W/VALENCIA	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	0	1	36	414	19	8,300	96	0	100	0	4/2/25	New Construction - Initial	1/1/80
082	235	ALLEY N/THIRD ST	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	0	1	36	147	19	2,960	97	0	100	0	4/2/25	New Construction - Initial	1/1/80
091	262	ALLEY S/LA HABRA BLVD	ALLEY W/VALENCIA ST	VALENCIA ST	Alley	AC	0	1	36	125	19	2,520	98	0	100	0	4/2/25	New Construction - Initial	1/1/80
092	282	ALLEY S/STEARNS AVENUE	WEST END	MCPHERSON ST	Alley	AC	0	1	35	309	14	4,650	98	0	100	0	3/26/25	Complete Reconstruction - AC	12/1/21
065	204	ALLEY E/BEACH BLVD	ALLEY S/WHITTIER	GREGORY	Alley	AAC	0	1	09	614	14	9,225	99	0	100	0	2/25/25	Overlay - AC Structural	6/1/24
070	210	ALLEY E/HARBOR-W/BEDFOR	W/O BEDFORD	N/O STEARNS	Alley	AAC	0	1	38	745	16	9,685	99	0	100	0	3/25/25	Overlay - AC Structural	12/1/21
086	251	ALLEY S/FLORENCE AVENUE	WEST END	MCPHERSON ST	Alley	AAC	0	1	35	310	14	4,665	99	0	100	0	4/2/25	Overlay - AC Structural	12/1/21
080	230	ALLEY N/LA HABRA BLVD	ORANGE ST	EAST END	Alley	AAC	0	1	28	467	13	6,552	99	0	0	100	2/13/25	Overlay - AC Structural	4/4/24
085	249	ALLEY S/FIRST AVE	ALDRICH ST	CYPRESS ST	Alley	AAC	0	1	29	408	16	6,528	99	0	100	0	4/17/25	Overlay - AC Structural	3/4/23
093	286	ALLEY S/WHITTIER BLVD	W/O ALLEY E/BEACH	W/O RIDGEWAY	Alley	AC	0	1	09	162	19	3,260	99	0	100	0	5/5/25	New Construction - Initial	1/1/80
096	289	ALLEY W/EUCLID	ALLEY S/LA HABRA BL	FIRST ST	Alley	AAC	0	1	22	152	11	1,836	99	0	100	0	4/21/25	Overlay - AC Structural	4/1/24
080	229	ALLEY N/LA HABRA BLVD	EUCLID ST	CIVIC CENTER DR	Alley	AC	0	1	28	351	19	7,040	100	0	0	0	4/25/25	New Construction - Initial	1/1/80
										6.4		582,079							

SECTION IV
FORECAST MAINTENANCE & REHABILITATION (FMR) REPORT

A. Recommended Budget, Seven Year Plan (2025-2032)

FORECAST MAINTENANCE & REHABILITATION (FMR) REPORT

Specific street section listing sorted by street classification, plan year then alphabetically; this report presents the year and action corresponding to the next recommended/scheduled work activity for specific segments within the pavement network. Sections not shown are considered as deferred maintenance or backlog.

RECOMMENDED BUDGET – A recommended budget was generated for the City to demonstrate how a \$24.5 Million / yr budget allocation would perform against the current citywide conditions.

We have sorted the following report by street classifications for easy review (Arterial – Local, A to Z order).

The annual projected revenues shown below only account for the cost of pavement maintenance and rehabilitation activities. A 25% contingency was applied to the pavement costs. Additional right-of-way, utility, curb & gutter, ADA ramps, tree removals, etc. were not included in these cost projections.

In general sections are chosen first and foremost on available budget; secondly, the square footage of each section, found distress types, extents and severities and PCI Load and PCI Climate act as large factors to when a section is recommended for maintenance/rehabilitation. The software initially chooses the draft sections that will increase PCI, sustain PCI or slow PCI deterioration within the budgeted timeframe. Additionally, zone designations, the types of distress, extents of distress and severities of distress (high, medium, low) also determine how sections are/can be selected.

The City of La Habra makes all final decisions on what pavement sections are scheduled for improvement and within which fiscal year.

FORECAST MAINTENANCE & REHABILITATION (FMR) REPORT
RECOMMENDED BUDGET

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
Arterials / Collectors (MPAH)																			
2025-26	329	1101	MACY ST	WHITTIER BLVD	WALLACE AVE	Secondary	AC	A	2	~	869	45	40,020	100	0	0	0	2" ARHM	Funded / Ongoing
2025-26	329	1505	MACY ST	WALLACE AVE	RUSSELL ST	Secondary	AC	A	2	~	570	45	25,266	100	0	0	0	2" ARHM	
2025-26	329	937	MACY ST	RUSSELL ST	CITY LIMIT	Local	AC	E	2	01	743	35	26,784	100	0	0	0	2" ARHM	
2025-26	005	37	PALM ST	TANGLEWOOD ST	LAMBERT RD	Secondary	AC	A	4	~	1,521	60	88,855	100	0	0	0	3" AC Grind-Overlay	
2025-26	014	73	RUSSELL ST	VALLEY HOME AVE	MACY ST	Secondary	AC	A	2	~	1,757	42	79,744	79	23	55	22	Type II Slurry	\$51,834
2025-26	006	38	WHITTIER BLVD	PALM ST	CITY LIMITS	Collector	AC	A	2	~	1,262	36	45,468	79	16	80	4	Type II Slurry	\$29,554
2025-26	006	39	WHITTIER BLVD	BRIGHTON ST	PALM ST	Collector	AC	A	5	~	1,456	58	83,948	69	32	68	0	3" AC Grind-Overlay	\$293,818
2025-26	006	40	WHITTIER BLVD	HARBOR BLVD	BRIGHTON ST	Collector	AC	A	4	~	1,187	56	66,472	68	10	90	0	3" AC Grind-Overlay	\$232,652
																			\$607,858
2026-27	001	3	IDAHO ST	LA HABRA BLVD	HILLANDALE AVE	Secondary	AC	A	5	~	895	59	53,760	71	43	51	6	3" AC Grind-Overlay	\$195,686
2026-27	001	4	IDAHO ST	HILLANDALE AVE	LAMBERT RD	Secondary	AC	A	5	~	1,713	59	102,840	65	36	43	21	3" AC Grind-Overlay	\$374,338
2026-27	001	5	IDAHO ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	5	~	1,084	60	66,290	71	15	85	0	3" AC Grind-Overlay	\$241,296
2026-27	001	6	IDAHO ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	5	~	1,525	59	91,560	79	0	100	0	Type II Slurry	\$62,261
2026-27	001	65	IDAHO ST	IMPERIAL HWY	SANDLEWOOD AVE	Secondary	AC	A	5	~	1,469	60	95,625	65	10	58	32	3" AC Grind-Overlay	\$348,075
2026-27	001	66	IDAHO ST	SANDLEWOOD AVE	CITY LIMIT	Secondary	AC	A	4	~	2,549	66	168,234	76	12	80	8	Type II Slurry	\$114,399
																			\$1,336,055
2027-28	061C	100	HARBOR BLVD	CITY LIMIT	BROOKDALE AVE	Primary	AC	A	4	~	1,315	80	89,075	84	38	42	20	Type II Slurry	\$62,353
2027-28	061C	101	HARBOR BLVD	BROOKDALE AVE	WHITTIER AVE	Primary	AC	A	2	~	1,320	80	103,600	78	15	38	47	3" AC Grind-Overlay	\$392,644
2027-28	002	7	IMPERIAL HWY	W. CITY LIMIT	BRASS LANTERN DR	Primary	AC	A	6	~	1,549	64	101,136	45	47	52	1	2" ARHM	\$497,589
2027-28	002	8	IMPERIAL HWY	BRASS LANTERN DR	BEACH BLVD	Primary	AC	A	6	~	1,051	64	72,264	37	38	51	11	2" ARHM	\$355,539
																			\$1,308,125
2028-29	061C	102	HARBOR BLVD	WHITTIER AVE	FRANCIS AVE	Primary	AC	A	4	~	1,185	72	85,320	84	0	91	9	Type II Slurry	\$62,284
2028-29	061C	103	HARBOR BLVD	FRANCIS AVE	LA HABRA BLVD	Primary	AC	A	4	~	1,440	72	103,680	80	29	67	4	Type II Slurry	\$75,686
2028-29	061C	104	HARBOR BLVD	LA HABRA BLVD	SUPERIOR AVE	Primary	AC	A	6	~	1,400	72	102,000	61	32	56	12	2" ARHM	\$522,240
2028-29	061C	105	HARBOR BLVD	SUPERIOR AVE	LAMBERT RD	Primary	AC	A	6	~	1,240	78	96,720	73	20	63	17	3" AC Grind-Overlay	\$381,077
2028-29	061C	167	HARBOR BLVD	435' S/O IMPERIAL HWY	LAS RIENDAS	Major	AC	A	6	~	526	80	42,160	85	16	84	0	Type II Slurry	\$30,777
2028-29	003	13	LA HABRA BLVD	IDAHO ST	MONTE VISTA ST	Secondary	AC	A	4	~	1,309	55	70,745	69	54	38	8	3" AC Grind-Overlay	\$278,735
																			\$1,350,799
2029-30	003	10	LA HABRA BLVD	DEXFORD ST	BEACH BLVD	Secondary	AC	A	4	~	1,540	55	86,296	73	24	32	44	3" AC Grind-Overlay	\$352,951
2029-30	003	14	LA HABRA BLVD	MONTE VISTA ST	WALNUT ST	Secondary	AC	A	4	~	1,322	54	70,668	78	29	53	18	3" AC Grind-Overlay	\$289,032
2029-30	003	15	LA HABRA BLVD	WALNUT ST	EUCLID ST	Secondary	AC	A	4	~	1,318	54	70,440	83	0	95	5	Type II Slurry	\$53,534
2029-30	003	16	LA HABRA BLVD	EUCLID ST	CYPRESS ST	Secondary	AC	A	4	~	1,325	60	77,580	74	23	74	3	3" AC Grind-Overlay	\$317,302
2029-30	003	17	LA HABRA BLVD	CYPRESS ST	COLLEGE ST	Secondary	AC	A	4	~	1,318	60	76,655	77	15	64	21	3" AC Grind-Overlay	\$313,519
																			\$1,326,338
2030-31	003	18	LA HABRA BLVD	COLLEGE ST	HARBOR BLVD	Secondary	AC	A	4	~	1,249	60	70,800	71	34	50	16	3" AC Grind-Overlay	\$301,608
2030-31	003	19	LA HABRA BLVD	HARBOR BLVD	FONDA ST	Primary	AC	A	4	~	1,126	60	66,060	74	30	57	13	3" AC Grind-Overlay	\$281,416
2030-31	003	20	LA HABRA BLVD	FONDA ST	PALM ST	Primary	AC	A	4	~	1,441	60	86,460	81	0	84	16	Type II Slurry	\$68,303
2030-31	003	21	LA HABRA BLVD	PALM ST	E. CITY LIMIT	Primary	AC	A	4	~	1,304	60	78,240	83	21	42	37	Type II Slurry	\$61,810
2030-31	003	9	LA HABRA BLVD	VALLEY HOME AVE	DEXFORD ST	Secondary	AC	A	4	~	1,002	56	56,112	79	16	76	8	Type II Slurry	\$44,328
2030-31	004	25	LAMBERT RD	RAIL ROAD	HARBOR BLVD	Primary	AC	A	5	~	1,320	79	105,680	88	15	58	27	Type II Slurry	\$83,487
2030-31	004	26	LAMBERT RD	CYPRESS ST	RAILROAD	Primary	AC	A	5	~	1,320	79	105,680	89	17	69	14	Type II Slurry	\$83,487
2030-31	004	27	LAMBERT RD	EUCLID ST	CYPRESS ST	Primary	AC	A	5	~	1,411	60	86,739	86	20	50	30	Type II Slurry	\$68,524
2030-31	004	28	LAMBERT RD	WALNUT ST	EUCLID ST	Primary	AC	A	4	~	1,316	64	85,605	92	27	73	0	Type II Slurry	\$67,628
2030-31	004	29	LAMBERT RD	MONTE VISTA ST	WALNUT ST	Primary	AC	A	2	~	1,236	65	79,345	93	36	64	0	Type II Slurry	\$62,683
2030-31	004	30	LAMBERT RD	IDAHO ST	MONTE VISTA ST	Primary	AC	A	4	~	1,310	64	91,850	93	0	100	0	Type II Slurry	\$72,562
																			\$1,195,835
2031-32	018	89	HACIENDA RD	WHITTIER BLVD	NORTH CITY LIMIT	Secondary	AAC	A	4	~	2,324	45	111,240	91	62	21	17	Type II Slurry	\$91,217
2031-32	0618	109	HARBOR BLVD EAST SIDE	LAS RIENDAS DR	LAS PALMAS DR	Major	AC	A	2	~	1,075	32	34,400	80	11	58	31	Type II Slurry	\$28,208
2031-32	0618	110	HARBOR BLVD EAST SIDE	LAS PALMAS DR	450' S/O LAS PALMAS DR	Major	AC	A	2	~	450	32	14,400	86	0	100	0	Type II Slurry	\$11,808
2031-32	061	106	HARBOR BLVD WEST SIDE	LAMBERT RD	EDWARDS DR	Major	AC	A	3	~	1,289	32	41,248	84	15	82	3	Type II Slurry	\$33,823
2031-32	061	107	HARBOR BLVD WEST SIDE	EDWARDS DR	IMPERIAL HWY	Major	AC	A	3	~	1,338	16	21,408	85	19	64	17	Type II Slurry	\$17,555
2031-32	061	108	HARBOR BLVD WEST SIDE	IMPERIAL HWY	435' S/O IMPEIRAL HWY	Major	AC	A	2	~	434	32	12,820	66	26	74	0	Type II Slurry	\$10,512
2030-31	004	31	LAMBERT RD	WHITEBOOK DR	IDAHO ST	Primary	AC	A	4	~	1,024	64	66,625	81	50	50	0	3" AC Grind-Overlay	\$295,149
2030-31	004	33	LAMBERT RD	MARTINEZ DR	BEACH BLVD	Primary	AC	A	5	~	1,294	70	98,960	85	28	62	10	3" AC Grind-Overlay	\$438,393
2030-31	004	34	LAMBERT RD	CITY LIMITS	MARTINEZ DR	Primary	AC	A	6	~	1,246	79	99,760	81	34	66	0	3" AC Grind-Overlay	\$441,937
																			\$1,368,601
Locals																			
2025-26	065	1716	ALLEY E/BEACH BLVD	SAN JOSE AVE	ALLEY N/SAN JOSE	Alley	AC	O	1	10	179	19	3,600	11	64	16	20	AC Recon	\$28,620
2025-26	065	1717	ALLEY E/BEACH BLVD	ALLEY S/SAN JOSE	SAN JOSE AVE	Alley	AC	O	1	10	428	19	8,580	14	47	10	43	AC Recon	\$68,211
2025-26	078	222	ALLEY N/GREENWOOD AVE	E/O HAZEL	MID ALLEY E/HAZEL-W/HILLSIDE	Alley	AC	O	1	21	136	12	1,781	45	60	14	26	2" AC Grind-Overlay	\$12,057
2025-26	536	1718	ALLEY N/SAN JOSE AVE	BEACH BLVD	ALLEY E/BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	15	70	25	5	AC Recon	\$22,260
2025-26	091	268	ALLEY S/LA HABRA BLVD	DEXFORD ST	MISSION ST	Alley	AC	O	1	03	1,013	19	20,280	12	68	26	6	AC Recon	\$161,226
2025-26	091	276	ALLEY S/LA HABRA BLVD	OAKLAND ST	DEXFORD ST	Alley	AC	O	1	03	446	19	8,940	33	62	28	10	2" AC Grind-Overlay	\$60,524
2025-26	091	277	ALLEY S/LA HABRA BLVD	W/END	W/O MONTE VISTA	Alley	AC	O	1	15	211	19	4,240	11	82	12	6	AC Recon	\$33,708

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2025-26	537	1719	ALLEY S/SAN JOSE AVE	ALLEY E/BEACH BLVD	BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	38	69	31	0	2" AC Grind-Overlay	\$18,956
2025-26	093	285	ALLEY S/WHITTIER BLVD	HAZEL ST	ALLEY E/HAZEL ST	Alley	AC	O	1	21	146	19	2,940	18	46	14	40	AC Recon	\$23,373
2025-26	103	315	ALPINE ST	W/O BEDFORD	N/O SUPERIOR	Local	AAC	E	2	39	1,409	31	45,120	74	0	98	2	Type II Slurry	\$22,560
2025-26	109	329	ASHLEY CIR	NORTH END	HILLANDALE AVE	Local	AC	E	2	10	246	32	9,447	49	49	28	23	2" AC Grind-Overlay	\$31,647
2025-26	116	340	BAJA AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	468	30	15,615	78	29	49	22	Type II Slurry	\$7,808
2025-26	119	344	BEDFORD ST	LA HABRA BLVD	ALPINE ST	Local	AAC	E	2	39	207	41	8,736	72	0	100	0	Type II Slurry	\$4,368
2025-26	119	345	BEDFORD ST	ALPINE ST	SUPERIOR AVE	Local	AAC	E	2	39	1,473	31	47,168	72	28	72	0	Type II Slurry	\$23,584
2025-26	119	346	BEDFORD ST	ESSEX	FRANCIS AVE	Local	AC	E	2	38	742	29	22,290	93	0	100	0	Stop Gap-Preventive	\$5,573
2025-26	133	388	BRUCE LN	WEST END	W/O OAKLAND	Local	AAC	E	2	03	111	30	4,905	72	44	56	0	Type II Slurry	\$2,453
2025-26	162	462	CLIFTON ST	OLIVE AVE	LAMBERT RD	Local	AAC	E	2	30	826	36	29,736	76	3	78	19	Type II Slurry	\$14,868
2025-26	162	463	CLIFTON ST	LAMBERT RD	ROSECREST AVE	Local	AAC	E	2	31	496	30	14,880	81	23	77	0	Type II Slurry	\$7,440
2025-26	167	477	COLFAX ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	1,802	32	57,376	75	0	98	2	Type II Slurry	\$28,688
2025-26	168	478	COLLEEN ST	LA HABRA BLVD	LORELLA	Local	AAC	E	2	10	495	36	17,388	68	45	55	0	Type II Slurry	\$8,694
2025-26	176	506	DARBY CT	WEST END	CLIFTON	Local	AAC	E	2	30	183	26	6,333	51	63	25	12	2" AC Grind-Overlay	\$21,216
2025-26	028	125	DEXFORD DR	GREGORY LN	FOXDALE DR	Local	AAC	E	2	02	877	35	31,608	75	56	44	0	Stop Gap-Preventive	\$7,902
2025-26	184	135	DEXFORD ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	984	35	35,460	71	60	40	0	Type II Slurry	\$17,730
2025-26	203	569	ELECTRIC AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	30	38,610	74	25	60	15	Type II Slurry	\$19,305
2025-26	207	577	EMERY AVE	PALM ST	EAST END	Local	AAC	E	2	39	666	36	25,456	67	46	45	9	Type II Slurry	\$12,728
2025-26	009	58	EUCLID ST	NORTH CITY LIMITS	AMANDA DR	Local	AAC	C	2	27	2,240	36	67,603	100	0	0	0	2" AC Grind-Overlay	Funded / Ongoing
2025-26	009	165	EUCLID ST	AMANDA DR	WHITTIER BLVD	Local	AAC	C	2	27	424	35	15,300	100	0	0	0	2" AC Grind-Overlay	
2025-26	220	610	FIFTH AVE	MONTE VISTA ST	MCFADDEN ST	Local	AAC	E	2	18	657	24	15,624	60	64	29	7	2" AC Grind-Overlay	\$52,340
2025-26	223	623	FLORENCE AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,284	26	32,916	72	47	53	0	Type II Slurry	\$16,458
2025-26	223	625	FLORENCE AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,258	26	32,396	79	63	34	3	Type II Slurry	\$16,198
2025-26	223	628	FLORENCE AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	30	13,590	80	27	73	0	Type II Slurry	\$6,795
2025-26	223	629	FLORENCE AVE	LYDIA ST	MONTE VISTA ST	Local	AC	E	2	14	493	30	14,430	57	53	26	21	2" AC Grind-Overlay	\$48,341
2025-26	223	633	FLORENCE AVE	WEST END	MCPHERSON ST	Local	AC	E	2	35	310	30	9,120	75	17	83	0	Type II Slurry	\$4,560
2025-26	012	61	FONDA ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	2,014	32	64,192	76	1	99	0	Type II Slurry	\$32,096
2025-26	012	635	FONDA ST	CONCOURSE	WHITTIER (FRONTAGE)	Local	AC	C	2	37	1,072	29	32,190	94	0	100	0	Stop Gap-Preventive	\$8,048
2025-26	227	640	FOURTH AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	18	1,285	36	45,900	72	47	43	10	Type II Slurry	\$22,950
2025-26	227	642	FOURTH AVE	WEST END	CYPRESS ST	Local	AAC	E	2	30	642	26	16,536	55	63	31	6	2" AC Grind-Overlay	\$55,396
2025-26	256	740	HIGHLANDER AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	16	1,283	26	39,226	74	27	73	0	Type II Slurry	\$19,613
2025-26	256	741	HIGHLANDER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,278	40	50,200	74	12	79	9	Type II Slurry	\$25,100
2025-26	040	141	HILLANDALE AVE	DEANNA ST	CDS E/ EUNICE CIR	Local	AC	E	2	10	759	36	31,035	65	65	34	1	2" AC Grind-Overlay	\$103,967
2025-26	040	181	HILLANDALE AVE	CDS E/ EUNICE CIR	IDAHO ST	Local	AC	E	2	10	725	36	25,315	46	72	15	13	2" AC Grind-Overlay	\$84,805
2025-26	040	753	HILLANDALE AVE	WEST END	DEANNA ST	Local	AC	E	2	10	776	36	29,731	54	67	21	12	2" AC Grind-Overlay	\$99,599
2025-26	261	1520	HILLSIDE ST	HILLSIDE CT	N END	Local	AAC	E	2	20	1,165	35	38,420	71	40	41	19	Type II Slurry	\$19,210
2025-26	261	759	HILLSIDE ST	WHITTIER BLVD	GREENWOOD	Local	AC	E	2	21	786	36	27,356	67	40	58	2	Type II Slurry	\$13,678
2025-26	261	761	HILLSIDE ST	HILLSIDE CT	WHITTIER BLVD	Local	AAC	E	2	20	480	36	14,255	80	0	89	11	Type II Slurry	\$7,128
2025-26	286	814	KINGSTON DR	NORTH END	LA PRESA	Local	AAC	E	2	20	447	36	18,637	81	0	100	0	Type II Slurry	\$9,319
2025-26	296	843	LA PRESA DR	HILLSIDE	KINGSTON	Local	AAC	E	2	20	224	33	7,650	80	0	100	0	Type II Slurry	\$3,825
2025-26	296	844	LA PRESA DR	SIERRA VISTA	WALNUT ST	Local	AAC	E	2	13	1,144	30	33,960	90	0	99	1	Stop Gap-Preventive	\$8,490
2025-26	296	845	LA PRESA DR	WALNUT ST	HILLSIDE ST	Local	AC	E	2	20	635	36	22,680	65	0	99	1	2" AC Grind-Overlay	\$75,978
2025-26	317	903	LIBERTY ST	OLIVE AVE	SOUTH END	Local	AAC	E	2	30	435	26	13,105	66	30	50	20	2" AC Grind-Overlay	\$43,902
2025-26	326	927	LORELLA AVE	DEANNA ST	IDAHO ST	Local	AAC	E	2	10	1,428	36	51,192	77	9	91	0	Type II Slurry	\$25,596
2025-26	327	932	LYDIA ST	HIGHLANDER AVE	SOUTH END	Local	AC	E	2	14	963	30	30,685	71	44	45	11	Type II Slurry	\$15,343
2025-26	337	950	MARIAN ST	LA HABRA BLVD	WALKER AVE	Local	AAC	E	2	15	1,077	30	33,060	76	24	52	24	Type II Slurry	\$16,530
2025-26	337	951	MARIAN ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	E	2	14	1,277	30	39,060	61	43	36	21	2" AC Grind-Overlay	\$130,851
2025-26	338	954	MARIE ST	OAKLAND	STORY	Local	AAC	E	2	03	719	31	23,040	76	30	70	0	Type II Slurry	\$11,520
2025-26	339	955	MARIN ST	LORELLA AVE	HILLANDALE AVE	Local	AC	E	2	10	548	36	20,478	63	59	41	0	2" AC Grind-Overlay	\$68,601
2025-26	038	139	MARIPOSA ST	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,100	36	36,420	74	46	52	2	Type II Slurry	\$18,210
2025-26	038	146	MARIPOSA ST	LAMBERT RD	SHEFFIELD DR	Local	AAC	E	2	05	965	36	34,524	81	0	20	80	Type II Slurry	\$17,262
2025-26	346	970	MCFADDEN ST	NORTH END	SOUTH END	Local	AAC	E	2	18	541	30	21,484	78	12	88	0	Type II Slurry	\$10,742
2025-26	041	142	MERCED AVE	BEACH BLVD	EAST END	Local	AAC	E	2	10	1,280	36	50,580	70	48	33	19	Type II Slurry	\$25,290
2025-26	041	996	MERCED AVE	MARIPOSA ST	BEACH BLVD	Local	AC	E	2	04	512	36	18,000	75	42	45	13	Type II Slurry	\$9,000
2025-26	035	136	MISSION ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	894	35	32,220	74	41	55	4	Type II Slurry	\$16,110
2025-26	013	67	MONTE VISTA ST	WHITTIER BLVD	HIGHLANDER AVE	Local	AAC	E	2	16	1,316	39	52,680	66	56	26	18	2" AC Grind-Overlay	\$176,478
2025-26	013	68	MONTE VISTA ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AAC	C	2	16	1,289	40	49,084	70	59	17	24	Type II Slurry	\$24,542
2025-26	362	1015	MOUNTAIN VIEW AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	37	47,397	69	36	53	11	Type II Slurry	\$23,699
2025-26	362	1016	MOUNTAIN VIEW AVE	LAMBERT RD	WALNUT ST	Local	AC	E	2	18	713	37	27,631	57	66	33	1	2" AC Grind-Overlay	\$92,564
2025-26	368	1027	NORMA ST	LORELLA	HILLANDALE	Local	AAC	E	2	10	613	36	21,852	75	34	66	0	Type II Slurry	\$10,926
2025-26	372	1034	OAKLAND DR	DEXFORD ST	STORY AVE	Local	AAC	E	2	03	1,172	36	41,760	71	47	53	0	Type II Slurry	\$20,880
2025-26	372	1036	OAKLAND DR	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,014	36	35,640	73	31	62	7	Type II Slurry	\$17,820
2025-26	519	1417	OLIVE AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,415	35	45,025	74	7	72	21	Type II Slurry	\$22,513
2025-26	383	1077	PAINTER ST	OAKLAND	STORY AVE	Local	AAC	E	2	03	600	32	19,008	75	31	66	3	Type II Slurry	\$9,504
2025-26	403	1128	RAYMOND ST	OAKLAND	STORY	Local	AAC	E	2	03	605	32	19,168	73	37	61	2	Type II Slurry	\$9,584
2025-26	403	1129	RAYMOND ST	WILSHIRE	BLAKE	Local	AAC	E	2	04	547	32	18,062	80	57	43	0	Type II Slurry	\$9,031

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2025-26	430	1200	SAN JOSE AVE	BEACH BLVD	MARIN ST	Local	AC	E	2	10	583	36	20,556	62	43	57	0	2" AC Grind-Overlay	\$68,863
2025-26	430	1201	SAN JOSE AVE	MISSION ST	BEACH BLVD	Local	AAC	E	2	03	493	36	17,316	74	0	90	10	Type II Slurry	\$8,658
2025-26	439	1224	SIDON AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	741	31	23,744	90	12	88	0	Stop Gap-Preventive	\$5,936
2025-26	450	1250	STANFORD ST	OAKLAND	STORY	Local	AAC	E	2	03	565	32	18,112	74	31	56	13	Type II Slurry	\$9,056
2025-26	457	1268	STORY AVE	MISSION ST	EAST END	Local	AAC	E	2	03	451	30	15,325	68	41	59	0	Type II Slurry	\$7,663
2025-26	457	1269	STORY AVE	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,058	35	38,124	68	38	44	18	Type II Slurry	\$19,062
2025-26	457	1270	STORY AVE	CITY LIMITS	DEXFORD ST	Local	AAC	E	2	03	989	36	37,751	77	35	65	0	Type II Slurry	\$18,876
2025-26	043	1298	SUPERIOR AVE	BEDFORD ST	EAST END	Local	AAC	E	2	39	930	32	30,370	75	12	88	0	Type II Slurry	\$15,185
2025-26	043	144	SUPERIOR AVE	HARBOR BLVD	BEDFORD ST	Local	AAC	E	2	39	464	33	15,345	73	0	86	14	Type II Slurry	\$7,673
2025-26	471	1316	THIRD AVE	MARIAN ST	EAST END	Local	AAC	E	2	15	165	26	5,540	79	29	71	0	Type II Slurry	\$2,770
2025-26	475	1325	UNION AVE	WALL ST	BLAKE ST	Local	AC	E	2	04	634	31	20,320	77	25	75	0	Type II Slurry	\$10,160
2025-26	475	1326	UNION AVE	CITY LIMIT	WALL ST	Local	AC	E	2	04	113	32	3,424	78	9	91	0	Type II Slurry	\$1,712
2025-26	476	1327	URELL DR	LA SERNA AVE	LA PRESA DR	Local	AAC	E	2	20	474	25	12,350	73	18	81	1	Type II Slurry	\$6,175
2025-26	489	1358	VIRGINIA ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	14	751	30	22,350	74	30	63	7	Type II Slurry	\$11,175
2025-26	489	1359	VIRGINIA ST	HIGHLANDER AVE	HEATHER AVE	Local	AC	E	2	14	525	29	15,780	78	12	88	0	Type II Slurry	\$7,890
2025-26	492	1362	WALKER AVE	MARIAN	EAST END	Local	AAC	E	2	15	218	30	7,040	75	33	65	2	Type II Slurry	\$3,520
2025-26	506	1390	WILGAR DR	EAST END	LORELLA	Local	AC	E	2	10	401	30	14,480	77	49	51	0	Type II Slurry	\$7,240
2025-26	508	1397	WILSHIRE AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	979	35	35,280	79	32	68	0	Type II Slurry	\$17,640
2025-26	508	1402	WILSHIRE AVE	WEST END	WALL ST	Local	AAC	E	2	04	148	35	5,364	91	16	84	0	Stop Gap-Preventive	\$1,341
																			\$2,456,480
2026-27	071	211	ALLEY E/HAZEL-W/HILLSID	S/O ALLEY S/WHITTIER	N/O ALLEY N/GREENWOOD	Alley	PCC	O	1	21	481	10	4,810	19	69	4	27	AC Recon	\$39,779
2026-27	074	216	ALLEY E/WALNUT STREET	ALLEY N/WALNUT STREET	ALLY N/GREENWOOD AVE	Alley	AC	O	1	21	372	10	4,103	52	36	51	13	2" AC Grind-Overlay	\$28,885
2026-27	078	221	ALLEY N/GREENWOOD AVE	E/O ALLEY E/O WALNUT	W/O HAZEL	Alley	AC	O	1	21	162	15	2,608	47	39	61	0	2" AC Grind-Overlay	\$18,360
2026-27	078	223	ALLEY N/GREENWOOD AVE	E/O WALNUT	E/O ALLEY E/WALNUT-W/HAZEL	Alley	AC	O	1	21	166	15	2,672	39	64	36	0	2" AC Grind-Overlay	\$18,811
2026-27	078	224	ALLEY N/GREENWOOD AVE	MID ALLEY E/HAZEL-W/HILLSIDE	W/O HILLSIDE	Alley	PCC	O	1	21	150	10	1,500	21	83	0	17	AC Recon	\$12,405
2026-27	079	225	ALLEY N/INDUSTRY AVE	E/O EUCLID	W/O CYPRESS	Alley	AC	O	1	31	724	19	14,500	42	64	31	5	2" AC Grind-Overlay	\$102,080
2026-27	080	228	ALLEY N/LA HABRA BLVD	DEXFORD ST	E/END	Alley	AC	O	1	02	275	19	5,520	50	21	53	26	2" AC Grind-Overlay	\$38,861
2026-27	080	231	ALLEY N/LA HABRA BLVD	WEST END	DEXFORD ST	Alley	AC	O	1	02	226	19	4,540	50	45	55	0	2" AC Grind-Overlay	\$31,962
2026-27	081	232	ALLEY N/LAMBERT	N/END	W/O MOUNTAIN VIEW	Alley	AC	O	1	18	105	19	2,120	27	79	21	0	AC Recon	\$17,532
2026-27	083	236	ALLEY N/WHITTIER BLVD	KIRBY DR	WALNUT ST	Alley	AC	O	1	13	484	19	9,700	14	55	23	22	AC Recon	\$80,219
2026-27	083	237	ALLEY N/WHITTIER BLVD	WEST END	KIRBY DR	Alley	AC	O	1	13	167	19	3,360	31	44	53	3	2" AC Grind-Overlay	\$23,654
2026-27	084	243	ALLEY S/ERNA	SUNSET ST	ALLEY W/HARBOR BL	Alley	AC	O	1	35	308	15	4,635	93	0	100	0	Type II Slurry	\$2,410
2026-27	087	252	ALLEY S/GREENWOOD AVE	ALLEY W/LOIS ST	EAST END	Alley	AC	O	1	21	122	20	2,440	55	0	100	0	2" AC Grind-Overlay	\$17,178
2026-27	087	253	ALLEY S/GREENWOOD AVE	HAZEL ST	ALLEY W/LOIS ST	Alley	AC	O	1	21	164	19	3,300	45	44	53	3	2" AC Grind-Overlay	\$23,232
2026-27	087	254	ALLEY S/GREENWOOD AVE	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	321	19	6,440	44	66	33	1	2" AC Grind-Overlay	\$45,338
2026-27	090	258	ALLEY S/KENRICH COURT	W/END	W/O CHANTRY	Alley	AC	O	1	02	510	14	7,665	67	34	49	17	2" AC Grind-Overlay	\$53,962
2026-27	092	280	ALLEY S/STEARNS AVENUE	SUNSET ST	EAST END	Alley	AC	O	1	35	343	14	3,509	87	0	100	0	Type II Slurry	\$1,825
2026-27	093	284	ALLEY S/WHITTIER BLVD	ALLEY E/HAZEL ST	HILLSIDE ST	Alley	AC	O	1	21	121	12	1,586	12	48	14	38	AC Recon	\$13,116
2026-27	093	286	ALLEY S/WHITTIER BLVD	W/O ALLEY E/BEACH	W/O RIDGEWAY	Alley	AC	O	1	09	162	19	3,260	99	0	100	0	Stop Gap-Preventive	\$815
2026-27	099	296	ALLEY W/LOIS STREET	ALLEY S/GREENWOOD ST	ROSE AVE	Alley	AC	O	1	21	168	19	3,380	43	67	20	13	2" AC Grind-Overlay	\$23,795
2026-27	099	297	ALLEY W/LOIS STREET	ROSE AVE	ALLEY S/ROSE AVE	Alley	AC	O	1	21	156	19	3,140	36	63	8	29	2" AC Grind-Overlay	\$22,106
2026-27	102	307	ALLEY W/O HARBOR BLVD	ERNA AVE	LA HABRA BLVD	Alley	AC	O	1	35	343	19	6,880	86	0	100	0	Type II Slurry	\$3,578
2026-27	134	389	BUENA VISTA AVE	W END	LA CASA AVE	Local	AC	E	2	19	1,210	36	43,128	53	71	17	12	2" AC Grind-Overlay	\$150,085
2026-27	157	453	CHESHAM AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	895	36	32,754	53	42	58	0	2" AC Grind-Overlay	\$113,984
2026-27	182	514	DERRY ST	RYE AVE	N/O LAS LOMAS	Local	AC	E	2	19	520	36	19,220	63	62	19	19	2" AC Grind-Overlay	\$66,886
2026-27	182	516	DERRY ST	BUENA VISTA AVE	CHESHAM AVE	Local	AC	E	2	19	480	36	17,780	65	68	31	1	Type II Slurry	\$9,246
2026-27	190	542	DOVER DR	WALNUT ST	DURHAM	Local	AC	E	2	24	459	35	16,560	45	82	18	0	2" AC Grind-Overlay	\$57,629
2026-27	191	543	DURHAM ST	DOVER DR	LAS LOMAS AVE	Local	AC	E	2	24	817	36	29,196	71	51	30	19	Type II Slurry	\$15,182
2026-27	198	556	EL NIDO ST	NORTH END	ROSECREST	Local	AAC	E	2	24	246	30	8,955	69	0	99	1	Type II Slurry	\$4,657
2026-27	208	578	ENCINITAS ST	LAS LOMAS DR	KEENE DR	Local	AC	E	2	24	698	36	24,912	77	37	47	16	Type II Slurry	\$12,954
2026-27	214	602	EXETER AVE	DERRY ST	NASHUA ST	Local	AC	E	2	19	910	26	23,507	76	13	87	0	Type II Slurry	\$12,224
2026-27	215	603	EXETER CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	74	12	88	0	Type II Slurry	\$3,227
2026-27	264	775	HOLLIS CIR	WALNUT ST	EAST END	Local	AC	E	2	24	247	26	7,947	71	29	71	0	Type II Slurry	\$4,132
2026-27	270	783	IPSWICH ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	83	0	73	27	Type II Slurry	\$3,619
2026-27	273	787	JAFFREY ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	79	20	22	58	Type II Slurry	\$3,619
2026-27	281	802	KEENE DR	WALNUT ST	EUCLID ST	Local	AC	E	2	24	1,525	36	54,252	76	43	49	8	Type II Slurry	\$28,211
2026-27	281	807	KEENE DR	LAS LOMAS DR	WALNUT ST	Local	AC	E	2	19	746	39	28,626	64	54	40	6	Type II Slurry	\$14,886
2026-27	292	835	LA CASA AVE	BUENA VISTA AVE	DEL SUR AVE	Local	AC	E	2	19	717	36	23,424	64	68	32	0	2" AC Grind-Overlay	\$81,516
2026-27	303	857	LADERA TERR	LAS RIENDAS	SOUTH END	Local	AC	E	2	32	524	26	10,677	72	35	65	0	Type II Slurry	\$5,552
2026-27	047	149	LAS LOMAS DR	IDAHO ST	DERRY ST	Local	AAC	E	2	19	1,514	35	54,540	60	0	100	0	Type II Slurry	\$28,361
2026-27	047	151	LAS LOMAS DR	WALNUT ST	EUCLID ST	Local	AC	E	2	24	1,320	36	47,088	64	67	24	9	2" AC Grind-Overlay	\$163,866
2026-27	307	874	LAS RIENDAS DR	HARBOR BLVD	CITY LIMITS	Local	AC	E	2	32	723	36	26,028	73	36	64	0	Type II Slurry	\$13,535
2026-27	367	1025	NASHUA ST	RYE AVE	LAS LOMAS DR	Local	AC	E	2	19	447	35	16,128	70	43	32	25	Type II Slurry	\$8,387
2026-27	386	1081	PARK AVE	BUENA VISTA	SOUTH END	Local	AC	E	2	19	240	27	7,824	49	28	68	4	2" AC Grind-Overlay	\$27,228
2026-27	423	1180	ROSECREST AVE	LAMBERT RD	EUCLID ST	Local	AC	E	2	24	1,001	30	31,280	70	0	100	0	Type II Slurry	\$16,266
2026-27	429	1199	RYE CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	70	50	50	0	Type II Slurry	\$3,227
2026-27	431	1203	SANDOWN ST	NORTH END	CHESHAM	Local	AC	E	2	19	188	26	6,413	65	36	36	28	Type II Slurry	\$3,335

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2026-27	446	1245	SONORA AVE	WEST END	LA CASA	Local	AC	E	2	19	355	27	10,815	48	40	60	0	2" AC Grind-Overlay	\$37,636
																			\$1,509,347
2027-28	076	1706	ALLEY N/ERNA STREET	WILLOW ST	EAST END	Alley	AC	O	1	16	335	16	3,965	81	6	83	11	Type II Slurry	\$2,141
2027-28	076	1708	ALLEY N/ERNA STREET	WEST END	ALLEY W/O WALNUT ST	Alley	AC	O	1	16	240	20	4,080	82	0	100	0	Type II Slurry	\$2,203
2027-28	084	240	ALLEY S/ERNA	LEORA ST	WALNUT ST	Alley	AC	O	1	16	454	19	9,100	63	32	26	42	2" AC Grind-Overlay	\$66,612
2027-28	084	241	ALLEY S/ERNA	WILLOW ST	ALLEY W/LEORA ST	Alley	AC	O	1	16	359	14	5,400	15	55	22	23	AC Recon	\$46,440
2027-28	098	294	ALLEY W/LEORA STREET	ALLEY S/ERNA ST	LA HABRA BL	Alley	AC	O	1	16	145	9	1,460	13	77	23	0	AC Recon	\$12,556
2027-28	098	295	ALLEY W/LEORA STREET	ERNA ST	ALLEY S/ERNA ST	Alley	AC	O	1	16	153	9	1,540	15	41	14	45	AC Recon	\$13,244
2027-28	101	301	ALLEY W/WALNUT STREET	ALLEY S/HEATHER AVE	ERNA ST	Alley	AC	O	1	16	141	15	2,272	82	0	100	0	Type II Slurry	\$1,227
2027-28	101	305	ALLEY W/WALNUT STREET	HEATHER AVE	ALLEY S/HEATHER AVE	Alley	AC	O	1	16	157	15	2,528	60	48	52	0	2" AC Grind-Overlay	\$18,505
2027-28	158	455	CHESTNUT ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	742	30	22,080	76	0	55	45	Type II Slurry	\$11,923
2027-28	158	456	CHESTNUT ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	35	503	30	14,910	75	19	81	0	Type II Slurry	\$8,051
2027-28	022	114	CITRUS DR	WHITTIER BLVD	RYAN AVE	Local	AAC	E	2	13	773	29	26,156	56	30	67	3	2" AC Grind-Overlay	\$94,685
2027-28	022	115	CITRUS DR	RYAN AVE	CITY LIMITS 140' N/ENTRADA DR	Local	AAC	E	2	13	1,763	31	55,664	63	36	58	6	2" AC Grind-Overlay	\$201,504
2027-28	169	479	COLLEGE ST	COLLEGE ST	THIRD AVE	Local	AAC	E	2	36	1,005	33	33,165	67	55	31	14	2" AC Grind-Overlay	\$120,057
2027-28	169	480	COLLEGE ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	638	32	18,484	83	0	100	0	Type II Slurry	\$9,981
2027-28	169	484	COLLEGE ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	664	38	25,232	69	33	43	24	Type II Slurry	\$13,625
2027-28	169	485	COLLEGE ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	626	37	23,826	67	40	44	16	2" AC Grind-Overlay	\$86,250
2027-28	525	1509	CORTO WAY	WHITTIER BLVD	SOUTH END	Local	AAC	E	2	09	250	26	8,295	66	34	66	0	2" AC Grind-Overlay	\$30,028
2027-28	210	582	ERNA AVE	COLLEGE ST	ALLEY W/HARBOR BLVD	Local	AC	E	2	35	996	30	29,910	85	0	100	0	Type II Slurry	\$16,151
2027-28	210	583	ERNA AVE	WILLOW ST	WALNUT ST	Local	AC	E	2	16	1,000	32	31,616	47	66	26	8	2" AC Grind-Overlay	\$114,450
2027-28	210	586	ERNA AVE	WALNUT ST	HAZEL ST	Local	AAC	E	2	21	319	30	9,600	89	0	100	0	Stop Gap-Preventive	\$2,400
2027-28	210	587	ERNA AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	936	30	27,780	85	0	95	5	Type II Slurry	\$15,001
2027-28	210	7155	ERNA AVE	HAZEL ST	EUCUID ST	Local	AC	E	2	21	924	30	27,000	69	54	34	12	Type II Slurry	\$14,580
2027-28	224	1709	FLORENCE CT	FLORENCE AVE	SOUTH END	Local	AC	E	2	35	107	16	1,836	54	52	14	34	2" AC Grind-Overlay	\$6,646
2027-28	224	634	FLORENCE CT	NORTH END	FLORENCE AVE	Local	AC	E	2	35	91	16	1,564	45	84	16	0	2" AC Grind-Overlay	\$5,662
2027-28	033	647	FRANCIS AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	35	1,229	26	33,562	52	9	91	0	2" AC Grind-Overlay	\$121,494
2027-28	033	648	FRANCIS AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	1,008	30	30,270	81	12	88	0	Type II Slurry	\$16,346
2027-28	245	687	GREENWOOD AVE	VALENCIA	SUNSET	Local	AC	E	2	35	299	28	8,400	57	53	28	19	2" AC Grind-Overlay	\$30,408
2027-28	245	690	GREENWOOD AVE	COLLEGE	VALENCIA	Local	AC	E	2	35	185	28	5,208	37	76	10	14	2" AC Grind-Overlay	\$18,853
2027-28	301	855	LA VITA PL	NORTH END	LA SERNA AVE	Local	AC	E	2	13	80	29	3,895	84	0	100	0	Type II Slurry	\$2,103
2027-28	311	879	LEMON ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	35	800	30	23,820	63	65	27	8	2" AC Grind-Overlay	\$86,228
2027-28	311	882	LEMON ST	PINEHURST AVE	FLORENCE AVE	Local	AAC	E	2	35	1,247	30	37,050	76	0	90	10	Type II Slurry	\$20,007
2027-28	332	944	MAPLE ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	743	30	22,110	69	0	100	0	Type II Slurry	\$11,939
2027-28	332	945	MAPLE ST	WHITTIER BLVD	SOUTH END	Local	AC	E	2	35	296	32	11,267	41	74	22	4	2" AC Grind-Overlay	\$40,787
2027-28	347	973	MCPHERSON ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,007	44	43,876	65	67	33	0	2" AC Grind-Overlay	\$158,831
2027-28	347	977	MCPHERSON ST	STEARNS AVE	LA HABRA BLVD	Local	AAC	E	2	35	637	30	18,630	91	0	100	0	Stop Gap-Preventive	\$4,658
2027-28	347	978	MCPHERSON ST	FRANCIS AVE	STEARNS AVE	Local	AAC	E	2	35	655	29	19,680	93	0	100	0	Stop Gap-Preventive	\$4,920
2027-28	347	985	MCPHERSON ST	ROSE AVE	FRANCIS AVE	Local	AAC	E	2	35	474	30	14,720	63	0	100	0	2" AC Grind-Overlay	\$53,286
2027-28	396	1110	PINEHURST AVE	CYPRESS ST	GREENWOOD AVE	Local	AC	E	2	35	1,350	38	50,844	83	44	41	15	Type II Slurry	\$27,456
2027-28	421	1172	ROSE AVE	COLLEGE ST	SUNSET ST	Local	AC	E	2	35	489	26	12,558	64	13	46	41	2" AC Grind-Overlay	\$45,460
2027-28	421	1176	ROSE AVE	MCPHERSON ST	COLLEGE ST	Local	AAC	E	2	35	260	30	8,300	58	0	100	0	2" AC Grind-Overlay	\$30,046
2026-27	428	1198	RYE AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,144	36	41,718	60	59	23	18	2" AC Grind-Overlay	\$151,019
2027-28	453	1253	STEARNS AVE	COLLEGE ST	SUNSET ST	Local	AAC	E	2	35	714	26	19,070	76	0	82	18	Type II Slurry	\$10,298
2027-28	453	1256	STEARNS AVE	SUNSET ST	HARBOR BL	Local	AAC	E	2	35	627	33	20,493	66	12	87	1	2" AC Grind-Overlay	\$74,185
2027-28	460	1288	SUNSET ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	523	26	13,692	83	0	100	0	Type II Slurry	\$7,394
2027-28	460	1289	SUNSET ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	634	32	20,096	81	35	65	0	Type II Slurry	\$10,852
2027-28	460	1292	SUNSET ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	54	78	22	0	2" AC Grind-Overlay	\$71,249
2027-28	477	1328	VALENCIA ST	NORTH END	GREENWOOD AVE	Local	AAC	E	2	35	285	30	10,075	56	0	100	0	2" AC Grind-Overlay	\$36,472
2027-28	477	1331	VALENCIA ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	639	32	20,256	69	51	29	20	Type II Slurry	\$10,938
2027-28	498	1374	WARD ST	NORTH END	FRANCIS AVE	Local	AAC	E	2	35	658	26	18,858	74	40	58	2	Type II Slurry	\$10,183
2027-28	499	1375	WARNE ST	NORTH END	FRANCIS	Local	AAC	E	2	35	783	26	23,052	70	0	99	1	Type II Slurry	\$12,448
																			\$1,981,783
2028-29	074	215	ALLEY E/WALNUT STREET	FIRST ST	SOUTH END	Alley	AC	O	1	22	309	18	5,890	94	0	71	29	Type II Slurry	\$3,298
2028-29	085	1710	ALLEY S/FIRST AVE	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	305	14	2,783	76	0	100	0	2" AC Grind-Overlay	\$21,206
2028-29	091	261	ALLEY S/LA HABRA BLVD	ALLEY W/EUCUID ST	EUCUID ST	Alley	AC	O	1	22	126	14	1,905	68	0	30	70	2" AC Grind-Overlay	\$14,516
2028-29	091	264	ALLEY S/LA HABRA BLVD	WALLACE ST	CALIFORNIA ST	Alley	AC	O	1	22	268	14	4,035	58	57	23	20	2" AC Grind-Overlay	\$30,747
2028-29	091	272	ALLEY S/LA HABRA BLVD	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	269	19	5,400	76	25	37	38	Type II Slurry	\$3,024
2028-29	091	274	ALLEY S/LA HABRA BLVD	WALLACE ST	ALLEY W/EUCUID ST	Alley	AC	O	1	22	192	14	2,895	82	0	64	36	Type II Slurry	\$1,621
2028-29	091	275	ALLEY S/LA HABRA BLVD	WALNUT ST	HAZEL ST	Alley	AC	O	1	22	318	19	6,380	70	42	25	33	2" AC Grind-Overlay	\$48,616
2028-29	527	1507	BEACH ST	WHITTIER BLVD	NORTH END	Local	AC	E	2	07	221	36	9,531	56	82	13	5	2" AC Grind-Overlay	\$35,932
2028-29	145	1723	CANFIELD DR	RANDALL AVE	MACY ST	Local	AC	E	1	01	817	32	27,246	70	8	69	23	Type II Slurry	\$15,258
2028-29	145	427	CANFIELD DR	CARPENTER ST	EAST END	Local	AC	E	2	01	748	33	25,236	70	0	100	0	Type II Slurry	\$14,132
2028-29	146	430	CANTERBURY LN	GLENHAVEN	W/O STURBRIDGE	Local	AAC	E	2	05	465	36	17,346	92	0	84	16	Stop Gap-Preventive	\$4,337
2028-29	539	1727	CREEK LN	RUSSELL ST	RUSSELL ST	Local	AC	E	1	01	749	29	21,456	69	16	84	0	Type II Slurry	\$12,015
2028-29	187	533	DOLORES ST	LINDAUER DR	N/O LAGUNA	Local	AC	E	2	07	433	29	13,020	77	36	64	0	Type II Slurry	\$7,291
2028-29	522	1440	ELMSFORD AVE	GLENCLIFF	WHITEBOOK	Local	AC	E	2	11	1,003	36	36,714	80	19	57	24	Type II Slurry	\$20,560

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2028-29	218	607	FARRINGTON DR	NORTH END	RUSSELL ST	Local	AAC	E	2	07	186	30	7,105	75	22	78	0	Type II Slurry	\$3,979
2028-29	218	608	FARRINGTON DR	RUSSELL ST	SOUTH END	Local	AAC	E	2	07	704	30	22,695	77	9	91	0	Type II Slurry	\$12,709
2028-29	010	59	FASHION SQUARE LN	BEACH BLVD	EAST END	Local	AC	E	4	11	518	56	29,555	65	0	87	13	2" AC Grind-Overlay	\$111,422
2028-29	234	662	GLENCLIFF ST	SHEFFIELD	SHEFFIELD	Local	AC	E	2	11	282	36	10,902	91	0	100	0	Stop Gap-Preventive	\$2,726
2028-29	234	663	GLENCLIFF ST	SHEFFIELD	FASHION SQUARE	Local	AC	E	2	11	720	36	25,704	77	71	29	0	Type II Slurry	\$14,394
2028-29	235	664	GLENHAVEN DR	NORTH END	WIMBLETON	Local	AC	E	2	05	124	36	4,248	93	0	100	0	Stop Gap-Preventive	\$1,062
2028-29	235	665	GLENHAVEN DR	WIMBLETON	CANTEBURY	Local	AAC	E	2	05	1,024	36	37,614	91	0	71	29	Stop Gap-Preventive	\$9,404
2028-29	236	1732	GORDON AVE	BALDWIN ST	SHARPLESS ST	Local	AC	E	2	01	551	30	17,891	74	11	89	0	Type II Slurry	\$10,019
2028-29	236	666	GORDON AVE	VALLEY HOME	ROANOKE	Local	AAC	E	2	01	422	32	14,004	78	18	82	0	Type II Slurry	\$7,842
2028-29	538	1740	JANISON DR	RANDALL AVE	CREEK LN	Local	AC	E	2	01	245	26	6,535	61	54	46	0	2" AC Grind-Overlay	\$24,637
2028-29	280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	Type II Slurry	\$3,418
2028-29	280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	Type II Slurry	\$3,418
2028-29	280	801	KEARNY LN	SOUTH END	O'MALLEY	Local	AAC	E	2	06	163	31	6,848	91	0	100	0	Stop Gap-Preventive	\$1,712
2028-29	532	1701	LA HABRA HILLS DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	12	943	46	37,757	54	70	29	1	2" AC Grind-Overlay	\$142,344
2028-29	293	839	LA MIRADA ST	LINDAUER	LAGUNA	Local	AC	E	2	07	345	29	10,380	76	51	49	0	Type II Slurry	\$5,813
2028-29	304	858	LAGUNA DRIVE	LINDAUER DR	HACIENDA RD	Local	AC	E	2	07	1,430	30	42,540	59	70	30	0	2" AC Grind-Overlay	\$160,376
2028-29	062	111	LINDAUER DR	WHITTIER BLVD	HACIENDA RD	Local	AC	E	2	07	2,034	30	62,620	60	64	36	0	2" AC Grind-Overlay	\$236,077
2028-29	334	947	MARCIA DR	RUSSELL ST	NORTH END	Local	AC	E	2	01	337	32	8,317	69	7	93	0	Type II Slurry	\$4,658
2028-29	354	1000	MIDDLETON ST	SHEFFIELD	WHITEBOOK	Local	AAC	E	2	11	494	36	18,534	80	0	100	0	Type II Slurry	\$10,379
2028-29	357	1006	MONTEREY ST	LINDAUER DR	LAGUNA DR	Local	AC	E	2	07	475	30	14,070	70	44	50	6	Type II Slurry	\$7,879
2028-29	376	1054	O'MALLEY LN	PENDLETON	KEARNEY	Local	AC	E	2	06	313	36	11,802	75	0	99	1	Type II Slurry	\$6,609
2028-29	393	1105	PENDLETON LN	O'MALLEY	ZEKE AND ELSIE	Local	AC	E	2	06	290	32	10,780	77	0	93	7	Type II Slurry	\$6,037
2028-29	528	1720	RANDALL AVE	KOOPMANS WAY	MACY ST	Local	AC	E	2	01	681	32	22,520	77	55	43	2	Type II Slurry	\$12,611
2028-29	528	1721	RANDALL AVE	MACY ST	RUSSELL ST	Local	AC	E	2	01	1,274	32	42,858	64	56	43	1	2" AC Grind-Overlay	\$161,575
2028-29	528	1722	RANDALL AVE	RUSSELL ST	JANISON DR	Local	AC	E	2	01	718	35	25,569	62	64	36	0	2" AC Grind-Overlay	\$96,395
2028-29	407	1137	RIDGEHAVEN DR	CAJON DR	GREENBRIER LN	Local	AC	E	2	05	708	36	26,238	71	54	46	0	Type II Slurry	\$14,693
2028-29	407	1138	RIDGEHAVEN DR	GRAYVILLE DR	BRASS LANTERN DR	Local	AAC	E	2	06	988	36	36,318	89	0	100	0	Stop Gap-Preventive	\$9,080
2028-29	407	1141	RIDGEHAVEN DR	LAMBERT RD	WOODBRIER DR	Local	AC	E	2	05	1,169	35	42,120	78	13	87	0	Type II Slurry	\$23,587
2028-29	407	1144	RIDGEHAVEN DR	WOODBRIER DR	CAJON DR	Local	AC	E	2	05	632	35	22,788	69	78	22	0	Type II Slurry	\$12,761
2028-29	413	1158	ROANOKE AVE	RUSSELL	GORDON	Local	AAC	E	2	01	267	32	9,044	81	0	100	0	Type II Slurry	\$5,065
2028-29	014	1191	RUSSELL ST	WEST END	FARRINGTON DR	Local	AC	E	2	07	191	36	8,380	77	28	64	8	Type II Slurry	\$4,693
2028-29	014	1512	RUSSELL ST	HACIENDA RD	FARRINGTON DR	Local	AAC	E	2	07	355	36	12,564	76	17	76	7	Type II Slurry	\$7,036
2028-29	435	1213	SHADY VALLEY	VALLEY HOME AVE	EAST END	Local	AAC	E	2	01	420	34	15,855	80	31	69	0	Type II Slurry	\$8,879
2028-29	436	1214	SHARPLESS ST	CANFIELD	RUSSELL	Local	AC	E	2	01	592	33	19,338	74	0	100	0	Type II Slurry	\$10,829
2028-29	436	1734	SHARPLESS ST	RUSSELL ST	RANDALL AVE	Local	AC	E	2	01	837	31	26,528	79	12	88	0	Type II Slurry	\$14,856
2028-29	437	1215	SHEFFIELD DR	GLENCLIFF ST	MIDDLETON DR	Local	AC	E	2	11	439	35	15,840	83	0	94	6	Type II Slurry	\$8,870
2028-29	437	1217	SHEFFIELD DR	MIDDLETON DR	WHITEBOOK DR	Local	AC	E	2	11	565	35	20,376	83	0	100	0	Type II Slurry	\$11,411
2028-29	437	1218	SHEFFIELD DR	STURBRIDGE DR	MARIPOSA ST	Local	AC	E	2	05	290	36	10,224	91	0	100	0	Stop Gap-Preventive	\$2,556
2028-29	442	1237	SILVERSPUR LN	CANDLEWOOD DR	RIDGEHAVEN DR	Local	AC	E	2	05	332	26	9,382	77	0	26	74	Type II Slurry	\$5,254
2028-29	442	1238	SILVERSPUR LN	RIDGEHAVEN DR	SILVERSPUR WAY	Local	AC	E	2	05	573	36	21,378	63	62	18	20	2" AC Grind-Overlay	\$80,595
2028-29	048	1247	SPRING MEADOW LN	GRAYVILLE	SOUTH END	Local	AC	E	2	06	67	60	5,570	69	0	64	36	Type II Slurry	\$3,119
2028-29	048	152	SPRING MEADOW LN	GRAYVILLE DR	IMPERIAL HWY	Local	AC	E	2	06	195	36	6,732	81	34	66	0	Type II Slurry	\$3,770
2028-29	454	1264	STONEHAM WAY	WEST END	WHITEBOOK DR	Local	AAC	E	2	11	147	32	6,254	82	0	100	0	Type II Slurry	\$3,502
2028-29	044	1279	STURBRIDGE DR	WOODMERE CT	CANTEBURY LN	Local	AC	E	2	05	845	35	30,456	83	0	70	30	Type II Slurry	\$17,055
2028-29	044	1280	STURBRIDGE DR	GREENBRIER LN	SOUTH END	Local	AC	E	2	05	135	27	5,495	74	0	100	0	Type II Slurry	\$3,077
2028-29	044	145	STURBRIDGE DR	LAMBERT RD	WIMBLETON LN	Local	AC	E	2	05	619	35	22,320	89	0	100	0	Stop Gap-Preventive	\$5,580
2028-29	016	78	VALLEY HOME AVE	GORDON AVE	WHITTIER AVE	Local	AC	C	2	01	1,135	15	18,176	53	81	16	3	2" AC Grind-Overlay	\$68,524
2028-29	016	79	VALLEY HOME AVE	WHITTIER AVE	GREGORY LN	Local	AAC	C	2	02	1,311	17	23,616	50	57	28	15	2" AC Grind-Overlay	\$89,032
2028-29	016	80	VALLEY HOME AVE	GREGORY LN	LA HABRA BLVD	Local	AAC	C	2	02	1,579	18	28,422	47	68	24	8	2" AC Grind-Overlay	\$107,151
2028-29	483	1347	VERNON ST	LINDAUER	LAGUNA	Local	AC	E	2	07	455	30	13,470	69	49	51	0	Type II Slurry	\$7,543
2028-29	500	1376	WATERBURY WAY	WEST END	WHITEBOOK	Local	AAC	E	2	11	149	32	6,318	76	0	100	0	Type II Slurry	\$3,538
2028-29	046	1382	WHITEBOOK DR	SHEFFIELD DR	MIDDLETON ST	Local	AAC	E	2	11	922	32	30,254	79	0	84	16	Type II Slurry	\$16,942
2028-29	046	148	WHITEBOOK DR	LAMBERT RD	SHEFFIELD DR	Local	AC	E	2	11	1,085	36	43,560	64	69	25	6	2" AC Grind-Overlay	\$164,221
2028-29	515	1413	WOODMERE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	119	26	4,669	82	0	100	0	Type II Slurry	\$2,615
2028-29	518	1416	ZEKE AND ELSIE DR	BALDWIN ST	PENDLETON	Local	AC	E	2	06	252	36	9,606	77	35	65	0	Type II Slurry	\$5,379
																			\$2,011,262
2029-30	063	200	ACACIA ST	PORTOLA	LOMA VERDE	Local	AAC	E	2	22	171	31	5,801	64	0	74	26	2" AC Grind-Overlay	\$22,740
2029-30	069	209	ALLEY E/EUCLID STREET	N/END	N/O PINEHURST	Alley	AC	O	1	28	313	19	6,280	19	24	52	24	AC Recon	\$58,404
2029-30	091	259	ALLEY S/LA HABRA BLVD	ALDRICH ST	CYPRESS ST	Alley	AC	O	1	29	408	14	6,135	60	56	38	6	2" AC Grind-Overlay	\$48,589
2029-30	091	265	ALLEY S/LA HABRA BLVD	BANK OF AMERICA PARKING LOT	ALDRICH ST	Alley	AC	O	1	29	255	14	3,840	74	39	33	28	2" AC Grind-Overlay	\$30,413
2029-30	104	316	ALTO LN	E/O ROANNE	E/END	Local	AAC	E	2	34	207	26	6,933	78	34	42	24	Type II Slurry	\$4,021
2029-30	025	324	ARBOLITA DR	RODDY DR	HARBOR BLVD	Local	AC	E	2	34	582	35	20,988	52	70	13	17	2" AC Grind-Overlay	\$82,273
2029-30	122	354	BISHOP DR	CYPRESS ST	EAST END	Local	AC	E	2	34	587	30	20,237	89	45	55	0	Stop Gap-Preventive	\$5,059
2029-30	122	7160	BISHOP DR	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	519	30	15,600	81	18	82	0	Type II Slurry	\$9,048
2029-30	023	116	BROOKDALE AVE	LINDEN LN	HARBOR BLVD	Local	AC	E	2	34	1,844	35	66,420	82	0	80	20	Type II Slurry	\$38,524
2029-30	135	396	BURCH WAY	NORTH END	PINEHURST	Local	AC	E	2	28	198	30	7,515	70	59	41	0	Type II Slurry	\$4,359
2029-30	523	1460	CALIFORNIA ST	LA HABRA BLVD	SOUTH END	Local	AAC	E	2	22	635	30	18,790	62	56	44	0	2" AC Grind-Overlay	\$73,657

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2029-30	141	423	CANDACE LN	RODDY	EAST END	Local	AC	E	2	34	413	30	13,941	80	0	62	38	Type II Slurry	\$8,086
2029-30	174	504	COUNTRY LN	EAST END	MEADOWLARK	Local	AC	E	2	34	182	26	7,277	79	0	81	19	Type II Slurry	\$4,221
2029-30	008	1715	CYPRESS ST	CITY BOUNDARY	BONNIE LN	Local	AC	C	2	27	501	35	18,072	68	47	50	3	2" AC Grind-Overlay	\$70,842
2029-30	008	50	CYPRESS ST	305' N/O FOUNDATION	IMPERIAL HWY	Local	AC	C	2	31	1,201	35	43,272	41	42	55	3	2" AC Grind-Overlay	\$169,626
2029-30	008	51	CYPRESS ST	LAMBERT RD	498' S/O PACIFIC	Local	AC	C	2	31	1,642	35	59,148	58	33	59	8	2" AC Grind-Overlay	\$231,860
2029-30	008	57	CYPRESS ST	BONNIE LN	CAPELLA AVE	Local	AC	C	2	34	467	35	16,848	73	9	89	2	Type II Slurry	\$9,772
2029-30	206	575	EMBER LN	FALLENLEAF ST	EAST END	Local	AAC	E	2	34	67	47	4,399	83	16	57	27	Type II Slurry	\$2,551
2029-30	206	576	EMBER LN	WEST END	FALLENLEAF ST	Local	AAC	E	2	34	409	36	16,275	81	0	100	0	Type II Slurry	\$9,440
2029-30	011	611	FIRST AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	22	1,290	45	57,510	73	58	41	1	Type II Slurry	\$33,356
2029-30	011	614	FIRST AVE	CITY LIMIT	WALNUT ST	Local	AC	E	2	17	952	30	28,590	69	33	59	8	Type II Slurry	\$16,582
2029-30	033	1501	FRANCIS AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	664	29	19,950	67	0	59	41	2" AC Grind-Overlay	\$78,204
2029-30	033	1502	FRANCIS AVE	ORANGE ST	CYPRESS ST	Local	AC	E	2	28	658	29	19,770	77	0	83	17	Type II Slurry	\$11,467
2029-30	245	686	GREENWOOD AVE	LEORA	WALNUT ST	Local	AC	E	2	16	631	26	16,094	72	39	61	0	Type II Slurry	\$9,335
2029-30	245	692	GREENWOOD AVE	HILLSIDE ST	EUCLID ST	Local	AC	E	2	21	622	29	18,690	72	15	85	0	Type II Slurry	\$10,840
2029-30	245	693	GREENWOOD AVE	MONTTE VISTA	LEORA	Local	AC	E	2	16	596	30	17,520	62	38	35	27	2" AC Grind-Overlay	\$68,678
2029-30	250	715	HAZEL ST	LA HABRA BLVD	FISRT ST	Local	AC	E	2	22	308	38	11,488	79	10	53	37	Type II Slurry	\$6,663
2029-30	250	716	HAZEL ST	FIRST ST	SOUTH END	Local	AC	E	2	22	327	38	12,426	89	0	95	5	Stop Gap-Preventive	\$3,107
2029-30	251	727	HEATHER AVE	MONTTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,303	29	37,247	73	39	46	15	Type II Slurry	\$21,603
2029-30	260	757	HILLCREST ST	FIRST AVE	SOUTH END	Local	AC	E	2	17	815	33	29,282	59	59	24	17	2" AC Grind-Overlay	\$114,785
2029-30	260	758	HILLCREST ST	LA HABRA BLVD	FIRST AVE	Local	AC	E	2	17	331	33	10,725	73	31	57	12	Type II Slurry	\$6,221
2029-30	315	891	LEORA ST	PINEHURST AVE	FLORENCE AVE	Local	AC	E	2	16	994	30	30,014	78	29	59	12	Type II Slurry	\$17,408
2029-30	315	893	LEORA ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	16	299	30	8,850	90	49	51	0	Stop Gap-Preventive	\$2,213
2029-30	322	916	LINDEN LN	BROOKDALE AVE	EAST END	Local	AAC	E	2	34	272	26	8,867	75	46	46	8	Type II Slurry	\$5,143
2029-30	322	917	LINDEN LN	WEST END	BROOKDALE AVE	Local	AAC	E	2	34	93	26	4,213	80	0	100	0	Type II Slurry	\$2,444
2029-30	324	925	LOMA VERDE AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	63	0	82	18	2" AC Grind-Overlay	\$66,350
2029-30	331	942	MAIN ST	FIRST AVE	SECOND ST	Local	AC	E	2	29	306	46	13,800	56	77	23	0	2" AC Grind-Overlay	\$54,096
2029-30	331	943	MAIN ST	FLORENCE AVE	SOUTH END	Local	AC	E	2	28	276	39	12,671	63	74	26	0	2" AC Grind-Overlay	\$49,670
2029-30	348	987	MEADOW LARK ST	BROOKDALE AVE	COUNTRY LN	Local	AC	E	2	34	804	36	29,478	83	0	94	6	Type II Slurry	\$17,097
2029-30	013	69	MONTTE VISTA ST	LA HABRA BLVD	FOURTH AVE	Local	AAC	C	2	15	1,446	36	52,315	99	0	100	0	Stop Gap-Preventive	\$13,079
2029-30	013	70	MONTTE VISTA ST	FOURTH AVE	LAMBERT RD	Local	AAC	C	2	18	1,109	36	41,070	99	0	100	0	Stop Gap-Preventive	\$10,268
2029-30	377	1745	ORANGE ST	ERNA AVE	ALLEY	Local	AC	E	2	28	191	34	6,720	75	58	29	13	Type II Slurry	\$3,898
2029-30	396	1108	PINEHURST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,247	30	36,990	77	45	53	2	Type II Slurry	\$21,454
2029-30	533	1713	RISNER WY	IDAHO ST	WESTRIDGE GATE	Local	AC	E	2	26	274	50	14,025	74	25	54	21	Type II Slurry	\$8,135
2029-30	533	1714	RISNER WY	CROSS GUTTER	BARRIER	Local	AC	E	2	26	113	50	5,814	77	0	75	25	Type II Slurry	\$3,372
2029-30	412	1154	ROANNE DR	CITY LIMIT	ARBOLITA DR	Local	AC	E	2	34	651	35	23,472	73	19	81	0	Type II Slurry	\$13,614
2029-30	417	1165	RODDY DR	BROOKDALE AVE	RODDY WAY	Local	AC	E	2	34	229	36	8,028	72	31	60	9	Type II Slurry	\$4,656
2029-30	418	1167	RODDY WAY	RODDY DR	EAST END	Local	AC	E	2	34	326	27	11,645	74	20	73	7	Type II Slurry	\$6,754
2029-30	421	1173	ROSE AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	623	30	18,510	78	0	68	32	Type II Slurry	\$10,736
2029-30	421	1174	ROSE AVE	ORANGE ST	EAST END	Local	AC	E	2	28	348	26	10,843	80	6	94	0	Type II Slurry	\$6,289
2029-30	434	1208	SECOND AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	29	1,288	34	43,588	82	40	51	9	Type II Slurry	\$25,281
2029-30	464	1303	SYCAMORE AVE	STONEWOOD	MEADOWLARK	Local	AC	E	2	34	609	36	22,494	80	0	72	28	Type II Slurry	\$13,047
2029-30	471	1320	THIRD AVE	KNUDSON ST	CHINCHILLA ST	Local	AC	E	2	17	293	30	10,040	37	48	18	34	2" AC Grind-Overlay	\$39,357
2029-30	541	1730	WALLACE AVE	MACY ST	BALDWIN ST	Local	AC	E	1	01	406	32	13,722	70	12	88	0	Type II Slurry	\$7,959
2029-30	541	1733	WALLACE AVE	SHARPLESS ST	END	Local	AC	E	2	01	333	31	13,605	78	6	94	0	Type II Slurry	\$7,891
2029-30	017	83	WALNUT ST	WHITTIER AVE	HIGHLANDER AVE	Local	AC	C	2	21	1,284	29	38,550	48	38	48	14	2" AC Grind-Overlay	\$151,116
2029-30	017	84	WALNUT ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	C	2	21	1,285	29	38,580	49	42	46	12	2" AC Grind-Overlay	\$151,234
2029-30	507	1391	WILLOW ST	GREENWOOD AVE	HIGHLANDER AVE	Local	AC	E	2	16	327	30	9,630	58	70	29	1	2" AC Grind-Overlay	\$37,750
2029-30	507	1392	WILLOW ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	16	616	30	18,300	82	35	42	23	Type II Slurry	\$10,614
2029-30	514	1409	WOODCREST AVE	FALLENLEAF ST	ROANNE DR	Local	AC	E	2	34	1,369	36	52,284	72	48	43	9	Type II Slurry	\$30,325
2029-30	514	1410	WOODCREST AVE	ROANNE DR	EAST END	Local	AC	E	2	34	207	26	6,933	82	36	64	0	Type II Slurry	\$4,021
																			\$2,059,592
2030-31	073	213	ALLEY E/VALENCIA ST	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	O	1	36	434	19	8,700	94	40	60	0	Type II Slurry	\$5,307
2030-31	074	214	ALLEY E/WALNUT STREET	N/END	N/O ALLEY N/ERNA	Alley	AC	O	1	21	429	19	8,600	92	0	100	0	Type II Slurry	\$5,246
2030-31	076	217	ALLEY N/ERNA STREET	E/O ALLEY E/WALNUT	W/O HAZEL	Alley	AC	O	1	21	174	19	3,500	91	0	100	0	Type II Slurry	\$2,135
2030-31	076	218	ALLEY N/ERNA STREET	HAZEL	E/END	Alley	AC	O	1	21	255	20	5,100	89	0	100	0	Type II Slurry	\$3,111
2030-31	076	219	ALLEY N/ERNA STREET	WALNUT ST	E/O ALLEY E/WALNUT	Alley	AC	O	1	21	144	19	2,900	90	0	95	5	Type II Slurry	\$1,769
2030-31	080	226	ALLEY N/LA HABRA BLVD	E/O ALLEY E/CYPRESS	W/O LEMON	Alley	AC	O	1	35	144	14	2,175	89	0	74	26	Type II Slurry	\$1,327
2030-31	080	227	ALLEY N/LA HABRA BLVD	CYPRESS ST	E/O ALLEY E/CYPRESS	Alley	AC	O	1	35	146	14	2,205	91	0	100	0	Type II Slurry	\$1,345
2030-31	082	1712	ALLEY N/THIRD ST	ALLEY W/O VALENCIA	VALENCIA ST	Alley	AC	O	1	36	153	20	2,091	84	0	15	85	2" AC Grind-Overlay	\$17,230
2030-31	082	235	ALLEY N/THIRD ST	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	147	19	2,960	97	0	100	0	Type II Slurry	\$1,806
2030-31	084	244	ALLEY S/ERNA	COLLEGE ST	VALENCIA ST	Alley	AC	O	1	35	312	14	4,695	92	0	100	0	Type II Slurry	\$2,864
2030-31	084	247	ALLEY S/ERNA	VALENCIA ST	SUNSET ST	Alley	AC	O	1	35	283	9	2,840	92	0	53	47	Type II Slurry	\$1,732
2030-31	085	250	ALLEY S/FIRST AVE	CYPRESS ST	MCIPHERSON ST	Alley	AC	O	1	36	640	16	10,240	91	0	100	0	Type II Slurry	\$6,246
2030-31	087	255	ALLEY S/GREENWOOD AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	470	19	9,420	91	27	73	0	Type II Slurry	\$5,746
2030-31	091	262	ALLEY S/LA HABRA BLVD	ALLEY W/VALENCIA ST	VALENCIA ST	Alley	AC	O	1	36	125	19	2,520	98	0	100	0	Type II Slurry	\$1,537
2030-31	091	263	ALLEY S/LA HABRA BLVD	BEDFORD ST	ALLEY E/BEDFORD ST	Alley	AC	O	1	39	133	19	2,680	90	0	100	0	Type II Slurry	\$1,635
2030-31	091	267	ALLEY S/LA HABRA BLVD	CYPRESS ST	MCIPHERSON ST	Alley	AC	O	1	36	640	14	9,615	79	0	66	34	2" AC Grind-Overlay	\$79,228

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2030-31	092	278	ALLEY S/STEARNS AVENUE	E/O COLLEGE	W/O VALENCIA	Alley	AC	O	1	35	312	14	4,695	89	0	100	0	Type II Slurry	\$2,864
2030-31	092	279	ALLEY S/STEARNS AVENUE	E/O MCPHERSON	W/O COLLEGE	Alley	AC	O	1	35	304	14	4,575	92	0	100	0	Type II Slurry	\$2,791
2030-31	095	288	ALLEY W/BURWOOD ST	NORTH END	MONTWOOD AVE	Alley	AC	O	1	32	1,035	20	21,756	92	0	100	0	Type II Slurry	\$13,271
2030-31	101	303	ALLEY W/WALNUT STREET	FLORENCE AVE	HEATHER AVE	Alley	AC	O	1	16	301	15	4,832	89	32	60	8	Type II Slurry	\$2,948
2030-31	101	304	ALLEY W/WALNUT STREET	GREENWOOD AVE	ALLEY S/GREENWOOD AVE	Alley	AC	O	1	16	160	15	2,576	90	24	68	8	Type II Slurry	\$1,571
2030-31	101	306	ALLEY W/WALNUT STREET	HIGHLANDER AVE	ALLEY S/HIGHLANDER AVE	Alley	AC	O	1	16	156	15	2,512	92	0	100	0	Type II Slurry	\$1,532
2030-31	106	319	AMORITA AVE	VECINO ST	VERONA ST	Local	AC	E	2	40	575	30	17,280	84	57	34	9	Type II Slurry	\$10,541
2030-31	025	118	ARBOLITA DR	HARBOR BLVD	BRIGHTON ST	Local	AAC	E	2	37	1,195	36	42,520	72	63	23	14	Type II Slurry	\$25,937
2030-31	025	119	ARBOLITA DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,275	36	45,550	80	46	54	0	Type II Slurry	\$27,786
2030-31	118	343	BEA WAY	JOAN ST	EAST END	Local	AC	E	2	38	149	33	5,364	71	58	33	9	Type II Slurry	\$3,272
2030-31	119	347	BEDFORD ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	754	29	22,650	84	0	100	0	Type II Slurry	\$13,817
2030-31	129	371	BRIGHT ST	SECOND ST	SOUTH END	Local	AC	E	2	36	402	32	15,331	86	0	89	11	Type II Slurry	\$9,352
2030-31	026	120	BRIGHTON ST	WHITTIER BLVD	CONCOURSE ST	Local	AC	E	2	37	1,174	35	42,300	85	42	58	0	Type II Slurry	\$25,803
2030-31	026	121	BRIGHTON ST	CONCOURSE ST	CITY LIMIT	Local	AC	E	2	37	1,330	36	47,448	83	75	25	0	Type II Slurry	\$28,943
2030-31	023	1503	BROOKDALE AVE	PALM ST	EAST END	Local	AC	E	2	40	319	35	10,955	76	33	52	15	Type II Slurry	\$6,683
2030-31	023	379	BROOKDALE AVE	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,386	35	49,932	79	34	66	0	Type II Slurry	\$30,459
2030-31	023	382	BROOKDALE AVE	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	998	36	36,678	87	1	51	48	Type II Slurry	\$22,374
2030-31	521	386	BROOKFIELD AVE	SHELburne ST	NANTUCKET ST	Local	AC	E	2	37	404	36	15,150	88	47	53	0	Type II Slurry	\$9,242
2030-31	149	435	CARMELA LN	HARBOR BLVD	EAST END	Local	AAC	E	2	37	749	35	27,984	88	0	97	3	Type II Slurry	\$17,070
2030-31	158	1506	CHESTNUT ST	CITY LIMIT NORTH	WHITTIER BLVD	Local	AC	E	2	35	153	36	5,698	69	58	42	0	Type II Slurry	\$3,476
2030-31	166	472	COLFAX CT	WEST END	COLFAX ST	Local	AC	E	2	38	217	30	9,006	74	38	31	31	Type II Slurry	\$5,494
2030-31	167	474	COLFAX ST	COLFAX CT	ESSEX DR	Local	AC	E	2	38	254	30	8,190	80	1	40	59	Type II Slurry	\$4,996
2030-31	167	475	COLFAX ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	706	30	21,000	85	22	78	0	Type II Slurry	\$12,810
2030-31	167	476	COLFAX ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	765	30	22,770	78	57	41	2	Type II Slurry	\$13,890
2030-31	170	491	COMITY CIR	CONCOURSE ST	EAST END	Local	AAC	E	2	37	209	30	7,817	89	0	100	0	Stop Gap-Preventive	\$1,954
2030-31	524	1504	COMMERCIAL WY	CYPRESS AVE	PARK INDUSTRIAL DR	Local	AC	E	2	36	1,026	36	36,972	60	45	36	19	2" AC Grind-Overlay	\$150,846
2030-31	172	493	CONCOURSE ST	DAVIT CIR	BRIGHTON ST	Local	AC	E	2	37	980	36	35,280	78	0	100	0	Type II Slurry	\$21,521
2030-31	172	495	CONCOURSE ST	WHITTIER AVE (FRONTAGE)	DAVIT CIR	Local	AC	E	2	37	637	36	22,932	92	0	100	0	Stop Gap-Preventive	\$5,733
2030-31	008	171	CYPRESS ST	LA HABRA BLVD	SECOND ST	Local	AC	C	2	36	724	35	26,100	83	33	37	30	Type II Slurry	\$15,921
2030-31	008	52	CYPRESS ST	COMMERCIAL WAY	LAMBERT RD	Local	AC	C	2	36	1,094	35	39,420	79	43	37	20	Type II Slurry	\$24,046
2030-31	008	53	CYPRESS ST	SECOND ST	COMMERCIAL WAY	Local	AC	C	2	36	835	36	30,060	88	1	57	42	Type II Slurry	\$18,337
2030-31	178	508	DAVIT CIR	CONCOURSE ST	EAST END	Local	AC	E	2	37	128	30	5,467	88	0	100	0	Type II Slurry	\$3,335
2030-31	185	529	DEXTER ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	734	30	21,840	80	50	25	25	Type II Slurry	\$13,322
2030-31	185	530	DEXTER ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	85	34	66	0	Type II Slurry	\$14,000
2030-31	529	1530	DOT AVE	JOAN ST	JUANITA ST	Local	AC	E	2	38	414	32	13,695	91	0	100	0	Stop Gap-Preventive	\$3,424
2030-31	193	546	EASTPARK DR	GREENTREE LN	FONDA ST	Local	AC	E	2	38	528	32	18,396	85	0	100	0	Type II Slurry	\$11,222
2030-31	211	596	ESSEX DR	BEDFORD ST	FONDA ST	Local	AC	E	2	38	739	30	22,170	59	60	16	24	2" AC Grind-Overlay	\$90,454
2030-31	211	599	ESSEX DR	FONDA ST	NORTH END	Local	AC	E	2	38	172	30	6,906	72	0	100	0	Type II Slurry	\$4,213
2030-31	212	600	ESTATE DR	GREENTREE	FONDA ST	Local	AC	E	2	38	532	32	17,774	86	0	100	0	Type II Slurry	\$10,842
2030-31	011	615	FIRST AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	640	44	27,896	82	0	90	10	Type II Slurry	\$17,017
2030-31	222	622	FLAMINGO WAY	NORTH END	AMORITA	Local	AC	E	2	40	789	36	30,202	88	20	47	33	Type II Slurry	\$18,423
2030-31	012	62	FONDA ST	EASTPARK DR	LA HABRA BLVD	Local	AC	E	2	38	444	35	16,020	85	0	98	2	Type II Slurry	\$9,772
2030-31	012	637	FONDA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	64	75	18	7	2" AC Grind-Overlay	\$93,636
2030-31	012	638	FONDA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,187	30	35,370	80	62	36	2	Type II Slurry	\$21,576
2030-31	033	131	FRANCIS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	36	41,580	90	0	100	0	Stop Gap-Preventive	\$10,395
2030-31	033	132	FRANCIS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,454	35	52,380	80	22	58	20	Type II Slurry	\$31,952
2030-31	231	659	FRANTZ AVE	PALM	VERONA	Local	AC	E	2	41	864	36	30,960	78	0	100	0	Type II Slurry	\$18,886
2030-31	233	661	GERRY ST	NORTH END	FRANCIS	Local	AC	E	2	38	467	30	15,577	88	0	100	0	Type II Slurry	\$9,502
2030-31	242	681	GREENTREE LN	EASTPARK	ESTATE	Local	AC	E	2	38	297	36	12,192	90	0	92	8	Stop Gap-Preventive	\$3,048
2030-31	262	765	HODSON AVE	WEST END	EAST END	Local	AC	E	2	41	713	36	25,452	76	57	43	0	Type II Slurry	\$15,526
2030-31	262	768	HODSON AVE	VALLEJO ST	PALM ST	Local	AC	E	2	38	1,184	36	43,158	82	0	96	4	Type II Slurry	\$26,326
2030-31	263	770	HOLGATE ST	HODSON AVE	SOUTH END	Local	AC	E	2	41	450	26	13,403	83	43	57	0	Type II Slurry	\$8,176
2030-31	263	771	HOLGATE ST	Vaqueiro ST	HODSON AVE	Local	AC	E	2	41	1,076	29	32,310	73	53	47	0	Type II Slurry	\$19,709
2030-31	266	778	HOLT DR	WILSON	HOLGATE	Local	AC	E	2	41	371	30	12,677	92	0	100	0	Stop Gap-Preventive	\$3,169
2030-31	269	782	INOLA CT	NORTH END	WHITTIER BLVD	Local	AC	E	2	40	236	26	7,683	72	73	25	2	Type II Slurry	\$4,687
2030-31	275	789	JOAN ST	DOT AVE	FRANCIS AVE	Local	AC	E	2	38	503	30	14,910	68	67	18	15	2" AC Grind-Overlay	\$60,833
2030-31	279	795	JUANITA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,149	29	34,500	88	0	100	0	Type II Slurry	\$21,045
2030-31	279	796	JUANITA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	739	29	22,200	81	0	100	0	Type II Slurry	\$13,542
2030-31	310	878	LAURA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,151	32	36,704	87	0	100	0	Type II Slurry	\$22,389
2030-31	526	1510	LOMA NORTE PL	BROOKDALE AVE	SOUTH END	Local	AC	E	2	40	235	28	8,207	73	47	43	10	Type II Slurry	\$5,006
2030-31	330	940	MADONNA LN	PALM	EAST END	Local	AC	E	2	40	222	32	8,741	83	0	95	5	Type II Slurry	\$5,332
2030-31	335	948	MARCINE ST	NORTH END	CARMELA	Local	AAC	E	2	37	317	32	11,717	87	0	100	0	Type II Slurry	\$7,147
2030-31	344	968	MATEO AVE	VALLEJO	JUANITA	Local	AC	E	2	38	621	26	15,834	77	57	43	0	Type II Slurry	\$9,659
2030-31	345	969	MCCART AVE	ROSCOE	CITY LIMIT	Local	AC	E	2	41	334	36	12,774	85	0	100	0	Type II Slurry	\$7,792
2030-31	365	1020	NANTUCKET ST	SHELburne ST	NORTH END	Local	AC	E	2	37	704	36	27,142	75	46	32	22	Type II Slurry	\$16,557
2030-31	365	1022	NANTUCKET ST	BRIGHTON ST	SHELburne ST	Local	AC	E	2	37	619	36	22,140	77	59	39	2	Type II Slurry	\$13,505
2030-31	369	1028	NORTH HILLS DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,236	36	44,352	85	60	37	3	Type II Slurry	\$27,055

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2030-31	369	1029	NORTH HILLS DR	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	739	36	26,316	87	46	54	0	Type II Slurry	\$16,053
2030-31	370	1032	NORTHGATE WAY	STEARNS AVE	EASTPARK	Local	AC	E	2	38	223	32	6,944	89	0	100	0	Stop Gap-Preventive	\$1,736
2030-31	384	1078	PALERMO WAY	NORTH END	SOUTH END	Local	AC	E	2	41	1,010	26	29,562	75	15	55	30	Type II Slurry	\$18,033
2030-31	385	1080	PAMELA LN	NORTH END	NORTH HILLS	Local	AC	E	2	37	248	26	8,047	84	53	47	0	Type II Slurry	\$4,909
2030-31	387	1082	PARK INDUSTRIAL DR	CYPRESS ST	COMMERCIAL	Local	AC	E	2	36	985	36	33,300	68	45	50	5	2" AC Grind-Overlay	\$135,864
2030-31	402	1126	RAMONA AVE	PALM	PALERMO	Local	AC	E	2	41	1,123	36	40,284	76	22	71	7	Type II Slurry	\$24,573
2030-31	416	1161	ROCKINGHORSE LN	NORTH END	BROOKDALE AVE	Local	AC	E	2	37	1,031	37	40,824	85	57	37	6	Type II Slurry	\$24,903
2030-31	420	1170	ROSCOE ST	MCCART AVE	LA HABRA BLVD	Local	AC	E	2	41	776	36	28,686	80	13	82	5	Type II Slurry	\$17,498
2030-31	434	1209	SECOND AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	641	30	19,050	86	0	87	13	Type II Slurry	\$11,621
2030-31	546	1737	SHADYCREST LN	PALM ST	END	Local	AC	E	2	40	614	11	10,838	63	64	22	14	2" AC Grind-Overlay	\$44,219
2030-31	438	1219	SHELburnE ST	BROOKFIELD AVE	NANTUCKET ST	Local	AC	E	2	37	550	36	20,406	82	41	59	0	Type II Slurry	\$12,448
2030-31	438	1220	SHELburnE ST	NANTUCKET ST	WHITTIER BLVD	Local	AC	E	2	37	739	36	26,460	93	0	100	0	Stop Gap-Preventive	\$6,615
2030-31	447	1246	SONORA PL	NORTH END	STEARNS	Local	AC	E	2	38	468	26	13,758	68	54	45	1	2" AC Grind-Overlay	\$56,133
2030-31	453	1260	STEARNS AVE	PALM ST	HOLGATE ST	Local	AC	E	2	41	626	30	18,660	84	0	100	0	Type II Slurry	\$11,383
2030-31	34	133	STEARNS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	32	31,995	79	0	76	24	Type II Slurry	\$19,517
2030-31	34	134	STEARNS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,455	30	43,650	82	0	100	0	Type II Slurry	\$26,627
2030-31	460	1287	SUNSET ST	NORTH END	THIRD AVE	Local	AC	E	2	36	340	32	10,688	75	57	30	13	Type II Slurry	\$6,520
2030-31	462	1301	SUSAN LN	WOODCREST	NORTH HILLS	Local	AC	E	2	37	280	36	10,686	81	0	83	17	Type II Slurry	\$6,518
2030-31	463	1302	SWANSEA CIR	NANTUCKET	EAST END	Local	AC	E	2	37	202	26	6,799	76	51	43	6	Type II Slurry	\$4,147
2030-31	471	1314	THIRD AVE	BRIGHT ST	COLLEGE ST	Local	AAC	E	2	36	1,142	40	48,188	85	46	49	5	Type II Slurry	\$29,395
2030-31	471	1315	THIRD AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	36	1,152	33	39,202	80	58	39	3	Type II Slurry	\$23,913
2030-31	473	1322	TOPAZ AVE	PALM	VERONA	Local	AC	E	2	41	846	36	30,312	80	1	99	0	Type II Slurry	\$18,490
2030-31	474	1324	TROPICANA WAY	ORCHID AVE	WHITTIER BLVD	Local	AC	E	2	40	765	36	27,396	76	57	43	0	Type II Slurry	\$16,712
2030-31	477	1329	VALENCIA ST	LA HABRA BLVD	THIRD AVE	Local	AC	E	2	36	1,006	36	36,000	77	52	48	0	Type II Slurry	\$21,960
2030-31	478	1337	VALLEJO ST	VERDUGO AVE	STEARNS AVE	Local	AC	E	2	38	514	36	19,038	81	11	84	5	Type II Slurry	\$11,613
2030-31	478	1339	VALLEJO ST	STEARNS AVE	HODSON AVE	Local	AC	E	2	38	221	36	8,490	69	79	21	0	Type II Slurry	\$5,179
2030-31	484	1348	VERONA ST	AMORITA AVE	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	87	53	47	0	Type II Slurry	\$10,889
2030-31	484	1349	VERONA ST	WHITTIER BLVD	VaquERO AVE	Local	AC	E	2	41	1,040	35	37,476	77	5	82	13	Type II Slurry	\$22,860
2030-31	484	1352	VERONA ST	VaquERO AVE	SOUTH END	Local	AC	E	2	41	155	26	5,681	78	13	60	27	Type II Slurry	\$3,465
2030-31	491	1361	WADE ST	HODSON	LA HABRA BLVD	Local	AC	E	2	41	492	36	17,496	83	0	100	0	Type II Slurry	\$10,673
2030-31	495	1370	WALLING AVE	HOLGATE	CITY LIMIT	Local	AC	E	2	41	646	31	20,704	78	44	56	0	Type II Slurry	\$12,629
2030-31	017	88	WALNUT ST	LAS LOMAS AVE	IMPERIAL HWY	Local	AC	C	2	24	1,407	35	50,688	66	30	55	15	2" AC Grind-Overlay	\$206,807
2030-31	505	1387	WHITTIER BLVD (FRONT RD)	CONCOURSE ST	BRIGHTON ST	Local	AC	E	2	37	715	28	20,020	88	0	100	0	Type II Slurry	\$12,212
2030-31	510	1403	WILSON ST	VaquERO ST	STEARNS AVE	Local	AC	E	2	41	778	32	24,768	91	0	100	0	Stop Gap-Preventive	\$6,192
2030-31	514	1411	WOODCREST AVE	SUSAN LN	PALM ST	Local	AC	E	2	37	846	36	31,062	70	27	59	14	Type II Slurry	\$18,948
																			\$2,227,264
2031-32	067	0207	ALLEY E/BURWOOD	PARKWOOD	MONTWOOD	Alley	AC	O	1	32	882	19	17,660	85	57	43	0	Type II Slurry	\$11,126
2031-32	068	0208	ALLEY E/CORTO	WHITTIER BL	SOUTH END	Alley	AC	O	1	09	226	19	4,540	60	74	24	2	2" AC Grind-Overlay	\$38,908
2031-32	076	220	ALLEY N/ERNA STREET	WEST END	EUCLID ST	Alley	AC	O	1	21	315	14	4,740	87	0	100	0	Type II Slurry	\$2,986
2031-32	097	290	ALLEY N/O WHITTIER	WEST END	HARBOR BL	Alley	AC	O	1	34	172	16	2,941	32	64	19	17	2" AC Grind-Overlay	\$25,204
2031-32	084	238	ALLEY S/ERNA	MCPHERSON ST	COLLEGE ST	Alley	AC	O	1	35	304	14	4,575	88	0	100	0	Type II Slurry	\$2,882
2031-32	084	239	ALLEY S/ERNA	HAZEL ST	LOIS ST	Alley	AC	O	1	21	434	14	6,525	80	1	60	39	2" AC Grind-Overlay	\$55,919
2031-32	084	242	ALLEY S/ERNA	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	319	19	6,400	82	22	49	29	Type II Slurry	\$4,032
2031-32	084	245	ALLEY S/ERNA	LOIS ST	EUCLID ST	Alley	AC	O	1	21	464	24	11,625	80	0	95	5	2" AC Grind-Overlay	\$99,626
2031-32	088	256	ALLEY S/HIGHLANDER AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	471	15	7,552	88	19	55	26	Type II Slurry	\$4,758
2031-32	091	260	ALLEY S/LA HABRA BLVD	ALLEY E/BEDFORD ST	COLFAX ST	Alley	AC	O	1	39	96	19	1,940	87	0	100	0	Type II Slurry	\$1,222
2031-32	091	266	ALLEY S/LA HABRA BLVD	COLFAX ST	DEXTER ST	Alley	AC	O	1	39	202	19	4,060	80	7	93	0	2" AC Grind-Overlay	\$34,794
2031-32	091	269	ALLEY S/LA HABRA BLVD	DEXTER ST	FONDA ST	Alley	AC	O	1	39	202	19	4,060	82	20	78	2	Type II Slurry	\$2,558
2031-32	091	271	ALLEY S/LA HABRA BLVD	FONDA ST	EAST END	Alley	AC	O	1	39	101	19	2,040	78	0	100	0	2" AC Grind-Overlay	\$17,483
2031-32	091	273	ALLEY S/LA HABRA BLVD	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	138	16	2,363	82	74	18	8	Type II Slurry	\$1,489
2031-32	101	300	ALLEY W/WALNUT STREET	ALLEY S/GREENWOOD AVE	HIGHLANDER AVE	Alley	AC	O	1	16	142	15	2,288	81	0	39	61	2" AC Grind-Overlay	\$19,608
2031-32	101	302	ALLEY W/WALNUT STREET	ALLEY S/HIGHLANDER AVE	FLORENCE AVE	Alley	AC	O	1	16	146	15	2,352	87	0	57	43	Type II Slurry	\$1,482
2031-32	125	363	BONNIE LN	CYPRESS ST	N/O CAPELLA	Local	AC	E	2	27	706	30	22,180	66	70	22	8	2" AC Grind-Overlay	\$94,043
2031-32	060	163	CALLE DON GUILLERMO	EUCLID ST	COUNTRY HILLS DR	Local	AAC	E	2	33	1,749	35	63,000	80	0	100	0	Type II Slurry	\$39,690
2031-32	060	414	CALLE DON GUILLERMO	COUNTRY HILLS DR	SOUTH END	Local	AC	E	2	33	153	32	8,677	70	24	73	3	Type II Slurry	\$5,467
2031-32	147	431	CAPELLA AVE	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	495	36	17,604	79	0	100	0	Type II Slurry	\$11,091
2031-32	147	432	CAPELLA AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	27	692	36	24,696	76	0	100	0	Type II Slurry	\$15,558
2031-32	150	437	CAROL ST	CITY LIMIT	LA SERNA AVE	Local	AC	E	2	13	889	30	26,920	79	39	58	3	Type II Slurry	\$16,960
2031-32	154	450	CHERI DR	REBECCA	SILLIKER	Local	AAC	E	2	08	461	26	11,830	69	16	84	0	Type II Slurry	\$7,453
2031-32	173	500	COUNTRY HILLS DR	CALLE DON JUAN	EAST END	Local	AC	E	2	33	62	32	3,259	76	6	94	0	Type II Slurry	\$2,053
2031-32	173	502	COUNTRY HILLS DR	DORWOOD AVE	EUCLID ST	Local	AC	E	2	26	511	36	17,964	79	13	87	0	Type II Slurry	\$11,317
2031-32	173	503	COUNTRY HILLS DR	WEST END	CHERRYWOOD	Local	AAC	E	2	26	383	32	14,051	92	0	100	0	Stop Gap-Preventive	\$3,513
2031-32	189	537	DORWOOD AVE	SANDLEWOOD AVE	LATCHWOOD LN	Local	AC	E	2	26	852	36	30,672	72	54	42	4	Type II Slurry	\$19,323
2031-32	199	557	EL PORTAL CT	WEST END	EL PORTAL DR	Local	AAC	E	2	09	237	30	8,660	70	8	92	0	Type II Slurry	\$5,456
2031-32	204	570	ELM ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	21	448	30	13,440	59	58	42	0	2" AC Grind-Overlay	\$56,986
2031-32	226	639	FOUNDATION AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	907	46	41,170	58	59	40	1	2" AC Grind-Overlay	\$174,561
2031-32	238	669	GRANADA CT	GRANADA DR	SOUTH END	Local	AAC	E	2	09	359	30	12,295	69	12	81	7	Type II Slurry	\$7,746

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2031-32	018	130	HACIENDA RD	EL RANCHO DR	WHITTIER BLVD	Local	AC	E	2	09	324	50	16,295	60	38	61	1	2" AC Grind-Overlay	\$69,091
2031-32	257	748	HILL RD	VIEW	BISHOP	Local	AC	E	2	27	369	31	11,939	72	71	29	0	Type II Slurry	\$7,522
2031-32	001	63	IDAHO ST	END OF PVMNT	REBECCA DR	Local	AC	C	1	08	265	17	4,505	49	55	14	31	2" AC Grind-Overlay	\$19,101
2031-32	268	781	INDUSTRY AVE	EUCLID	CYPRESS	Local	AAC	E	2	31	684	36	24,192	61	35	51	14	2" AC Grind-Overlay	\$102,574
2031-32	288	821	KIRBY DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	883	32	28,128	71	16	77	7	Type II Slurry	\$17,721
2031-32	288	826	KIRBY DR	W/END	KIRBY (NORTH CDS)	Local	AAC	E	2	13	89	32	5,315	70	0	100	0	Type II Slurry	\$3,348
2031-32	295	841	LA PLAZA DR	N END	LA HABRA BLVD	Local	AAC	E	2	09	1,455	36	52,416	69	8	87	5	Type II Slurry	\$33,022
2031-32	298	848	LA SERNA AVE	MARLEI DR	LAUNER DR	Local	AC	E	2	13	616	36	24,012	72	26	74	0	Type II Slurry	\$15,128
2031-32	058	161	LAKEVIEW AVE	MONTWOOD AVE	IMPERIAL HWY	Local	AAC	E	2	32	1,144	35	41,220	75	7	75	18	Type II Slurry	\$25,969
2031-32	308	876	LATCHWOOD LN	DORWOOD	EAST END	Local	AAC	E	2	26	267	26	8,467	59	61	29	10	2" AC Grind-Overlay	\$35,900
2031-32	319	907	LINDA AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	793	29	23,820	77	8	52	40	Type II Slurry	\$15,007
2031-32	319	908	LINDA AVE	SIERRA VISTA DR	EAST END	Local	AAC	E	2	13	347	30	12,205	71	0	100	0	Type II Slurry	\$7,689
2031-32	323	922	LOIS ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	21	785	31	25,152	78	1	99	0	Type II Slurry	\$15,846
2031-32	342	964	MARLEI DR	ENTRADA DR	LA SERNA AVE	Local	AC	E	2	13	717	32	23,694	77	9	91	0	Type II Slurry	\$14,927
2031-32	057	160	MONTWOOD AVE	EUCLID ST	LAKEVIEW AVE	Local	AC	E	2	32	2,259	35	81,360	69	64	35	1	Type II Slurry	\$51,257
2031-32	364	1019	NADA STREET	EL PORTAL	SOUTH END	Local	AAC	E	2	09	147	30	7,037	42	74	26	0	2" AC Grind-Overlay	\$29,837
2031-32	373	1044	OLINDA AVE	KIRBY DR	NORTH END	Local	AAC	E	2	13	380	30	12,925	76	8	92	0	Type II Slurry	\$8,143
2031-32	377	1055	ORANGE ST	CITY LIMIT	STEVENS AVE	Local	AAC	E	2	27	823	30	25,062	78	0	100	0	Type II Slurry	\$15,789
2031-32	377	1057	ORANGE ST	STEVENS AVE	BISHOP DR	Local	AAC	E	2	27	916	29	27,510	79	0	100	0	Type II Slurry	\$17,331
2031-32	378	1068	ORANGEWOOD ST	PARKWOOD AVE	SOUTH END	Local	AC	E	2	32	907	32	30,627	76	32	41	27	Type II Slurry	\$19,295
2031-32	388	1083	PARK PL	GREENWOOD	ROSE	Local	AC	E	2	21	299	26	7,622	74	55	45	0	Type II Slurry	\$4,802
2031-32	396	1114	PINEHURST AVE	HILLSIDE ST	ELM ST	Local	AC	E	2	21	287	29	8,640	75	0	100	0	Type II Slurry	\$5,443
2031-32	397	1120	PINEWOOD PL	SANDLEWOOD	SOUTH END	Local	AC	E	2	26	169	33	7,102	77	27	53	20	Type II Slurry	\$4,474
2031-32	427	1195	RYAN AVE	SIERRA VISTA DR	WALNUT ST	Local	AC	E	2	13	1,151	30	34,170	76	52	35	13	Type II Slurry	\$21,527
2031-32	015	76	SANDLEWOOD AVE	PATWOOD DR	EUCLID ST	Local	AC	E	2	25	1,449	35	52,200	56	71	17	12	2" AC Grind-Overlay	\$221,328
2031-32	440	1226	SIERRA VISTA DR	CITY LIMITS	LA VEREDA DR	Local	AAC	E	2	13	860	30	35,908	75	8	92	0	Type II Slurry	\$22,622
2031-32	440	1228	SIERRA VISTA DR	LA VEREDA DR	LA PRESA DR	Local	AC	E	2	13	831	35	29,952	89	0	98	2	Stop Gap-Preventive	\$7,488
2031-32	440	1229	SIERRA VISTA DR	LA PRESA DR	LINDA AVE	Local	AAC	E	2	13	596	36	21,240	72	0	82	18	Type II Slurry	\$13,381
2031-32	021	1233	SILLIKER AVE	REBECCA DR	IDAHO ST	Local	AAC	E	2	08	522	36	18,792	73	0	88	12	Type II Slurry	\$11,839
2031-32	452	1252	STARLAND DR	NORTH END	STEVENS	Local	AAC	E	2	27	516	30	17,480	75	0	100	0	Type II Slurry	\$11,012
2031-32	530	1600	STEVENS AVE	STARLAND ST	ORANGE ST	Local	AAC	E	2	27	240	30	7,020	59	57	43	0	2" AC Grind-Overlay	\$29,765
2031-32	530	1601	STEVENS AVE	EUCLID ST	STARLAND ST	Local	AAC	E	2	27	299	30	8,790	71	33	62	5	Type II Slurry	\$5,538
2031-32	469	1312	TERRAZA SANTA ELENA	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	232	32	9,891	74	33	61	6	Type II Slurry	\$6,231
2031-32	470	1313	TERRY WAY	ORANGE ST	NORTH END	Local	AAC	E	2	27	351	30	10,350	79	0	100	0	Type II Slurry	\$6,521
2031-32	487	1356	VIA LOS BONITOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	154	32	6,503	77	25	61	14	Type II Slurry	\$4,097
2031-32	488	1357	VIEW DR	AMANDA	HILL	Local	AC	E	2	27	358	31	12,598	61	60	27	13	2" AC Grind-Overlay	\$53,416
2031-32	502	1379	WEDGEWOOD LN	KIRKWOOD	COACHWOOD	Local	AAC	E	2	26	1,541	32	50,312	69	40	32	28	Type II Slurry	\$31,697
																			\$1,780,969

SECTION V

OCTA – LA HABRA PAVEMENT MANAGEMENT COMPLIANCE REPORT 2025

May 10, 2025

Mr. Andrew Luna, P.E.
Associate Civil Engineer
City of La Habra
110 E. La Habra Boulevard
La Habra, CA 90631

Subject: City of La Habra – OCTA Pavement Management Compliance Report 2025

Dear Andrew:

As part of the 2025 Update of the Pavement Management Plan (PMP) for the City of La Habra, *Bucknam Infrastructure Group, Inc.* is pleased to submit the PMP reporting required by the Orange County Transportation Authority (OCTA). This data/report will be submitted to OCTA as part of the City's required biennial PMP prior to June 30, 2025.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Pavement Management Plan Certification**
- **Quality Assurance / Quality Control (QA/QC) Plan**
- **Pavement Management Data Files (electronic La Habra.e70 file format)**
- **Pavement Management Plan that includes the following:**
 - **Average Pavement Conditions For Each Segment in the Network (PCI Report)**

The Pavement Condition Index report shows the present condition of each street in the pavement network (MPAH and Locals). In addition, the report shows the basic geometry of each street segment.
 - **Seven-year Projected PCI Under Existing Funding Levels**

This report identifies the projected PCI's based on the local agencies current funding programs. This report details the PCI projects for the entire network, MPAH roadways and Local streets.
 - **Seven-year Plan for Road Maintenance and Rehabilitation (Forecast Maintenance & Rehabilitation - FMR Report)**

The Forecast Maintenance & Rehabilitation (FMR) Report projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for all streets. This includes all scheduled projects provided by the City for fiscal years 2025 through 2032.

- **Alternative Funding Levels**

OCTA has requested two reports indicating the necessary funding to maintain the City's current weighted average PCI as well as the necessary funding to improve the weighted average PCI by one PCI point over the next seven years.

- **Backlog by Fiscal Year (re: unfunded restoration, rehabilitation and reconstruction)**

- **Percentage of total network in each of the five condition categories based on centerline mileage**

- **Local Match Reduction Reporting**

❖ In order to be eligible for Local Match Reduction of 10%, the following must be submitted:

- Measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one PCI point.
- No reduction in the overall weighted (by area) average PCI in the MPAH or local street categories
- or -
- Have road pavement conditions, for the overall network, during the previous reporting period within the highest twenty (20%) of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

These reports will be submitted to the City of La Habra as part of the biennial Pavement Management Plan that is due prior to June 30, 2025. These reports will be packaged in a way that it will be easy for staff to review.

All comments received from the City have been incorporated in the reports that follow. All of the City's issues and needs that were brought to our attention are included in the report. It has been a pleasure working with you and the City on updating your Pavement Management Plan. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.



Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services



3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

AGENCY SUBMITTAL TABLE OF CONTENTS

I.	Pavement Management Plan Certification.....	2
II.	Executive Summary	3
III.	Background	4
IV.	Current Pavement Conditions (PCI).....	7
V.	Projected Pavement Conditions (PCI) – Current Funding Levels.....	8
VI.	Alternative Funding Levels.....	9
	a. Maintain Existing Average Network PCI	9
	b. Improve Average Network PCI.....	9
VII.	Current and Projected Backlog by Year of Pavement Maintenance Needs	9
VIII.	Centerline Mileage.....	10
IX.	Percentage of Network in Each of Five Condition Categories Based on Centerline mileage	10
X.	Reduction in M2 Local Match	11
XI.	Appendix A – Seven-Year Road Maintenance and Rehabilitation Plan Based on Current or Expected Funding Level	12
XII.	Appendix B – Complete Street Listing Current Conditions.....	13
XIII.	Appendix C – GIS Digital Data	14
XIV.	Appendix D – Quality Assurance / Quality Control Plan.....	15
	• Introduction	15
	• Objectives	15
	• Structure of QA/QC Plan.....	16
	• Condition Survey Procedures.....	16
	• Accuracy Required for Data Collection	17
	• Random and Systematic Re-Inspections.....	17
	• PCI Comparison with Past Surveys.....	18
	• Inspector Qualifications and Experience	18
	• Safety Procedures	18
XV.	Appendix E – Pavement Management Data Files.....	19
XVI.	Appendix F – GIS Maps – Current Conditions.....	20



CITY OF LA HABRA PAVEMENT MANAGEMENT PLAN

- part of -

**COUNTYWIDE PAVEMENT MANAGEMENT PLAN GUIDELINES
(OCTA Guideline – April 2024)**

Prepared by: Bucknam Infrastructure Group, Inc.
Submitted to OCTA: June 30, 2025



**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

I. Pavement Management Plan Certification

The City of La Habra, CA certifies that it has a Pavement Management Plan in conformance with the criteria stated in the Orange County Transportation Authority Ordinance No. 3. This ordinance requires that a Pavement Management Plan be in place and maintained to qualify for allocation of revenues generated from renewed Measure M (M2).

The plan was developed by Bucknam Infrastructure Group, Inc. using MicroPAVER, a pavement management system conforming to American Society for Testing and Materials (ASTM) Standard D6433, and contains, at a minimum, the following elements:

- Inventory of MPAH and Local routes reviewed and updated biennially. The last update of the inventory was completed on May 2025 for the Arterial (MPAH) and May 2025 for portion of the Local streets;
- Assessment of the pavement condition for all routes in the system, updated biennially. The last field review of the pavement condition was completed in May 2025;
- Percentage of all sections of pavement needing:
 - Preventive Maintenance = 36.9%;
 - Rehabilitation = 33.3%;
 - Reconstruction = 1.2%
- Budget needs for preventive maintenance, rehabilitation and/or reconstruction of deficient sections of pavement for:
 - Current biennial period \$7,000,000;
 - Following biennial period \$7,000,000
- Funds budgeted or available for Preventive Maintenance, Rehabilitation and/or Reconstruction.
 - Current biennial period \$7,000,000;
 - Following biennial period \$7,000,000
- Backlog by year of unfunded rehabilitation, restoration and reconstruction needs (See page 9);
- The Pavement Management Plan is consistent with countywide pavement condition assessment standards as described in the OCTA Countywide Pavement Management Plan Guidelines adopted by the OCTA Board of Directors.

*An electronic copy of the Pavement Management Plan (with MicroPAVER or StreetSaver compatible files) has been or will be submitted with the certification statement. A copy of this certification is being provided to the Orange County Transportation Authority.

Submitted by:

Mr. Albert Mendoza
Name (Print)

City of La Habra
Jurisdiction

Signed

5/20/25
Date

Deputy Director of PW/City Engineer
Title



**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

II. EXECUTIVE SUMMARY

2025 UPDATE OF PAVEMENT MANAGEMENT PROGRAM (PMP)

As the City of La Habra continues to show growth with its population, demographics, infrastructure, and maintenance needs, the street network has been running parallel as new developments/annexations increase the size of La Habra's pavement infrastructure. As growth continues within the City and regionally, wear and tear on the infrastructure will occur at an ever increasing rate. Pavement aging through annual weathering and increased usage, compounded with the increased cost of performing maintenance add to the yearly operational maintenance of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

In the upcoming years as the City continues to build upon this study through future inspections and maintenance efforts, La Habra pavement data will continue to provide reliable data to enhance the PMP through detailed Orange County Transportation Authority (OCTA) Measure M2 funding analysis, City specific budgetary reporting and level of service reporting.

The La Habra PMP has been developed to assist City personnel by providing current data on the City's street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City's 2023 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all defined Master Plan of Arterial Highways (MPAH) routes (Arterials/Collectors) this past winter/spring to assist the City in being consistent with OCTA Measure M2 guidelines; additionally, we surveyed all local and alley streets that required inspection. We updated the City's unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of the City's MyRoads® and GIS Enterprise.

Bucknam Infrastructure Group reviewed the City's previous maintenance efforts, current 2024-25 and proposed FY 2025-26 projects. These street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The result of these work efforts is this report.

**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

III. BACKGROUND – CITY OF LA HABRA PMP

In late 1990, voters throughout Orange County approved a ½-cent sales tax for transportation improvements known as OC Go, formerly known as Measure M2. Funding for streets and roads are included within the sales tax and are distributed to local agencies through both formula and a competitive method. In late 2006, the renewal of OC Go was approved by voters that would continue the ½-cent sales tax for thirty additional years, starting in 2011.

The primary goal of this report is to comply with established guidelines from OCTA to ensure that field data collection and reporting efforts performed by outside consultants or local agency staff are consistent. This is required in order that funding allocations can be reviewed and based on agency comparable pavement conditions. Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

- * PMP report consistent with OCTA OC Go guidelines
- * the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;
- * a ranked list of all streets, or segments of streets, by condition within the network;
- * rehabilitation/maintenance needs of each street segment by year;
- * an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;
- * optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;
- * prediction of the life-cycle performance of the City's pavement network and each individual street section; and
- * pavement condition data and analysis presented in GIS through MyRoads® and ESRI ArcGIS

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecasted maintenance recommendations we worked with La Habra Public Works/Engineering staff in identifying unit costs for all maintenance practices used on an annual basis. Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the La Habra pavement network is \$301,183,900. This value clearly indicates that the City's pavement network is the most valuable and essential asset to La Habra. The City's use of slurry seal, AC Overlay and R&R practices are typically applied at a five year, ten year and 25 year frequency respectively subject to funding availability. These frequencies are preferred but if not implemented the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of La Habra's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City and through our discussions with City staff the conditional data found across the network clearly shows that the City has applied strong, preventive maintenance strategies over the past decade. We continue to see an annual conditional “sustaining” within the Arterial and Local street programs (PCIs within the 78 to 83 range); this is a positive result for on-going, continuous long-term management of the PMP. Pavement management involves frequent preventive maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventive maintenances (such as slurry seal, stop gap, etc.) have limited benefits. More aggressive maintenance applications have to be used. Our study has shown that several MPAH and Local overlay projects will be needed over the next five years to maintain the network’s high level of condition.

Currently, the City’s three major streets networks (Arterial/Collector, Local & Alley) hold high weighted PCI values; it is our recommendation that a proactive, common sense overlay program be assessed and scheduled over the next several fiscal years. This will ensure that the citywide weighted PCI will sustain itself and allow for routine slurry seal maintenance to continue.

Through our analysis of the La Habra PMP we have found and recommend the following items which should be considered for a proactive approach to the PMP and future management of the program:

ARTERIAL/COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The recent 2025 MPAH inspections and PCI results have indicated that the La Habra MPAH network is currently in “Good” condition (weighted avg. PCI of 82.6). The City has been able to increase and sustain this average since 2017 and continues to apply proactive and timely maintenance/rehabilitation. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 8 and its corresponding Appendix A - Forecast Maint./Rehab (FMR) report recommendations to maintain a “Good” network weighted average PCI value.

Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 82.6;
- The MPAH network consists of 16.3 miles and 5,004,355 SF of pavement;
- Currently, 28% of the MPAH network (4.6 miles) qualify for rehabilitation/reconstruction; while 37% (6.0 miles) qualify for preventive/slurry seal maintenance;
- MPAH maintenance projects should focus on maintaining the current PCI above a weighted average of 83 over the next seven years;
- Develop a proactive fiscal and planned approach to identify MPAH overlay projects based on the deterioration modeling within MicroPAVER;
- At a minimum, maintain the MPAH revenues at the \$1,213,400/yr level for the term of the CIP to

**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

generate the projects identified on page 8; and

- Perform pavement inspections on the MPAH network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

LOCAL FINDINGS AND RECOMMENDATIONS

The recent 2025 Local inspections and PCI results have indicated that the La Habra Local network is currently in "Good" condition (weighted avg. PCI of 77.2). The City has been able to increase or sustain this average every year since 2011 and continues to apply proactive and timely maintenance which has stabilized conditions at 78 to 83 PCI levels. The cyclical nature of slurry seal ROI is showing with the current lower Local PCI compared to the 2023 results. If the Section IV recommendations are followed/applied, the Local PCI will again be in the low 80's.

At a minimum, to maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 8 and its corresponding spreadsheet reports to maintain a "Good" network weighted average PCI value.

Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 77.2;
- The Local network consists of 92.9 miles and 16,562,693 SF of pavement;
- Currently, 17% of the Local network (15.5 miles) qualify for rehabilitation/reconstruction; while 53% (49.8 miles) qualify for preventive/slurry seal maintenance;
- Local maintenance projects should focus on increasing the current PCI to a weighted average of 81 over the next seven years;
- Develop a proactive fiscal and planned approach to identify local overlay projects based on the deterioration modeling within MicroPAVER;
- At a minimum, maintain the Local revenues at the \$2,006,800 ,200/yr level for the term of the CIP to generate the projects identified on page 8;
- Perform pavement inspections on the Local network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2; and
- Continue to schedule and apply Local maintenance & rehabilitations within the City's defined Local Track/Zone boundaries; our Section IV reporting demonstrates these recommendations.


2025 Citywide Pavement Management Plan – OCTA Submittal

Final Report – May 20th, 2025

IV. CURRENT PAVEMENT CONDITIONS (PCI)

Rank	Mileage	SF	2025 PCI	2023 PCI	2021 PCI	2019 PCI	2017 PCI	2015 PCI	2013 PCI	2011 PCI	2009 PCI	2006 PCI	2003 PCI
Arterial	16.3	5,004,355	82.6	83.9	83.3	83.2	78.5	74.0	75.5	75.0	74.6	74.6	74.6
Locals	92.9	16,562,693	77.2	83.8	81.9	82.3	88.4	88.9	83.5	79.2	66.7	66.7	66.7
Alleys	6.4	582,079	72.2	73.5	69.5	64.8	50.7	47.5	43.4	46.2	40.6	40.6	40.6
Citywide	115.6	22,149,127	78.3	83.6	81.9	82.1	85.6	84.0	80.1	76.4	69.3	69.3	69.3

City's weighted average PCI w/o Alleys is 78.5

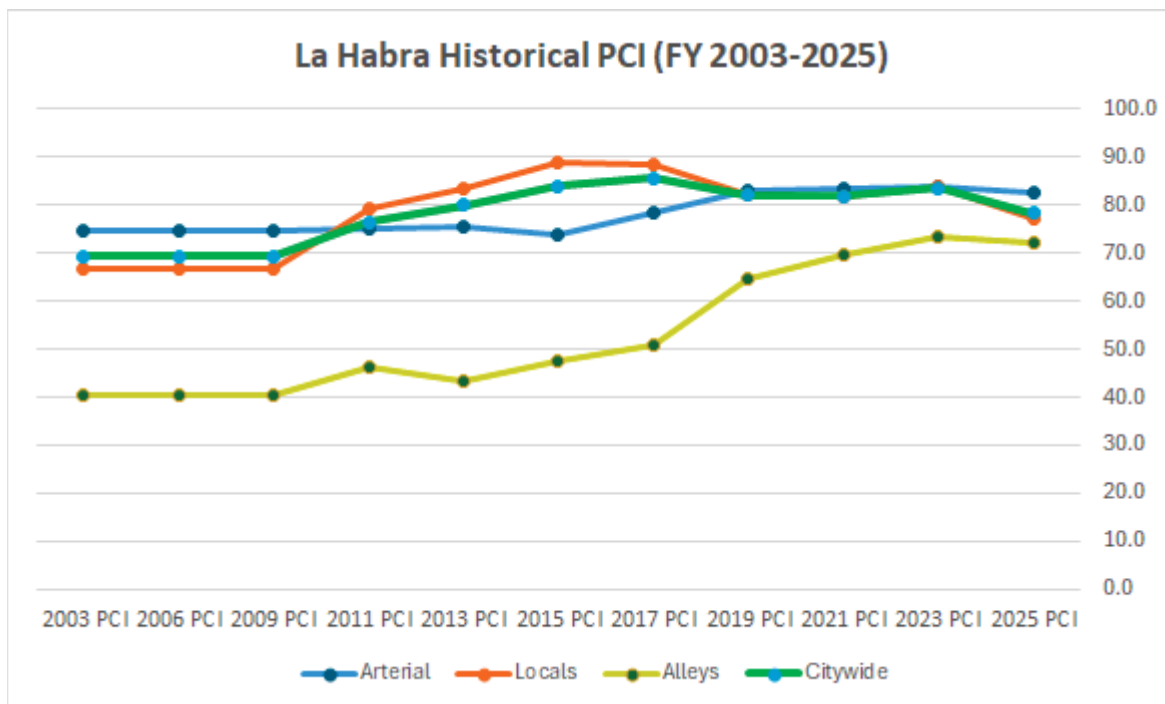


Condition	PCI Range	MPAH	Local	Alleys	Total Section Mi.	% of Network
Very Good	86-100	6.9	21.8	3.3	32.0	27.7%
Good	75-85	5.3	36.3	1.0	42.6	36.9%
Fair	60-74	3.6	27.8	0.5	31.9	27.6%
Poor	41-59	0.3	6.9	0.5	7.7	6.7%
Very Poor	0-40	0.2	0.1	1.1	1.4	1.2%
		16.3	92.9	6.4	115.6	

2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025

V. PROJECTED PAVEMENT CONDITIONS (PCI) – CURRENT FUNDING LEVELS

FY	Current Funding	Entire Network (PCI)	MPAH	Local
Current PCI		78.3	82.6	77.2
2025-26	\$3,500,000	78.8	82.9	77.9
2026-27	\$3,500,000	79.0	82.9	78.2
2027-28	\$3,500,000	79.4	83.0	78.5
2028-29	\$3,500,000	79.7	83.1	78.7
2029-30	\$3,500,000	79.9	83.1	78.9
2030-31	\$3,500,000	79.2	82.8	78.0
2031-32	\$3,500,000	78.4	82.4	78.6
	\$24,500,000			

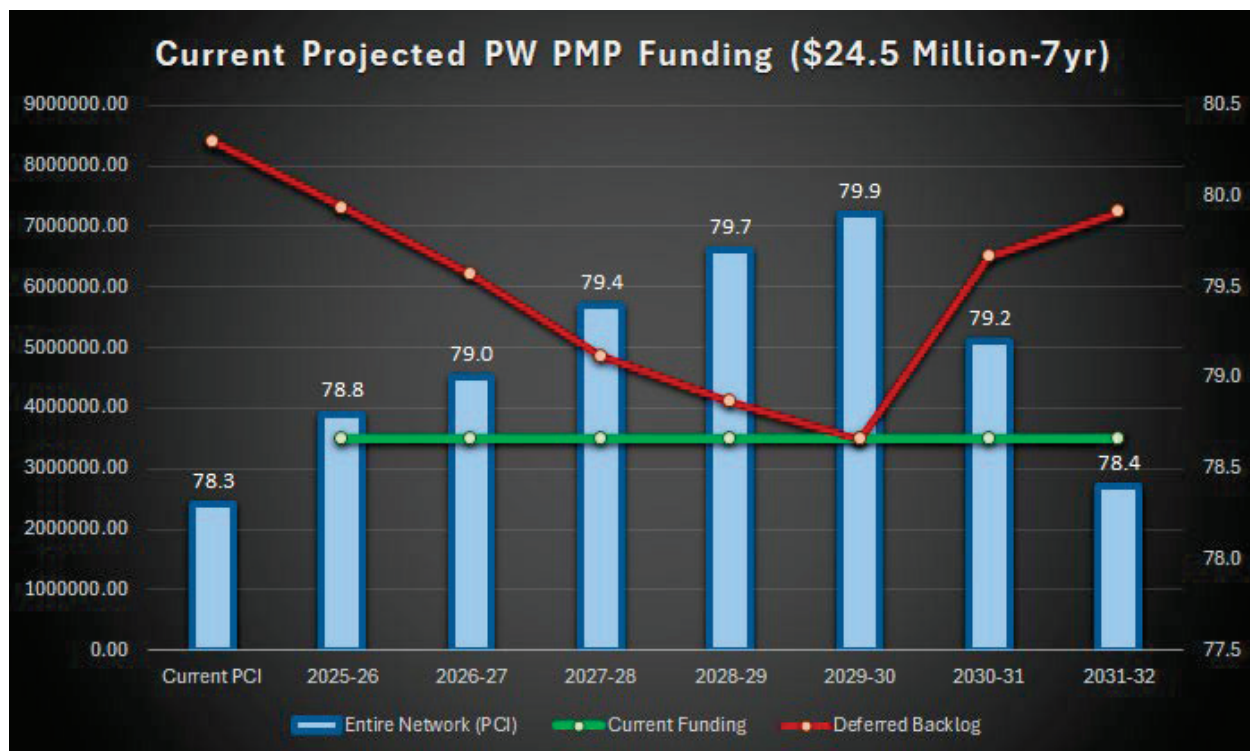

2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025

VI. ALTERNATIVE FUNDING LEVELS

Maintain Existing Average Network PCI

FY	Maintain PCI Funding	Entire Network (PCI)	MPAH	Local
Current PCI		78.3	82.6	77.2
2025-26	\$3,500,000	78.8	82.9	77.9
2026-27	\$3,500,000	79.0	82.9	78.2
2027-28	\$3,500,000	79.4	83.0	78.5
2028-29	\$3,500,000	79.7	83.1	78.7
2029-30	\$3,500,000	79.9	83.1	78.9
2030-31	\$3,500,000	79.2	82.8	78.0
2031-32	\$3,500,000	78.4	82.4	78.6
	\$24,500,000			

Based on the results of the City's Current Projected Budget the Maintain PCI results are already met and shown above.

Improve Average Network PCI

FY	Increase PCI Funding	Entire Network (PCI)	MPAH	Local
Current PCI		78.3	82.6	77.2
2025-26	\$3,500,000	78.8	82.9	77.9
2026-27	\$3,500,000	79.0	82.9	78.2
2027-28	\$3,500,000	79.4	83.0	78.5
2028-29	\$3,500,000	79.7	83.1	78.7
2029-30	\$3,889,000	80.0	83.2	79.5
2030-31	\$4,255,000	80.3	83.3	79.8
2031-32	\$4,561,000	80.5	83.4	80.3
	\$26,705,000			

VII. CURRENT AND PROJECTED BACKLOG BY YEAR OF PAVEMENT MAINTENANCE NEEDS

DEFERRED MAINTENANCE

Delaying repairs on streets where pavement conditions indicate a need generates deferred maintenance or "backlog". Deferred maintenance is work that is postponed to a future budget cycle, or until funds are available. As maintenance is deferred, the opportunity to apply preventive, life extending pavement treatments is forfeited and the ultimate cost of rehabilitation multiplies (i.e. slurry seal costs to overlay costs). By using the City's pavement maintenance applications and their associated unit costs, when a budgetary model is exercised within the PMP software the amount of deferred maintenance is calculated. Based upon the available budget applied to the model, deferred maintenance will increase or decrease.

2025 Citywide Pavement Management Plan – OCTA Submittal

Final Report – May 20th, 2025

As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiples.

In the case of La Habra, the City's current annual funding through FY 2031-32 will continue to generate an positive reduction in the amount of deferred maintenance on the network to a \$7.2 level by FY 2032.

FY	Current Funding	Maintain PCI	Increase PCI
Current	\$8,405,600	\$8,405,600	\$8,405,600
2025-26	\$7,318,000	\$7,318,000	\$7,318,000
2026-27	\$6,209,000	\$6,209,000	\$6,209,000
2027-28	\$4,858,900	\$4,858,900	\$4,858,900
2028-29	\$4,108,100	\$4,108,100	\$4,108,100
2029-30	\$3,492,300	\$3,492,300	\$3,105,600
2030-31	\$6,503,600	\$6,503,600	\$3,981,400
2031-32	\$7,242,200	\$7,242,200	\$4,264,700

VIII. CENTERLINE MILEAGE

Rank	Mileage	SF	W. PCI
Arterial	16.3	5,004,355	82.6
Locals	92.9	16,562,693	77.2
Alleys	6.4	582,079	72.2
Citywide	115.6	22,149,127	78.3

IX. PERCENTAGE OF NETWORK IN EACH OF FIVE CONDITION CATEGORIES BASED ON CENTERLINE MILES

	PCI Range	Network	Percent Area of Total Pavement	Area of Pavement (SF)	Percent Centerline Mi.	Centerline Mileage of
Very Good	(86-100)	MPAH	9.3%	2,063,947	6.0%	6.9
		Local	17.7%	3,925,862	18.9%	21.8
		Alley	1.3%	296,528	2.9%	3.3
Good	(75-85)	MPAH	7.3%	1,609,817	4.6%	5.3
		Local	29.3%	6,483,125	31.4%	36.3
		Alley	0.4%	90,122	0.8%	0.9
Fair	(60-74)	MPAH	5.2%	1,157,191	3.1%	3.6
		Local	22.5%	4,989,182	24.0%	27.8
		Alley	0.2%	42,093	0.4%	0.4
Poor	(41-59)	MPAH	0.5%	101,136	0.3%	0.3
		Local	5.2%	1,149,276	6.0%	6.9
		Alley	0.2%	52,647	0.5%	0.5
Very Poor	(0-40)	MPAH	0.3%	72,264	0.2%	0.2
		Local	0.1%	15,248	0.1%	0.1
		Alley	0.5%	100,689	1.0%	1.2
				22,149,127		115.6

**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

X. REDUCTION IN M2 LOCAL MATCH

A local agency match reduction of 10% of the eligible cost for projects submitted for consideration of funding through the M2 Comprehensive Transportation Funding Programs (CTFP) call for projects is available if the local agency either:

- a. Shows measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one Pavement Condition Index (PCI) point with no reduction in the overall weighted (by area) average PCI in the Master Plan of Arterial Highways (MPAH) or local categories:

or

- b. Have road pavement conditions during the previous reporting period, within the highest 20% of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in “good condition”.

Road conditions found through our 2025 PMP management study shows that the City **is eligible** for Local Match Reduction based on the current network weighted PCI of 78.3.

**XI. APPENDIX A – SEVEN YEAR ROAD MAINTENANCE AND REHABILITATION
PLAN BASED ON CURRENT OR EXPECTED FUNDING LEVEL**

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
Arterials / Collectors (MPAH)																			
2025-26	329	1101	MACY ST	WHITTIER BLVD	WALLACE AVE	Secondary	AC	A	2	~	869	45	40,020	100	0	0	0	2" ARHM	Funded / Ongoing
2025-26	329	1505	MACY ST	WALLACE AVE	RUSSELL ST	Secondary	AC	A	2	~	570	45	25,266	100	0	0	0	2" ARHM	
2025-26	329	937	MACY ST	RUSSELL ST	CITY LIMIT	Local	AC	E	2	01	743	35	26,784	100	0	0	0	2" ARHM	
2025-26	005	37	PALM ST	TANGLEWOOD ST	LAMBERT RD	Secondary	AC	A	4	~	1,521	60	88,855	100	0	0	0	3" AC Grind-Overlay	
2025-26	014	73	RUSSELL ST	VALLEY HOME AVE	MACY ST	Secondary	AC	A	2	~	1,757	42	79,744	79	23	55	22	Type II Slurry	\$51,834
2025-26	006	38	WHITTIER BLVD	PALM ST	CITY LIMITS	Collector	AC	A	2	~	1,262	36	45,468	79	16	80	4	Type II Slurry	\$29,554
2025-26	006	39	WHITTIER BLVD	BRIGHTON ST	PALM ST	Collector	AC	A	5	~	1,456	58	83,948	69	32	68	0	3" AC Grind-Overlay	\$293,818
2025-26	006	40	WHITTIER BLVD	HARBOR BLVD	BRIGHTON ST	Collector	AC	A	4	~	1,187	56	66,472	68	10	90	0	3" AC Grind-Overlay	\$232,652
																			\$607,858
2026-27	001	3	IDAHO ST	LA HABRA BLVD	HILLANDALE AVE	Secondary	AC	A	5	~	895	59	53,760	71	43	51	6	3" AC Grind-Overlay	\$195,686
2026-27	001	4	IDAHO ST	HILLANDALE AVE	LAMBERT RD	Secondary	AC	A	5	~	1,713	59	102,840	65	36	43	21	3" AC Grind-Overlay	\$374,338
2026-27	001	5	IDAHO ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	5	~	1,084	60	66,290	71	15	85	0	3" AC Grind-Overlay	\$241,296
2026-27	001	6	IDAHO ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	5	~	1,525	59	91,560	79	0	100	0	Type II Slurry	\$62,261
2026-27	001	65	IDAHO ST	IMPERIAL HWY	SANDLEWOOD AVE	Secondary	AC	A	5	~	1,469	60	95,625	65	10	58	32	3" AC Grind-Overlay	\$348,075
2026-27	001	66	IDAHO ST	SANDLEWOOD AVE	CITY LIMIT	Secondary	AC	A	4	~	2,549	66	168,234	76	12	80	8	Type II Slurry	\$114,399
																			\$1,336,055
2027-28	061C	100	HARBOR BLVD	CITY LIMIT	BROOKDALE AVE	Primary	AC	A	4	~	1,315	80	89,075	84	38	42	20	Type II Slurry	\$62,353
2027-28	061C	101	HARBOR BLVD	BROOKDALE AVE	WHITTIER AVE	Primary	AC	A	2	~	1,320	80	103,600	78	15	38	47	3" AC Grind-Overlay	\$392,644
2027-28	002	7	IMPERIAL HWY	W. CITY LIMIT	BRASS LANTERN DR	Primary	AC	A	6	~	1,549	64	101,136	45	47	52	1	2" ARHM	\$497,589
2027-28	002	8	IMPERIAL HWY	BRASS LANTERN DR	BEACH BLVD	Primary	AC	A	6	~	1,051	64	72,264	37	38	51	11	2" ARHM	\$355,539
																			\$1,308,125
2028-29	061C	102	HARBOR BLVD	WHITTIER AVE	FRANCIS AVE	Primary	AC	A	4	~	1,185	72	85,320	84	0	91	9	Type II Slurry	\$62,284
2028-29	061C	103	HARBOR BLVD	FRANCIS AVE	LA HABRA BLVD	Primary	AC	A	4	~	1,440	72	103,680	80	29	67	4	Type II Slurry	\$75,686
2028-29	061C	104	HARBOR BLVD	LA HABRA BLVD	SUPERIOR AVE	Primary	AC	A	6	~	1,400	72	102,000	61	32	56	12	2" ARHM	\$522,240
2028-29	061C	105	HARBOR BLVD	SUPERIOR AVE	LAMBERT RD	Primary	AC	A	6	~	1,240	78	96,720	73	20	63	17	3" AC Grind-Overlay	\$381,077
2028-29	061C	167	HARBOR BLVD	435' S/O IMPERIAL HWY	LAS RIENDAS	Major	AC	A	6	~	526	80	42,160	85	16	84	0	Type II Slurry	\$30,777
2028-29	003	13	LA HABRA BLVD	IDAHO ST	MONTE VISTA ST	Secondary	AC	A	4	~	1,309	55	70,745	69	54	38	8	3" AC Grind-Overlay	\$278,735
																			\$1,350,799
2029-30	003	10	LA HABRA BLVD	DEXFORD ST	BEACH BLVD	Secondary	AC	A	4	~	1,540	55	86,296	73	24	32	44	3" AC Grind-Overlay	\$352,951
2029-30	003	14	LA HABRA BLVD	MONTE VISTA ST	WALNUT ST	Secondary	AC	A	4	~	1,322	54	70,668	78	29	53	18	3" AC Grind-Overlay	\$289,032
2029-30	003	15	LA HABRA BLVD	WALNUT ST	EUCLID ST	Secondary	AC	A	4	~	1,318	54	70,440	83	0	95	5	Type II Slurry	\$53,534
2029-30	003	16	LA HABRA BLVD	EUCLID ST	CYPRESS ST	Secondary	AC	A	4	~	1,325	60	77,580	74	23	74	3	3" AC Grind-Overlay	\$317,302
2029-30	003	17	LA HABRA BLVD	CYPRESS ST	COLLEGE ST	Secondary	AC	A	4	~	1,318	60	76,655	77	15	64	21	3" AC Grind-Overlay	\$313,519
																			\$1,326,338
2030-31	003	18	LA HABRA BLVD	COLLEGE ST	HARBOR BLVD	Secondary	AC	A	4	~	1,249	60	70,800	71	34	50	16	3" AC Grind-Overlay	\$301,608
2030-31	003	19	LA HABRA BLVD	HARBOR BLVD	FONDA ST	Primary	AC	A	4	~	1,126	60	66,060	74	30	57	13	3" AC Grind-Overlay	\$281,416
2030-31	003	20	LA HABRA BLVD	FONDA ST	PALM ST	Primary	AC	A	4	~	1,441	60	86,460	81	0	84	16	Type II Slurry	\$68,303
2030-31	003	21	LA HABRA BLVD	PALM ST	E. CITY LIMIT	Primary	AC	A	4	~	1,304	60	78,240	83	21	42	37	Type II Slurry	\$61,810
2030-31	003	9	LA HABRA BLVD	VALLEY HOME AVE	DEXFORD ST	Secondary	AC	A	4	~	1,002	56	56,112	79	16	76	8	Type II Slurry	\$44,328
2030-31	004	25	LAMBERT RD	RAIL ROAD	HARBOR BLVD	Primary	AC	A	5	~	1,320	79	105,680	88	15	58	27	Type II Slurry	\$83,487
2030-31	004	26	LAMBERT RD	CYPRESS ST	RAILROAD	Primary	AC	A	5	~	1,320	79	105,680	89	17	69	14	Type II Slurry	\$83,487
2030-31	004	27	LAMBERT RD	EUCLID ST	CYPRESS ST	Primary	AC	A	5	~	1,411	60	86,739	86	20	50	30	Type II Slurry	\$68,524
2030-31	004	28	LAMBERT RD	WALNUT ST	EUCLID ST	Primary	AC	A	4	~	1,316	64	85,605	92	27	73	0	Type II Slurry	\$67,628
2030-31	004	29	LAMBERT RD	MONTE VISTA ST	WALNUT ST	Primary	AC	A	2	~	1,236	65	79,345	93	36	64	0	Type II Slurry	\$62,683
2030-31	004	30	LAMBERT RD	IDAHO ST	MONTE VISTA ST	Primary	AC	A	4	~	1,310	64	91,850	93	0	100	0	Type II Slurry	\$72,562
																			\$1,195,835
2031-32	018	89	HACIENDA RD	WHITTIER BLVD	NORTH CITY LIMIT	Secondary	AAC	A	4	~	2,324	45	111,240	91	62	21	17	Type II Slurry	\$91,217
2031-32	0618	109	HARBOR BLVD EAST SIDE	LAS RIENDAS DR	LAS PALMAS DR	Major	AC	A	2	~	1,075	32	34,400	80	11	58	31	Type II Slurry	\$28,208
2031-32	0618	110	HARBOR BLVD EAST SIDE	LAS PALMAS DR	450' S/O LAS PALMAS DR	Major	AC	A	2	~	450	32	14,400	86	0	100	0	Type II Slurry	\$11,808
2031-32	061	106	HARBOR BLVD WEST SIDE	LAMBERT RD	EDWARDS DR	Major	AC	A	3	~	1,289	32	41,248	84	15	82	3	Type II Slurry	\$33,823
2031-32	061	107	HARBOR BLVD WEST SIDE	EDWARDS DR	IMPERIAL HWY	Major	AC	A	3	~	1,338	16	21,408	85	19	64	17	Type II Slurry	\$17,555
2031-32	061	108	HARBOR BLVD WEST SIDE	IMPERIAL HWY	435' S/O IMPEIRAL HWY	Major	AC	A	2	~	434	32	12,820	66	26	74	0	Type II Slurry	\$10,512
2030-31	004	31	LAMBERT RD	WHITEBOOK DR	IDAHO ST	Primary	AC	A	4	~	1,024	64	66,625	81	50	50	0	3" AC Grind-Overlay	\$295,149
2030-31	004	33	LAMBERT RD	MARTINEZ DR	BEACH BLVD	Primary	AC	A	5	~	1,294	70	98,960	85	28	62	10	3" AC Grind-Overlay	\$438,393
2030-31	004	34	LAMBERT RD	CITY LIMITS	MARTINEZ DR	Primary	AC	A	6	~	1,246	79	99,760	81	34	66	0	3" AC Grind-Overlay	\$441,937
																			\$1,368,601
Locals																			
2025-26	065	1716	ALLEY E/BEACH BLVD	SAN JOSE AVE	ALLEY N/SAN JOSE	Alley	AC	O	1	10	179	19	3,600	11	64	16	20	AC Recon	\$28,620
2025-26	065	1717	ALLEY E/BEACH BLVD	ALLEY S/SAN JOSE	SAN JOSE AVE	Alley	AC	O	1	10	428	19	8,580	14	47	10	43	AC Recon	\$68,211
2025-26	078	222	ALLEY N/GREENWOOD AVE	E/O HAZEL	MID ALLEY E/HAZEL-W/HILLSIDE	Alley	AC	O	1	21	136	12	1,781	45	60	14	26	2" AC Grind-Overlay	\$12,057
2025-26	536	1718	ALLEY N/SAN JOSE AVE	BEACH BLVD	ALLEY E/BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	15	70	25	5	AC Recon	\$22,260
2025-26	091	268	ALLEY S/LA HABRA BLVD	DEXFORD ST	MISSION ST	Alley	AC	O	1	03	1,013	19	20,280	12	68	26	6	AC Recon	\$161,226
2025-26	091	276	ALLEY S/LA HABRA BLVD	OAKLAND ST	DEXFORD ST	Alley	AC	O	1	03	446	19	8,940	33	62	28	10	2" AC Grind-Overlay	\$60,524
2025-26	091	277	ALLEY S/LA HABRA BLVD	W/END	W/O MONTE VISTA	Alley	AC	O	1	15	211	19	4,240	11	82	12	6	AC Recon	\$33,708

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2025-26	537	1719	ALLEY S/SAN JOSE AVE	ALLEY E/BEACH BLVD	BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	38	69	31	0	2" AC Grind-Overlay	\$18,956
2025-26	093	285	ALLEY S/WHITTIER BLVD	HAZEL ST	ALLEY E/HAZEL ST	Alley	AC	O	1	21	146	19	2,940	18	46	14	40	AC Recon	\$23,373
2025-26	103	315	ALPINE ST	W/O BEDFORD	N/O SUPERIOR	Local	AAC	E	2	39	1,409	31	45,120	74	0	98	2	Type II Slurry	\$22,560
2025-26	109	329	ASHLEY CIR	NORTH END	HILLANDALE AVE	Local	AC	E	2	10	246	32	9,447	49	49	28	23	2" AC Grind-Overlay	\$31,647
2025-26	116	340	BAJA AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	468	30	15,615	78	29	49	22	Type II Slurry	\$7,808
2025-26	119	344	BEDFORD ST	LA HABRA BLVD	ALPINE ST	Local	AAC	E	2	39	207	41	8,736	72	0	100	0	Type II Slurry	\$4,368
2025-26	119	345	BEDFORD ST	ALPINE ST	SUPERIOR AVE	Local	AAC	E	2	39	1,473	31	47,168	72	28	72	0	Type II Slurry	\$23,584
2025-26	119	346	BEDFORD ST	ESSEX	FRANCIS AVE	Local	AC	E	2	38	742	29	22,290	93	0	100	0	Stop Gap-Preventive	\$5,573
2025-26	133	388	BRUCE LN	WEST END	W/O OAKLAND	Local	AAC	E	2	03	111	30	4,905	72	44	56	0	Type II Slurry	\$2,453
2025-26	162	462	CLIFTON ST	OLIVE AVE	LAMBERT RD	Local	AAC	E	2	30	826	36	29,736	76	3	78	19	Type II Slurry	\$14,868
2025-26	162	463	CLIFTON ST	LAMBERT RD	ROSECREST AVE	Local	AAC	E	2	31	496	30	14,880	81	23	77	0	Type II Slurry	\$7,440
2025-26	167	477	COLFAX ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	1,802	32	57,376	75	0	98	2	Type II Slurry	\$28,688
2025-26	168	478	COLLEEN ST	LA HABRA BLVD	LORELLA	Local	AAC	E	2	10	495	36	17,388	68	45	55	0	Type II Slurry	\$8,694
2025-26	176	506	DARBY CT	WEST END	CLIFTON	Local	AAC	E	2	30	183	26	6,333	51	63	25	12	2" AC Grind-Overlay	\$21,216
2025-26	028	125	DEXFORD DR	GREGORY LN	FOXDALE DR	Local	AAC	E	2	02	877	35	31,608	75	56	44	0	Stop Gap-Preventive	\$7,902
2025-26	184	135	DEXFORD ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	984	35	35,460	71	60	40	0	Type II Slurry	\$17,730
2025-26	203	569	ELECTRIC AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	30	38,610	74	25	60	15	Type II Slurry	\$19,305
2025-26	207	577	EMERY AVE	PALM ST	EAST END	Local	AAC	E	2	39	666	36	25,456	67	46	45	9	Type II Slurry	\$12,728
2025-26	009	58	EUCLID ST	NORTH CITY LIMITS	AMANDA DR	Local	AAC	C	2	27	2,240	36	67,603	100	0	0	0	2" AC Grind-Overlay	Funded / Ongoing
2025-26	009	165	EUCLID ST	AMANDA DR	WHITTIER BLVD	Local	AAC	C	2	27	424	35	15,300	100	0	0	0	2" AC Grind-Overlay	
2025-26	220	610	FIFTH AVE	MONTE VISTA ST	MCFADDEN ST	Local	AAC	E	2	18	657	24	15,624	60	64	29	7	2" AC Grind-Overlay	\$52,340
2025-26	223	623	FLORENCE AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,284	26	32,916	72	47	53	0	Type II Slurry	\$16,458
2025-26	223	625	FLORENCE AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,258	26	32,396	79	63	34	3	Type II Slurry	\$16,198
2025-26	223	628	FLORENCE AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	30	13,590	80	27	73	0	Type II Slurry	\$6,795
2025-26	223	629	FLORENCE AVE	LYDIA ST	MONTE VISTA ST	Local	AC	E	2	14	493	30	14,430	57	53	26	21	2" AC Grind-Overlay	\$48,341
2025-26	223	633	FLORENCE AVE	WEST END	MCPHERSON ST	Local	AC	E	2	35	310	30	9,120	75	17	83	0	Type II Slurry	\$4,560
2025-26	012	61	FONDA ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	2,014	32	64,192	76	1	99	0	Type II Slurry	\$32,096
2025-26	012	635	FONDA ST	CONCOURSE	WHITTIER (FRONTAGE)	Local	AC	C	2	37	1,072	29	32,190	94	0	100	0	Stop Gap-Preventive	\$8,048
2025-26	227	640	FOURTH AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	18	1,285	36	45,900	72	47	43	10	Type II Slurry	\$22,950
2025-26	227	642	FOURTH AVE	WEST END	CYPRESS ST	Local	AAC	E	2	30	642	26	16,536	55	63	31	6	2" AC Grind-Overlay	\$55,396
2025-26	256	740	HIGHLANDER AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	16	1,283	26	39,226	74	27	73	0	Type II Slurry	\$19,613
2025-26	256	741	HIGHLANDER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,278	40	50,200	74	12	79	9	Type II Slurry	\$25,100
2025-26	040	141	HILLANDALE AVE	DEANNA ST	CDS E/ EUNICE CIR	Local	AC	E	2	10	759	36	31,035	65	65	34	1	2" AC Grind-Overlay	\$103,967
2025-26	040	181	HILLANDALE AVE	CDS E/ EUNICE CIR	IDAHO ST	Local	AC	E	2	10	725	36	25,315	46	72	15	13	2" AC Grind-Overlay	\$84,805
2025-26	040	753	HILLANDALE AVE	WEST END	DEANNA ST	Local	AC	E	2	10	776	36	29,731	54	67	21	12	2" AC Grind-Overlay	\$99,599
2025-26	261	1520	HILLSIDE ST	HILLSIDE CT	N END	Local	AAC	E	2	20	1,165	35	38,420	71	40	41	19	Type II Slurry	\$19,210
2025-26	261	759	HILLSIDE ST	WHITTIER BLVD	GREENWOOD	Local	AC	E	2	21	786	36	27,356	67	40	58	2	Type II Slurry	\$13,678
2025-26	261	761	HILLSIDE ST	HILLSIDE CT	WHITTIER BLVD	Local	AAC	E	2	20	480	36	14,255	80	0	89	11	Type II Slurry	\$7,128
2025-26	286	814	KINGSTON DR	NORTH END	LA PRESA	Local	AAC	E	2	20	447	36	18,637	81	0	100	0	Type II Slurry	\$9,319
2025-26	296	843	LA PRESA DR	HILLSIDE	KINGSTON	Local	AAC	E	2	20	224	33	7,650	80	0	100	0	Type II Slurry	\$3,825
2025-26	296	844	LA PRESA DR	SIERRA VISTA	WALNUT ST	Local	AAC	E	2	13	1,144	30	33,960	90	0	99	1	Stop Gap-Preventive	\$8,490
2025-26	296	845	LA PRESA DR	WALNUT ST	HILLSIDE ST	Local	AC	E	2	20	635	36	22,680	65	0	99	1	2" AC Grind-Overlay	\$75,978
2025-26	317	903	LIBERTY ST	OLIVE AVE	SOUTH END	Local	AAC	E	2	30	435	26	13,105	66	30	50	20	2" AC Grind-Overlay	\$43,902
2025-26	326	927	LORELLA AVE	DEANNA ST	IDAHO ST	Local	AAC	E	2	10	1,428	36	51,192	77	9	91	0	Type II Slurry	\$25,596
2025-26	327	932	LYDIA ST	HIGHLANDER AVE	SOUTH END	Local	AC	E	2	14	963	30	30,685	71	44	45	11	Type II Slurry	\$15,343
2025-26	337	950	MARIAN ST	LA HABRA BLVD	WALKER AVE	Local	AAC	E	2	15	1,077	30	33,060	76	24	52	24	Type II Slurry	\$16,530
2025-26	337	951	MARIAN ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	E	2	14	1,277	30	39,060	61	43	36	21	2" AC Grind-Overlay	\$130,851
2025-26	338	954	MARIE ST	OAKLAND	STORY	Local	AAC	E	2	03	719	31	23,040	76	30	70	0	Type II Slurry	\$11,520
2025-26	339	955	MARIN ST	LORELLA AVE	HILLANDALE AVE	Local	AC	E	2	10	548	36	20,478	63	59	41	0	2" AC Grind-Overlay	\$68,601
2025-26	038	139	MARIPOSA ST	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,100	36	36,420	74	46	52	2	Type II Slurry	\$18,210
2025-26	038	146	MARIPOSA ST	LAMBERT RD	SHEFFIELD DR	Local	AAC	E	2	05	965	36	34,524	81	0	20	80	Type II Slurry	\$17,262
2025-26	346	970	MCFADDEN ST	NORTH END	SOUTH END	Local	AAC	E	2	18	541	30	21,484	78	12	88	0	Type II Slurry	\$10,742
2025-26	041	142	MERCED AVE	BEACH BLVD	EAST END	Local	AAC	E	2	10	1,280	36	50,580	70	48	33	19	Type II Slurry	\$25,290
2025-26	041	996	MERCED AVE	MARIPOSA ST	BEACH BLVD	Local	AC	E	2	04	512	36	18,000	75	42	45	13	Type II Slurry	\$9,000
2025-26	035	136	MISSION ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	894	35	32,220	74	41	55	4	Type II Slurry	\$16,110
2025-26	013	67	MONTE VISTA ST	WHITTIER BLVD	HIGHLANDER AVE	Local	AAC	E	2	16	1,316	39	52,680	66	56	26	18	2" AC Grind-Overlay	\$176,478
2025-26	013	68	MONTE VISTA ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AAC	C	2	16	1,289	40	49,084	70	59	17	24	Type II Slurry	\$24,542
2025-26	362	1015	MOUNTAIN VIEW AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	37	47,397	69	36	53	11	Type II Slurry	\$23,699
2025-26	362	1016	MOUNTAIN VIEW AVE	LAMBERT RD	WALNUT ST	Local	AC	E	2	18	713	37	27,631	57	66	33	1	2" AC Grind-Overlay	\$92,564
2025-26	368	1027	NORMA ST	LORELLA	HILLANDALE	Local	AAC	E	2	10	613	36	21,852	75	34	66	0	Type II Slurry	\$10,926
2025-26	372	1034	OAKLAND DR	DEXFORD ST	STORY AVE	Local	AAC	E	2	03	1,172	36	41,760	71	47	53	0	Type II Slurry	\$20,880
2025-26	372	1036	OAKLAND DR	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,014	36	35,640	73	31	62	7	Type II Slurry	\$17,820
2025-26	519	1417	OLIVE AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,415	35	45,025	74	7	72	21	Type II Slurry	\$22,513
2025-26	383	1077	PAINTER ST	OAKLAND	STORY AVE	Local	AAC	E	2	03	600	32	19,008	75	31	66	3	Type II Slurry	\$9,504
2025-26	403	1128	RAYMOND ST	OAKLAND	STORY	Local	AAC	E	2	03	605	32	19,168	73	37	61	2	Type II Slurry	\$9,584
2025-26	403	1129	RAYMOND ST	WILSHIRE	BLAKE	Local	AAC	E	2	04	547	32	18,062	80	57	43	0	Type II Slurry	\$9,031

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2025-26	430	1200	SAN JOSE AVE	BEACH BLVD	MARIN ST	Local	AC	E	2	10	583	36	20,556	62	43	57	0	2" AC Grind-Overlay	\$68,863
2025-26	430	1201	SAN JOSE AVE	MISSION ST	BEACH BLVD	Local	AAC	E	2	03	493	36	17,316	74	0	90	10	Type II Slurry	\$8,658
2025-26	439	1224	SIDON AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	741	31	23,744	90	12	88	0	Stop Gap-Preventive	\$5,936
2025-26	450	1250	STANFORD ST	OAKLAND	STORY	Local	AAC	E	2	03	565	32	18,112	74	31	56	13	Type II Slurry	\$9,056
2025-26	457	1268	STORY AVE	MISSION ST	EAST END	Local	AAC	E	2	03	451	30	15,325	68	41	59	0	Type II Slurry	\$7,663
2025-26	457	1269	STORY AVE	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,058	35	38,124	68	38	44	18	Type II Slurry	\$19,062
2025-26	457	1270	STORY AVE	CITY LIMITS	DEXFORD ST	Local	AAC	E	2	03	989	36	37,751	77	35	65	0	Type II Slurry	\$18,876
2025-26	043	1298	SUPERIOR AVE	BEDFORD ST	EAST END	Local	AAC	E	2	39	930	32	30,370	75	12	88	0	Type II Slurry	\$15,185
2025-26	043	144	SUPERIOR AVE	HARBOR BLVD	BEDFORD ST	Local	AAC	E	2	39	464	33	15,345	73	0	86	14	Type II Slurry	\$7,673
2025-26	471	1316	THIRD AVE	MARIAN ST	EAST END	Local	AAC	E	2	15	165	26	5,540	79	29	71	0	Type II Slurry	\$2,770
2025-26	475	1325	UNION AVE	WALL ST	BLAKE ST	Local	AC	E	2	04	634	31	20,320	77	25	75	0	Type II Slurry	\$10,160
2025-26	475	1326	UNION AVE	CITY LIMIT	WALL ST	Local	AC	E	2	04	113	32	3,424	78	9	91	0	Type II Slurry	\$1,712
2025-26	476	1327	URELL DR	LA SERNA AVE	LA PRESA DR	Local	AAC	E	2	20	474	25	12,350	73	18	81	1	Type II Slurry	\$6,175
2025-26	489	1358	VIRGINIA ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	14	751	30	22,350	74	30	63	7	Type II Slurry	\$11,175
2025-26	489	1359	VIRGINIA ST	HIGHLANDER AVE	HEATHER AVE	Local	AC	E	2	14	525	29	15,780	78	12	88	0	Type II Slurry	\$7,890
2025-26	492	1362	WALKER AVE	MARIAN	EAST END	Local	AAC	E	2	15	218	30	7,040	75	33	65	2	Type II Slurry	\$3,520
2025-26	506	1390	WILGAR DR	EAST END	LORELLA	Local	AC	E	2	10	401	30	14,480	77	49	51	0	Type II Slurry	\$7,240
2025-26	508	1397	WILSHIRE AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	979	35	35,280	79	32	68	0	Type II Slurry	\$17,640
2025-26	508	1402	WILSHIRE AVE	WEST END	WALL ST	Local	AAC	E	2	04	148	35	5,364	91	16	84	0	Stop Gap-Preventive	\$1,341
																			\$2,456,480
2026-27	071	211	ALLEY E/HAZEL-W/HILLSID	S/O ALLEY S/WHITTIER	N/O ALLEY N/GREENWOOD	Alley	PCC	O	1	21	481	10	4,810	19	69	4	27	AC Recon	\$39,779
2026-27	074	216	ALLEY E/WALNUT STREET	ALLEY N/WALNUT STREET	ALLY N/GREENWOOD AVE	Alley	AC	O	1	21	372	10	4,103	52	36	51	13	2" AC Grind-Overlay	\$28,885
2026-27	078	221	ALLEY N/GREENWOOD AVE	E/O ALLEY E/O WALNUT	W/O HAZEL	Alley	AC	O	1	21	162	15	2,608	47	39	61	0	2" AC Grind-Overlay	\$18,360
2026-27	078	223	ALLEY N/GREENWOOD AVE	E/O WALNUT	E/O ALLEY E/WALNUT-W/HAZEL	Alley	AC	O	1	21	166	15	2,672	39	64	36	0	2" AC Grind-Overlay	\$18,811
2026-27	078	224	ALLEY N/GREENWOOD AVE	MID ALLEY E/HAZEL-W/HILLSIDE	W/O HILLSIDE	Alley	PCC	O	1	21	150	10	1,500	21	83	0	17	AC Recon	\$12,405
2026-27	079	225	ALLEY N/INDUSTRY AVE	E/O EUCLID	W/O CYPRESS	Alley	AC	O	1	31	724	19	14,500	42	64	31	5	2" AC Grind-Overlay	\$102,080
2026-27	080	228	ALLEY N/LA HABRA BLVD	DEXFORD ST	E/END	Alley	AC	O	1	02	275	19	5,520	50	21	53	26	2" AC Grind-Overlay	\$38,861
2026-27	080	231	ALLEY N/LA HABRA BLVD	WEST END	DEXFORD ST	Alley	AC	O	1	02	226	19	4,540	50	45	55	0	2" AC Grind-Overlay	\$31,962
2026-27	081	232	ALLEY N/LAMBERT	N/END	W/O MOUNTAIN VIEW	Alley	AC	O	1	18	105	19	2,120	27	79	21	0	AC Recon	\$17,532
2026-27	083	236	ALLEY N/WHITTIER BLVD	KIRBY DR	WALNUT ST	Alley	AC	O	1	13	484	19	9,700	14	55	23	22	AC Recon	\$80,219
2026-27	083	237	ALLEY N/WHITTIER BLVD	WEST END	KIRBY DR	Alley	AC	O	1	13	167	19	3,360	31	44	53	3	2" AC Grind-Overlay	\$23,654
2026-27	084	243	ALLEY S/ERNA	SUNSET ST	ALLEY W/HARBOR BL	Alley	AC	O	1	35	308	15	4,635	93	0	100	0	Type II Slurry	\$2,410
2026-27	087	252	ALLEY S/GREENWOOD AVE	ALLEY W/LOIS ST	EAST END	Alley	AC	O	1	21	122	20	2,440	55	0	100	0	2" AC Grind-Overlay	\$17,178
2026-27	087	253	ALLEY S/GREENWOOD AVE	HAZEL ST	ALLEY W/LOIS ST	Alley	AC	O	1	21	164	19	3,300	45	44	53	3	2" AC Grind-Overlay	\$23,232
2026-27	087	254	ALLEY S/GREENWOOD AVE	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	321	19	6,440	44	66	33	1	2" AC Grind-Overlay	\$45,338
2026-27	090	258	ALLEY S/KENRICH COURT	W/END	W/O CHANTRY	Alley	AC	O	1	02	510	14	7,665	67	34	49	17	2" AC Grind-Overlay	\$53,962
2026-27	092	280	ALLEY S/STEARNS AVENUE	SUNSET ST	EAST END	Alley	AC	O	1	35	343	14	3,509	87	0	100	0	Type II Slurry	\$1,825
2026-27	093	284	ALLEY S/WHITTIER BLVD	ALLEY E/HAZEL ST	HILLSIDE ST	Alley	AC	O	1	21	121	12	1,586	12	48	14	38	AC Recon	\$13,116
2026-27	093	286	ALLEY S/WHITTIER BLVD	W/O ALLEY E/BEACH	W/O RIDGEWAY	Alley	AC	O	1	09	162	19	3,260	99	0	100	0	Stop Gap-Preventive	\$815
2026-27	099	296	ALLEY W/LOIS STREET	ALLEY S/GREENWOOD ST	ROSE AVE	Alley	AC	O	1	21	168	19	3,380	43	67	20	13	2" AC Grind-Overlay	\$23,795
2026-27	099	297	ALLEY W/LOIS STREET	ROSE AVE	ALLEY S/ROSE AVE	Alley	AC	O	1	21	156	19	3,140	36	63	8	29	2" AC Grind-Overlay	\$22,106
2026-27	102	307	ALLEY W/O HARBOR BLVD	ERNA AVE	LA HABRA BLVD	Alley	AC	O	1	35	343	19	6,880	86	0	100	0	Type II Slurry	\$3,578
2026-27	134	389	BUENA VISTA AVE	W END	LA CASA AVE	Local	AC	E	2	19	1,210	36	43,128	53	71	17	12	2" AC Grind-Overlay	\$150,085
2026-27	157	453	CHESHAM AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	895	36	32,754	53	42	58	0	2" AC Grind-Overlay	\$113,984
2026-27	182	514	DERRY ST	RYE AVE	N/O LAS LOMAS	Local	AC	E	2	19	520	36	19,220	63	62	19	19	2" AC Grind-Overlay	\$66,886
2026-27	182	516	DERRY ST	BUENA VISTA AVE	CHESHAM AVE	Local	AC	E	2	19	480	36	17,780	65	68	31	1	Type II Slurry	\$9,246
2026-27	190	542	DOVER DR	WALNUT ST	DURHAM	Local	AC	E	2	24	459	35	16,560	45	82	18	0	2" AC Grind-Overlay	\$57,629
2026-27	191	543	DURHAM ST	DOVER DR	LAS LOMAS AVE	Local	AC	E	2	24	817	36	29,196	71	51	30	19	Type II Slurry	\$15,182
2026-27	198	556	EL NIDO ST	NORTH END	ROSECREST	Local	AAC	E	2	24	246	30	8,955	69	0	99	1	Type II Slurry	\$4,657
2026-27	208	578	ENCINITAS ST	LAS LOMAS DR	KEENE DR	Local	AC	E	2	24	698	36	24,912	77	37	47	16	Type II Slurry	\$12,954
2026-27	214	602	EXETER AVE	DERRY ST	NASHUA ST	Local	AC	E	2	19	910	26	23,507	76	13	87	0	Type II Slurry	\$12,224
2026-27	215	603	EXETER CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	74	12	88	0	Type II Slurry	\$3,227
2026-27	264	775	HOLLIS CIR	WALNUT ST	EAST END	Local	AC	E	2	24	247	26	7,947	71	29	71	0	Type II Slurry	\$4,132
2026-27	270	783	IPSWICH ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	83	0	73	27	Type II Slurry	\$3,619
2026-27	273	787	JAFFREY ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	79	20	22	58	Type II Slurry	\$3,619
2026-27	281	802	KEENE DR	WALNUT ST	EUCLID ST	Local	AC	E	2	24	1,525	36	54,252	76	43	49	8	Type II Slurry	\$28,211
2026-27	281	807	KEENE DR	LAS LOMAS DR	WALNUT ST	Local	AC	E	2	19	746	39	28,626	64	54	40	6	Type II Slurry	\$14,886
2026-27	292	835	LA CASA AVE	BUENA VISTA AVE	DEL SUR AVE	Local	AC	E	2	19	717	36	23,424	64	68	32	0	2" AC Grind-Overlay	\$81,516
2026-27	303	857	LADERA TERR	LAS RIENDAS	SOUTH END	Local	AC	E	2	32	524	26	10,677	72	35	65	0	Type II Slurry	\$5,552
2026-27	047	149	LAS LOMAS DR	IDAHO ST	DERRY ST	Local	AAC	E	2	19	1,514	35	54,540	60	0	100	0	Type II Slurry	\$28,361
2026-27	047	151	LAS LOMAS DR	WALNUT ST	EUCLID ST	Local	AC	E	2	24	1,320	36	47,088	64	67	24	9	2" AC Grind-Overlay	\$163,866
2026-27	307	874	LAS RIENDAS DR	HARBOR BLVD	CITY LIMITS	Local	AC	E	2	32	723	36	26,028	73	36	64	0	Type II Slurry	\$13,535
2026-27	367	1025	NASHUA ST	RYE AVE	LAS LOMAS DR	Local	AC	E	2	19	447	35	16,128	70	43	32	25	Type II Slurry	\$8,387
2026-27	386	1081	PARK AVE	BUENA VISTA	SOUTH END	Local	AC	E	2	19	240	27	7,824	49	28	68	4	2" AC Grind-Overlay	\$27,228
2026-27	423	1180	ROSECREST AVE	LAMBERT RD	EUCLID ST	Local	AC	E	2	24	1,001	30	31,280	70	0	100	0	Type II Slurry	\$16,266
2026-27	429	1199	RYE CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	70	50	50	0	Type II Slurry	\$3,227
2026-27	431	1203	SANDOWN ST	NORTH END	CHESHAM	Local	AC	E	2	19	188	26	6,413	65	36	36	28	Type II Slurry	\$3,335

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2026-27	446	1245	SONORA AVE	WEST END	LA CASA	Local	AC	E	2	19	355	27	10,815	48	40	60	0	2" AC Grind-Overlay	\$37,636
																			\$1,509,347
2027-28	076	1706	ALLEY N/ERNA STREET	WILLOW ST	EAST END	Alley	AC	O	1	16	335	16	3,965	81	6	83	11	Type II Slurry	\$2,141
2027-28	076	1708	ALLEY N/ERNA STREET	WEST END	ALLEY W/O WALNUT ST	Alley	AC	O	1	16	240	20	4,080	82	0	100	0	Type II Slurry	\$2,203
2027-28	084	240	ALLEY S/ERNA	LEORA ST	WALNUT ST	Alley	AC	O	1	16	454	19	9,100	63	32	26	42	2" AC Grind-Overlay	\$66,612
2027-28	084	241	ALLEY S/ERNA	WILLOW ST	ALLEY W/LEORA ST	Alley	AC	O	1	16	359	14	5,400	15	55	22	23	AC Recon	\$46,440
2027-28	098	294	ALLEY W/LEORA STREET	ALLEY S/ERNA ST	LA HABRA BL	Alley	AC	O	1	16	145	9	1,460	13	77	23	0	AC Recon	\$12,556
2027-28	098	295	ALLEY W/LEORA STREET	ERNA ST	ALLEY S/ERNA ST	Alley	AC	O	1	16	153	9	1,540	15	41	14	45	AC Recon	\$13,244
2027-28	101	301	ALLEY W/WALNUT STREET	ALLEY S/HEATHER AVE	ERNA ST	Alley	AC	O	1	16	141	15	2,272	82	0	100	0	Type II Slurry	\$1,227
2027-28	101	305	ALLEY W/WALNUT STREET	HEATHER AVE	ALLEY S/HEATHER AVE	Alley	AC	O	1	16	157	15	2,528	60	48	52	0	2" AC Grind-Overlay	\$18,505
2027-28	158	455	CHESTNUT ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	742	30	22,080	76	0	55	45	Type II Slurry	\$11,923
2027-28	158	456	CHESTNUT ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	35	503	30	14,910	75	19	81	0	Type II Slurry	\$8,051
2027-28	022	114	CITRUS DR	WHITTIER BLVD	RYAN AVE	Local	AAC	E	2	13	773	29	26,156	56	30	67	3	2" AC Grind-Overlay	\$94,685
2027-28	022	115	CITRUS DR	RYAN AVE	CITY LIMITS 140' N/ENTRADA DR	Local	AAC	E	2	13	1,763	31	55,664	63	36	58	6	2" AC Grind-Overlay	\$201,504
2027-28	169	479	COLLEGE ST	COLLEGE ST	THIRD AVE	Local	AAC	E	2	36	1,005	33	33,165	67	55	31	14	2" AC Grind-Overlay	\$120,057
2027-28	169	480	COLLEGE ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	638	32	18,484	83	0	100	0	Type II Slurry	\$9,981
2027-28	169	484	COLLEGE ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	664	38	25,232	69	33	43	24	Type II Slurry	\$13,625
2027-28	169	485	COLLEGE ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	626	37	23,826	67	40	44	16	2" AC Grind-Overlay	\$86,250
2027-28	525	1509	CORTO WAY	WHITTIER BLVD	SOUTH END	Local	AAC	E	2	09	250	26	8,295	66	34	66	0	2" AC Grind-Overlay	\$30,028
2027-28	210	582	ERNA AVE	COLLEGE ST	ALLEY W/HARBOR BLVD	Local	AC	E	2	35	996	30	29,910	85	0	100	0	Type II Slurry	\$16,151
2027-28	210	583	ERNA AVE	WILLOW ST	WALNUT ST	Local	AC	E	2	16	1,000	32	31,616	47	66	26	8	2" AC Grind-Overlay	\$114,450
2027-28	210	586	ERNA AVE	WALNUT ST	HAZEL ST	Local	AAC	E	2	21	319	30	9,600	89	0	100	0	Stop Gap-Preventive	\$2,400
2027-28	210	587	ERNA AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	936	30	27,780	85	0	95	5	Type II Slurry	\$15,001
2027-28	210	7155	ERNA AVE	HAZEL ST	EUCLID ST	Local	AC	E	2	21	924	30	27,000	69	54	34	12	Type II Slurry	\$14,580
2027-28	224	1709	FLORENCE CT	FLORENCE AVE	SOUTH END	Local	AC	E	2	35	107	16	1,836	54	52	14	34	2" AC Grind-Overlay	\$6,646
2027-28	224	634	FLORENCE CT	NORTH END	FLORENCE AVE	Local	AC	E	2	35	91	16	1,564	45	84	16	0	2" AC Grind-Overlay	\$5,662
2027-28	033	647	FRANCIS AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	35	1,229	26	33,562	52	9	91	0	2" AC Grind-Overlay	\$121,494
2027-28	033	648	FRANCIS AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	1,008	30	30,270	81	12	88	0	Type II Slurry	\$16,346
2027-28	245	687	GREENWOOD AVE	VALENCIA	SUNSET	Local	AC	E	2	35	299	28	8,400	57	53	28	19	2" AC Grind-Overlay	\$30,408
2027-28	245	690	GREENWOOD AVE	COLLEGE	VALENCIA	Local	AC	E	2	35	185	28	5,208	37	76	10	14	2" AC Grind-Overlay	\$18,853
2027-28	301	855	LA VITA PL	NORTH END	LA SERNA AVE	Local	AC	E	2	13	80	29	3,895	84	0	100	0	Type II Slurry	\$2,103
2027-28	311	879	LEMON ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	35	800	30	23,820	63	65	27	8	2" AC Grind-Overlay	\$86,228
2027-28	311	882	LEMON ST	PINEHURST AVE	FLORENCE AVE	Local	AAC	E	2	35	1,247	30	37,050	76	0	90	10	Type II Slurry	\$20,007
2027-28	332	944	MAPLE ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	743	30	22,110	69	0	100	0	Type II Slurry	\$11,939
2027-28	332	945	MAPLE ST	WHITTIER BLVD	SOUTH END	Local	AC	E	2	35	296	32	11,267	41	74	22	4	2" AC Grind-Overlay	\$40,787
2027-28	347	973	MCPHERSON ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,007	44	43,876	65	67	33	0	2" AC Grind-Overlay	\$158,831
2027-28	347	977	MCPHERSON ST	STEARNS AVE	LA HABRA BLVD	Local	AAC	E	2	35	637	30	18,630	91	0	100	0	Stop Gap-Preventive	\$4,658
2027-28	347	978	MCPHERSON ST	FRANCIS AVE	STEARNS AVE	Local	AAC	E	2	35	655	29	19,680	93	0	100	0	Stop Gap-Preventive	\$4,920
2027-28	347	985	MCPHERSON ST	ROSE AVE	FRANCIS AVE	Local	AAC	E	2	35	474	30	14,720	63	0	100	0	2" AC Grind-Overlay	\$53,286
2027-28	396	1110	PINEHURST AVE	CYPRESS ST	GREENWOOD AVE	Local	AC	E	2	35	1,350	38	50,844	83	44	41	15	Type II Slurry	\$27,456
2027-28	421	1172	ROSE AVE	COLLEGE ST	SUNSET ST	Local	AC	E	2	35	489	26	12,558	64	13	46	41	2" AC Grind-Overlay	\$45,460
2027-28	421	1176	ROSE AVE	MCPHERSON ST	COLLEGE ST	Local	AAC	E	2	35	260	30	8,300	58	0	100	0	2" AC Grind-Overlay	\$30,046
2026-27	428	1198	RYE AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,144	36	41,718	60	59	23	18	2" AC Grind-Overlay	\$151,019
2027-28	453	1253	STEARNS AVE	COLLEGE ST	SUNSET ST	Local	AAC	E	2	35	714	26	19,070	76	0	82	18	Type II Slurry	\$10,298
2027-28	453	1256	STEARNS AVE	SUNSET ST	HARBOR BL	Local	AAC	E	2	35	627	33	20,493	66	12	87	1	2" AC Grind-Overlay	\$74,185
2027-28	460	1288	SUNSET ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	523	26	13,692	83	0	100	0	Type II Slurry	\$7,394
2027-28	460	1289	SUNSET ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	634	32	20,096	81	35	65	0	Type II Slurry	\$10,852
2027-28	460	1292	SUNSET ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	54	78	22	0	2" AC Grind-Overlay	\$71,249
2027-28	477	1328	VALENCIA ST	NORTH END	GREENWOOD AVE	Local	AAC	E	2	35	285	30	10,075	56	0	100	0	2" AC Grind-Overlay	\$36,472
2027-28	477	1331	VALENCIA ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	639	32	20,256	69	51	29	20	Type II Slurry	\$10,938
2027-28	498	1374	WARD ST	NORTH END	FRANCIS AVE	Local	AAC	E	2	35	658	26	18,858	74	40	58	2	Type II Slurry	\$10,183
2027-28	499	1375	WARNE ST	NORTH END	FRANCIS	Local	AAC	E	2	35	783	26	23,052	70	0	99	1	Type II Slurry	\$12,448
																			\$1,981,783
2028-29	074	215	ALLEY E/WALNUT STREET	FIRST ST	SOUTH END	Alley	AC	O	1	22	309	18	5,890	94	0	71	29	Type II Slurry	\$3,298
2028-29	085	1710	ALLEY S/FIRST AVE	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	305	14	2,783	76	0	100	0	2" AC Grind-Overlay	\$21,206
2028-29	091	261	ALLEY S/LA HABRA BLVD	ALLEY W/EUCLID ST	EUCLID ST	Alley	AC	O	1	22	126	14	1,905	68	0	30	70	2" AC Grind-Overlay	\$14,516
2028-29	091	264	ALLEY S/LA HABRA BLVD	WALLACE ST	CALIFORNIA ST	Alley	AC	O	1	22	268	14	4,035	58	57	23	20	2" AC Grind-Overlay	\$30,747
2028-29	091	272	ALLEY S/LA HABRA BLVD	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	269	19	5,400	76	25	37	38	Type II Slurry	\$3,024
2028-29	091	274	ALLEY S/LA HABRA BLVD	WALLACE ST	ALLEY W/EUCLID ST	Alley	AC	O	1	22	192	14	2,895	82	0	64	36	Type II Slurry	\$1,621
2028-29	091	275	ALLEY S/LA HABRA BLVD	WALNUT ST	HAZEL ST	Alley	AC	O	1	22	318	19	6,380	70	42	25	33	2" AC Grind-Overlay	\$48,616
2028-29	527	1507	BEACH ST	WHITTIER BLVD	NORTH END	Local	AC	E	2	07	221	36	9,531	56	82	13	5	2" AC Grind-Overlay	\$35,932
2028-29	145	1723	CANFIELD DR	RANDALL AVE	MACY ST	Local	AC	E	1	01	817	32	27,246	70	8	69	23	Type II Slurry	\$15,258
2028-29	145	427	CANFIELD DR	CARPENTER ST	EAST END	Local	AC	E	2	01	748	33	25,236	70	0	100	0	Type II Slurry	\$14,132
2028-29	146	430	CANTERBURY LN	GLENHAVEN	W/O STURBRIDGE	Local	AAC	E	2	05	465	36	17,346	92	0	84	16	Stop Gap-Preventive	\$4,337
2028-29	539	1727	CREEK LN	RUSSELL ST	RUSSELL ST	Local	AC	E	1	01	749	29	21,456	69	16	84	0	Type II Slurry	\$12,015
2028-29	187	533	DOLORES ST	LINDAUER DR	N/O LAGUNA	Local	AC	E	2	07	433	29	13,020	77	36	64	0	Type II Slurry	\$7,291
2028-29	522	1440	ELMSFORD AVE	GLENCLIFF	WHITEBOOK	Local	AC	E	2	11	1,003	36	36,714	80	19	57	24	Type II Slurry	\$20,560

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2028-29	218	607	FARRINGTON DR	NORTH END	RUSSELL ST	Local	AAC	E	2	07	186	30	7,105	75	22	78	0	Type II Slurry	\$3,979
2028-29	218	608	FARRINGTON DR	RUSSELL ST	SOUTH END	Local	AAC	E	2	07	704	30	22,695	77	9	91	0	Type II Slurry	\$12,709
2028-29	010	59	FASHION SQUARE LN	BEACH BLVD	EAST END	Local	AC	E	4	11	518	56	29,555	65	0	87	13	2" AC Grind-Overlay	\$111,422
2028-29	234	662	GLENCLIFF ST	SHEFFIELD	SHEFFIELD	Local	AC	E	2	11	282	36	10,902	91	0	100	0	Stop Gap-Preventive	\$2,726
2028-29	234	663	GLENCLIFF ST	SHEFFIELD	FASHION SQUARE	Local	AC	E	2	11	720	36	25,704	77	71	29	0	Type II Slurry	\$14,394
2028-29	235	664	GLENHAVEN DR	NORTH END	WIMBLETON	Local	AC	E	2	05	124	36	4,248	93	0	100	0	Stop Gap-Preventive	\$1,062
2028-29	235	665	GLENHAVEN DR	WIMBLETON	CANTEBURY	Local	AAC	E	2	05	1,024	36	37,614	91	0	71	29	Stop Gap-Preventive	\$9,404
2028-29	236	1732	GORDON AVE	BALDWIN ST	SHARPLESS ST	Local	AC	E	2	01	551	30	17,891	74	11	89	0	Type II Slurry	\$10,019
2028-29	236	666	GORDON AVE	VALLEY HOME	ROANOKE	Local	AAC	E	2	01	422	32	14,004	78	18	82	0	Type II Slurry	\$7,842
2028-29	538	1740	JANISON DR	RANDALL AVE	CREEK LN	Local	AC	E	2	01	245	26	6,535	61	54	46	0	2" AC Grind-Overlay	\$24,637
2028-29	280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	Type II Slurry	\$3,418
2028-29	280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	Type II Slurry	\$3,418
2028-29	280	801	KEARNY LN	SOUTH END	O'MALLEY	Local	AAC	E	2	06	163	31	6,848	91	0	100	0	Stop Gap-Preventive	\$1,712
2028-29	532	1701	LA HABRA HILLS DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	12	943	46	37,757	54	70	29	1	2" AC Grind-Overlay	\$142,344
2028-29	293	839	LA MIRADA ST	LINDAUER	LAGUNA	Local	AC	E	2	07	345	29	10,380	76	51	49	0	Type II Slurry	\$5,813
2028-29	304	858	LAGUNA DRIVE	LINDAUER DR	HACIENDA RD	Local	AC	E	2	07	1,430	30	42,540	59	70	30	0	2" AC Grind-Overlay	\$160,376
2028-29	062	111	LINDAUER DR	WHITTIER BLVD	HACIENDA RD	Local	AC	E	2	07	2,034	30	62,620	60	64	36	0	2" AC Grind-Overlay	\$236,077
2028-29	334	947	MARCIA DR	RUSSELL ST	NORTH END	Local	AC	E	2	01	337	32	8,317	69	7	93	0	Type II Slurry	\$4,658
2028-29	354	1000	MIDDLETON ST	SHEFFIELD	WHITEBOOK	Local	AAC	E	2	11	494	36	18,534	80	0	100	0	Type II Slurry	\$10,379
2028-29	357	1006	MONTEREY ST	LINDAUER DR	LAGUNA DR	Local	AC	E	2	07	475	30	14,070	70	44	50	6	Type II Slurry	\$7,879
2028-29	376	1054	O'MALLEY LN	PENDLETON	KEARNEY	Local	AC	E	2	06	313	36	11,802	75	0	99	1	Type II Slurry	\$6,609
2028-29	393	1105	PENDLETON LN	O'MALLEY	ZEKE AND ELSIE	Local	AC	E	2	06	290	32	10,780	77	0	93	7	Type II Slurry	\$6,037
2028-29	528	1720	RANDALL AVE	KOOPMANS WAY	MACY ST	Local	AC	E	2	01	681	32	22,520	77	55	43	2	Type II Slurry	\$12,611
2028-29	528	1721	RANDALL AVE	MACY ST	RUSSELL ST	Local	AC	E	2	01	1,274	32	42,858	64	56	43	1	2" AC Grind-Overlay	\$161,575
2028-29	528	1722	RANDALL AVE	RUSSELL ST	JANISON DR	Local	AC	E	2	01	718	35	25,569	62	64	36	0	2" AC Grind-Overlay	\$96,395
2028-29	407	1137	RIDGEHAVEN DR	CAJON DR	GREENBRIER LN	Local	AC	E	2	05	708	36	26,238	71	54	46	0	Type II Slurry	\$14,693
2028-29	407	1138	RIDGEHAVEN DR	GRAYVILLE DR	BRASS LANTERN DR	Local	AAC	E	2	06	988	36	36,318	89	0	100	0	Stop Gap-Preventive	\$9,080
2028-29	407	1141	RIDGEHAVEN DR	LAMBERT RD	WOODBRIER DR	Local	AC	E	2	05	1,169	35	42,120	78	13	87	0	Type II Slurry	\$23,587
2028-29	407	1144	RIDGEHAVEN DR	WOODBRIER DR	CAJON DR	Local	AC	E	2	05	632	35	22,788	69	78	22	0	Type II Slurry	\$12,761
2028-29	413	1158	ROANOKE AVE	RUSSELL	GORDON	Local	AAC	E	2	01	267	32	9,044	81	0	100	0	Type II Slurry	\$5,065
2028-29	014	1191	RUSSELL ST	WEST END	FARRINGTON DR	Local	AC	E	2	07	191	36	8,380	77	28	64	8	Type II Slurry	\$4,693
2028-29	014	1512	RUSSELL ST	HACIENDA RD	FARRINGTON DR	Local	AAC	E	2	07	355	36	12,564	76	17	76	7	Type II Slurry	\$7,036
2028-29	435	1213	SHADY VALLEY	VALLEY HOME AVE	EAST END	Local	AAC	E	2	01	420	34	15,855	80	31	69	0	Type II Slurry	\$8,879
2028-29	436	1214	SHARPLESS ST	CANFIELD	RUSSELL	Local	AC	E	2	01	592	33	19,338	74	0	100	0	Type II Slurry	\$10,829
2028-29	436	1734	SHARPLESS ST	RUSSELL ST	RANDALL AVE	Local	AC	E	2	01	837	31	26,528	79	12	88	0	Type II Slurry	\$14,856
2028-29	437	1215	SHEFFIELD DR	GLENCLIFF ST	MIDDLETON DR	Local	AC	E	2	11	439	35	15,840	83	0	94	6	Type II Slurry	\$8,870
2028-29	437	1217	SHEFFIELD DR	MIDDLETON DR	WHITEBOOK DR	Local	AC	E	2	11	565	35	20,376	83	0	100	0	Type II Slurry	\$11,411
2028-29	437	1218	SHEFFIELD DR	STURBRIDGE DR	MARIPOSA ST	Local	AC	E	2	05	290	36	10,224	91	0	100	0	Stop Gap-Preventive	\$2,556
2028-29	442	1237	SILVERSPUR LN	CANDLEWOOD DR	RIDGEHAVEN DR	Local	AC	E	2	05	332	26	9,382	77	0	26	74	Type II Slurry	\$5,254
2028-29	442	1238	SILVERSPUR LN	RIDGEHAVEN DR	SILVERSPUR WAY	Local	AC	E	2	05	573	36	21,378	63	62	18	20	2" AC Grind-Overlay	\$80,595
2028-29	048	1247	SPRING MEADOW LN	GRAYVILLE	SOUTH END	Local	AC	E	2	06	67	60	5,570	69	0	64	36	Type II Slurry	\$3,119
2028-29	048	152	SPRING MEADOW LN	GRAYVILLE DR	IMPERIAL HWY	Local	AC	E	2	06	195	36	6,732	81	34	66	0	Type II Slurry	\$3,770
2028-29	454	1264	STONEHAM WAY	WEST END	WHITEBOOK DR	Local	AAC	E	2	11	147	32	6,254	82	0	100	0	Type II Slurry	\$3,502
2028-29	044	1279	STURBRIDGE DR	WOODMERE CT	CANTEBURY LN	Local	AC	E	2	05	845	35	30,456	83	0	70	30	Type II Slurry	\$17,055
2028-29	044	1280	STURBRIDGE DR	GREENBRIER LN	SOUTH END	Local	AC	E	2	05	135	27	5,495	74	0	100	0	Type II Slurry	\$3,077
2028-29	044	145	STURBRIDGE DR	LAMBERT RD	WIMBLETON LN	Local	AC	E	2	05	619	35	22,320	89	0	100	0	Stop Gap-Preventive	\$5,580
2028-29	016	78	VALLEY HOME AVE	GORDON AVE	WHITTIER AVE	Local	AC	C	2	01	1,135	15	18,176	53	81	16	3	2" AC Grind-Overlay	\$68,524
2028-29	016	79	VALLEY HOME AVE	WHITTIER AVE	GREGORY LN	Local	AAC	C	2	02	1,311	17	23,616	50	57	28	15	2" AC Grind-Overlay	\$89,032
2028-29	016	80	VALLEY HOME AVE	GREGORY LN	LA HABRA BLVD	Local	AAC	C	2	02	1,579	18	28,422	47	68	24	8	2" AC Grind-Overlay	\$107,151
2028-29	483	1347	VERNON ST	LINDAUER	LAGUNA	Local	AC	E	2	07	455	30	13,470	69	49	51	0	Type II Slurry	\$7,543
2028-29	500	1376	WATERBURY WAY	WEST END	WHITEBOOK	Local	AAC	E	2	11	149	32	6,318	76	0	100	0	Type II Slurry	\$3,538
2028-29	046	1382	WHITEBOOK DR	SHEFFIELD DR	MIDDLETON ST	Local	AAC	E	2	11	922	32	30,254	79	0	84	16	Type II Slurry	\$16,942
2028-29	046	148	WHITEBOOK DR	LAMBERT RD	SHEFFIELD DR	Local	AC	E	2	11	1,085	36	43,560	64	69	25	6	2" AC Grind-Overlay	\$164,221
2028-29	515	1413	WOODMERE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	119	26	4,669	82	0	100	0	Type II Slurry	\$2,615
2028-29	518	1416	ZEKE AND ELSIE DR	BALDWIN ST	PENDLETON	Local	AC	E	2	06	252	36	9,606	77	35	65	0	Type II Slurry	\$5,379
																			\$2,011,262
2029-30	063	200	ACACIA ST	PORTOLA	LOMA VERDE	Local	AAC	E	2	22	171	31	5,801	64	0	74	26	2" AC Grind-Overlay	\$22,740
2029-30	069	209	ALLEY E/EUCLID STREET	N/END	N/O PINEHURST	Alley	AC	O	1	28	313	19	6,280	19	24	52	24	AC Recon	\$58,404
2029-30	091	259	ALLEY S/LA HABRA BLVD	ALDRICH ST	CYPRESS ST	Alley	AC	O	1	29	408	14	6,135	60	56	38	6	2" AC Grind-Overlay	\$48,589
2029-30	091	265	ALLEY S/LA HABRA BLVD	BANK OF AMERICA PARKING LOT	ALDRICH ST	Alley	AC	O	1	29	255	14	3,840	74	39	33	28	2" AC Grind-Overlay	\$30,413
2029-30	104	316	ALTO LN	E/O ROANNE	E/END	Local	AAC	E	2	34	207	26	6,933	78	34	42	24	Type II Slurry	\$4,021
2029-30	025	324	ARBOLITA DR	RODDY DR	HARBOR BLVD	Local	AC	E	2	34	582	35	20,988	52	70	13	17	2" AC Grind-Overlay	\$82,273
2029-30	122	354	BISHOP DR	CYPRESS ST	EAST END	Local	AC	E	2	34	587	30	20,237	89	45	55	0	Stop Gap-Preventive	\$5,059
2029-30	122	7160	BISHOP DR	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	519	30	15,600	81	18	82	0	Type II Slurry	\$9,048
2029-30	023	116	BROOKDALE AVE	LINDEN LN	HARBOR BLVD	Local	AC	E	2	34	1,844	35	66,420	82	0	80	20	Type II Slurry	\$38,524
2029-30	135	396	BURCH WAY	NORTH END	PINEHURST	Local	AC	E	2	28	198	30	7,515	70	59	41	0	Type II Slurry	\$4,359
2029-30	523	1460	CALIFORNIA ST	LA HABRA BLVD	SOUTH END	Local	AAC	E	2	22	635	30	18,790	62	56	44	0	2" AC Grind-Overlay	\$73,657

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2029-30	141	423	CANDACE LN	RODDY	EAST END	Local	AC	E	2	34	413	30	13,941	80	0	62	38	Type II Slurry	\$8,086
2029-30	174	504	COUNTRY LN	EAST END	MEADOWLARK	Local	AC	E	2	34	182	26	7,277	79	0	81	19	Type II Slurry	\$4,221
2029-30	008	1715	CYPRESS ST	CITY BOUNDARY	BONNIE LN	Local	AC	C	2	27	501	35	18,072	68	47	50	3	2" AC Grind-Overlay	\$70,842
2029-30	008	50	CYPRESS ST	305' N/O FOUNDATION	IMPERIAL HWY	Local	AC	C	2	31	1,201	35	43,272	41	42	55	3	2" AC Grind-Overlay	\$169,626
2029-30	008	51	CYPRESS ST	LAMBERT RD	498' S/O PACIFIC	Local	AC	C	2	31	1,642	35	59,148	58	33	59	8	2" AC Grind-Overlay	\$231,860
2029-30	008	57	CYPRESS ST	BONNIE LN	CAPELLA AVE	Local	AC	C	2	34	467	35	16,848	73	9	89	2	Type II Slurry	\$9,772
2029-30	206	575	EMBER LN	FALLENLEAF ST	EAST END	Local	AAC	E	2	34	67	47	4,399	83	16	57	27	Type II Slurry	\$2,551
2029-30	206	576	EMBER LN	WEST END	FALLENLEAF ST	Local	AAC	E	2	34	409	36	16,275	81	0	100	0	Type II Slurry	\$9,440
2029-30	011	611	FIRST AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	22	1,290	45	57,510	73	58	41	1	Type II Slurry	\$33,356
2029-30	011	614	FIRST AVE	CITY LIMIT	WALNUT ST	Local	AC	E	2	17	952	30	28,590	69	33	59	8	Type II Slurry	\$16,582
2029-30	033	1501	FRANCIS AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	664	29	19,950	67	0	59	41	2" AC Grind-Overlay	\$78,204
2029-30	033	1502	FRANCIS AVE	ORANGE ST	CYPRESS ST	Local	AC	E	2	28	658	29	19,770	77	0	83	17	Type II Slurry	\$11,467
2029-30	245	686	GREENWOOD AVE	LEORA	WALNUT ST	Local	AC	E	2	16	631	26	16,094	72	39	61	0	Type II Slurry	\$9,335
2029-30	245	692	GREENWOOD AVE	HILLSIDE ST	EUCLID ST	Local	AC	E	2	21	622	29	18,690	72	15	85	0	Type II Slurry	\$10,840
2029-30	245	693	GREENWOOD AVE	MONTE VISTA	LEORA	Local	AC	E	2	16	596	30	17,520	62	38	35	27	2" AC Grind-Overlay	\$68,678
2029-30	250	715	HAZEL ST	LA HABRA BLVD	FISRT ST	Local	AC	E	2	22	308	38	11,488	79	10	53	37	Type II Slurry	\$6,663
2029-30	250	716	HAZEL ST	FIRST ST	SOUTH END	Local	AC	E	2	22	327	38	12,426	89	0	95	5	Stop Gap-Preventive	\$3,107
2029-30	251	727	HEATHER AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,303	29	37,247	73	39	46	15	Type II Slurry	\$21,603
2029-30	260	757	HILLCREST ST	FIRST AVE	SOUTH END	Local	AC	E	2	17	815	33	29,282	59	59	24	17	2" AC Grind-Overlay	\$114,785
2029-30	260	758	HILLCREST ST	LA HABRA BLVD	FIRST AVE	Local	AC	E	2	17	331	33	10,725	73	31	57	12	Type II Slurry	\$6,221
2029-30	315	891	LEORA ST	PINEHURST AVE	FLORENCE AVE	Local	AC	E	2	16	994	30	30,014	78	29	59	12	Type II Slurry	\$17,408
2029-30	315	893	LEORA ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	16	299	30	8,850	90	49	51	0	Stop Gap-Preventive	\$2,213
2029-30	322	916	LINDEN LN	BROOKDALE AVE	EAST END	Local	AAC	E	2	34	272	26	8,867	75	46	46	8	Type II Slurry	\$5,143
2029-30	322	917	LINDEN LN	WEST END	BROOKDALE AVE	Local	AAC	E	2	34	93	26	4,213	80	0	100	0	Type II Slurry	\$2,444
2029-30	324	925	LOMA VERDE AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	63	0	82	18	2" AC Grind-Overlay	\$66,350
2029-30	331	942	MAIN ST	FIRST AVE	SECOND ST	Local	AC	E	2	29	306	46	13,800	56	77	23	0	2" AC Grind-Overlay	\$54,096
2029-30	331	943	MAIN ST	FLORENCE AVE	SOUTH END	Local	AC	E	2	28	276	39	12,671	63	74	26	0	2" AC Grind-Overlay	\$49,670
2029-30	348	987	MEADOW LARK ST	BROOKDALE AVE	COUNTRY LN	Local	AC	E	2	34	804	36	29,478	83	0	94	6	Type II Slurry	\$17,097
2029-30	013	69	MONTE VISTA ST	LA HABRA BLVD	FOURTH AVE	Local	AAC	C	2	15	1,446	36	52,315	99	0	100	0	Stop Gap-Preventive	\$13,079
2029-30	013	70	MONTE VISTA ST	FOURTH AVE	LAMBERT RD	Local	AAC	C	2	18	1,109	36	41,070	99	0	100	0	Stop Gap-Preventive	\$10,268
2029-30	377	1745	ORANGE ST	ERNA AVE	ALLEY	Local	AC	E	2	28	191	34	6,720	75	58	29	13	Type II Slurry	\$3,898
2029-30	396	1108	PINEHURST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,247	30	36,990	77	45	53	2	Type II Slurry	\$21,454
2029-30	533	1713	RISNER WY	IDAHO ST	WESTRIDGE GATE	Local	AC	E	2	26	274	50	14,025	74	25	54	21	Type II Slurry	\$8,135
2029-30	533	1714	RISNER WY	CROSS GUTTER	BARRIER	Local	AC	E	2	26	113	50	5,814	77	0	75	25	Type II Slurry	\$3,372
2029-30	412	1154	ROANNE DR	CITY LIMIT	ARBOLITA DR	Local	AC	E	2	34	651	35	23,472	73	19	81	0	Type II Slurry	\$13,614
2029-30	417	1165	RODDY DR	BROOKDALE AVE	RODDY WAY	Local	AC	E	2	34	229	36	8,028	72	31	60	9	Type II Slurry	\$4,656
2029-30	418	1167	RODDY WAY	RODDY DR	EAST END	Local	AC	E	2	34	326	27	11,645	74	20	73	7	Type II Slurry	\$6,754
2029-30	421	1173	ROSE AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	623	30	18,510	78	0	68	32	Type II Slurry	\$10,736
2029-30	421	1174	ROSE AVE	ORANGE ST	EAST END	Local	AC	E	2	28	348	26	10,843	80	6	94	0	Type II Slurry	\$6,289
2029-30	434	1208	SECOND AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	29	1,288	34	43,588	82	40	51	9	Type II Slurry	\$25,281
2029-30	464	1303	SYCAMORE AVE	STONEWOOD	MEADOWLARK	Local	AC	E	2	34	609	36	22,494	80	0	72	28	Type II Slurry	\$13,047
2029-30	471	1320	THIRD AVE	KNUDSON ST	CHINCHILLA ST	Local	AC	E	2	17	293	30	10,040	37	48	18	34	2" AC Grind-Overlay	\$39,357
2029-30	541	1730	WALLACE AVE	MACY ST	BALDWIN ST	Local	AC	E	1	01	406	32	13,722	70	12	88	0	Type II Slurry	\$7,959
2029-30	541	1733	WALLACE AVE	SHARPLESS ST	END	Local	AC	E	2	01	333	31	13,605	78	6	94	0	Type II Slurry	\$7,891
2029-30	017	83	WALNUT ST	WHITTIER AVE	HIGHLANDER AVE	Local	AC	C	2	21	1,284	29	38,550	48	38	48	14	2" AC Grind-Overlay	\$151,116
2029-30	017	84	WALNUT ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	C	2	21	1,285	29	38,580	49	42	46	12	2" AC Grind-Overlay	\$151,234
2029-30	507	1391	WILLOW ST	GREENWOOD AVE	HIGHLANDER AVE	Local	AC	E	2	16	327	30	9,630	58	70	29	1	2" AC Grind-Overlay	\$37,750
2029-30	507	1392	WILLOW ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	16	616	30	18,300	82	35	42	23	Type II Slurry	\$10,614
2029-30	514	1409	WOODCREST AVE	FALLENLEAF ST	ROANNE DR	Local	AC	E	2	34	1,369	36	52,284	72	48	43	9	Type II Slurry	\$30,325
2029-30	514	1410	WOODCREST AVE	ROANNE DR	EAST END	Local	AC	E	2	34	207	26	6,933	82	36	64	0	Type II Slurry	\$4,021
																			\$2,059,592
2030-31	073	213	ALLEY E/VALENCIA ST	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	O	1	36	434	19	8,700	94	40	60	0	Type II Slurry	\$5,307
2030-31	074	214	ALLEY E/WALNUT STREET	N/END	N/O ALLEY N/ERNA	Alley	AC	O	1	21	429	19	8,600	92	0	100	0	Type II Slurry	\$5,246
2030-31	076	217	ALLEY N/ERNA STREET	E/O ALLEY E/WALNUT	W/O HAZEL	Alley	AC	O	1	21	174	19	3,500	91	0	100	0	Type II Slurry	\$2,135
2030-31	076	218	ALLEY N/ERNA STREET	HAZEL	E/END	Alley	AC	O	1	21	255	20	5,100	89	0	100	0	Type II Slurry	\$3,111
2030-31	076	219	ALLEY N/ERNA STREET	WALNUT ST	E/O ALLEY E/WALNUT	Alley	AC	O	1	21	144	19	2,900	90	0	95	5	Type II Slurry	\$1,769
2030-31	080	226	ALLEY N/LA HABRA BLVD	E/O ALLEY E/CYPRESS	W/O LEMON	Alley	AC	O	1	35	144	14	2,175	89	0	74	26	Type II Slurry	\$1,327
2030-31	080	227	ALLEY N/LA HABRA BLVD	CYPRESS ST	E/O ALLEY E/CYPRESS	Alley	AC	O	1	35	146	14	2,205	91	0	100	0	Type II Slurry	\$1,345
2030-31	082	1712	ALLEY N/THIRD ST	ALLEY W/O VALENCIA	VALENCIA ST	Alley	AC	O	1	36	153	20	2,091	84	0	15	85	2" AC Grind-Overlay	\$17,230
2030-31	082	235	ALLEY N/THIRD ST	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	147	19	2,960	97	0	100	0	Type II Slurry	\$1,806
2030-31	084	244	ALLEY S/ERNA	COLLEGE ST	VALENCIA ST	Alley	AC	O	1	35	312	14	4,695	92	0	100	0	Type II Slurry	\$2,864
2030-31	084	247	ALLEY S/ERNA	VALENCIA ST	SUNSET ST	Alley	AC	O	1	35	283	9	2,840	92	0	53	47	Type II Slurry	\$1,732
2030-31	085	250	ALLEY S/FIRST AVE	CYPRESS ST	MCIPHERSON ST	Alley	AC	O	1	36	640	16	10,240	91	0	100	0	Type II Slurry	\$6,246
2030-31	087	255	ALLEY S/GREENWOOD AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	470	19	9,420	91	27	73	0	Type II Slurry	\$5,746
2030-31	091	262	ALLEY S/LA HABRA BLVD	ALLEY W/VALENCIA ST	VALENCIA ST	Alley	AC	O	1	36	125	19	2,520	98	0	100	0	Type II Slurry	\$1,537
2030-31	091	263	ALLEY S/LA HABRA BLVD	BEDFORD ST	ALLEY E/BEDFORD ST	Alley	AC	O	1	39	133	19	2,680	90	0	100	0	Type II Slurry	\$1,635
2030-31	091	267	ALLEY S/LA HABRA BLVD	CYPRESS ST	MCIPHERSON ST	Alley	AC	O	1	36	640	14	9,615	79	0	66	34	2" AC Grind-Overlay	\$79,228

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2030-31	092	278	ALLEY S/STEARNS AVENUE	E/O COLLEGE	W/O VALENCIA	Alley	AC	O	1	35	312	14	4,695	89	0	100	0	Type II Slurry	\$2,864
2030-31	092	279	ALLEY S/STEARNS AVENUE	E/O MCPHERSON	W/O COLLEGE	Alley	AC	O	1	35	304	14	4,575	92	0	100	0	Type II Slurry	\$2,791
2030-31	095	288	ALLEY W/BURWOOD ST	NORTH END	MONTWOOD AVE	Alley	AC	O	1	32	1,035	20	21,756	92	0	100	0	Type II Slurry	\$13,271
2030-31	101	303	ALLEY W/WALNUT STREET	FLORENCE AVE	HEATHER AVE	Alley	AC	O	1	16	301	15	4,832	89	32	60	8	Type II Slurry	\$2,948
2030-31	101	304	ALLEY W/WALNUT STREET	GREENWOOD AVE	ALLEY S/GREENWOOD AVE	Alley	AC	O	1	16	160	15	2,576	90	24	68	8	Type II Slurry	\$1,571
2030-31	101	306	ALLEY W/WALNUT STREET	HIGHLANDER AVE	ALLEY S/HIGHLANDER AVE	Alley	AC	O	1	16	156	15	2,512	92	0	100	0	Type II Slurry	\$1,532
2030-31	106	319	AMORITA AVE	VECINO ST	VERONA ST	Local	AC	E	2	40	575	30	17,280	84	57	34	9	Type II Slurry	\$10,541
2030-31	025	118	ARBOLITA DR	HARBOR BLVD	BRIGHTON ST	Local	AAC	E	2	37	1,195	36	42,520	72	63	23	14	Type II Slurry	\$25,937
2030-31	025	119	ARBOLITA DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,275	36	45,550	80	46	54	0	Type II Slurry	\$27,786
2030-31	118	343	BEA WAY	JOAN ST	EAST END	Local	AC	E	2	38	149	33	5,364	71	58	33	9	Type II Slurry	\$3,272
2030-31	119	347	BEDFORD ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	754	29	22,650	84	0	100	0	Type II Slurry	\$13,817
2030-31	129	371	BRIGHT ST	SECOND ST	SOUTH END	Local	AC	E	2	36	402	32	15,331	86	0	89	11	Type II Slurry	\$9,352
2030-31	026	120	BRIGHTON ST	WHITTIER BLVD	CONCOURSE ST	Local	AC	E	2	37	1,174	35	42,300	85	42	58	0	Type II Slurry	\$25,803
2030-31	026	121	BRIGHTON ST	CONCOURSE ST	CITY LIMIT	Local	AC	E	2	37	1,330	36	47,448	83	75	25	0	Type II Slurry	\$28,943
2030-31	023	1503	BROOKDALE AVE	PALM ST	EAST END	Local	AC	E	2	40	319	35	10,955	76	33	52	15	Type II Slurry	\$6,683
2030-31	023	379	BROOKDALE AVE	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,386	35	49,932	79	34	66	0	Type II Slurry	\$30,459
2030-31	023	382	BROOKDALE AVE	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	998	36	36,678	87	1	51	48	Type II Slurry	\$22,374
2030-31	521	386	BROOKFIELD AVE	SHELburne ST	NANTUCKET ST	Local	AC	E	2	37	404	36	15,150	88	47	53	0	Type II Slurry	\$9,242
2030-31	149	435	CARMELA LN	HARBOR BLVD	EAST END	Local	AAC	E	2	37	749	35	27,984	88	0	97	3	Type II Slurry	\$17,070
2030-31	158	1506	CHESTNUT ST	CITY LIMIT NORTH	WHITTIER BLVD	Local	AC	E	2	35	153	36	5,698	69	58	42	0	Type II Slurry	\$3,476
2030-31	166	472	COLFAX CT	WEST END	COLFAX ST	Local	AC	E	2	38	217	30	9,006	74	38	31	31	Type II Slurry	\$5,494
2030-31	167	474	COLFAX ST	COLFAX CT	ESSEX DR	Local	AC	E	2	38	254	30	8,190	80	1	40	59	Type II Slurry	\$4,996
2030-31	167	475	COLFAX ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	706	30	21,000	85	22	78	0	Type II Slurry	\$12,810
2030-31	167	476	COLFAX ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	765	30	22,770	78	57	41	2	Type II Slurry	\$13,890
2030-31	170	491	COMITY CIR	CONCOURSE ST	EAST END	Local	AAC	E	2	37	209	30	7,817	89	0	100	0	Stop Gap-Preventive	\$1,954
2030-31	524	1504	COMMERCIAL WY	CYPRESS AVE	PARK INDUSTRIAL DR	Local	AC	E	2	36	1,026	36	36,972	60	45	36	19	2" AC Grind-Overlay	\$150,846
2030-31	172	493	CONCOURSE ST	DAVIT CIR	BRIGHTON ST	Local	AC	E	2	37	980	36	35,280	78	0	100	0	Type II Slurry	\$21,521
2030-31	172	495	CONCOURSE ST	WHITTIER AVE (FRONTAGE)	DAVIT CIR	Local	AC	E	2	37	637	36	22,932	92	0	100	0	Stop Gap-Preventive	\$5,733
2030-31	008	171	CYPRESS ST	LA HABRA BLVD	SECOND ST	Local	AC	C	2	36	724	35	26,100	83	33	37	30	Type II Slurry	\$15,921
2030-31	008	52	CYPRESS ST	COMMERCIAL WAY	LAMBERT RD	Local	AC	C	2	36	1,094	35	39,420	79	43	37	20	Type II Slurry	\$24,046
2030-31	008	53	CYPRESS ST	SECOND ST	COMMERCIAL WAY	Local	AC	C	2	36	835	36	30,060	88	1	57	42	Type II Slurry	\$18,337
2030-31	178	508	DAVIT CIR	CONCOURSE ST	EAST END	Local	AC	E	2	37	128	30	5,467	88	0	100	0	Type II Slurry	\$3,335
2030-31	185	529	DEXTER ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	734	30	21,840	80	50	25	25	Type II Slurry	\$13,322
2030-31	185	530	DEXTER ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	85	34	66	0	Type II Slurry	\$14,000
2030-31	529	1530	DOT AVE	JOAN ST	JUANITA ST	Local	AC	E	2	38	414	32	13,695	91	0	100	0	Stop Gap-Preventive	\$3,424
2030-31	193	546	EASTPARK DR	GREENTREE LN	FONDA ST	Local	AC	E	2	38	528	32	18,396	85	0	100	0	Type II Slurry	\$11,222
2030-31	211	596	ESSEX DR	BEDFORD ST	FONDA ST	Local	AC	E	2	38	739	30	22,170	59	60	16	24	2" AC Grind-Overlay	\$90,454
2030-31	211	599	ESSEX DR	FONDA ST	NORTH END	Local	AC	E	2	38	172	30	6,906	72	0	100	0	Type II Slurry	\$4,213
2030-31	212	600	ESTATE DR	GREENTREE	FONDA ST	Local	AC	E	2	38	532	32	17,774	86	0	100	0	Type II Slurry	\$10,842
2030-31	011	615	FIRST AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	640	44	27,896	82	0	90	10	Type II Slurry	\$17,017
2030-31	222	622	FLAMINGO WAY	NORTH END	AMORITA	Local	AC	E	2	40	789	36	30,202	88	20	47	33	Type II Slurry	\$18,423
2030-31	012	62	FONDA ST	EASTPARK DR	LA HABRA BLVD	Local	AC	E	2	38	444	35	16,020	85	0	98	2	Type II Slurry	\$9,772
2030-31	012	637	FONDA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	64	75	18	7	2" AC Grind-Overlay	\$93,636
2030-31	012	638	FONDA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,187	30	35,370	80	62	36	2	Type II Slurry	\$21,576
2030-31	033	131	FRANCIS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	36	41,580	90	0	100	0	Stop Gap-Preventive	\$10,395
2030-31	033	132	FRANCIS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,454	35	52,380	80	22	58	20	Type II Slurry	\$31,952
2030-31	231	659	FRANTZ AVE	PALM	VERONA	Local	AC	E	2	41	864	36	30,960	78	0	100	0	Type II Slurry	\$18,886
2030-31	233	661	GERRY ST	NORTH END	FRANCIS	Local	AC	E	2	38	467	30	15,577	88	0	100	0	Type II Slurry	\$9,502
2030-31	242	681	GREENTREE LN	EASTPARK	ESTATE	Local	AC	E	2	38	297	36	12,192	90	0	92	8	Stop Gap-Preventive	\$3,048
2030-31	262	765	HODSON AVE	WEST END	EAST END	Local	AC	E	2	41	713	36	25,452	76	57	43	0	Type II Slurry	\$15,526
2030-31	262	768	HODSON AVE	VALLEJO ST	PALM ST	Local	AC	E	2	38	1,184	36	43,158	82	0	96	4	Type II Slurry	\$26,326
2030-31	263	770	HOLGATE ST	HODSON AVE	SOUTH END	Local	AC	E	2	41	450	26	13,403	83	43	57	0	Type II Slurry	\$8,176
2030-31	263	771	HOLGATE ST	Vaqueiro ST	HODSON AVE	Local	AC	E	2	41	1,076	29	32,310	73	53	47	0	Type II Slurry	\$19,709
2030-31	266	778	HOLT DR	WILSON	HOLGATE	Local	AC	E	2	41	371	30	12,677	92	0	100	0	Stop Gap-Preventive	\$3,169
2030-31	269	782	INOLA CT	NORTH END	WHITTIER BLVD	Local	AC	E	2	40	236	26	7,683	72	73	25	2	Type II Slurry	\$4,687
2030-31	275	789	JOAN ST	DOT AVE	FRANCIS AVE	Local	AC	E	2	38	503	30	14,910	68	67	18	15	2" AC Grind-Overlay	\$60,833
2030-31	279	795	JUANITA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,149	29	34,500	88	0	100	0	Type II Slurry	\$21,045
2030-31	279	796	JUANITA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	739	29	22,200	81	0	100	0	Type II Slurry	\$13,542
2030-31	310	878	LAURA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,151	32	36,704	87	0	100	0	Type II Slurry	\$22,389
2030-31	526	1510	LOMA NORTE PL	BROOKDALE AVE	SOUTH END	Local	AC	E	2	40	235	28	8,207	73	47	43	10	Type II Slurry	\$5,006
2030-31	330	940	MADONNA LN	PALM	EAST END	Local	AC	E	2	40	222	32	8,741	83	0	95	5	Type II Slurry	\$5,332
2030-31	335	948	MARCINE ST	NORTH END	CARMELA	Local	AAC	E	2	37	317	32	11,717	87	0	100	0	Type II Slurry	\$7,147
2030-31	344	968	MATEO AVE	VALLEJO	JUANITA	Local	AC	E	2	38	621	26	15,834	77	57	43	0	Type II Slurry	\$9,659
2030-31	345	969	MCCART AVE	ROSCOE	CITY LIMIT	Local	AC	E	2	41	334	36	12,774	85	0	100	0	Type II Slurry	\$7,792
2030-31	365	1020	NANTUCKET ST	SHELburne ST	NORTH END	Local	AC	E	2	37	704	36	27,142	75	46	32	22	Type II Slurry	\$16,557
2030-31	365	1022	NANTUCKET ST	BRIGHTON ST	SHELburne ST	Local	AC	E	2	37	619	36	22,140	77	59	39	2	Type II Slurry	\$13,505
2030-31	369	1028	NORTH HILLS DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,236	36	44,352	85	60	37	3	Type II Slurry	\$27,055

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2030-31	369	1029	NORTH HILLS DR	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	739	36	26,316	87	46	54	0	Type II Slurry	\$16,053
2030-31	370	1032	NORTHGATE WAY	STEARNS AVE	EASTPARK	Local	AC	E	2	38	223	32	6,944	89	0	100	0	Stop Gap-Preventive	\$1,736
2030-31	384	1078	PALERMO WAY	NORTH END	SOUTH END	Local	AC	E	2	41	1,010	26	29,562	75	15	55	30	Type II Slurry	\$18,033
2030-31	385	1080	PAMELA LN	NORTH END	NORTH HILLS	Local	AC	E	2	37	248	26	8,047	84	53	47	0	Type II Slurry	\$4,909
2030-31	387	1082	PARK INDUSTRIAL DR	CYPRESS ST	COMMERCIAL	Local	AC	E	2	36	985	36	33,300	68	45	50	5	2" AC Grind-Overlay	\$135,864
2030-31	402	1126	RAMONA AVE	PALM	PALERMO	Local	AC	E	2	41	1,123	36	40,284	76	22	71	7	Type II Slurry	\$24,573
2030-31	416	1161	ROCKINGHORSE LN	NORTH END	BROOKDALE AVE	Local	AC	E	2	37	1,031	37	40,824	85	57	37	6	Type II Slurry	\$24,903
2030-31	420	1170	ROSCOE ST	MCCART AVE	LA HABRA BLVD	Local	AC	E	2	41	776	36	28,686	80	13	82	5	Type II Slurry	\$17,498
2030-31	434	1209	SECOND AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	641	30	19,050	86	0	87	13	Type II Slurry	\$11,621
2030-31	546	1737	SHADYCREST LN	PALM ST	END	Local	AC	E	2	40	614	11	10,838	63	64	22	14	2" AC Grind-Overlay	\$44,219
2030-31	438	1219	SHELBURNE ST	BROOKFIELD AVE	NANTUCKET ST	Local	AC	E	2	37	550	36	20,406	82	41	59	0	Type II Slurry	\$12,448
2030-31	438	1220	SHELBURNE ST	NANTUCKET ST	WHITTIER BLVD	Local	AC	E	2	37	739	36	26,460	93	0	100	0	Stop Gap-Preventive	\$6,615
2030-31	447	1246	SONORA PL	NORTH END	STEARNS	Local	AC	E	2	38	468	26	13,758	68	54	45	1	2" AC Grind-Overlay	\$56,133
2030-31	453	1260	STEARNS AVE	PALM ST	HOLGATE ST	Local	AC	E	2	41	626	30	18,660	84	0	100	0	Type II Slurry	\$11,383
2030-31	34	133	STEARNS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	32	31,995	79	0	76	24	Type II Slurry	\$19,517
2030-31	34	134	STEARNS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,455	30	43,650	82	0	100	0	Type II Slurry	\$26,627
2030-31	460	1287	SUNSET ST	NORTH END	THIRD AVE	Local	AC	E	2	36	340	32	10,688	75	57	30	13	Type II Slurry	\$6,520
2030-31	462	1301	SUSAN LN	WOODCREST	NORTH HILLS	Local	AC	E	2	37	280	36	10,686	81	0	83	17	Type II Slurry	\$6,518
2030-31	463	1302	SWANSEA CIR	NANTUCKET	EAST END	Local	AC	E	2	37	202	26	6,799	76	51	43	6	Type II Slurry	\$4,147
2030-31	471	1314	THIRD AVE	BRIGHT ST	COLLEGE ST	Local	AAC	E	2	36	1,142	40	48,188	85	46	49	5	Type II Slurry	\$29,395
2030-31	471	1315	THIRD AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	36	1,152	33	39,202	80	58	39	3	Type II Slurry	\$23,913
2030-31	473	1322	TOPAZ AVE	PALM	VERONA	Local	AC	E	2	41	846	36	30,312	80	1	99	0	Type II Slurry	\$18,490
2030-31	474	1324	TROPICANA WAY	ORCHID AVE	WHITTIER BLVD	Local	AC	E	2	40	765	36	27,396	76	57	43	0	Type II Slurry	\$16,712
2030-31	477	1329	VALENCIA ST	LA HABRA BLVD	THIRD AVE	Local	AC	E	2	36	1,006	36	36,000	77	52	48	0	Type II Slurry	\$21,960
2030-31	478	1337	VALLEJO ST	VERDUGO AVE	STEARNS AVE	Local	AC	E	2	38	514	36	19,038	81	11	84	5	Type II Slurry	\$11,613
2030-31	478	1339	VALLEJO ST	STEARNS AVE	HODSON AVE	Local	AC	E	2	38	221	36	8,490	69	79	21	0	Type II Slurry	\$5,179
2030-31	484	1348	VERONA ST	AMORITA AVE	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	87	53	47	0	Type II Slurry	\$10,889
2030-31	484	1349	VERONA ST	WHITTIER BLVD	Vaquero AVE	Local	AC	E	2	41	1,040	35	37,476	77	5	82	13	Type II Slurry	\$22,860
2030-31	484	1352	VERONA ST	Vaquero AVE	SOUTH END	Local	AC	E	2	41	155	26	5,681	78	13	60	27	Type II Slurry	\$3,465
2030-31	491	1361	WADE ST	HODSON	LA HABRA BLVD	Local	AC	E	2	41	492	36	17,496	83	0	100	0	Type II Slurry	\$10,673
2030-31	495	1370	WALLING AVE	HOLGATE	CITY LIMIT	Local	AC	E	2	41	646	31	20,704	78	44	56	0	Type II Slurry	\$12,629
2030-31	017	88	WALNUT ST	LAS LOMAS AVE	IMPERIAL HWY	Local	AC	C	2	24	1,407	35	50,688	66	30	55	15	2" AC Grind-Overlay	\$206,807
2030-31	505	1387	WHITTIER BLVD (FRONT RD)	CONCOURSE ST	BRIGHTON ST	Local	AC	E	2	37	715	28	20,020	88	0	100	0	Type II Slurry	\$12,212
2030-31	510	1403	WILSON ST	Vaquero AVE	STEARNS AVE	Local	AC	E	2	41	778	32	24,768	91	0	100	0	Stop Gap-Preventive	\$6,192
2030-31	514	1411	WOODCREST AVE	SUSAN LN	PALM ST	Local	AC	E	2	37	846	36	31,062	70	27	59	14	Type II Slurry	\$18,948
																			\$2,227,264
2031-32	067	0207	ALLEY E/BURWOOD	PARKWOOD	MONTWOOD	Alley	AC	O	1	32	882	19	17,660	85	57	43	0	Type II Slurry	\$11,126
2031-32	068	0208	ALLEY E/CORTO	WHITTIER BL	SOUTH END	Alley	AC	O	1	09	226	19	4,540	60	74	24	2	2" AC Grind-Overlay	\$38,908
2031-32	076	220	ALLEY N/ERNA STREET	WEST END	EUCLID ST	Alley	AC	O	1	21	315	14	4,740	87	0	100	0	Type II Slurry	\$2,986
2031-32	097	290	ALLEY N/O WHITTIER	WEST END	HARBOR BL	Alley	AC	O	1	34	172	16	2,941	32	64	19	17	2" AC Grind-Overlay	\$25,204
2031-32	084	238	ALLEY S/ERNA	MCPHERSON ST	COLLEGE ST	Alley	AC	O	1	35	304	14	4,575	88	0	100	0	Type II Slurry	\$2,882
2031-32	084	239	ALLEY S/ERNA	HAZEL ST	LOIS ST	Alley	AC	O	1	21	434	14	6,525	80	1	60	39	2" AC Grind-Overlay	\$55,919
2031-32	084	242	ALLEY S/ERNA	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	319	19	6,400	82	22	49	29	Type II Slurry	\$4,032
2031-32	084	245	ALLEY S/ERNA	LOIS ST	EUCLID ST	Alley	AC	O	1	21	464	24	11,625	80	0	95	5	2" AC Grind-Overlay	\$99,626
2031-32	088	256	ALLEY S/HIGHLANDER AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	471	15	7,552	88	19	55	26	Type II Slurry	\$4,758
2031-32	091	260	ALLEY S/LA HABRA BLVD	ALLEY E/BEDFORD ST	COLFAX ST	Alley	AC	O	1	39	96	19	1,940	87	0	100	0	Type II Slurry	\$1,222
2031-32	091	266	ALLEY S/LA HABRA BLVD	COLFAX ST	DEXTER ST	Alley	AC	O	1	39	202	19	4,060	80	7	93	0	2" AC Grind-Overlay	\$34,794
2031-32	091	269	ALLEY S/LA HABRA BLVD	DEXTER ST	FONDA ST	Alley	AC	O	1	39	202	19	4,060	82	20	78	2	Type II Slurry	\$2,558
2031-32	091	271	ALLEY S/LA HABRA BLVD	FONDA ST	EAST END	Alley	AC	O	1	39	101	19	2,040	78	0	100	0	2" AC Grind-Overlay	\$17,483
2031-32	091	273	ALLEY S/LA HABRA BLVD	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	138	16	2,363	82	74	18	8	Type II Slurry	\$1,489
2031-32	101	300	ALLEY W/WALNUT STREET	ALLEY S/GREENWOOD AVE	HIGHLANDER AVE	Alley	AC	O	1	16	142	15	2,288	81	0	39	61	2" AC Grind-Overlay	\$19,608
2031-32	101	302	ALLEY W/WALNUT STREET	ALLEY S/HIGHLANDER AVE	FLORENCE AVE	Alley	AC	O	1	16	146	15	2,352	87	0	57	43	Type II Slurry	\$1,482
2031-32	125	363	BONNIE LN	CYPRESS ST	N/O CAPELLA	Local	AC	E	2	27	706	30	22,180	66	70	22	8	2" AC Grind-Overlay	\$94,043
2031-32	060	163	CALLE DON GUILLERMO	EUCLID ST	COUNTRY HILLS DR	Local	AAC	E	2	33	1,749	35	63,000	80	0	100	0	Type II Slurry	\$39,690
2031-32	060	414	CALLE DON GUILLERMO	COUNTRY HILLS DR	SOUTH END	Local	AC	E	2	33	153	32	8,677	70	24	73	3	Type II Slurry	\$5,467
2031-32	147	431	CAPELLA AVE	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	495	36	17,604	79	0	100	0	Type II Slurry	\$11,091
2031-32	147	432	CAPELLA AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	27	692	36	24,696	76	0	100	0	Type II Slurry	\$15,558
2031-32	150	437	CAROL ST	CITY LIMIT	LA SERNA AVE	Local	AC	E	2	13	889	30	26,920	79	39	58	3	Type II Slurry	\$16,960
2031-32	154	450	CHERI DR	REBECCA	SILLIKER	Local	AAC	E	2	08	461	26	11,830	69	16	84	0	Type II Slurry	\$7,453
2031-32	173	500	COUNTRY HILLS DR	CALLE DON JUAN	EAST END	Local	AC	E	2	33	62	32	3,259	76	6	94	0	Type II Slurry	\$2,053
2031-32	173	502	COUNTRY HILLS DR	DORWOOD AVE	EUCLID ST	Local	AC	E	2	26	511	36	17,964	79	13	87	0	Type II Slurry	\$11,317
2031-32	173	503	COUNTRY HILLS DR	WEST END	CHERRYWOOD	Local	AAC	E	2	26	383	32	14,051	92	0	100	0	Stop Gap-Preventive	\$3,513
2031-32	189	537	DORWOOD AVE	SANDLEWOOD AVE	LATCHWOOD LN	Local	AC	E	2	26	852	36	30,672	72	54	42	4	Type II Slurry	\$19,323
2031-32	199	557	EL PORTAL CT	WEST END	EL PORTAL DR	Local	AAC	E	2	09	237	30	8,660	70	8	92	0	Type II Slurry	\$5,456
2031-32	204	570	ELM ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	21	448	30	13,440	59	58	42	0	2" AC Grind-Overlay	\$56,986
2031-32	226	639	FOUNDATION AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	907	46	41,170	58	59	40	1	2" AC Grind-Overlay	\$174,561
2031-32	238	669	GRANADA CT	GRANADA DR	SOUTH END	Local	AAC	E	2	09	359	30	12,295	69	12	81	7	Type II Slurry	\$7,746

City of La Habra, CA
Forecast Maintenance / Rehabilitation (FMR) Report - FY 2025-2032

Sorted by Rank, FY, Name Order (A-Z)

FY	BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Type	Total \$
2031-32	018	130	HACIENDA RD	EL RANCHO DR	WHITTIER BLVD	Local	AC	E	2	09	324	50	16,295	60	38	61	1	2" AC Grind-Overlay	\$69,091
2031-32	257	748	HILL RD	VIEW	BISHOP	Local	AC	E	2	27	369	31	11,939	72	71	29	0	Type II Slurry	\$7,522
2031-32	001	63	IDAHO ST	END OF PVMNT	REBECCA DR	Local	AC	C	1	08	265	17	4,505	49	55	14	31	2" AC Grind-Overlay	\$19,101
2031-32	268	781	INDUSTRY AVE	EUCLID	CYPRESS	Local	AAC	E	2	31	684	36	24,192	61	35	51	14	2" AC Grind-Overlay	\$102,574
2031-32	288	821	KIRBY DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	883	32	28,128	71	16	77	7	Type II Slurry	\$17,721
2031-32	288	826	KIRBY DR	W/END	KIRBY (NORTH CDS)	Local	AAC	E	2	13	89	32	5,315	70	0	100	0	Type II Slurry	\$3,348
2031-32	295	841	LA PLAZA DR	N END	LA HABRA BLVD	Local	AAC	E	2	09	1,455	36	52,416	69	8	87	5	Type II Slurry	\$33,022
2031-32	298	848	LA SERNA AVE	MARLEI DR	LAUNER DR	Local	AC	E	2	13	616	36	24,012	72	26	74	0	Type II Slurry	\$15,128
2031-32	058	161	LAKEVIEW AVE	MONTWOOD AVE	IMPERIAL HWY	Local	AAC	E	2	32	1,144	35	41,220	75	7	75	18	Type II Slurry	\$25,969
2031-32	308	876	LATCHWOOD LN	DORWOOD	EAST END	Local	AAC	E	2	26	267	26	8,467	59	61	29	10	2" AC Grind-Overlay	\$35,900
2031-32	319	907	LINDA AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	793	29	23,820	77	8	52	40	Type II Slurry	\$15,007
2031-32	319	908	LINDA AVE	SIERRA VISTA DR	EAST END	Local	AAC	E	2	13	347	30	12,205	71	0	100	0	Type II Slurry	\$7,689
2031-32	323	922	LOIS ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	21	785	31	25,152	78	1	99	0	Type II Slurry	\$15,846
2031-32	342	964	MARLEI DR	ENTRADA DR	LA SERNA AVE	Local	AC	E	2	13	717	32	23,694	77	9	91	0	Type II Slurry	\$14,927
2031-32	057	160	MONTWOOD AVE	EUCLID ST	LAKEVIEW AVE	Local	AC	E	2	32	2,259	35	81,360	69	64	35	1	Type II Slurry	\$51,257
2031-32	364	1019	NADA STREET	EL PORTAL	SOUTH END	Local	AAC	E	2	09	147	30	7,037	42	74	26	0	2" AC Grind-Overlay	\$29,837
2031-32	373	1044	OLINDA AVE	KIRBY DR	NORTH END	Local	AAC	E	2	13	380	30	12,925	76	8	92	0	Type II Slurry	\$8,143
2031-32	377	1055	ORANGE ST	CITY LIMIT	STEVENS AVE	Local	AAC	E	2	27	823	30	25,062	78	0	100	0	Type II Slurry	\$15,789
2031-32	377	1057	ORANGE ST	STEVENS AVE	BISHOP DR	Local	AAC	E	2	27	916	29	27,510	79	0	100	0	Type II Slurry	\$17,331
2031-32	378	1068	ORANGEWOOD ST	PARKWOOD AVE	SOUTH END	Local	AC	E	2	32	907	32	30,627	76	32	41	27	Type II Slurry	\$19,295
2031-32	388	1083	PARK PL	GREENWOOD	ROSE	Local	AC	E	2	21	299	26	7,622	74	55	45	0	Type II Slurry	\$4,802
2031-32	396	1114	PINEHURST AVE	HILLSIDE ST	ELM ST	Local	AC	E	2	21	287	29	8,640	75	0	100	0	Type II Slurry	\$5,443
2031-32	397	1120	PINEWOOD PL	SANDLEWOOD	SOUTH END	Local	AC	E	2	26	169	33	7,102	77	27	53	20	Type II Slurry	\$4,474
2031-32	427	1195	RYAN AVE	SIERRA VISTA DR	WALNUT ST	Local	AC	E	2	13	1,151	30	34,170	76	52	35	13	Type II Slurry	\$21,527
2031-32	015	76	SANDLEWOOD AVE	PATWOOD DR	EUCLID ST	Local	AC	E	2	25	1,449	35	52,200	56	71	17	12	2" AC Grind-Overlay	\$221,328
2031-32	440	1226	SIERRA VISTA DR	CITY LIMITS	LA VEREDA DR	Local	AAC	E	2	13	860	30	35,908	75	8	92	0	Type II Slurry	\$22,622
2031-32	440	1228	SIERRA VISTA DR	LA VEREDA DR	LA PRESA DR	Local	AC	E	2	13	831	35	29,952	89	0	98	2	Stop Gap-Preventive	\$7,488
2031-32	440	1229	SIERRA VISTA DR	LA PRESA DR	LINDA AVE	Local	AAC	E	2	13	596	36	21,240	72	0	82	18	Type II Slurry	\$13,381
2031-32	021	1233	SILLIKER AVE	REBECCA DR	IDAHO ST	Local	AAC	E	2	08	522	36	18,792	73	0	88	12	Type II Slurry	\$11,839
2031-32	452	1252	STARLAND DR	NORTH END	STEVENS	Local	AAC	E	2	27	516	30	17,480	75	0	100	0	Type II Slurry	\$11,012
2031-32	530	1600	STEVENS AVE	STARLAND ST	ORANGE ST	Local	AAC	E	2	27	240	30	7,020	59	57	43	0	2" AC Grind-Overlay	\$29,765
2031-32	530	1601	STEVENS AVE	EUCLID ST	STARLAND ST	Local	AAC	E	2	27	299	30	8,790	71	33	62	5	Type II Slurry	\$5,538
2031-32	469	1312	TERRAZA SANTA ELENA	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	232	32	9,891	74	33	61	6	Type II Slurry	\$6,231
2031-32	470	1313	TERRY WAY	ORANGE ST	NORTH END	Local	AAC	E	2	27	351	30	10,350	79	0	100	0	Type II Slurry	\$6,521
2031-32	487	1356	VIA LOS BONITOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	154	32	6,503	77	25	61	14	Type II Slurry	\$4,097
2031-32	488	1357	VIEW DR	AMANDA	HILL	Local	AC	E	2	27	358	31	12,598	61	60	27	13	2" AC Grind-Overlay	\$53,416
2031-32	502	1379	WEDGEWOOD LN	KIRKWOOD	COACHWOOD	Local	AAC	E	2	26	1,541	32	50,312	69	40	32	28	Type II Slurry	\$31,697
																			\$1,780,969

XII. APPENDIX B – COMPLETE STREET LISTING CURRENT CONDITIONS

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
Arterials / Collectors (MPAH)																			
009	91	EUCUID ST	WHITTIER BLVD	FRANCIS AVE	Secondary	AC	A	2	~	1,449	35	52,200	99	0	61	39	2/13/25	Overlay - AC Rubber	2/1/25
009	92	EUCUID ST	FRANCIS ST	LA HABRA BLVD	Secondary	AC	A	2	~	1,115	52	49,425	96	0	30	70	2/13/25	Overlay - AC Rubber	2/1/25
009	93	EUCUID ST	LA HABRA BLVD	SECOND ST	Secondary	AC	A	4	~	710	60	42,600	79	13	63	24	5/9/25	New Construction - Initial	1/1/75
009	94	EUCUID ST	SECOND ST	OLIVE AVE	Secondary	AC	A	2	~	975	60	58,500	77	15	63	22	5/9/25	New Construction - Initial	1/1/75
009	95	EUCUID ST	OLIVE AVE	LAMBERT RD	Secondary	AC	A	4	~	935	60	56,100	79	27	73	0	5/9/25	New Construction - Initial	1/1/75
009	96	EUCUID ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	4	~	1,320	60	79,200	73	38	36	26	5/9/25	New Construction - Initial	1/1/75
009	97	EUCUID ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	4	~	1,320	60	74,580	76	31	38	31	5/9/25	New Construction - Initial	1/1/75
009	98	EUCUID ST	IMPERIAL HWY	SANDLEWOOD AVE	Major	AAC	A	4	~	1,600	80	128,000	87	37	63	0	5/9/25	Overlay - AC Structural	6/1/17
009	99	EUCUID ST	SANDLEWOOD AVE	CITY LIMIT	Major	AAC	A	4	~	1,580	80	126,400	84	13	80	7	5/9/25	Overlay - AC Structural	6/1/17
018	89	HACIENDA RD	WHITTIER BLVD	NORTH CITY LIMIT	Secondary	AAC	A	4	~	2,324	45	111,240	91	62	21	17	2/19/25	Overlay - AC Structural	1/1/21
061C	100	HARBOR BLVD	CITY LIMIT	BROOKDALE AVE	Primary	AC	A	4	~	1,315	80	89,075	84	38	42	20	4/23/25	New Construction - Initial	1/1/80
061C	101	HARBOR BLVD	BROOKDALE AVE	WHITTIER AVE	Primary	AC	A	2	~	1,320	80	103,600	78	15	38	47	4/23/25	New Construction - Initial	1/1/80
061C	102	HARBOR BLVD	WHITTIER AVE	FRANCIS AVE	Primary	AC	A	4	~	1,185	72	85,320	84	0	91	9	4/23/25	New Construction - Initial	1/1/80
061C	103	HARBOR BLVD	FRANCIS AVE	LA HABRA BLVD	Primary	AC	A	4	~	1,440	72	103,680	80	29	67	4	4/23/25	New Construction - Initial	1/1/80
061C	104	HARBOR BLVD	LA HABRA BLVD	SUPERIOR AVE	Primary	AC	A	6	~	1,400	72	102,000	61	32	56	12	5/5/25	New Construction - Initial	1/1/80
061C	105	HARBOR BLVD	SUPERIOR AVE	LAMBERT RD	Primary	AC	A	6	~	1,240	78	96,720	73	20	63	17	4/23/25	New Construction - Initial	1/1/80
061C	167	HARBOR BLVD	435' S/O IMPERIAL HWY	LAS RIENDAS	Major	AC	A	6	~	526	80	42,160	85	16	84	0	2/14/25	Overlay - AC Rubber	8/7/17
061B	109	HARBOR BLVD EAST SIDE	LAS RIENDAS DR	LAS PALMAS DR	Major	AC	A	2	~	1,075	32	34,400	80	11	58	31	2/14/25	Overlay - AC Rubber	8/7/17
061B	110	HARBOR BLVD EAST SIDE	LAS PALMAS DR	450' S/O LAS PALMAS DR	Major	AC	A	2	~	450	32	14,400	86	0	100	0	2/14/25	Overlay - AC Rubber	8/7/17
061B	106	HARBOR BLVD WEST SIDE	LAMBERT RD	EDWARDS DR	Major	AC	A	3	~	1,289	32	41,248	84	15	82	3	2/14/25	New Construction - Initial	1/1/80
061	107	HARBOR BLVD WEST SIDE	EDWARDS DR	IMPERIAL HWY	Major	AC	A	3	~	1,338	16	21,408	85	19	64	17	2/14/25	New Construction - Initial	1/1/80
061	108	HARBOR BLVD WEST SIDE	435' S/O IMPEIRAL HWY	IMPERIAL HWY	Major	AC	A	2	~	434	32	12,820	66	26	74	0	2/14/25	New Construction - Initial	1/1/80
001	1	IDAHO ST	WHITTIER BLVD	HIGHLANDER AVE	Secondary	AC	A	2	~	1,317	39	52,720	97	0	90	10	2/14/25	Surface Treatment - Slurry Seal	7/1/11
001	2	IDAHO ST	HIGHLANDER AVE	LA HABRA BLVD	Secondary	AC	A	2	~	1,283	39	51,360	96	0	85	15	2/14/25	New Construction - Initial	10/1/86
001	3	IDAHO ST	LA HABRA BLVD	HILLANDALE AVE	Secondary	AC	A	5	~	895	59	53,760	71	43	51	6	3/16/25	New Construction - Initial	1/1/78
001	4	IDAHO ST	HILLANDALE AVE	LAMBERT RD	Secondary	AC	A	5	~	1,713	59	102,840	65	36	43	21	3/12/25	New Construction - Initial	1/1/78
001	5	IDAHO ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	5	~	1,084	60	66,290	71	15	85	0	3/12/25	New Construction - Initial	1/1/78
001	6	IDAHO ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	5	~	1,525	59	91,560	79	0	100	0	3/12/25	New Construction - Initial	1/1/77
001	65	IDAHO ST	IMPERIAL HWY	SANDLEWOOD AVE	Secondary	AC	A	5	~	1,469	60	95,625	65	10	58	32	3/12/25	New Construction - Initial	1/1/80
001	66	IDAHO ST	SANDLEWOOD AVE	CITY LIMIT	Secondary	AC	A	4	~	2,549	66	168,234	76	12	80	8	3/11/25	New Construction - Initial	1/1/94
002	7	IMPERIAL HWY	W. CITY LIMIT	BRASS LANTERN DR	Primary	AC	A	6	~	1,549	64	101,136	45	47	52	1	3/12/25	New Construction - Initial	1/1/72
002	8	IMPERIAL HWY	BRASS LANTERN DR	BEACH BLVD	Primary	AC	A	6	~	1,051	64	72,264	37	38	51	11	3/12/25	New Construction - Initial	1/1/72
003	10	LA HABRA BLVD	DEXFORD ST	BEACH BLVD	Secondary	AC	A	4	~	1,540	55	86,296	73	24	32	44	2/25/25	New Construction - Initial	1/1/80
003	11	LA HABRA BLVD	BEACH BLVD	DEANNA ST	Secondary	AC	A	4	~	1,174	58	66,342	95	0	64	36	2/26/25	Complete Reconstruction - AC	1/1/20
003	12	LA HABRA BLVD	DEANNA ST	IDAHO ST	Secondary	AC	A	4	~	1,487	56	90,132	97	0	100	0	2/26/25	Complete Reconstruction - AC	1/1/20
003	13	LA HABRA BLVD	IDAHO ST	MONTE VISTA ST	Secondary	AC	A	4	~	1,309	55	70,745	69	54	38	8	2/26/25	New Construction - Initial	1/1/90
003	14	LA HABRA BLVD	MONTE VISTA ST	WALNUT ST	Secondary	AC	A	4	~	1,322	54	70,668	78	29	53	18	3/3/25	New Construction - Initial	1/1/90
003	15	LA HABRA BLVD	WALNUT ST	EUCUID ST	Secondary	AC	A	4	~	1,318	54	70,440	83	0	95	5	4/25/25	New Construction - Initial	1/1/90
003	16	LA HABRA BLVD	EUCUID ST	CYPRESS ST	Secondary	AC	A	4	~	1,325	60	77,580	74	23	74	3	5/5/25	New Construction - Initial	1/1/79
003	17	LA HABRA BLVD	CYPRESS ST	COLLEGE ST	Secondary	AC	A	4	~	1,318	60	76,655	77	15	64	21	5/5/25	New Construction - Initial	1/1/79
003	18	LA HABRA BLVD	COLLEGE ST	HARBOR BLVD	Secondary	AC	A	4	~	1,249	60	70,800	71	34	50	16	5/5/25	New Construction - Initial	1/1/79
003	19	LA HABRA BLVD	HARBOR BLVD	FONDA ST	Primary	AC	A	4	~	1,126	60	66,060	74	30	57	13	4/23/25	New Construction - Initial	1/1/79
003	20	LA HABRA BLVD	FONDA ST	PALM ST	Primary	AC	A	4	~	1,441	60	86,460	81	0	84	16	4/22/25	New Construction - Initial	1/1/76
003	21	LA HABRA BLVD	PALM ST	E. CITY LIMIT	Primary	AC	A	4	~	1,304	60	78,240	83	21	42	37	4/23/25	New Construction - Initial	1/1/76
003	9	LA HABRA BLVD	VALLEY HOME AVE	DEXFORD ST	Secondary	AC	A	4	~	1,002	56	56,112	79	16	76	8	2/25/25	New Construction - Initial	1/1/80
004	22	LAMBERT RD	PALM ST	CITY LIMIT	Major	AC	A	5	~	1,289	77	100,620	92	0	100	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	23	LAMBERT RD	RAILROAD	PALM ST	Major	AC	A	2	~	1,327	39	53,120	91	21	79	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	24	LAMBERT RD	HARBOR BLVD	RAILROAD	Major	AC	A	2	~	1,324	39	53,000	91	32	68	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	25	LAMBERT RD	RAIL ROAD	HARBOR BLVD	Primary	AC	A	5	~	1,320	79	105,680	88	15	58	27	2/14/25	Complete Reconstruction - AC	10/1/18
004	26	LAMBERT RD	CYPRESS ST	RAILROAD	Primary	AC	A	5	~	1,320	79	105,680	89	17	69	14	2/14/25	Complete Reconstruction - AC	10/1/18
004	27	LAMBERT RD	EUCUID ST	CYPRESS ST	Primary	AC	A	5	~	1,411	60	86,739	86	20	50	30	2/14/25	Complete Reconstruction - AC	10/1/18
004	28	LAMBERT RD	WALNUT ST	EUCUID ST	Primary	AC	A	4	~	1,316	64	85,605	92	27	73	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	29	LAMBERT RD	MONTE VISTA ST	WALNUT ST	Primary	AC	A	2	~	1,236	65	79,345	93	36	64	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	30	LAMBERT RD	IDAHO ST	MONTE VISTA ST	Primary	AC	A	4	~	1,310	64	91,850	93	0	100	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	31	LAMBERT RD	WHITEBOOK DR	IDAHO ST	Primary	AC	A	4	~	1,024	64	66,625	81	50	50	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	32	LAMBERT RD	BEACH BLVD	WHITEBOOK DR	Primary	AC	A	4	~	1,618	64	105,235	74	63	37	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	33	LAMBERT RD	MARTINEZ DR	BEACH BLVD	Primary	AC	A	5	~	1,294	70	98,960	85	28	62	10	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	34	LAMBERT RD	CITY LIMITS	MARTINEZ DR	Primary	AC	A	6	~	1,246	79	99,760	81	34	66	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
329	1101	MACY ST	WHITTIER BLVD	WALLACE AVE	Secondary	AC	A	2	~	869	45	40,020	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
329	1505	MACY ST	WALLACE AVE	RUSSELL ST	Secondary	AC	A	2	~	570	45	25,266	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
005	166	PALM ST	STEARNS AVE	LA HABRA BLVD	Collector	AAC	A	5	~	674	35	24,300	98	0	32	68	3/24/25	Overlay - AC Structural	5/1/23
005	35	PALM ST	WHITTIER BLVD	FRANCIS AVE	Collector	AAC	A	2	~	1,182	35	42,588	97	0	25	75	3/24/25	Overlay - AC Structural	5/1/23
005	36	PALM ST	FRANCIS AVE	STEARNS AVE	Collector	AAC	A	2	~	780	36	28,080	98	0	42	58	3/24/25	Overlay - AC Structural	5/1/23
005	37	PALM ST	TANGLEWOOD ST	LAMBERT RD	Secondary	AC	A	4	~	1,521	60	88,855	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
014	73	RUSSELL ST	VALLEY HOME AVE	MACY ST	Secondary	AC	A	2	~	1,757	42	79,744	79	23	55	22	2/18/25	Surface Treatment - Slurry Seal	8/4/23

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
006	38	WHITTIER BLVD	PALM ST	CITY LIMITS	Collector	AC	A	2	~	1,262	36	45,468	79	16	80	4	4/23/25	New Construction - Initial	1/1/91
006	39	WHITTIER BLVD	BRIGHTON ST	PALM ST	Collector	AC	A	5	~	1,456	58	83,948	69	32	68	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
006	40	WHITTIER BLVD	HARBOR BLVD	BRIGHTON ST	Collector	AC	A	4	~	1,187	56	66,472	68	10	90	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
										16.3		5,004,355							
		Locals																	
063	200	ACACIA ST	PORTOLA	LOMA VERDE	Local	AAC	E	2	22	171	31	5,801	64	0	74	26	3/16/25	Surface Treatment - Slurry Seal	4/1/13
007	49	ALDRICH ST	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	885	28	23,650	78	62	38	0	4/17/25	Surface Treatment - Slurry Seal	8/4/23
055	158	ALMONDWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	924	35	33,300	86	18	82	0	3/10/25	Surface Treatment - Slurry Seal	4/1/24
055	311	ALMONDWOOD ST	TEAKWOOD AVE	SOUTH END	Local	AC	E	2	26	236	36	10,643	92	29	71	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
055	313	ALMONDWOOD ST	SCHOOLWOOD DR	SANDLEWOOD AVE	Local	AC	E	2	26	169	35	6,120	83	53	47	0	3/11/25	Surface Treatment - Slurry Seal	11/30/10
103	315	ALPINE ST	W/O BEDFORD	N/O SUPERIOR	Local	AAC	E	2	39	1,409	31	45,120	74	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
104	316	ALTO LN	E/O ROANNE	E/END	Local	AAC	E	2	34	207	26	6,933	78	34	42	24	3/25/25	Overlay - AC Thin	4/1/13
105	317	AMANDA LN	EUCUID ST	BISHOP	Local	AC	E	2	27	456	30	14,930	75	49	41	10	3/5/25	Surface Treatment - Slurry Seal	1/1/20
105	318	AMANDA LN	BISHOP	VIEW	Local	AC	E	2	27	397	30	12,660	78	59	39	2	4/18/25	Surface Treatment - Slurry Seal	1/1/20
106	319	AMORITA AVE	VECINO ST	VERONA ST	Local	AC	E	2	40	575	30	17,280	84	57	34	9	3/17/25	New Construction - Initial	1/1/80
107	321	ANTOINETTE DR	CITY LIMIT	GREENVIEW DR	Local	AC	E	2	08	978	33	32,274	90	21	56	23	2/19/25	Surface Treatment - Slurry Seal	1/1/20
025	118	ARBOLITA DR	HARBOR BLVD	BRIGHTON ST	Local	AAC	E	2	37	1,195	36	42,520	72	63	23	14	3/24/25	Overlay - AC Thin	4/1/13
025	119	ARBOLITA DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,275	36	45,550	80	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
025	324	ARBOLITA DR	RODDY DR	HARBOR BLVD	Local	AC	E	2	34	582	35	20,988	52	70	13	17	3/25/25	Slurry Seal or Chip Seal	8/1/05
109	329	ASHLEY CIR	NORTH END	HILLDALE AVE	Local	AC	E	2	10	246	32	9,447	49	49	28	23	2/25/25	New Construction - Initial	1/1/80
110	330	AVENIDA SANTA ANITA	BURWOOD	CALLE DON JUAN	Local	AAC	E	2	33	244	36	9,284	83	40	57	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
110	331	AVENIDA SANTA ANITA	CALLE DON GUILLERMO	BURWOOD	Local	AAC	E	2	33	1,047	36	37,188	66	69	26	5	3/10/25	Surface Treatment - Slurry Seal	1/1/20
111	332	AVENIDA SANTA BARBARA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AAC	E	2	33	1,075	32	33,440	78	51	45	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
112	333	AVENIDA SANTA CATALINA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	978	31	31,328	75	30	46	24	3/10/25	Surface Treatment - Slurry Seal	1/1/20
113	334	AVENIDA SANTA DOMINGO	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,246	32	38,912	80	48	52	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
114	338	AVENIDA SANTA DOROTEA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	1,293	32	41,376	80	4	96	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
115	339	AVENIDA SANTA ELENA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,255	32	40,160	82	7	93	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
116	340	BAJA AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	468	30	15,615	78	29	49	22	3/4/25	New Construction - Initial	1/1/80
116	341	BAJA AVE	KERN ST	MARIPOSA ST	Local	AC	E	2	04	255	32	8,910	51	84	16	0	3/4/25	New Construction - Initial	1/1/80
542	1735	BALDWIN ST	GORDON AVE	RANDALL AVE	Local	AC	E	2	01	545	31	18,011	79	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
542	1736	BALDWIN ST	RANDALL AVE	SOUTH END	Local	AC	E	2	01	255	31	11,792	71	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
117	342	BANCROFT AVE	KINLEY	RIGSBY ST	Local	AAC	E	2	02	335	29	10,080	95	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
118	343	BEA WAY	JOAN ST	EAST END	Local	AC	E	2	38	149	33	5,364	71	58	33	9	3/25/25	Surface Treatment - Slurry Seal	4/1/13
527	1507	BEACH ST	WHITTIER BLVD	NORTH END	Local	AC	E	2	07	221	36	9,531	56	82	13	5	2/19/25	Overlay - AC Rubber	4/1/13
119	344	BEDFORD ST	LA HABRA BLVD	ALPINE ST	Local	AAC	E	2	39	207	41	8,736	72	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
119	345	BEDFORD ST	ALPINE ST	SUPERIOR AVE	Local	AAC	E	2	39	1,473	31	47,168	72	28	72	0	4/2/25	Overlay - AC Thin	8/1/07
119	346	BEDFORD ST	ESSEX	FRANCIS AVE	Local	AC	E	2	38	742	29	22,290	93	0	100	0	3/24/25	Overlay - AC Rubber	4/1/13
119	347	BEDFORD ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	754	29	22,650	84	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
120	350	BERKLEY AVENUE	DEXFORD DR	UIME ST	Local	AAC	E	2	02	238	35	8,604	70	34	66	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
120	351	BERKLEY AVENUE	WEST END	DEXFORD ST	Local	AAC	E	2	02	59	36	1,303	69	39	47	14	2/24/25	Surface Treatment - Slurry Seal	11/15/21
121	352	BIRCH TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	84	60	5,719	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
122	353	BISHOP DR	AMANDA LN	ORANGE ST	Local	AC	E	2	27	589	30	17,700	66	71	28	1	4/17/25	Surface Treatment - Slurry Seal	1/1/20
122	354	BISHOP DR	CYPRESS ST	EAST END	Local	AC	E	2	34	587	30	20,237	89	45	55	0	4/17/25	Surface Treatment - Slurry Seal	4/1/13
122	7160	BISHOP DR	CYPRESS ST	ORANGE ST	Local	AAC	E	2	27	519	30	15,600	81	18	82	0	4/17/25	Overlay - AC Structural	1/1/20
123	358	BLAKE ST	WILSHIRE AVE	RAYMOND ST	Local	AC	E	2	04	1,089	32	35,214	85	26	74	0	3/9/25	New Construction - Initial	1/1/80
124	362	BOND AVE	KINLEY ST	RIGSBY ST	Local	AAC	E	2	02	421	30	12,450	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
125	363	BONNIE LN	CYPRESS ST	N/O CAPELLA	Local	AC	E	2	27	706	30	22,180	66	70	22	8	4/18/25	Surface Treatment - Slurry Seal	1/1/20
126	364	BRANFORD LN	WEST END	STURBRIDGE	Local	AC	E	2	05	223	26	7,373	86	16	84	0	2/26/25	Overlay - AC Rubber	4/1/13
049	153	BRASS LANTERN DR	IMPERIAL HWY	ZEKE & ELSIE AVE	Local	AC	E	2	06	1,774	35	63,900	86	26	74	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
049	365	BRASS LANTERN DR	RIDGEHAVEN DR	ZEKE & ELSIE AVE	Local	AC	E	2	06	295	36	11,370	68	32	68	0	2/18/25	Overlay - AC Rubber	4/1/13
128	368	BRIERCLIFF DR	CAJON DR	IMPERIAL HWY	Local	AC	E	2	05	1,083	36	38,556	76	29	44	27	2/25/25	Surface Treatment - Slurry Seal	8/4/23
128	9368	BRIERCLIFF DR	CAJON DR	CEDARWOOD DR	Local	AC	E	2	05	500	36	17,568	64	55	40	5	2/25/25	Surface Treatment - Slurry Seal	8/4/23
129	371	BRIGHT ST	SECOND ST	SOUTH END	Local	AC	E	2	36	402	32	15,331	86	0	89	11	4/17/25	Slurry Seal or Chip Seal	8/1/05
026	120	BRIGHTON ST	WHITTIER BLVD	CONCOURSE ST	Local	AC	E	2	37	1,174	35	42,300	85	42	58	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
026	121	BRIGHTON ST	CONCOURSE ST	CITY LIMIT	Local	AC	E	2	37	1,330	36	47,448	83	75	25	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
023	116	BROOKDALE AVE	LINDEN LN	HARBOR BLVD	Local	AC	E	2	34	1,844	35	66,420	82	0	80	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
023	1503	BROOKDALE AVE	PALM ST	EAST END	Local	AC	E	2	40	319	35	10,955	76	33	52	15	3/25/25	New Construction - Initial	1/1/80
023	379	BROOKDALE AVE	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,386	35	49,932	79	34	66	0	3/24/25	New Construction - Initial	1/1/80
023	382	BROOKDALE AVE	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	998	36	36,678	87	1	51	48	3/24/25	Surface Treatment - Slurry Seal	4/1/13
023	385	BROOKDALE AVE	FALLENLEAF ST	LINDEN LN	Local	AC	E	2	34	290	35	10,476	86	0	97	3	3/25/25	Slurry Seal or Chip Seal	8/1/05
521	386	BROOKFIELD AVE	SHELburne ST	NANTUCKET ST	Local	AC	E	2	37	404	36	15,150	88	47	53	0	3/25/25	New Construction - Initial	1/1/80
132	387	BROOKWOOD DR	NORTH END	ORCHID	Local	AC	E	2	40	408	36	17,236	71	78	14	8	3/17/25	New Construction - Initial	1/1/80
133	388	BRUCE LN	WEST END	W/O OAKLAND	Local	AAC	E	2	03	111	30	4,905	72	44	56	0	2/20/25	Overlay - AC Thin	8/1/08
134	389	BUENA VISTA AVE	W END	LA CASA AVE	Local	AC	E	2	19	1,210	36	43,128	53	71	17	12	4/25/25	Surface Treatment - Slurry Seal	7/1/12
134	390	BUENA VISTA AVE	LA CASA AVE	KEENE DR	Local	AC	E	2	19	871	36	31,356	88	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/11
134	395	BUENA VISTA AVE	WALNUT ST	ENCINITAS ST	Local	AAC	E	2	24	1,209	30	35,910	58	0	100	0	4/15/25	Surface Reconstruction - AC	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
135	396	BURCH WAY	NORTH END	PINEHURST	Local	AC	E	2	28	198	30	7,515	70	59	41	0	4/2/25	New Construction - Initial	1/1/80
136	397	BURWOOD ST	MONTWOOD AVE	PARKWOOD AVE	Local	AC	E	2	32	883	36	32,538	79	48	26	26	3/10/25	Surface Treatment - Slurry Seal	1/1/20
136	398	BURWOOD ST	MONTWOOD AVE	AVENIDA SANTA ANITA	Local	AC	E	2	32	257	35	9,288	92	0	92	8	3/10/25	Surface Treatment - Slurry Seal	1/1/20
145	147	CAJON DR	BRIERCLIFF DR	GREENBRIER LN	Local	AC	E	2	05	1,035	36	37,260	74	62	20	18	2/25/25	Surface Treatment - Slurry Seal	8/4/23
045	168	CAJON DR	GREENBRIER LN	IMPERIAL HWY	Local	AC	E	2	05	340	46	14,110	96	34	66	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
045	399	CAJON DR	RIDGEHAVEN DR	BRIERCLIFF DR	Local	AC	E	2	05	687	35	24,768	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
523	1460	CALIFORNIA ST	LA HABRA BLVD	SOUTH END	Local	AAC	E	2	22	635	30	18,790	62	56	44	0	4/21/25	Overlay - AC Thin	4/1/13
060	163	CALLE DON GUILLERMO	EUCUID ST	COUNTRY HILLS DR	Local	AAC	E	2	33	1,749	35	63,000	80	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
060	414	CALLE DON GUILLERMO	COUNTRY HILLS DR	SOUTH END	Local	AC	E	2	33	153	32	8,677	70	24	73	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
139	415	CALLE DON JUAN	AVENIDA SANTA ANITA	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	859	36	31,674	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
139	416	CALLE DON JUAN	AVENIDA SANTA DOMINGO	CITY LIMITS	Local	AC	E	2	33	737	36	26,532	85	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
140	422	CAMPBELL AVE	WALL ST	BLAKE ST	Local	AAC	E	2	04	871	31	27,904	84	41	59	0	3/9/25	Overlay - AC Thin	8/1/08
141	423	CANDACE LN	RODDY	EAST END	Local	AC	E	2	34	413	30	13,941	80	0	62	38	3/25/25	Slurry Seal or Chip Seal	8/1/05
142	424	CANDIA CIR	WEST END	KEENE DR	Local	AC	E	2	19	165	26	5,815	86	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
143	425	CANDLEWOOD DR	SILVERSPUR	S/O CANDLEWOOD	Local	AAC	E	2	05	369	26	11,094	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
144	426	CANDLEWOOD WAY	E/O CANDLEWOOD	E/END	Local	AAC	E	2	05	94	51	6,544	91	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
145	1723	CANFIELD DR	MACY ST	RANDALL AVE	Local	AC	E	1	01	817	32	27,246	70	8	69	23	2/17/25	Surface Treatment - Slurry Seal	8/4/23
145	427	CANFIELD DR	CARPENTER ST	EAST END	Local	AC	E	2	01	748	33	25,236	70	0	100	0	2/18/25	New Construction - Initial	1/1/80
146	430	CANTERBURY LN	GLENHAVEN	W/O STURBRIDGE	Local	AAC	E	2	05	465	36	17,346	92	0	84	16	2/26/25	Surface Reconstruction - AC	4/1/13
147	431	CAPELLA AVE	CYPRESS ST	ORANGE ST	Local	AAC	E	2	27	495	36	17,604	79	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
147	432	CAPELLA AVE	EUCUID ST	ORANGE ST	Local	AAC	E	2	27	692	36	24,696	76	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
148	434	CARLISLE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	114	26	4,539	93	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
149	435	CARMELA LN	HARBOR BLVD	EAST END	Local	AAC	E	2	37	749	35	27,984	88	0	97	3	3/17/25	Surface Reconstruction - AC	4/1/13
150	437	CAROL ST	CITY LIMIT	LA SERNA AVE	Local	AC	E	2	13	889	30	26,920	79	39	58	3	2/27/25	Surface Treatment - Slurry Seal	1/1/20
150	438	CAROL ST	LA SERNA AVE	N/O RYAN	Local	AC	E	2	13	767	30	23,010	84	1	45	54	2/27/25	Surface Treatment - Slurry Seal	1/1/20
151	441	CARPENTER ST	RUSSELL ST	NORTH END	Local	AC	E	2	01	534	33	15,235	67	0	98	2	2/18/25	Surface Treatment - Cape Seal	4/1/13
152	443	CEDARWOOD DR	BRIERCLIFF DR	SOUTH END	Local	AC	E	2	05	270	26	8,599	83	0	100	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
152	444	CEDARWOOD DR	SILVERSPUR LN	BRIERCLIFF DR	Local	AC	E	2	05	1,001	36	35,820	63	54	30	16	2/25/25	Surface Treatment - Slurry Seal	8/4/23
030	127	CHANTRY DR	FOXDALE DR	WHITTIER BLVD	Local	AAC	E	2	02	474	35	17,100	75	40	60	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
030	446	CHANTRY DR	FOXDALE DR	GREGORY LN	Local	AAC	E	2	02	715	33	23,397	79	31	69	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
154	450	CHERI DR	REBECCA	SILLIKER	Local	AAC	E	2	08	461	26	11,830	69	16	84	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
155	451	CHERRY TREE CIR	RAIN TREE	S/END	Local	AAC	E	2	12	82	50	4,100	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
156	452	CHERRYWOOD ST	TEAKWOOD AVE	COUNTRY HILLS DR	Local	AAC	E	2	26	151	32	4,640	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
157	453	CHESHAM AVE	WALNUT ST	DERRY ST	Local	AC	E	2	19	895	36	32,754	53	42	58	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
158	1506	CHESTNUT ST	CITY LIMIT NORTH	WHITTIER BLVD	Local	AC	E	2	35	153	36	5,698	69	58	42	0	4/22/25	New Construction - Initial	1/1/09
158	455	CHESTNUT ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	742	30	22,080	76	0	55	45	3/26/25	Surface Treatment - Slurry Seal	7/1/12
158	456	CHESTNUT ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	35	503	30	14,910	75	19	81	0	3/26/25	3 in AC OVERLAY	7/1/12
159	457	CHINCHILLA ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	660	30	20,300	63	52	38	10	3/4/25	Slurry Seal or Chip Seal	8/1/05
160	458	CIRCLE DR	CAROL	RYAN AVE	Local	AAC	E	2	13	761	30	24,080	87	21	79	0	2/13/25	Overlay - AC Structural	1/1/20
022	114	CITRUS DR	WHITTIER BLVD	RYAN AVE	Local	AAC	E	2	13	773	29	26,156	56	30	67	3	2/27/25	Surface Reconstruction - AC	7/1/11
022	115	CITRUS DR	RYAN AVE	CITY LIMITS 140' N/ENTRADA DR	Local	AAC	E	2	13	1,763	31	55,664	63	36	58	6	2/27/25	Surface Reconstruction - AC	7/1/11
534	1704	CIVIC CENTER PLAZA	LA HABRA BLVD	ALLEY N/O LA HABRA BLVD	Local	AC	E	2	28	341	34	15,594	100	0	0	0	4/25/25	Surface Treatment - Slurry Seal	8/4/23
534	1705	CIVIC CENTER PLAZA	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	214	39	7,878	72	0	100	0	4/18/25	Surface Treatment - Slurry Seal	4/1/13
162	462	CLIFTON ST	OLIVE AVE	LAMBERT RD	Local	AAC	E	2	30	826	36	29,736	76	3	78	19	4/21/25	Overlay - AC Thin	8/1/07
162	463	CLIFTON ST	LAMBERT RD	ROSECREST AVE	Local	AAC	E	2	31	496	30	14,880	81	23	77	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
056	159	COACHWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	1,134	35	40,860	87	0	70	30	3/10/25	Overlay - AC Structural	1/1/20
164	470	COBBLESTONE RD	GRAYVILLE DR	RIDGEHAVEN DR	Local	AC	E	2	06	1,384	36	49,392	68	64	36	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
165	471	COLE WAY	NORTH END	OLINDA	Local	AAC	E	2	20	157	36	7,227	84	0	100	0	2/13/25	Surface Reconstruction - AC	8/1/05
166	472	COLFAX CT	WEST END	COLFAX ST	Local	AC	E	2	38	217	30	9,006	74	38	31	31	3/24/25	Surface Treatment - Slurry Seal	4/1/13
167	474	COLFAX ST	COLFAX CT	ESSEX DR	Local	AC	E	2	38	254	30	8,190	80	1	40	59	3/24/25	Surface Treatment - Slurry Seal	4/1/13
167	475	COLFAX ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	706	30	21,000	85	22	78	0	3/24/25	New Construction - Initial	1/1/80
167	476	COLFAX ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	765	30	22,770	78	57	41	2	3/24/25	New Construction - Initial	1/1/80
167	477	COLFAX ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	1,802	32	57,376	75	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
168	478	COLLEEN ST	LA HABRA BLVD	LORELLA	Local	AAC	E	2	10	495	36	17,388	68	45	55	0	2/26/25	Surface Reconstruction - AC	8/1/08
169	479	COLLEGE ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,005	33	33,165	67	55	31	14	4/18/25	Overlay - AC Thin	8/1/05
169	480	COLLEGE ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	638	32	18,484	83	0	100	0	4/22/25	Surface Treatment - Slurry Seal	7/1/12
169	484	COLLEGE ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	664	38	25,232	69	33	43	24	4/22/25	Surface Treatment - Slurry Seal	7/1/12
169	485	COLLEGE ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	626	37	23,826	67	40	44	16	4/22/25	Surface Treatment - Slurry Seal	7/1/11
170	491	COMITY CIR	CONCOURSE ST	EAST END	Local	AAC	E	2	37	209	30	7,817	89	0	100	0	3/17/25	Overlay - AC Thin	4/1/13
524	1504	COMMERCIAL WY	CYPRESS AVE	PARK INDUSTRIAL DR	Local	AC	E	2	36	1,026	36	36,972	60	45	36	19	4/21/25	Slurry Seal or Chip Seal	8/1/05
171	492	CONCORD WAY	CAJON DR	N/O REDCOACH	Local	AC	E	2	05	464	26	11,752	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
172	493	CONCOURSE ST	BRIGHTON ST	DAVIT CIR	Local	AC	E	2	37	980	36	35,280	78	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
172	495	CONCOURSE ST	WHITTIER AVE (FRONTAGE)	DAVIT CIR	Local	AC	E	2	37	637	36	22,932	92	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
525	1509	CORTO WAY	WHITTIER BLVD	SOUTH END	Local	AAC	E	2	09	250	26	8,295	66	34	66	0	2/20/25	Surface Reconstruction - AC	7/1/11
173	497	COUNTRY HILLS DR	CITY LIMIT	CALLE DON JUAN	Local	AC	E	2	33	1,325	36	47,268	80	10	90	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	500	COUNTRY HILLS DR	CALLE DON JUAN	EAST END	Local	AC	E	2	33	62	32	3,259	76	6	94	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	501	COUNTRY HILLS DR	CHERRYWOOD	DORWOOD AVE	Local	AAC	E	2	26	991	35	35,712	88	24	61	15	3/10/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
173	502	COUNTRY HILLS DR	DORWOOD AVE	EUCLID ST	Local	AC	E	2	26	511	36	17,964	79	13	87	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
174	503	COUNTRY HILLS DR	WEST END	CHEERYWOOD	Local	AAC	E	2	26	383	32	14,051	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
174	504	COUNTRY LN	EAST END	MEADOWLARK	Local	AC	E	2	34	182	26	7,277	79	0	81	19	3/25/25	Slurry Seal or Chip Seal	8/1/05
539	1727	CREEK LN	JANISON DR	RUSSELL ST	Local	AC	E	1	01	749	29	21,456	69	16	84	0	2/17/25	New Construction - AC	1/1/18
008	171	CYPRESS ST	LA HABRA BLVD	SECOND ST	Local	AC	C	2	36	724	35	26,100	83	33	37	30	4/18/25	Slurry Seal or Chip Seal	8/1/05
008	1715	CYPRESS ST	CITY BOUNDARY	BONNIE LN	Local	AC	C	2	27	501	35	18,072	68	47	50	3	4/18/25	New Construction - AC	1/1/80
008	50	CYPRESS ST	305' N/O FOUNDATION	IMPERIAL HWY	Local	AC	C	2	31	1,201	35	43,272	41	42	55	3	2/14/25	New Construction - Initial	1/1/92
008	51	CYPRESS ST	LAMBERT RD	498' S/O PACIFIC	Local	AC	C	2	31	1,642	35	59,148	58	33	59	8	2/14/25	New Construction - Initial	1/1/92
008	52	CYPRESS ST	COMMERCIAL WAY	LAMBERT RD	Local	AC	C	2	36	1,094	35	39,420	79	43	37	20	4/21/25	New Construction - Initial	1/1/74
008	53	CYPRESS ST	SECOND ST	COMMERCIAL WAY	Local	AC	C	2	36	835	36	30,060	88	1	57	42	4/18/25	New Construction - Initial	1/1/74
008	54	CYPRESS ST	FRANCIS AVE	LA HABRA BLVD	Local	AAC	C	2	35	1,109	35	40,716	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
008	55	CYPRESS ST	WHITTIER BLVD	FRANCIS AVE	Local	AAC	C	2	35	1,475	34	51,660	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
008	56	CYPRESS ST	CAPELLA AVE	WHITTIER BLVD	Local	AAC	C	2	34	1,419	35	51,120	69	64	32	4	4/18/25	Overlay - AC Structural	2/1/24
008	57	CYPRESS ST	BONNIE LN	CAPELLA AVE	Local	AC	C	2	34	467	35	16,848	73	9	89	2	4/18/25	New Construction - Initial	1/1/75
176	506	DARBY CT	WEST END	CLIFTON	Local	AAC	E	2	30	183	26	6,333	51	63	25	12	4/21/25	Overlay - AC Thin	8/1/07
177	507	DAVID AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	619	30	18,390	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
178	508	DAVIT CIR	CONCOURSE ST	EAST END	Local	AC	E	2	37	128	30	5,467	88	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
039	140	DEANNA ST	LA HABRA BLVD	HILLDALE AVE	Local	AAC	E	2	10	1,049	35	37,800	87	22	78	0	2/25/25	Surface Reconstruction - AC	8/1/08
180	512	DEBWOOD PL	PARKWOOD AVE	S/END	Local	AC	E	2	25	392	26	11,717	68	48	36	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
181	513	DEL SUR AVE	WEST END	E/O LA CASA	Local	AC	E	2	19	349	22	7,700	59	57	20	23	4/15/25	Surface Treatment - Slurry Seal	7/1/12
182	514	DERRY ST	RYE AVE	N/O LAS LOMAS	Local	AC	E	2	19	520	36	19,220	63	62	19	19	4/15/25	Surface Treatment - Slurry Seal	7/1/02
182	516	DERRY ST	BUENA VISTA AVE	CHESHAM AVE	Local	AC	E	2	19	480	36	17,780	65	68	31	1	4/15/25	Surface Treatment - Slurry Seal	7/1/12
028	124	DEXFORD DR	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	82	46	54	0	2/24/25	Overlay - AC Structural	11/15/21
028	125	DEXFORD DR	GREGORY LN	FOXDALE DR	Local	AAC	E	2	02	877	35	31,608	75	56	44	0	2/24/25	Overlay - AC Structural	11/15/21
184	135	DEXFORD ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	984	35	35,460	71	60	40	0	2/20/25	Overlay - AC Thin	8/1/08
184	527	DEXFORD ST	STORY AVE	SOUTH END	Local	AAC	E	2	03	219	36	8,634	82	34	66	0	2/20/25	Overlay - AC Thin	8/1/08
185	528	DEXTER ST	ALLEY S/LA HABRA	SUPERIOR AVE	Local	AAC	E	2	39	1,762	32	56,256	76	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
185	529	DEXTER ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	734	30	21,840	80	50	25	25	3/24/25	New Construction - Initial	1/1/80
185	530	DEXTER ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	85	34	66	0	3/24/25	New Construction - Initial	1/1/80
185	531	DEXTER ST	LA HABRA BLVD	ALLEY S/LA HABRA	Local	AAC	E	2	39	145	31	4,672	75	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
186	532	DITWOOD PL	RONWOOD	SOUTH END	Local	AC	E	2	25	132	26	4,957	68	51	33	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
187	533	DOLORES ST	LINDAUER DR	N/O LAGUNA	Local	AC	E	2	07	433	29	13,020	77	36	64	0	2/19/25	New Construction - Initial	1/1/80
188	534	DONNYBROOK AVE	STONEWOOD	W/O MEADOWLARK	Local	AC	E	2	34	596	36	21,024	86	0	100	0	3/25/25	Slurry Seal or Chip Seal	8/1/05
054	164	DORWOOD AVE	GWYNWOOD AVE	STONEWOOD AVE	Local	AC	E	2	25	299	35	10,800	98	0	100	0	4/15/25	Surface Treatment - Slurry Seal	4/1/24
189	535	DORWOOD AVE	COUNTRY HILLS DR	SOUTH END	Local	AAC	E	2	26	158	36	7,835	94	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
189	536	DORWOOD AVE	COUNTRY HILLS DR	COUNTRY HILL DR	Local	AAC	E	2	26	631	36	22,716	65	75	25	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
189	537	DORWOOD AVE	SANDLEWOOD AVE	LATCHWOOD LN	Local	AC	E	2	26	852	36	30,672	72	54	42	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
529	1530	DOT AVE	JOAN ST	JUANITA ST	Local	AC	E	2	38	414	32	13,695	91	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
190	542	DOVER DR	WALNUT ST	DURHAM	Local	AC	E	2	24	459	35	16,560	45	82	18	0	4/21/25	Surface Treatment - Slurry Seal	7/1/12
191	543	DURHAM ST	DOVER DR	LAS LOMAS AVE	Local	AC	E	2	24	817	36	29,196	71	51	30	19	4/15/25	Surface Treatment - Slurry Seal	7/1/12
191	544	DURHAM ST	LAMBERT RD	DOVER DR	Local	AC	E	2	24	471	36	16,740	84	0	95	5	4/15/25	Surface Treatment - Slurry Seal	7/1/12
192	545	EAGLEWOOD PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	66	32	3,139	78	52	48	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
193	546	EASTPARK DR	GREENTREE LN	FONDA ST	Local	AC	E	2	38	528	32	18,396	85	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
194	548	EDGEMONT ST	SANSINENA LN	N/O RUSSELL	Local	AAC	E	2	08	599	32	19,040	92	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
194	549	EDGEMONT ST	RUSSELL ST	SILLIKER AVE	Local	AAC	E	2	08	575	32	27,872	86	17	83	0	2/19/25	Overlay - AC Structural	1/1/20
195	551	EL CAMINO DR	SIERRA VISTA	WALNUT ST	Local	AC	E	2	13	1,143	30	33,930	89	22	78	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
196	552	EL DON DR	HACIENDA DR	EL RANCHO DR	Local	AAC	E	2	09	400	30	11,820	82	0	89	11	2/24/25	Overlay - AC Structural	1/1/20
197	554	EL DORADO AVE	HACIENDA	EL RANCHO	Local	AAC	E	2	09	432	29	12,990	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
197	555	EL DORADO AVE	WEST END	HACIENDA	Local	AAC	E	2	09	829	30	26,665	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
198	556	EL NIDO ST	NORTH END	ROSECREST	Local	AAC	E	2	24	246	30	8,955	69	0	99	1	4/21/25	Surface Reconstruction - AC	7/1/12
199	557	EL PORTAL CT	WEST END	EL PORTAL DR	Local	AAC	E	2	09	237	30	8,660	70	8	92	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
031	128	EL PORTAL DR	BEACH BLVD	GRANADA DR	Local	AAC	E	2	09	1,725	30	51,642	66	37	63	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
031	169	EL PORTAL DR	GRANADA DR	LA HABRA BLVD	Local	AAC	E	2	09	709	35	25,560	67	46	48	6	2/20/25	Surface Treatment - Slurry Seal	1/1/20
032	129	EL RANCHO DR	EL DORADO AVE	HACIENDA RD	Local	AAC	E	2	09	1,604	30	48,150	83	14	86	0	2/24/25	Overlay - AC Structural	1/1/20
032	1511	EL RANCHO DR	EL PORTAL	SOUTH END	Local	AC	E	2	09	370	30	12,675	85	16	84	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
032	7146	EL RANCHO DR	EL DORADO AVE	EL PORTAL DR	Local	AC	E	2	09	425	30	12,780	85	39	61	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
202	568	EL REY DR	EL RANCHO DR	EL RANCHO DR	Local	AAC	E	2	09	473	30	14,010	79	12	80	8	2/24/25	Overlay - AC Structural	1/1/20
203	569	ELECTRIC AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	30	38,610	74	25	60	15	3/4/25	Overlay - AC Thin	8/1/07
204	570	ELM ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	21	448	30	13,440	59	58	42	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
205	573	ELMCROFT CIR	MARIPOSA	EAST END	Local	AAC	E	2	05	371	32	13,667	88	0	35	65	5/6/25	Surface Reconstruction - AC	4/1/13
522	1440	ELMSFORD AVE	GLENCLIFF	WHITEBOOK	Local	AC	E	2	11	1,003	36	36,714	80	19	57	24	3/4/25	Slurry Seal or Chip Seal	8/1/05
206	575	EMBER LN	FALLENLEAF ST	EAST END	Local	AAC	E	2	34	67	47	4,399	83	16	57	27	3/26/25	Surface Reconstruction - AC	8/1/05
206	576	EMBER LN	WEST END	FALLENLEAF ST	Local	AAC	E	2	34	409	36	16,275	81	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
207	577	EMERY AVE	PALM ST	EAST END	Local	AAC	E	2	39	666	36	25,456	67	46	45	9	2/14/25	Overlay - AC Thin	8/1/07
208	578	ENCINITAS ST	LAS LOMAS DR	KEENE DR	Local	AC	E	2	24	698	36	24,912	77	37	47	16	4/15/25	Surface Treatment - Slurry Seal	7/1/12
209	580	ENTRADA DR	CITRUS DR	CAROL ST	Local	AAC	E	2	13	447	30	13,230	81	63	37	0	2/27/25	Overlay - AC Structural	1/1/20
210	582	ERNA AVE	COLLEGE ST	ALLEY W/HARBOR BLVD	Local	AC	E	2	35	996	30	29,910	85	0	100	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
210	583	ERNA AVE	WILLOW ST	WALNUT ST	Local	AC	E	2	16	1,000	32	31,616	47	66	26	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
210	586	ERNA AVE	WALNUT ST	HAZEL ST	Local	AAC	E	2	21	319	30	9,600	89	0	100	0	4/17/25	Overlay - AC Structural	1/1/20
210	587	ERNA AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	936	30	27,780	85	0	95	5	3/26/25	Surface Treatment - Slurry Seal	7/1/12
210	591	ERNA AVE	ORANGE ST	CYPRESS ST	Local	AC	E	2	28	628	50	29,650	86	17	83	0	2/13/25	New Construction - Initial	1/1/80
210	7155	ERNA AVE	HAZEL ST	EUCLID ST	Local	AC	E	2	21	924	30	27,000	69	54	34	12	4/18/25	Surface Treatment - Slurry Seal	1/1/20
211	596	ESSEX DR	BEDFORD ST	FONDA ST	Local	AC	E	2	38	739	30	22,170	59	60	16	24	3/24/25	New Construction - Initial	1/1/80
211	599	ESSEX DR	FONDA ST	NORTH END	Local	AC	E	2	38	172	30	6,906	72	0	100	0	3/24/25	New Construction - Initial	1/1/80
212	600	ESTATE DR	GREENTREE	FONDA ST	Local	AC	E	2	38	532	32	17,774	86	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
009	165	EUCLID ST	AMANDA DR	WHITTIER BLVD	Local	AAC	C	2	27	424	35	15,300	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24
009	58	EUCLID ST	NORTH CITY LIMITS	AMANDA DR	Local	AAC	C	2	27	2,240	36	67,603	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24
213	601	EUNICE CIR	NORTH END	N/O HILLDALE	Local	AAC	E	2	10	309	31	11,154	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/08
214	602	EXETER AVE	DERRY ST	NASHUA ST	Local	AC	E	2	19	910	26	23,507	76	13	87	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
215	603	EXETER CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	74	12	88	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
535	1707	FAHRINGER WY	IDAHO ST	WEST END	Local	AC	E	2	09	339	25	8,840	79	21	79	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
217	605	FALLENLEAF ST	WOODCREST AVE	BROOKDALE AVE	Local	AC	E	2	34	773	36	27,828	85	0	100	0	3/25/25	Surface Treatment - Slurry Seal	4/1/13
218	607	FARRINGTON DR	NORTH END	RUSSELL ST	Local	AAC	E	2	07	186	30	7,105	75	22	78	0	2/19/25	Surface Reconstruction - AC	4/1/13
218	608	FARRINGTON DR	RUSSELL ST	SOUTH END	Local	AAC	E	2	07	704	30	22,695	77	9	91	0	2/19/25	Overlay - AC Thin	4/1/13
010	59	FASHION SQUARE LN	BEACH BLVD	EAST END	Local	AC	E	4	11	518	56	29,555	65	0	87	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
219	609	FERN WY	RIGSBY ST	EAST END	Local	AAC	E	2	02	197	30	7,777	98	0	58	42	2/14/25	Surface Treatment - Slurry Seal	11/15/21
220	610	FIFTH AVE	MONTE VISTA ST	MCFADDEN ST	Local	AAC	E	2	18	657	24	15,624	60	64	29	7	3/4/25	Overlay - AC Thin	8/1/07
011	60	FIRST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	29	1,288	43	53,024	86	0	95	5	4/17/25	Slurry Seal or Chip Seal	8/1/05
011	611	FIRST AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	22	1,290	45	57,510	73	58	41	1	4/21/25	Surface Reconstruction - AC	8/1/05
011	614	FIRST AVE	CITY LIMIT	WALNUT ST	Local	AC	E	2	17	952	30	28,590	69	33	59	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
011	615	FIRST AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	640	44	27,896	82	0	90	10	4/15/25	Surface Treatment - Cape Seal	4/1/13
222	622	FLAMINGO WAY	NORTH END	AMORITA	Local	AC	E	2	40	789	36	30,202	88	20	47	33	3/17/25	Surface Treatment - Slurry Seal	4/1/13
223	623	FLORENCE AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,284	26	32,916	72	47	53	0	3/3/25	New Construction - Initial	1/1/80
223	624	FLORENCE AVE	CYPRESS ST	FLORENCE CT	Local	AC	E	2	35	584	30	17,520	85	58	41	1	3/26/25	Surface Treatment - Slurry Seal	7/1/12
223	625	FLORENCE AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,258	26	32,396	79	63	34	3	4/2/25	New Construction - Initial	1/1/81
223	628	FLORENCE AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	30	13,590	80	27	73	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
223	629	FLORENCE AVE	LYDIA ST	MONTE VISTA ST	Local	AC	E	2	14	493	30	14,430	57	53	26	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
223	633	FLORENCE AVE	WEST END	MCPHERSON ST	Local	AC	E	2	35	310	30	9,120	75	17	83	0	4/2/25	2 in Cold Mill & Overlay	7/1/12
224	1709	FLORENCE CT	FLORENCE AVE	SOUTH END	Local	AC	E	2	35	107	16	1,836	54	52	14	34	4/22/25	New Construction - Initial	1/1/80
224	634	FLORENCE CT	NORTH END	FLORENCE AVE	Local	AC	E	2	35	91	16	1,564	45	84	16	0	4/22/25	New Construction - Initial	1/1/80
012	61	FONDA ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	2,014	32	64,192	76	1	99	0	4/17/25	Overlay - AC Thin	8/1/07
012	62	FONDA ST	EASTPARK DR	LA HABRA BLVD	Local	AC	E	2	38	444	35	16,020	85	0	98	2	3/24/25	Surface Treatment - Cape Seal	4/1/13
012	635	FONDA ST	CONCOURSE	WHITTIER (FRONTAGE)	Local	AC	C	2	37	1,072	29	32,190	94	0	100	0	3/17/25	New Construction - Initial	1/1/80
012	637	FONDA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	64	75	18	7	3/24/25	Surface Treatment - Slurry Seal	4/1/13
012	638	FONDA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,187	30	35,370	80	62	36	2	3/17/25	New Construction - Initial	1/1/80
226	639	FOUNDATION AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	907	46	41,170	58	59	40	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
227	640	FOURTH AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	18	1,285	36	45,900	72	47	43	10	3/4/25	Overlay - AC Thin	8/1/07
227	642	FOURTH AVE	WEST END	CYPRESS ST	Local	AAC	E	2	30	642	26	16,536	55	63	31	6	4/21/25	Overlay - AC Thin	8/1/07
228	643	FOXDALE AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	1,158	30	34,560	91	72	28	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
029	126	FOXDALE DR	DEXFORD DR	CHANNTRY DR	Local	AAC	E	2	02	376	35	13,572	85	15	85	0	2/24/25	Overlay - AC Structural	11/15/21
033	131	FRANCIS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	36	41,580	90	0	100	0	3/24/25	Surface Treatment - Cape Seal	4/1/13
033	132	FRANCIS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,454	35	52,380	80	22	58	20	3/24/25	Overlay - AC Rubber	4/1/13
033	1501	FRANCIS AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	664	29	19,950	67	0	59	41	4/2/25	New Construction - Initial	1/1/80
033	1502	FRANCIS AVE	ORANGE ST	CYPRESS ST	Local	AC	E	2	28	658	29	19,770	77	0	83	17	4/2/25	New Construction - Initial	1/1/80
033	647	FRANCIS AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	35	1,229	26	33,562	52	9	91	0	4/18/25	Surface Reconstruction - AC	7/1/12
033	648	FRANCIS AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	1,008	30	30,270	81	12	88	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
033	651	FRANCIS AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	26	11,778	60	68	32	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
231	659	FRANTZ AVE	PALM	VERONA	Local	AC	E	2	41	864	36	30,960	78	0	100	0	3/17/25	New Construction - Initial	1/1/80
232	660	GALEN DR	KINLEY	RIGSBY	Local	AAC	E	2	02	958	30	31,990	85	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
233	661	GERRY ST	NORTH END	FRANCIS	Local	AC	E	2	38	467	30	15,577	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
234	662	GLENCLIFF ST	ELMSFORD	SHEFFIELD	Local	AC	E	2	11	282	36	10,902	91	0	100	0	3/4/25	Slurry Seal or Chip Seal	8/1/05
234	663	GLENCLIFF ST	SHEFFIELD	FASHION SQUARE	Local	AC	E	2	11	720	36	25,704	77	71	29	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
235	664	GLENHAVEN DR	NORTH END	WIMBLETON	Local	AC	E	2	05	124	36	4,248	93	0	100	0	2/26/25	New Construction - Initial	1/1/80
235	665	GLENHAVEN DR	WIMBLETON	CANTEBURY	Local	AAC	E	2	05	1,024	36	37,614	91	0	71	29	2/26/25	Surface Reconstruction - AC	4/1/13
236	1728	GORDON AVE	RANDALL AVE	MACY ST	Local	AC	E	1	01	674	32	22,640	67	11	89	0	2/17/25	Surface Treatment - Slurry Seal	8/4/23
236	1731	GORDON AVE	MACY ST	BALDWIN ST	Local	AC	E	2	01	413	33	13,678	67	31	66	3	2/17/25	Surface Treatment - Slurry Seal	8/4/23
236	1732	GORDON AVE	BALDWIN ST	SHARPLESS ST	Local	AC	E	2	01	551	30	17,891	74	11	89	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
236	666	GORDON AVE	VALLEY HOME	ROANOKE	Local	AAC	E	2	01	422	32	14,004	78	18	82	0	2/18/25	New Construction - Initial	4/24/15
237	667	GRACE AVE	EUCLID	LIBERTY	Local	AC	E	2	31	682	36	24,336	84	15	85	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
237	668	GRACE AVE	LIBERTY	CYPRESS	Local	AC	E	2	31	606	36	21,600	89	0	98	2	2/14/25	Surface Treatment - Slurry Seal	1/1/20
238	669	GRANADA CT	GRANADA DR	SOUTH END	Local	AAC	E	2	09	359	30	12,295	69	12	81	7	2/20/25	Surface Treatment - Slurry Seal	1/1/20
239	670	GRANADA DR	GRANADA CT	EL PORTAL	Local	AAC	E	2	09	297	30	8,730	66	45	55	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
239	671	GRANADA DR	HANLINE	GRANADA CT	Local	AAC	E	2	09	326	30	11,305	62	7	81	12	2/20/25	Surface Treatment - Slurry Seal	1/1/20
240	672	GRAYVILLE DR	SUMMERSHADE	BRASS LANTERN	Local	AAC	E	2	06	787	35	28,368	70	36	41	23	2/18/25	Surface Treatment - Slurry Seal	8/4/23

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
240	673	GRAYVILLE DR	WEST END	SUMMERSHADE	Local	AC	E	2	06	723	35	26,064	73	4	54	42	2/18/25	Surface Treatment - Slurry Seal	8/4/23
241	677	GREENBRIER LN	RIDGEHAVEN	CAJON	Local	AC	E	2	05	1,180	36	43,086	68	47	41	12	2/19/25	Surface Treatment - Slurry Seal	8/4/23
241	678	GREENBRIER LN	CAJON	STURBRIDGE	Local	AAC	E	2	05	405	36	14,148	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
242	681	GREENTREE LN	EASTPARK	ESTATE	Local	AC	E	2	38	297	36	12,192	90	0	92	8	3/24/25	Surface Treatment - Slurry Seal	4/1/13
243	682	GREENVIEW DR	CITY LIMIT	ANTOINETTE	Local	AAC	E	2	08	1,100	33	36,300	81	10	82	8	2/19/25	Overlay - AC Structural	1/1/20
243	683	GREENVIEW DR	ANTOINETTE	RUSSELL	Local	AAC	E	2	08	305	33	9,867	93	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
244	684	GREENWAY TER	HENSEL	STONEWOOD	Local	AC	E	2	34	116	32	3,520	66	53	21	26	3/26/25	Surface Treatment - Slurry Seal	8/4/23
244	685	GREENWAY TER	NORTH END	HENSEL	Local	AC	E	2	34	386	32	15,677	65	59	21	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
245	686	GREENWOOD AVE	LEORA	WALNUT ST	Local	AC	E	2	16	631	26	16,094	72	39	61	0	3/3/25	Surface Treatment - Cape Seal	4/1/13
245	687	GREENWOOD AVE	VALENCIA	SUNSET	Local	AC	E	2	35	299	28	8,400	57	53	28	19	4/25/25	Surface Treatment - Slurry Seal	7/1/12
245	688	GREENWOOD AVE	EUCLID ST	ORANGE	Local	AC	E	2	28	623	30	18,510	84	0	100	0	3/26/25	New Construction - Initial	1/1/80
245	689	GREENWOOD AVE	WALNUT ST	HILLSIDE ST	Local	AC	E	2	21	663	30	19,710	64	57	43	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
245	690	GREENWOOD AVE	COLLEGE	VALENCIA	Local	AC	E	2	35	185	28	5,208	37	76	10	14	4/18/25	Surface Treatment - Slurry Seal	7/1/12
245	692	GREENWOOD AVE	HILLSIDE ST	EUCLID ST	Local	AC	E	2	21	622	29	18,690	72	15	85	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
245	693	GREENWOOD AVE	MONTE VISTA	LEORA	Local	AC	E	2	16	596	30	17,520	62	38	35	27	3/3/25	Surface Treatment - Slurry Seal	4/1/13
245	694	GREENWOOD AVE	ORANGE	EAST END	Local	AC	E	2	28	357	30	12,505	85	0	100	0	3/26/25	New Construction - Initial	1/1/80
246	699	GREGORY LN	BEACH BLVD	RIDGEWAY LN	Local	AC	E	2	09	491	36	17,712	78	13	85	2	2/24/25	Surface Treatment - Slurry Seal	1/1/20
246	700	GREGORY LN	DEXFORD DR	BEACH BLVD	Local	AAC	E	2	02	1,022	31	32,736	78	61	39	0	2/24/25	Overlay - AC Structural	11/15/21
246	702	GREGORY LN	KINLEY ST	DEXFORD DR	Local	AAC	E	2	02	885	35	31,896	88	65	35	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
246	706	GREGORY LN	VALLEY HOME	KINLEY ST	Local	AAC	E	2	02	529	36	18,828	93	38	62	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
247	709	GWYNWOOD AVE	DORWOOD	VALWOOD	Local	AAC	E	2	25	576	36	21,486	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
247	710	GWYNWOOD AVE	DORWOOD	PATWOOD	Local	AAC	E	2	25	795	35	28,656	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
248	711	HACIENDA DR	EL DON	EL DORADO	Local	AC	E	2	09	591	30	17,550	84	17	83	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
248	712	HACIENDA DR	HACIENDA	EL DON	Local	AAC	E	2	09	829	29	24,900	89	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
018	130	HACIENDA DR	EL RANCHO DR	WHITTIER BLVD	Local	AC	E	2	09	324	50	16,295	60	38	61	1	2/24/25	Surface Treatment - Slurry Seal	1/1/20
250	714	HAZEL ST	NORTH END	ERNA AVE	Local	AC	E	2	21	658	36	25,483	87	0	94	6	4/22/25	Surface Treatment - Slurry Seal	1/1/20
250	715	HAZEL ST	LA HABRA BLVD	FIRST ST	Local	AC	E	2	22	308	38	11,488	79	10	53	37	4/22/25	Slurry Seal or Chip Seal	8/1/05
250	716	HAZEL ST	FIRST ST	SOUTH END	Local	AC	E	2	22	327	38	12,426	89	0	95	5	4/22/25	2 in overlay	10/1/12
250	717	HAZEL ST	WHITTIER BLVD	ALLEY S/GREENWOOD	Local	AC	E	2	21	946	36	34,696	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
250	719	HAZEL ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	21	300	36	10,584	84	16	73	11	4/22/25	Surface Treatment - Slurry Seal	1/1/20
251	727	HEATHER AVE	MONTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,303	29	37,247	73	39	46	15	3/3/25	Surface Treatment - Slurry Seal	8/4/23
251	728	HEATHER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,265	30	36,900	54	63	24	13	2/26/25	Surface Treatment - Slurry Seal	4/1/13
252	734	HEATHER WAY	HAZEL	EAST END	Local	AAC	E	2	21	209	30	7,350	89	0	90	10	4/17/25	Overlay - AC Structural	1/1/20
253	735	HENDERSON WAY	NORTH END	IDAHO ST	Local	AC	E	2	09	439	30	15,821	83	15	49	36	2/20/25	Surface Treatment - Slurry Seal	1/1/20
255	738	HIGHLAND CT	ORANGE ST	EAST END	Local	AC	E	2	27	347	30	11,935	62	76	22	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
255	739	HIGHLAND CT	WEST END	ORANGE ST	Local	AC	E	2	27	176	29	5,310	82	67	33	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
256	740	HIGHLANDER AVE	MONTE VISTA ST	WALNUT ST	Local	AAC	E	2	16	1,283	26	39,226	74	27	73	0	3/3/25	Overlay - AC Thin	4/1/13
256	741	HIGHLANDER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,278	40	50,200	74	12	79	9	2/26/25	Surface Treatment - Cape Seal	4/1/13
257	748	HILL RD	VIEW	BISHOP	Local	AC	E	2	27	369	31	11,939	72	71	29	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
040	141	HILLDALE AVE	DEANNA ST	CDS E/ EUNICE CIR	Local	AC	E	2	10	759	36	31,035	65	65	34	1	2/25/25	Slurry Seal or Chip Seal	8/1/05
040	181	HILLDALE AVE	CDS E/ EUNICE CIR	IDAHO ST	Local	AC	E	2	10	725	36	25,315	46	72	15	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
040	753	HILLDALE AVE	WEST END	DEANNA ST	Local	AC	E	2	10	776	36	29,731	54	67	21	12	2/25/25	Slurry Seal or Chip Seal	8/1/05
260	757	HILLCREST ST	FIRST AVE	SOUTH END	Local	AC	E	2	17	815	33	29,282	59	59	24	17	3/4/25	Slurry Seal or Chip Seal	8/1/05
260	758	HILLCREST ST	LA HABRA BLVD	FIRST AVE	Local	AC	E	2	17	331	33	10,725	73	31	57	12	3/4/25	Surface Treatment - Slurry Seal	4/1/13
261	1520	HILLSIDE ST	HILLSIDE CT	N END	Local	AAC	E	2	20	1,165	35	38,420	71	40	41	19	4/21/25	Overlay - AC Thin	8/1/07
261	759	HILLSIDE ST	WHITTIER BLVD	GREENWOOD	Local	AC	E	2	21	786	36	27,356	67	40	58	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
261	761	HILLSIDE ST	HILLSIDE CT	WHITTIER BLVD	Local	AAC	E	2	20	480	36	14,255	80	0	89	11	4/21/25	Overlay - AC Thin	8/1/07
262	765	HODSON AVE	WEST END	EAST END	Local	AC	E	2	41	713	36	25,452	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
262	768	HODSON AVE	VALLEJO ST	PALM ST	Local	AC	E	2	38	1,184	36	43,158	82	0	96	4	3/24/25	New Construction - Initial	1/1/80
263	770	HOLGATE ST	HODSON AVE	SOUTH END	Local	AC	E	2	41	450	26	13,403	83	43	57	0	3/17/25	New Construction - Initial	1/1/80
263	771	HOLGATE ST	VAQUERO ST	HODSON AVE	Local	AC	E	2	41	1,076	29	32,310	73	53	47	0	3/17/25	New Construction - Initial	1/1/80
264	775	HOLLIS CIR	WALNUT ST	EAST END	Local	AC	E	2	24	247	26	7,947	71	29	71	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
264	776	HOLLIS CIR	WEST END	WALNUT ST	Local	AC	E	2	19	181	26	6,231	60	69	31	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
265	777	HOLLY AVE	VALLEY HOME	PARSONS	Local	AAC	E	2	02	274	32	9,268	90	59	41	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
266	778	HOLT DR	WILSON	HOLGATE	Local	AC	E	2	41	371	30	12,677	92	0	100	0	3/17/25	New Construction - Initial	1/1/80
267	779	HONEYWOOD LN	ALMONDWOOD	COACHWOOD	Local	AAC	E	2	26	1,497	32	47,136	87	18	82	0	3/10/25	Overlay - AC Structural	1/1/20
267	780	HONEYWOOD LN	WEST END	ALMONDWOOD	Local	AAC	E	2	26	526	32	13,816	83	33	65	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
001	63	IDAHO ST	END OF PVMNT	REBECCA DR	Local	AC	C	1	08	265	17	4,505	49	55	14	31	2/27/25	Surface Treatment - Slurry Seal	1/1/20
001	64	IDAHO ST	REBECCA DR	WHITTIER BLVD	Local	AC	C	2	08	1,492	36	64,276	67	45	51	4	2/14/25	Surface Treatment - Slurry Seal	1/1/20
268	781	INDUSTRY AVE	EUCLID	CYPRESS	Local	AAC	E	2	31	684	36	24,192	61	35	51	14	2/14/25	Surface Treatment - Slurry Seal	1/1/20
269	782	INOLA CT	NORTH END	WHITTIER BLVD	Local	AC	E	2	40	236	26	7,683	72	73	25	2	3/17/25	New Construction - Initial	1/1/80
270	783	IPSWICH ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	83	0	73	27	4/15/25	Surface Treatment - Slurry Seal	7/1/12
271	784	IRONWOOD ST	PARKWOOD AVE	MONTWOOD AVE	Local	AC	E	2	32	883	36	31,572	95	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
272	786	IVY PL	RIBSBY	EAST END	Local	AAC	E	2	02	92	30	3,760	86	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
273	787	JAFFREY ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	79	20	22	58	4/15/25	Surface Treatment - Slurry Seal	7/1/12
274	788	JAMIE AVE	LESUE	EAST END	Local	AAC	E	2	32	605	36	23,305	79	12	88	0	3/11/25	Overlay - AC Structural	1/1/20
538	1740	JANISON DR	RANDALL AVE	CREEK LN	Local	AC	E	2	01	245	26	6,535	61	54	46	0	2/17/25	New Construction - AC	1/1/18

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
275	789	JOAN ST	DOT AVE	FRANCIS AVE	Local	AC	E	2	38	503	30	14,910	68	67	18	15	3/17/25	New Construction - Initial	1/1/80
276	791	JOCELYN AVE	LEMON	WEST END	Local	AAC	E	2	35	239	26	7,739	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
277	792	JOHNSON AVE	VALLEY HOME AVE	KINLEY ST	Local	AAC	E	2	02	537	30	16,680	79	12	67	21	2/25/25	Surface Treatment - Slurry Seal	11/15/21
278	794	JOSEPH CT	NORTH END	RUSSELL	Local	AC	E	2	08	119	33	5,927	86	0	73	27	2/19/25	Surface Treatment - Slurry Seal	1/1/20
279	795	JUANITA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,149	29	34,500	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
279	796	JUANITA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	739	29	22,200	81	0	100	0	3/24/25	New Construction - Initial	1/1/80
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Overlay - AC Thin	4/1/13
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Surface Treatment - Slurry Seal	4/1/13
280	801	KEARNY LN	SOUTH END	O'MALLEY	Local	AAC	E	2	06	163	31	6,848	91	0	100	0	2/24/25	Overlay - AC Thin	4/1/13
281	802	KEENE DR	WALNUT ST	EUCID ST	Local	AC	E	2	24	1,525	36	54,252	76	43	49	8	4/15/25	Surface Treatment - Slurry Seal	7/1/12
281	807	KEENE DR	LAS LOMAS DR	WALNUT ST	Local	AC	E	2	19	746	39	28,626	64	54	40	6	4/15/25	Surface Treatment - Slurry Seal	7/1/12
282	810	KENRICH CT	WEST END	CHANNY	Local	AAC	E	2	02	262	26	8,387	94	0	100	0	5/6/25	Surface Treatment - Slurry Seal	11/15/21
283	811	KENWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	25	646	36	23,756	76	49	40	11	3/11/25	Surface Treatment - Slurry Seal	4/1/24
284	812	KERN ST	WILSHIRE	BAJA	Local	AC	E	2	04	524	32	17,518	86	15	78	7	3/4/25	New Construction - Initial	1/1/80
285	813	KERNER WAY	WEST END	HARBOR	Local	AAC	E	2	35	492	30	16,335	88	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
286	814	KINGSTON DR	NORTH END	LA PRESA	Local	AAC	E	2	20	447	36	18,637	81	0	100	0	4/18/25	Overlay - AC Thin	8/1/07
287	815	KINLEY ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	870	30	26,670	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
287	817	KINLEY ST	FOXDALE AVE	GREGORY LN	Local	AC	E	2	02	901	30	26,850	89	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
288	820	KIRBY DR	CITY LIMIT	LA VEREDA DR	Local	AAC	E	2	13	541	30	16,980	92	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
288	821	KIRBY DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	883	32	28,128	71	16	77	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
288	826	KIRBY DR	W/END	KIRBY (NORTH CDS)	Local	AAC	E	2	13	89	32	5,315	70	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
288	827	KIRBY DR	W/END	KIRBY (SOUTH CDS)	Local	AAC	E	2	13	89	32	5,315	68	0	76	24	2/27/25	Surface Treatment - Slurry Seal	1/1/20
289	828	KIRKWOOD LN	ALMONDWOOD ST	COACHWOOD ST	Local	AAC	E	2	26	1,483	36	52,428	89	21	79	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
289	832	KIRKWOOD LN	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	566	32	19,687	86	17	80	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
291	834	KNUDSON ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	678	30	20,840	64	42	36	22	3/4/25	Surface Treatment - Slurry Seal	4/1/13
531	1700	KOOPMANS WY	WHITTIER BLVD	RANDALL AVE	Local	AC	E	2	01	544	32	17,864	72	20	80	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
302	856	LA CADENA WAY	GREGORY LN	SOUTH END	Local	AC	E	2	09	276	36	11,511	62	66	34	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
292	835	LA CASA AVE	BUENA VISTA AVE	DEL SUR AVE	Local	AC	E	2	19	717	36	23,424	64	68	32	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
292	837	LA CASA AVE	LAS LOMAS AVE	BUENA VISTA AVE	Local	AC	E	2	19	260	36	9,120	60	79	21	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
532	1701	LA HABRA HILLS DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	12	943	46	37,757	54	70	29	1	3/12/25	Surface Treatment - Slurry Seal	4/1/13
293	839	LA MIRADA ST	LINDAUER	LAGUNA	Local	AC	E	2	07	345	29	10,380	76	51	49	0	2/19/25	New Construction - Initial	1/1/80
294	840	LA PLAZA CT	NORTH END	LA PLAZA DR	Local	AAC	E	2	09	128	30	5,635	66	12	77	11	2/20/25	Surface Treatment - Slurry Seal	1/1/20
295	841	LA PLAZA DR	N END	LA HABRA BLVD	Local	AAC	E	2	09	1,455	36	52,416	69	8	87	5	2/20/25	Surface Treatment - Slurry Seal	1/1/20
296	843	LA PRESA DR	HILLSIDE	KINGSTON	Local	AAC	E	2	20	224	33	7,650	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	7/1/11
296	844	LA PRESA DR	SIERRA VISTA	WALNUT ST	Local	AAC	E	2	13	1,144	30	33,960	90	0	99	1	2/13/25	Overlay - AC Structural	1/1/20
296	845	LA PRESA DR	WALNUT ST	HILLSIDE ST	Local	AC	E	2	20	635	36	22,680	65	0	99	1	4/18/25	New Construction - Initial	1/1/80
298	847	LA SERNA AVE	SIERRA VISTA DR	WALNUT ST	Local	AAC	E	2	13	1,142	30	33,900	88	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
298	848	LA SERNA AVE	MARLEI DR	LAUNER DR	Local	AC	E	2	13	616	36	24,012	72	26	74	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
298	849	LA SERNA AVE	LAUNER DR	SIERRA VISTA DR	Local	AAC	E	2	13	244	31	7,840	80	0	67	33	2/27/25	Overlay - AC Structural	1/1/20
299	852	LA SERNA DR	WALNUT ST	EAST END	Local	AAC	E	2	20	492	36	19,291	76	0	83	17	2/27/25	Overlay - AC Thin	8/1/07
300	854	LA VEREDA DR	SIERRA VISTA DR	KIRBY	Local	AAC	E	2	13	686	37	25,882	87	0	98	2	2/13/25	Overlay - AC Structural	1/1/20
301	855	LA VITA PL	NORTH END	LA SERNA AVE	Local	AC	E	2	13	80	29	3,895	84	0	100	0	2/13/25	Surface Treatment - Slurry Seal	7/1/11
303	857	LADERA TERR	LAS RIENDAS	SOUTH END	Local	AC	E	2	32	524	26	10,677	72	35	65	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
304	858	LAGUNA DRIVE	LINDAUER DR	HACIENDA RD	Local	AC	E	2	07	1,430	30	42,540	59	70	30	0	2/19/25	New Construction - Initial	1/1/80
058	161	LAKEVIEW AVE	MONTWOOD AVE	IMPERIAL HWY	Local	AAC	E	2	32	1,144	35	41,220	75	7	75	18	3/11/25	Surface Treatment - Slurry Seal	1/1/20
058	865	LAKEVIEW AVE	MONTWOOD AVE	CITY LIMITS	Local	AC	E	2	32	363	35	13,104	68	62	37	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
047	149	LAS LOMAS DR	IDAHO ST	DERRY ST	Local	AAC	E	2	19	1,514	35	54,540	60	0	100	0	4/23/25	Surface Reconstruction - AC	7/1/12
047	150	LAS LOMAS DR	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,169	35	42,120	59	67	30	3	4/23/25	Surface Treatment - Slurry Seal	7/1/12
047	151	LAS LOMAS DR	WALNUT ST	EUCID ST	Local	AC	E	2	24	1,320	36	47,088	64	67	24	9	4/23/25	Surface Treatment - Slurry Seal	7/1/12
307	874	LAS RIENDAS DR	HARBOR BLVD	CITY LIMITS	Local	AC	E	2	32	723	36	26,028	73	36	64	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
308	876	LATCHWOOD LN	DORWOOD	EAST END	Local	AAC	E	2	26	267	26	8,467	59	61	29	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
309	877	LAUNER DR	NORTH END	LA SERNA AVE	Local	AAC	E	2	13	787	32	28,300	82	0	100	0	2/27/25	Overlay - AC Structural	1/1/20
310	878	LAURA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,151	32	36,704	87	0	100	0	3/17/25	New Construction - Initial	1/1/80
311	879	LEMON ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	35	800	30	23,820	63	65	27	8	4/22/25	Surface Treatment - Slurry Seal	7/1/12
311	882	LEMON ST	PINEHURST AVE	FLORENCE AVE	Local	AAC	E	2	35	1,247	30	37,050	76	0	90	10	3/26/25	Surface Reconstruction - AC	7/1/12
312	885	LEMON TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	400	36	16,195	97	0	1	99	3/12/25	Overlay - AC Structural	2/1/23
051	155	LEMON TREE DR	SMOKE TREE DR	OLIVE TREE DR	Local	AAC	E	2	12	851	35	30,672	100	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
314	889	LEMONWOOD DR	LAKEVIEW AVE	ORANGEWOOD ST	Local	AC	E	2	32	205	32	6,560	85	46	54	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
314	890	LEMONWOOD DR	ORANGEWOOD ST	EAST END	Local	AC	E	2	32	194	32	7,733	77	8	55	37	3/11/25	Surface Treatment - Slurry Seal	1/1/20
315	891	LEORA ST	PINEHURST AVE	FLORENCE AVE	Local	AC	E	2	16	994	30	30,014	78	29	59	12	3/3/25	Surface Treatment - Cape Seal	4/1/13
315	893	LEORA ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	16	299	30	8,850	90	49	51	0	3/3/25	New Construction - Initial	1/1/80
316	899	LESLIE ST	NORTH END	IMPERIAL HWY	Local	AAC	E	2	32	1,305	36	49,127	61	59	27	14	3/11/25	Overlay - AC Structural	1/1/20
317	901	LIBERTY ST	GRACE AVE	PACIFIC AVE	Local	AC	E	2	31	450	26	11,492	83	0	100	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
317	903	LIBERTY ST	OLIVE AVE	SOUTH END	Local	AAC	E	2	30	435	26	13,025	66	30	50	20	3/16/25	Overlay AC Thin	11/30/10
318	904	LIME ST	MORRIS AVE	BERKLEY AVE	Local	AAC	E	2	02	800	30	22,820	84	0	93	7	2/25/25	Surface Treatment - Slurry Seal	11/15/21
319	907	LINDA AVE	SIERRA VISTA DR	CITRUS DR	Local	AC	E	2	13	793	29	23,820	77	8	52	40	2/27/25	Surface Treatment - Slurry Seal	1/1/20
319	908	LINDA AVE	SIERRA VISTA DR	EAST END	Local	AAC	E	2	13	347	30	12,205	71	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
062	111	LINDAUER DR	WHITTIER BLVD	HACIENDA RD	Local	AC	E	2	07	2,034	30	62,620	60	64	36	0	2/19/25	New Construction - Initial	1/1/74
062	915	LINDAUER DR	WEST END	RUSSELL ST	Local	AC	E	2	08	204	33	8,582	94	3	97	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
322	916	LINDEN LN	BROOKDALE AVE	EAST END	Local	AAC	E	2	34	272	26	8,867	75	46	46	8	3/26/25	Surface Reconstruction - AC	8/1/05
322	917	LINDEN LN	WEST END	BROOKDALE AVE	Local	AAC	E	2	34	93	26	4,213	80	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
323	918	LOIS ST	GREENWOOD AVE	FLORENCE AVE	Local	AC	E	2	21	979	32	31,360	65	49	47	4	4/21/25	Surface Treatment - Slurry Seal	1/1/20
323	922	LOIS ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	21	785	31	25,152	78	1	99	0	4/21/25	Surface Treatment - Slurry Seal	1/1/20
526	1510	LOMA NORTE PL	BROOKDALE AVE	SOUTH END	Local	AC	E	2	40	235	28	8,207	73	47	43	10	3/25/25	Surface Treatment - Slurry Seal	4/1/13
324	925	LOMA VERDE AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	63	0	82	18	3/16/25	Slurry Seal or Chip Seal	8/1/05
325	926	LORAWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	623	36	22,928	92	0	81	19	3/10/25	Surface Treatment - Slurry Seal	1/1/20
326	927	LORELLA AVE	DEANNA ST	IDAHO ST	Local	AAC	E	2	10	1,428	36	51,192	77	9	91	0	2/26/25	Surface Reconstruction - AC	8/1/08
326	929	LORELLA AVE	MARIN ST	DEANNA ST	Local	AAC	E	2	10	562	36	20,766	87	17	83	0	2/25/25	Surface Reconstruction - AC	8/1/08
327	932	LYDIA ST	HIGHLANDER AVE	SOUTH END	Local	AC	E	2	14	963	30	30,685	71	44	45	11	2/26/25	Surface Treatment - Slurry Seal	8/4/23
328	935	LYNWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	622	29	18,690	90	0	38	62	3/10/25	Surface Treatment - Slurry Seal	1/1/20
329	937	MACY ST	RUSSELL ST	CITY LIMIT	Local	AC	E	2	01	743	35	26,784	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
330	940	MADONNA LN	PALM	EAST END	Local	AC	E	2	40	222	32	8,741	83	0	95	5	3/24/25	New Construction - Initial	1/1/80
331	941	MAIN ST	NORTH END	PINEHURST AVE	Local	AC	E	2	28	257	29	9,028	87	22	78	0	4/17/25	New Construction - Initial	1/1/80
331	942	MAIN ST	FIRST AVE	SECOND ST	Local	AC	E	2	29	306	46	13,800	56	77	23	0	4/17/25	Surface Treatment - Cape Seal	4/1/13
331	943	MAIN ST	FLORENCE AVE	SOUTH END	Local	AC	E	2	28	276	39	12,671	63	74	26	0	4/2/25	Surface Treatment - Slurry Seal	4/1/13
332	944	MAPLE ST	PINEHURST AVE	FRANCIS AVE	Local	AAC	E	2	35	743	30	22,110	69	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
332	945	MAPLE ST	WHITTIER BLVD	SOUTH END	Local	AC	E	2	35	296	32	11,267	41	74	22	4	4/22/25	Surface Treatment - Slurry Seal	7/1/12
333	946	MAPLE TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	263	36	11,043	92	0	81	19	3/12/25	Overlay - AC Structural	2/1/23
334	947	MARCIA DR	RUSSELL ST	NORTH END	Local	AC	E	2	01	337	32	8,317	69	7	93	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
335	948	MARCINE ST	NORTH END	CARMELA	Local	AAC	E	2	37	317	32	11,717	87	0	100	0	3/17/25	Surface Reconstruction - AC	4/1/13
336	949	MARDINA WAY	DEXFORD DR	GREGORY LN	Local	AAC	E	2	02	561	36	19,764	80	36	64	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
337	950	MARIAN ST	LA HABRA BLVD	WALKER AVE	Local	AAC	E	2	15	1,077	30	33,060	76	24	52	24	3/4/25	Overlay - AC Thin	8/1/08
337	951	MARIAN ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	E	2	14	1,277	30	39,060	61	43	36	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
338	954	MARIE ST	OAKLAND	STORY	Local	AAC	E	2	03	719	31	23,040	76	30	70	0	2/20/25	Overlay - AC Thin	8/1/08
339	955	MARIN ST	LORELLA AVE	HILLANDALE AVE	Local	AC	E	2	10	548	36	20,478	63	59	41	0	2/25/25	New Construction - Initial	1/1/80
038	139	MARIPOSA ST	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,100	36	36,420	74	46	52	2	3/5/25	New Construction - Initial	1/1/92
038	146	MARIPOSA ST	LAMBERT RD	SHEFFIELD DR	Local	AAC	E	2	05	965	36	34,524	81	0	20	80	2/26/25	Surface Reconstruction - AC	4/1/13
341	963	MARLBORO ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	84	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
342	964	MARLEI DR	ENTRADA DR	LA SERNA AVE	Local	AC	E	2	13	717	32	23,694	77	9	91	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
037	138	MARTINEZ DR	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,169	35	42,120	84	8	84	8	3/9/25	New Construction - Initial	1/1/92
344	968	MATEO AVE	VALLEJO	JUANITA	Local	AC	E	2	38	621	26	15,834	77	57	43	0	3/24/25	New Construction - Initial	1/1/80
345	969	MCCART AVE	ROSCOE	CITY LIMIT	Local	AC	E	2	41	334	36	12,774	85	0	100	0	3/17/25	New Construction - Initial	1/1/80
346	970	MCFADDEN ST	NORTH END	SOUTH END	Local	AAC	E	2	18	541	30	21,484	78	12	88	0	3/4/25	Overlay - AC Thin	8/1/07
347	973	MCPHERSON ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,007	44	43,876	65	67	33	0	4/22/25	Surface Treatment - Slurry Seal	8/4/23
347	977	MCPHERSON ST	STEARNS AVE	LA HABRA BLVD	Local	AAC	E	2	35	637	30	18,630	91	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
347	978	MCPHERSON ST	FRANCIS AVE	STEARNS AVE	Local	AAC	E	2	35	655	29	19,680	93	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
347	985	MCPHERSON ST	ROSE AVE	FRANCIS AVE	Local	AAC	E	2	35	474	30	14,720	63	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
348	987	MEADOW LARK ST	BROOKDALE AVE	COUNTRY LN	Local	AC	E	2	34	804	36	29,478	83	0	94	6	3/25/25	Slurry Seal or Chip Seal	8/1/05
041	142	MERCED AVE	BEACH BLVD	EAST END	Local	AAC	E	2	10	1,280	36	50,580	70	48	33	19	3/5/25	Overlay - AC Thin	8/1/05
041	996	MERCED AVE	MARIPOSA ST	BEACH BLVD	Local	AC	E	2	04	512	36	18,000	75	42	45	13	3/4/25	New Construction - Initial	1/1/80
354	1000	MIDDLETON ST	SHEFFIELD	WHITEBOOK	Local	AAC	E	2	11	494	36	18,534	80	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
355	1001	MIKINDA AVE	EDGEMONT	ANTOINETTE	Local	AC	E	2	08	656	32	20,736	95	4	96	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
355	1724	MIKINDA AVE	MACY ST	RANDALL AVE	Local	AC	E	1	01	813	31	26,815	75	13	86	1	2/17/25	Surface Treatment - Slurry Seal	8/4/23
035	136	MISSION ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	894	35	32,220	74	41	55	4	2/20/25	Overlay - AC Thin	8/1/08
013	67	MONTE VISTA ST	WHITTIER BLVD	HIGHLANDER AVE	Local	AAC	E	2	16	1,316	39	52,680	66	56	26	18	2/26/25	Overlay - AC Structural	8/1/05
013	68	MONTE VISTA ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AAC	C	2	16	1,289	40	49,084	70	59	17	24	2/26/25	Overlay - AC Structural	8/1/05
013	69	MONTE VISTA ST	LA HABRA BLVD	FOURTH AVE	Local	AAC	C	2	15	1,446	36	52,315	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
013	70	MONTE VISTA ST	FOURTH AVE	LAMBERT RD	Local	AAC	C	2	18	1,109	36	41,070	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
357	1006	MONTEREY ST	LINDAUER DR	LAGUNA DR	Local	AC	E	2	07	475	30	14,070	70	44	50	6	2/19/25	New Construction - Initial	1/1/80
057	1012	MONTWOOD AVE	VALWOOD ST	EUCLID ST	Local	AAC	E	2	25	138	35	5,004	92	0	40	60	4/15/25	Overlay - AC Structural	4/1/24
057	160	MONTWOOD AVE	EUCLID ST	LAKEVIEW AVE	Local	AC	E	2	32	2,259	35	81,360	69	64	35	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
360	1013	MORRIS AVE	DEXFORD DR	EAST END	Local	AAC	E	2	02	321	36	11,124	78	49	51	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
362	1015	MOUNTAIN VIEW AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	37	47,397	69	36	53	11	3/4/25	Overlay - AC Thin	8/1/07
362	1016	MOUNTAIN VIEW AVE	LAMBERT RD	WALNUT ST	Local	AC	E	2	18	713	37	27,631	57	66	33	1	3/16/25	New Construction - Initial	1/1/80
363	1018	MUIR WAY	WILSON	EAST END	Local	AC	E	2	41	108	32	5,093	86	0	100	0	3/17/25	New Construction - Initial	1/1/80
364	1019	NADA STREET	EL PORTAL	SOUTH END	Local	AAC	E	2	09	147	30	7,037	42	74	26	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
365	1020	NANTUCKET ST	SHELburne ST	NORTH END	Local	AC	E	2	37	704	36	27,142	75	46	32	22	3/25/25	New Construction - Initial	1/1/80
365	1022	NANTUCKET ST	BRIGHTON ST	SHELburne ST	Local	AC	E	2	37	619	36	22,140	77	59	39	2	3/25/25	New Construction - Initial	1/1/80
366	1024	NANWOOD ST	RONWOOD	PATWOOD	Local	AC	E	2	25	372	36	14,142	76	57	43	0	3/11/25	Surface Treatment - Slurry Seal	4/1/24
367	1025	NASHUA ST	RYE AVE	LAS LOMAS DR	Local	AC	E	2	19	447	35	16,128	70	43	32	25	4/15/25	Surface Treatment - Slurry Seal	7/1/12
368	1027	NORMA ST	LORELLA	HILLANDALE	Local	AAC	E	2	10	613	36	21,852	75	34	66	0	2/25/25	Overlay - AC Thin	8/1/08
369	1028	NORTH HILLS DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,236	36	44,352	85	60	37	3	3/24/25	Surface Treatment - Slurry Seal	4/1/13
369	1029	NORTH HILLS DR	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	739	36	26,316	87	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
370	1032	NORTHGATE WAY	STEARNS AVE	EASTPARK	Local	AC	E	2	38	223	32	6,944	89	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
371	1033	OAK TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	93	38	5,329	91	0	0	100	3/12/25	Overlay - AC Structural	2/1/23
372	1034	OAKLAND DR	DEXFORD ST	STORY AVE	Local	AAC	E	2	03	1,172	36	41,760	71	47	53	0	2/20/25	Overlay - AC Thin	8/1/08
372	1036	OAKLAND DR	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,014	36	35,640	73	31	62	7	2/20/25	Overlay - AC Thin	8/1/08
373	1043	OLINDA AVE	WALNUT ST	N/END	Local	AAC	E	2	20	1,058	36	39,397	85	0	77	23	2/13/25	Surface Reconstruction - AC	8/1/05
373	1044	OLINDA AVE	KIRBY DR	NORTH END	Local	AAC	E	2	13	380	30	12,925	76	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
519	1417	OLIVE AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,415	35	45,025	74	7	72	21	3/4/25	Overlay - AC Thin	8/1/07
042	143	OLIVE AVE	EUCLID ST	LAMBERT RD	Local	AAC	E	2	30	1,619	35	58,320	83	51	49	0	3/16/25	Overlay - AC Thin	8/1/07
050	1053	OLIVE TREE DR	WEST END	SMOKE TREE DR	Local	AAC	E	2	12	238	36	6,421	97	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
050	154	OLIVE TREE DR	SMOKE TREE DR	IDAHO ST	Local	AAC	E	2	12	1,044	35	37,620	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
376	1054	O'MALLEY LN	PENDLETON	KEARNEY	Local	AC	E	2	06	313	36	11,802	75	0	99	1	2/18/25	Surface Treatment - Slurry Seal	4/1/13
377	1055	ORANGE ST	CITY LIMIT	STEVENS AVE	Local	AAC	E	2	27	823	30	25,062	78	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
377	1056	ORANGE ST	BISHOP DR	WHITTIER BLVD	Local	AC	E	2	27	774	30	23,040	83	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
377	1057	ORANGE ST	STEVENS AVE	BISHOP DR	Local	AAC	E	2	27	916	29	27,510	79	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
377	1058	ORANGE ST	ROSE AVE	SOUTH END	Local	AC	E	2	28	944	36	33,935	85	17	83	0	3/26/25	New Construction - Initial	1/1/80
377	1061	ORANGE ST	WHITTIER BLVD	ROSE AVE	Local	AC	E	2	28	1,156	36	40,968	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
377	1745	ORANGE ST	ERNA AVE	ALLEY	Local	AC	E	2	28	191	34	6,720	75	58	29	13	4/22/25	New Construction - Initial	1/1/80
378	1068	ORANGEWOOD ST	PARKWOOD AVE	SOUTH END	Local	AC	E	2	32	907	32	30,627	76	32	41	27	3/11/25	Surface Treatment - Slurry Seal	1/1/20
379	1072	ORCHARD PL	MONTTE VISTA	WEST END	Local	AC	E	2	16	638	30	20,715	89	22	78	0	3/3/25	Surface Treatment - Slurry Seal	4/1/13
380	1073	ORCHID AVE	BROOKWOOD	TROPICANA	Local	AC	E	2	40	314	36	11,910	92	0	98	2	3/17/25	New Construction - Initial	1/1/80
381	1074	OTIS AVE	LIME	EAST END	Local	AAC	E	2	02	164	32	5,056	75	25	75	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
382	1075	PACIFIC AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	31	1,289	33	39,165	80	13	77	10	2/14/25	Surface Treatment - Slurry Seal	1/1/20
383	1077	PAINTER ST	STORY AVE	OAKLAND	Local	AAC	E	2	03	600	32	19,008	75	31	66	3	2/20/25	Surface Reconstruction - AC	8/1/08
384	1078	PALERMO WAY	NORTH END	SOUTH END	Local	AC	E	2	41	1,010	26	29,562	75	15	55	30	3/17/25	New Construction - Initial	1/1/80
005	1738	PALM ST	BROOKDALE AVE	MADONNA LN	Local	AAC	E	2	40	487	26	14,100	97	0	16	84	3/24/25	Overlay - AC Structural	3/1/23
005	71	PALM ST	CITY LIMIT	BROOKDALE AVE	Local	AAC	C	2	37	1,200	36	43,200	97	0	35	65	3/24/25	Overlay - AC Structural	3/1/23
005	72	PALM ST	MADONNA LN	WHITTIER AVE	Local	AAC	C	2	40	928	35	33,444	96	0	23	77	3/24/25	Overlay - AC Structural	3/1/23
385	1080	PAMELA LN	NORTH END	NORTH HILLS	Local	AC	E	2	37	248	26	8,047	84	53	47	0	3/24/25	New Construction - Initial	1/1/80
386	1081	PARK AVE	BUENA VISTA	SOUTH END	Local	AC	E	2	19	240	27	7,824	49	28	68	4	4/21/25	3 in AC OVERLAY	7/1/12
387	1082	PARK INDUSTRIAL DR	CYPRESS ST	COMMERCIAL	Local	AC	E	2	36	985	36	33,300	68	45	50	5	4/21/25	Surface Treatment - Slurry Seal	4/1/13
550	997	PARK LA HABRA MOBILE HOMES	LAMBERT RD	NORTH END	Local	AC	E	2	10	3,244	19	77,550	94	0	78	22	3/4/25	Complete Reconstruction - AC	8/15/22
388	1083	PARK PL	GREENWOOD	ROSE	Local	AC	E	2	21	299	26	7,622	74	55	45	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
389	1084	PARK WAY	PARK AVE	EAST END	Local	AC	E	2	19	204	26	5,535	51	66	16	18	4/25/25	Surface Treatment - Slurry Seal	7/1/12
052	1085	PARKWOOD AVE	BURWOOD CT	LAKEVIEW AVE	Local	AC	E	2	32	1,060	36	38,910	85	0	97	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
052	1090	PARKWOOD AVE	LAKEVIEW AVE	EAST END	Local	AC	E	2	32	434	32	15,491	84	1	87	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
052	1094	PARKWOOD AVE	SCHOOLWOOD DR	VIVIWOOD PL	Local	AAC	E	2	25	988	35	35,604	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
052	156	PARKWOOD AVE	EUCLID ST	VIVIWOOD PL	Local	AAC	E	2	25	959	35	34,560	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
391	1098	PARSONS ST	FOXDALE AVE	HOLLY AVE	Local	AAC	E	2	02	330	32	11,310	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
391	1099	PARSONS ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	872	30	25,980	91	22	70	8	2/25/25	Surface Treatment - Slurry Seal	11/15/21
053	1100	PATWOOD DR	IRONWOOD ST	LORAWOOD ST	Local	AC	E	2	32	507	36	18,786	90	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
053	1102	PATWOOD DR	WALNUT ST	KENWOOD ST	Local	AC	E	2	25	1,235	36	44,994	75	52	36	12	3/11/25	Surface Treatment - Slurry Seal	4/1/24
053	157	PATWOOD DR	GWYNWOOD AVE	SANDLEWOOD AVE	Local	AC	E	2	25	404	35	14,580	58	78	16	6	4/15/25	Surface Treatment - Slurry Seal	4/1/24
393	1105	PENDLETON LN	O'MALLEY	ZEKE AND ELSIE	Local	AC	E	2	06	290	32	10,780	77	0	93	7	2/18/25	Surface Treatment - Slurry Seal	4/1/13
394	1106	PENMAR AVE	CLIFTON	CYPRESS ST	Local	AAC	E	2	31	1,028	30	30,660	84	25	74	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
395	1107	PINE TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	222	38	10,231	96	0	25	75	3/12/25	Overlay - AC Structural	2/1/23
396	1108	PINEHURST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,247	30	36,990	77	45	53	2	3/26/25	New Construction - Initial	1/1/80
396	1110	PINEHURST AVE	CYPRESS ST	GREENWOOD AVE	Local	AC	E	2	35	1,350	38	50,844	83	44	41	15	3/26/25	Surface Treatment - Slurry Seal	7/1/12
396	1112	PINEHURST AVE	ELM ST	EUCLID ST	Local	AC	E	2	21	295	30	8,490	87	31	69	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
396	1114	PINEHURST AVE	HILLSIDE ST	ELM ST	Local	AC	E	2	21	287	29	8,640	75	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
396	1118	PINEHURST AVE	MONTTE VISTA ST	LEORA ST	Local	AC	E	2	16	625	30	19,100	91	25	62	13	3/3/25	Surface Treatment - Slurry Seal	4/1/13
397	1120	PINEWOOD PL	SANDLEWOOD	SOUTH END	Local	AC	E	2	26	169	33	7,102	77	27	53	20	3/10/25	Surface Treatment - Slurry Seal	1/1/20
398	1121	PORTOLA AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	66	0	76	24	3/16/25	Slurry Seal or Chip Seal	8/1/05
399	1122	RADCLIFF PL	NORTH END	REDCOACH	Local	AAC	E	2	05	182	26	6,283	94	0	100	0	2/19/25	Overlay - AC Rubber	4/1/13
400	1123	RAIN TREE DR	LEMON TREE CT	IDAHO ST	Local	AAC	E	2	12	578	35	20,844	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
401	1125	RAINIER WY	VALLEY HOME	EAST END	Local	AAC	E	2	02	218	26	7,193	88	41	59	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
402	1126	RAMONA AVE	PALM	PALERMO	Local	AC	E	2	41	1,123	36	40,284	76	22	71	7	3/17/25	New Construction - Initial	1/1/80
528	1508	RANDALL AVE	VALLEY HOME AVE	KOOPMANS WAY	Local	AC	E	2	01	983	31	30,995	77	23	50	27	2/18/25	Surface Treatment - Slurry Seal	8/4/23
528	1720	RANDALL AVE	KOOPMANS WAY	MACY ST	Local	AC	E	2	01	681	32	22,520	77	55	43	2	2/18/25	Surface Treatment - Slurry Seal	8/4/23
528	1721	RANDALL AVE	MACY ST	RUSSELL ST	Local	AC	E	2	01	1,274	32	42,858	64	56	43	1	2/17/25	New Construction - AC	1/1/18
528	1722	RANDALL AVE	RUSSELL ST	JANISON DR	Local	AC	E	2	01	718	35	25,569	62	64	36	0	2/17/25	New Construction - AC	1/1/18
540	1729	RANDALL ST	RANDALL AVE	END	Local	AC	E	2	01	119	31	6,126	59	19	77	4	2/17/25	New Construction - AC	1/1/18
403	1128	RAYMOND ST	OAKLAND	STORY	Local	AAC	E	2	03	605	32	19,168	73	37	61	2	2/20/25	Overlay - AC Thin	8/1/08
403	1129	RAYMOND ST	WILSHIRE	BLAKE	Local	AAC	E	2	04	547	32	18,062	80	57	43	0	3/9/25	Overlay - AC Thin	8/1/08
404	1130	REBECCA DR	SILLIKER	IDAHO ST	Local	AAC	E	2	08	862	36	31,782	67	33	62	5	2/14/25	Surface Treatment - Slurry Seal	1/1/20
405	1132	RED COACH LN	RIDGEHAVEN DR	CAJON DR	Local	AC	E	2	05	1,167	26	29,718	70	29	51	20	2/19/25	Surface Treatment - Slurry Seal	8/4/23
406	1136	REDWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	299	26	9,299	77	17	81	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
407	1137	RIDGEHAVEN DR	CAJON DR	GREENBRIER LN	Local	AC	E	2	05	708	36	26,238	71	54	46	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
407	1138	RIDGEHAVEN DR	GRAYVILLE DR	BRASS LANTERN DR	Local	AAC	E	2	06	988	36	36,318	89	0	100	0	2/18/25	Surface Reconstruction - AC	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
407	1141	RIDGEHAVEN DR	LAMBERT RD	WOODBRIER DR	Local	AC	E	2	05	1,169	35	42,120	78	13	87	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
407	1144	RIDGEHAVEN DR	WOODBRIER DR	CAJON DR	Local	AC	E	2	05	632	35	22,788	69	78	22	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
408	1146	RIDGEWAY LN	ALLEY NORTH END	SOUTH END	Local	AC	E	2	09	729	38	29,497	77	8	87	5	2/24/25	Surface Treatment - Slurry Seal	1/1/20
027	122	RIGSBY ST	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	90	24	76	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
027	123	RIGSBY ST	GREGORY LN	WHITTIER BLVD	Local	AAC	E	2	02	1,324	35	47,700	87	23	77	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
410	1152	RIO VERDE DRIVE	CHANNY	EAST END	Local	AAC	E	2	02	250	33	9,825	83	29	71	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
533	1703	RISNER WY	IDAHO ST	WESTHILLS ESTATE GATE	Local	AAC	E	2	26	340	51	13,834	87	24	60	16	3/11/25	Overlay - AC Structural	3/1/23
533	1713	RISNER WY	IDAHO ST	WESTRIDGE GATE	Local	AC	E	2	26	274	50	14,025	74	25	54	21	3/11/25	New Construction - AC	1/1/80
533	1714	RISNER WY	CROSS GUTTER	BARRIER	Local	AC	E	2	26	113	50	5,814	77	0	75	25	3/11/25	New Construction - AC	1/1/80
412	1154	ROANNE DR	CITY LIMIT	ARBOLITA DR	Local	AC	E	2	34	651	35	23,472	73	19	81	0	3/26/25	Slurry Seal or Chip Seal	8/1/05
413	1158	ROANOKE AVE	RUSSELL	GORDON	Local	AAC	E	2	01	267	32	9,044	81	0	100	0	2/18/25	Overlay - AC Thin	4/1/13
414	1159	ROANOKE ST	CANFIELD	RUSSELL	Local	AC	E	2	01	577	32	19,074	77	8	92	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
415	1160	ROBIN WAY	WEST END	IDAHO ST	Local	AC	E	2	09	178	26	6,453	68	19	81	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
416	1161	ROCKINGHORSE LN	NORTH END	BROOKDALE AVE	Local	AC	E	2	37	1,031	37	40,824	85	57	37	6	3/24/25	New Construction - Initial	1/1/80
417	1164	RODDY DR	ARBOLITA DR	BROOKDALE AVE	Local	AC	E	2	34	509	36	19,074	86	0	100	0	3/25/25	New Construction - Initial	1/1/80
417	1165	RODDY DR	BROOKDALE AVE	RODDY WAY	Local	AC	E	2	34	229	36	8,028	72	31	60	9	3/25/25	New Construction - Initial	1/1/80
418	1167	RODDY WAY	RODDY DR	EAST END	Local	AC	E	2	34	326	27	11,645	74	20	73	7	3/25/25	New Construction - Initial	1/1/80
419	1168	RONWOOD AVE	WALNUT ST	NANWOOD ST	Local	AC	E	2	25	569	36	21,018	81	48	47	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
420	1170	ROSCOE ST	MCCART AVE	LA HABRA BLVD	Local	AC	E	2	41	776	36	28,686	80	13	82	5	3/17/25	New Construction - Initial	1/1/80
421	1172	ROSE AVE	COLLEGE ST	SUNSET ST	Local	AC	E	2	35	489	26	12,558	64	13	46	41	4/18/25	Surface Treatment - Slurry Seal	7/11/12
421	1173	ROSE AVE	EUCUD ST	ORANGE ST	Local	AC	E	2	28	623	30	18,510	78	0	68	32	3/26/25	New Construction - Initial	1/1/80
421	1174	ROSE AVE	ORANGE ST	EAST END	Local	AC	E	2	28	348	26	10,843	80	6	94	0	3/26/25	New Construction - Initial	1/1/80
421	1175	ROSE AVE	ALLEY W/LOIS	EUCUD ST	Local	AC	E	2	21	771	26	19,742	85	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
421	1176	ROSE AVE	MCPHERSON ST	COLLEGE ST	Local	AAC	E	2	35	260	30	8,300	58	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
423	1179	ROSECREST AVE	EUCUD ST	CYPRESS ST	Local	AAC	E	2	31	1,292	30	38,580	81	13	87	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
423	1180	ROSECREST AVE	LAMBERT RD	EUCUD ST	Local	AC	E	2	24	1,001	30	31,280	70	0	100	0	4/21/25	2 in overlay	7/1/12
424	1183	ROSEWOOD LN	ORANGEWOOD	EAST END	Local	AC	E	2	32	194	32	7,783	85	17	83	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
425	1184	ROXBURY TERR	GREENBRIER	SOUTH END	Local	AAC	E	2	05	96	28	4,483	93	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
014	1185	RUSSELL ST	HACIENDA RD	GREENVIEW DR	Local	AC	E	2	08	841	32	26,720	87	19	80	1	2/19/25	Surface Treatment - Slurry Seal	1/1/20
014	1188	RUSSELL ST	GREENVIEW DR	SOUTH END	Local	AC	E	2	08	902	32	31,331	86	15	85	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
014	1191	RUSSELL ST	WEST END	FARRINGTON DR	Local	AC	E	2	07	191	36	8,380	77	28	64	8	2/19/25	Overlay - AC Rubber	4/1/13
014	1512	RUSSELL ST	HACIENDA RD	FARRINGTON DR	Local	AAC	E	2	07	355	36	12,564	76	17	76	7	2/19/25	Overlay - AC Thin	4/1/13
014	1725	RUSSELL ST	MACY ST	CREEK LN	Local	AC	E	2	01	1,114	34	39,952	71	15	83	2	2/17/25	Surface Treatment - Slurry Seal	8/4/23
014	1726	RUSSELL ST	CUL-DE-SAC		Local	AC	E	2	01	93	71	5,715	68	0	100	0	2/17/25	New Construction - AC	1/1/18
427	1192	RYAN AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	762	29	22,890	68	24	69	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
427	1195	RYAN AVE	WALNUT ST	SIERRA VISTA DR	Local	AC	E	2	13	1,151	30	34,170	76	52	35	13	2/27/25	Surface Treatment - Slurry Seal	1/1/20
428	1198	RYE AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,144	36	41,718	60	59	23	18	4/15/25	Surface Treatment - Slurry Seal	7/1/12
429	1199	RYE CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	70	50	50	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
430	1200	SAN JOSE AVE	BEACH BLVD	MARIN ST	Local	AC	E	2	10	583	36	20,556	62	43	57	0	2/25/25	New Construction - Initial	1/1/80
430	1201	SAN JOSE AVE	MISSION ST	BEACH BLVD	Local	AAC	E	2	03	493	36	17,316	74	0	90	10	5/6/25	Overlay - AC Thin	8/1/08
015	74	SANDLEWOOD AVE	IDAHO ST	ALMONDWOOD ST	Local	AC	E	2	25	1,156	35	41,652	82	15	55	30	3/10/25	Surface Treatment - Slurry Seal	1/1/20
015	75	SANDLEWOOD AVE	ALMONDWOOD ST	PATWOOD DR	Local	AC	E	2	25	1,013	35	36,504	79	20	70	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
015	76	SANDLEWOOD AVE	PATWOOD DR	EUCUD ST	Local	AC	E	2	25	1,449	35	52,200	56	71	17	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
431	1203	SANDOWN ST	NORTH END	CHESHAM	Local	AC	E	2	19	188	26	6,413	65	36	36	28	4/15/25	Surface Treatment - Slurry Seal	7/1/12
020	112	SANSINENA LN	HACIENDA RD	EDGE MONT ST	Local	AAC	E	2	08	280	33	9,273	87	18	74	8	2/19/25	Overlay - AC Structural	1/1/20
020	7150	SANSINENA LN	EDGE MONT ST	ANTOINETTE DR	Local	AC	E	2	08	747	33	24,684	68	55	35	10	2/19/25	Surface Treatment - Slurry Seal	1/1/20
433	1207	SCHOOLWOOD DR	ALMONDWOOD ST	PARKWOOD AVE	Local	AC	E	2	25	1,809	30	56,480	74	35	45	20	3/11/25	Surface Treatment - Slurry Seal	4/1/24
434	1208	SECOND AVE	EUCUD ST	CYPRESS ST	Local	AAC	E	2	29	1,288	34	43,588	82	40	51	9	4/17/25	Overlay - AC Structural	1/1/15
434	1209	SECOND AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	641	30	19,050	86	0	87	13	4/15/25	Surface Treatment - Slurry Seal	4/1/13
435	1213	SHADY VALLEY	VALLEY HOME AVE	EAST END	Local	AAC	E	2	01	420	34	15,855	80	31	69	0	2/18/25	Overlay - AC Thin	4/1/13
546	1737	SHADYCREST LN	PALM ST	END	Local	AC	E	2	40	614	11	10,838	63	64	22	14	5/5/25	New Construction - AC	1/1/18
543	1739	SHARON WAY	VALLEY HOME AVE	END	Local	AC	E	2	01	774	31	27,001	80	28	72	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
436	1214	SHARPLESS ST	CANFIELD	RUSSELL	Local	AC	E	2	01	592	33	19,338	74	0	100	0	2/18/25	New Construction - Initial	1/1/80
436	1734	SHARPLESS ST	RUSSELL ST	RANDALL AVE	Local	AC	E	2	01	837	31	26,528	79	12	88	0	2/18/25	New Construction - AC	1/1/18
437	1215	SHEFFIELD DR	GLENCLIFF ST	MIDDLETON DR	Local	AC	E	2	11	439	35	15,840	83	0	94	6	2/26/25	Surface Treatment - Slurry Seal	8/4/23
437	1216	SHEFFIELD DR	MARIPOSA ST	BEACH BL	Local	AC	E	2	05	459	36	16,308	86	9	57	34	2/26/25	New Construction - Initial	1/1/80
437	1217	SHEFFIELD DR	MIDDLETON DR	WHITEBOOK DR	Local	AC	E	2	11	565	35	20,376	83	0	100	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
437	1218	SHEFFIELD DR	STURBRIDGE DR	MARIPOSA ST	Local	AC	E	2	05	290	36	10,224	91	0	100	0	2/26/25	New Construction - Initial	1/1/80
438	1219	SHELBURNE ST	BROOKFIELD AVE	NANTUCKET ST	Local	AC	E	2	37	550	36	20,406	82	41	59	0	3/25/25	New Construction - Initial	1/1/80
438	1220	SHELBURNE ST	NANTUCKET ST	WHITTIER BLVD	Local	AC	E	2	37	739	36	26,460	93	0	100	0	3/25/25	New Construction - Initial	1/1/80
439	1223	SIDON AVE	MARIPOSA ST	EAST END	Local	AAC	E	2	04	469	30	15,865	82	14	86	0	3/4/25	Surface Reconstruction - AC	8/1/08
439	1224	SIDON AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	741	31	23,744	90	12	88	0	3/5/25	Overlay - AC Thin	8/1/08
439	1225	SIDON AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	1,099	32	34,784	83	35	63	2	3/5/25	Overlay - AC Thin	8/1/08
440	1226	SIERRA VISTA DR	CITY LIMITS	LA VEREDA DR	Local	AAC	E	2	13	860	30	35,908	75	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
440	1228	SIERRA VISTA DR	LA VEREDA DR	LA PRESA DR	Local	AC	E	2	13	831	35	29,952	89	0	98	2	2/13/25	Surface Treatment - Slurry Seal	1/1/20
440	1229	SIERRA VISTA DR	LA PRESA DR	LUNDA AVE	Local	AAC	E	2	13	596	36	21,240	72	0	82	18	2/27/25	Surface Treatment - Slurry Seal	1/1/20
021	113	SILLIKER AVE	HACIENDA RD	EDGE MONT ST	Local	AC	E	2	08	294	35	10,620	87	0	100	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
021	1233	SILLIKER AVE	REBECCA DR	IDAHO ST	Local	AAC	E	2	08	522	36	18,792	73	0	88	12	2/27/25	Surface Treatment - Slurry Seal	1/1/20
021	1234	SILLIKER AVE	EDGE MONT ST	RUSSELL ST	Local	AC	E	2	08	633	32	20,064	92	2	98	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
442	1237	SILVERSPUR LN	CANDLEWOOD DR	RIDGEHAVEN DR	Local	AC	E	2	05	332	26	9,382	77	0	26	74	2/25/25	Surface Treatment - Cape Seal	4/1/13
442	1238	SILVERSPUR LN	RIDGEHAVEN DR	SILVERSPUR WAY	Local	AC	E	2	05	573	36	21,378	63	62	18	20	2/25/25	Surface Treatment - Slurry Seal	8/4/23
444	1240	SILVERSPUR WAY	SILVERSPUR LN	SOUTH END	Local	AC	E	2	05	258	26	9,253	75	43	57	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
444	1241	SMOKE TREE CT	LEMON TREE	SOUTH END	Local	AAC	E	2	12	210	32	8,515	97	0	6	94	3/12/25	Overlay - AC Structural	2/1/23
445	1242	SMOKE TREE DR	OLIVE TREE DR	LEMON TREE CT	Local	AAC	E	2	12	681	36	24,300	94	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
446	1245	SONORA AVE	WEST END	LA CASA	Local	AC	E	2	19	355	27	10,815	48	40	60	0	4/15/25	3 in AC OVERLAY	7/1/12
447	1246	SONORA PL	NORTH END	STEARNS	Local	AC	E	2	38	468	26	13,758	68	54	45	1	3/25/25	New Construction - Initial	1/1/80
048	1247	SPRING MEADOW LN	GRAYVILLE	SOUTH END	Local	AC	E	2	06	67	60	5,570	69	0	64	36	2/19/25	Surface Treatment - Slurry Seal	8/4/23
048	152	SPRING MEADOW LN	GRAYVILLE DR	IMPERIAL HWY	Local	AC	E	2	06	195	36	6,732	81	34	66	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
449	1249	SPRING TREE CT	LEMON TREE CT	EAST END	Local	AAC	E	2	12	120	32	5,365	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
450	1250	STANFORD ST	OAKLAND	STORY	Local	AAC	E	2	03	565	32	18,112	74	31	56	13	2/20/25	Overlay - AC Thin	8/1/08
451	1251	STANTON AVE	WEST END	OAKLAND	Local	AC	E	2	03	466	29	14,010	74	25	36	39	2/20/25	New Construction - Initial	1/1/80
452	1252	STARLAND DR	NORTH END	STEVENS	Local	AAC	E	2	27	516	30	17,480	75	0	100	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
453	1253	STEARNS AVE	COLLEGE ST	SUNSET ST	Local	AAC	E	2	35	714	26	19,070	76	0	82	18	4/18/25	Surface Reconstruction - AC	7/1/12
453	1254	STEARNS AVE	WEST END	COLLEGE ST	Local	AAC	E	2	35	649	25	16,900	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
453	1256	STEARNS AVE	SUNSET ST	HARBOR BL	Local	AAC	E	2	35	627	33	20,493	66	12	87	1	4/18/25	Surface Reconstruction - AC	7/1/12
453	1260	STEARNS AVE	PALM ST	HOLGATE ST	Local	AC	E	2	41	626	30	18,660	84	0	100	0	3/17/25	New Construction - Initial	1/1/80
34	133	STEARNS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	32	31,995	79	0	76	24	3/25/25	New Construction - Initial	1/1/88
34	134	STEARNS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,455	30	43,650	82	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
530	1600	STEVENS AVE	STARLAND ST	ORANGE ST	Local	AAC	E	2	27	240	30	7,020	59	57	43	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
530	1601	STEVENS AVE	EUCLID ST	STARLAND ST	Local	AAC	E	2	27	299	30	8,790	71	33	62	5	3/4/25	Surface Treatment - Slurry Seal	1/1/20
454	1264	STONEHAM WAY	WEST END	WHITEBOOK DR	Local	AAC	E	2	11	147	32	6,254	82	0	100	0	3/4/25	Surface Treatment - Slurry Seal	8/4/23
024	117	STONEWOOD ST	WHITTIER BLVD	SYCAMORE AVE	Local	AC	E	2	34	1,055	36	38,730	83	46	52	2	3/25/25	Surface Treatment - Slurry Seal	4/1/13
457	1268	STORY AVE	MISSION ST	EAST END	Local	AAC	E	2	03	451	30	15,325	68	41	59	0	2/20/25	Overlay - AC Thin	8/1/08
457	1269	STORY AVE	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,058	35	38,124	68	38	44	18	2/20/25	Overlay - AC Thin	8/1/08
457	1270	STORY AVE	CITY LIMITS	DEXFORD ST	Local	AAC	E	2	03	989	36	37,751	77	35	65	0	2/20/25	Overlay - AC Thin	8/1/08
044	1276	STURBRIDGE DR	WIMBLETON LN	WOODMERE CT	Local	AC	E	2	05	271	35	9,792	67	45	55	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
044	1277	STURBRIDGE DR	CANTEBURY LN	GREENBRIER LN	Local	AC	E	2	05	584	35	21,060	85	0	100	0	2/26/25	New Construction - Initial	1/1/80
044	1279	STURBRIDGE DR	CANTEBURY LN	WOODMERE CT	Local	AC	E	2	05	845	35	30,456	83	0	70	30	2/26/25	Surface Treatment - Slurry Seal	4/1/13
044	1280	STURBRIDGE DR	GREENBRIER LN	SOUTH END	Local	AC	E	2	05	135	27	5,495	74	0	100	0	2/25/25	New Construction - Initial	1/1/80
044	145	STURBRIDGE DR	LAMBERT RD	WIMBLETON LN	Local	AC	E	2	05	619	35	22,320	89	0	100	0	2/26/25	New Construction - Initial	1/1/90
459	1285	SUMMER SHADE DR	GRAYVILLE DR	RIDGEHAVEN DR	Local	AC	E	2	06	811	35	29,232	59	55	31	14	2/18/25	Surface Treatment - Slurry Seal	8/4/23
459	1286	SUMMER SHADE DR	CITY LIMIT	RIDGEHAVEN DR	Local	AAC	E	2	06	123	35	4,464	95	0	100	0	5/6/25	Surface Reconstruction - AC	4/1/13
460	1287	SUNSET ST	NORTH END	THIRD AVE	Local	AC	E	2	36	340	32	10,688	75	57	30	13	4/2/25	Slurry Seal or Chip Seal	8/1/05
460	1288	SUNSET ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	523	26	13,692	83	0	100	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
460	1289	SUNSET ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	634	32	20,096	81	35	65	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
460	1292	SUNSET ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	54	78	22	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
043	1298	SUPERIOR AVE	BEDFORD ST	EAST END	Local	AAC	E	2	39	930	32	30,370	75	12	88	0	4/17/25	Overlay - AC Thin	8/1/07
043	144	SUPERIOR AVE	HARBOR BLVD	BEDFORD ST	Local	AAC	E	2	39	464	33	15,345	73	0	86	14	4/17/25	Overlay - AC Thin	8/1/07
462	1301	SUSAN LN	WOODCREST	NORTH HILLS	Local	AC	E	2	37	280	36	10,686	81	0	83	17	3/24/25	Surface Treatment - Slurry Seal	4/1/13
463	1302	SWANSEA CIR	NANTUCKET	EAST END	Local	AC	E	2	37	202	26	6,799	76	51	43	6	3/25/25	Surface Treatment - Slurry Seal	4/1/13
464	1303	SYCAMORE AVE	STONEWOOD	MEADOWLARK	Local	AC	E	2	34	609	36	22,494	80	0	72	28	3/25/25	Slurry Seal or Chip Seal	8/1/05
465	1304	TEAKWOOD AVE	ALMONDWOOD ST	CHERRYWOOD	Local	AC	E	2	26	834	32	26,208	92	27	71	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
465	1305	TEAKWOOD AVE	CHERRYWOOD	DORWOOD AVE	Local	AC	E	2	26	935	36	33,064	78	61	18	21	3/10/25	Surface Treatment - Slurry Seal	1/1/20
465	1307	TEAKWOOD AVE	DORWOOD AVE	EAST END	Local	AC	E	2	26	239	26	7,739	61	58	29	13	3/10/25	Surface Treatment - Slurry Seal	1/1/20
465	1308	TEAKWOOD AVE	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	422	32	15,029	90	23	77	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
466	1309	TERRAZA SAN ANGELO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	251	32	9,557	83	16	84	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
467	1310	TERRAZA SAN BENITO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	173	32	7,331	84	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
520	1311	TERRAZA SAN CARLOS	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	208	32	8,181	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
469	1312	TERRAZA SANTA ELENA	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	232	32	9,891	74	33	61	6	3/10/25	Surface Treatment - Slurry Seal	1/1/20
470	1313	TERRY WAY	ORANGE ST	NORTH END	Local	AAC	E	2	27	351	30	10,350	79	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
471	1314	THIRD AVE	BRIGHT ST	COLLEGE ST	Local	AAC	E	2	36	1,142	40	48,188	85	46	49	5	4/17/25	Overlay - AC Thin	4/1/13
471	1315	THIRD AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	36	1,152	33	39,202	80	58	39	3	4/17/25	Surface Treatment - Slurry Seal	4/1/13
471	1316	THIRD AVE	MARIAN ST	EAST END	Local	AAC	E	2	15	165	26	5,540	79	29	71	0	3/4/25	Overlay - AC Thin	8/1/08
471	1320	THIRD AVE	KNUDSON ST	CHINCHILLA ST	Local	AC	E	2	17	293	30	10,040	37	48	18	34	3/4/25	Surface Treatment - Slurry Seal	4/1/13
472	1321	THORNE AVE	LIME	EAST END	Local	AAC	E	2	02	308	32	11,431	84	19	81	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
473	1322	TOPAZ AVE	PALM	VERONA	Local	AC	E	2	41	846	36	30,312	80	1	99	0	3/17/25	New Construction - Initial	1/1/80
474	1323	TROPICANA WAY	NORTH END	ORCHID AVE	Local	AC	E	2	40	538	36	21,166	81	78	22	0	3/17/25	New Construction - Initial	1/1/80
474	1324	TROPICANA WAY	ORCHID AVE	WHITTIER BLVD	Local	AC	E	2	40	765	36	27,396	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
475	1325	UNION AVE	WALL ST	BLAKE ST	Local	AC	E	2	04	634	31	20,320	77	25	75	0	3/9/25	New Construction - Initial	1/1/80
475	1326	UNION AVE	CITY LIMIT	WALL ST	Local	AC	E	2	04	113	32	3,424	78	9	91	0	3/9/25	New Construction - Initial	1/1/80
476	1327	URELL DR	LA SERNA AVE	LA PRESA DR	Local	AAC	E	2	20	474	25	12,350	73	18	81	1	2/27/25	Overlay - AC Thin	8/1/07
477	1328	VALENCIA ST	NORTH END	GREENWOOD AVE	Local	AAC	E	2	35	285	30	10,075	56	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
477	1329	VALENCIA ST	LA HABRA BLVD	THIRD AVE	Local	AC	E	2	36	1,006	36	36,000	77	52	48	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
477	1331	VALENCIA ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	639	32	20,256	69	51	29	20	3/26/25	Surface Treatment - Slurry Seal	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
477	1334	VALENCIA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	86	0	100	0	3/26/25	3 in AC OVERLAY	7/1/12
478	1337	VALLEJO ST	VERDUGO AVE	STEARNS AVE	Local	AC	E	2	38	514	36	19,038	81	11	84	5	3/24/25	New Construction - Initial	1/1/80
478	1339	VALLEJO ST	STEARNS AVE	HODSON AVE	Local	AC	E	2	38	221	36	8,490	69	79	21	0	3/24/25	New Construction - Initial	1/1/80
016	77	VALLEY HOME AVE	CITY LIMIT	GORDON AVE	Local	AC	C	1	01	1,056	16	16,912	65	77	23	0	2/18/25	New Construction - Initial	1/1/81
016	78	VALLEY HOME AVE	GORDON AVE	WHITTIER AVE	Local	AC	C	2	01	1,135	15	18,176	53	81	16	3	2/18/25	New Construction - Initial	1/1/94
016	79	VALLEY HOME AVE	WHITTIER AVE	GREGORY LN	Local	AAC	C	2	02	1,311	17	23,616	50	57	28	15	2/25/25	Overlay - AC Thin	10/1/06
016	80	VALLEY HOME AVE	GREGORY LN	LA HABRA BLVD	Local	AAC	C	2	02	1,579	18	28,422	47	68	24	8	2/25/25	Overlay - AC Thin	10/1/06
479	1340	VALWOOD ST	PARKWOOD AVE	GWYNWOOD AVE	Local	AAC	E	2	25	921	36	33,690	97	0	75	25	4/15/25	Overlay - AC Structural	4/1/24
480	1342	VAQUERO AVE	PALM ST	VERONA ST	Local	AC	E	2	41	847	36	30,348	77	20	74	6	3/17/25	New Construction - Initial	1/1/80
481	1345	VECINO ST	AMORITA	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	94	0	81	19	3/17/25	New Construction - Initial	1/1/80
482	1346	VERDUGO AVE	VALLEJO ST	JUANITA	Local	AC	E	2	38	621	36	22,892	75	47	53	0	3/24/25	New Construction - Initial	1/1/80
483	1347	VERNON ST	LINDAUER	LAGUNA	Local	AC	E	2	07	455	30	13,470	69	49	51	0	2/19/25	New Construction - Initial	1/1/80
484	1348	VERONA ST	AMORITA AVE	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	87	53	47	0	3/17/25	New Construction - Initial	1/1/80
484	1349	VERONA ST	WHITTIER BLVD	VAQUERO AVE	Local	AC	E	2	41	1,040	35	37,476	77	5	82	13	3/17/25	New Construction - Initial	1/1/80
484	1352	VERONA ST	VAQUERO AVE	SOUTH END	Local	AC	E	2	41	155	26	5,681	78	13	60	27	3/17/25	Surface Treatment - Slurry Seal	4/1/13
486	1355	VIA LOS ALTOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	226	32	8,807	82	32	68	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
487	1356	VIA LOS BONITOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	154	32	6,503	77	25	61	14	3/10/25	Surface Treatment - Slurry Seal	1/1/20
485	1354	VIA LOS COYOTES	NORTH END	AVENDIA SANTA DOMINGO	Local	AC	E	2	33	201	32	8,007	82	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
488	1357	VIEW DR	AMANDA	HILL	Local	AC	E	2	27	358	31	12,598	61	60	27	13	4/18/25	Surface Treatment - Slurry Seal	1/1/20
552	998	VIEW PARK MOBILE ESTATES	LAMBERT RD	SOUTH END	Local	AC	E	2	11	4,079	24	103,500	98	0	100	0	2/26/25	Complete Reconstruction - AC	8/15/22
059	162	VILLAGE DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	32	1,075	32	34,400	66	41	59	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
489	1358	VIRGINIA ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	14	751	30	22,350	74	30	63	7	2/26/25	Surface Treatment - Slurry Seal	4/1/13
489	1359	VIRGINIA ST	HIGHLANDER AVE	HEATHER AVE	Local	AC	E	2	14	525	29	15,780	78	12	88	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
490	1360	VIVIWOOD PL	PARKWOOD AVE	SOUTH END	Local	AC	E	2	25	392	26	11,717	74	45	26	29	3/11/25	Surface Treatment - Slurry Seal	4/1/24
491	1361	WADE ST	HODSON	LA HABRA BLVD	Local	AC	E	2	41	492	36	17,496	83	0	100	0	3/17/25	New Construction - Initial	1/1/80
492	1362	WALKER AVE	MARIAN	EAST END	Local	AAC	E	2	15	218	30	7,040	75	33	65	2	3/4/25	Overlay - AC Thin	8/1/08
036	137	WALL ST	WILSHIRE AVE	LAMBERT RD	Local	AAC	E	2	04	1,089	35	39,240	82	0	100	0	3/5/25	Overlay - AC Thin	8/1/08
541	1730	WALLACE AVE	MACY ST	BALDWIN ST	Local	AC	E	1	01	406	32	13,722	70	12	88	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
541	1733	WALLACE AVE	SHARPLESS ST	END	Local	AC	E	2	01	333	31	13,605	78	6	94	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
494	1367	WALLACE ST	LA HABRA BLVD	ALLEY S/FIRST AVE	Local	AAC	E	2	22	495	41	19,885	78	22	78	0	4/21/25	Surface Reconstruction - AC	8/1/05
495	1370	WALLING AVE	HOLGATE	CITY LIMIT	Local	AC	E	2	41	646	31	20,704	78	44	56	0	3/17/25	New Construction - Initial	1/1/80
017	1371	WALNUT ST	PARKWOOD AVE	PATWOOD DR	Local	AC	E	2	25	812	35	29,268	76	57	38	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
017	81	WALNUT ST	CITY LIMIT	LA PRESA DR	Local	AAC	C	2	13	1,386	36	46,215	84	15	79	6	2/13/25	Overlay - AC Structural	1/1/20
017	82	WALNUT ST	WHITTIER AVE	WHITTIER AVE	Local	AAC	C	2	13	1,135	35	40,896	98	0	100	0	2/13/25	Overlay - AC Structural	5/1/23
017	83	WALNUT ST	WHITTIER AVE	HIGHLANDER AVE	Local	AC	C	2	21	1,284	29	38,550	48	38	48	14	3/3/25	New Construction - Initial	1/1/81
017	84	WALNUT ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	C	2	21	1,285	29	38,580	49	42	46	12	3/3/25	New Construction - Initial	1/1/81
017	85	WALNUT ST	LA HABRA BLVD	LOMA VERDE AVE	Local	AAC	C	2	22	1,206	33	41,038	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
017	86	WALNUT ST	LOMA VERDE AVE	LAMBERT RD	Local	AAC	C	2	23	1,403	36	50,180	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
017	87	WALNUT ST	LAMBERT RD	LAS LOMAS AVE	Local	AC	C	2	24	1,287	35	46,368	64	36	53	11	4/22/25	Slurry Seal or Chip Seal	8/1/05
017	88	WALNUT ST	LAS LOMAS AVE	IMPERIAL HWY	Local	AC	C	2	24	1,407	35	50,688	66	30	55	15	4/22/25	Slurry Seal or Chip Seal	8/1/05
497	1373	WALTHAM WAY	SHELburne	EAST END	Local	AC	E	2	37	188	26	6,435	94	0	100	0	3/25/25	New Construction - Initial	1/1/80
498	1374	WARD ST	NORTH END	FRANCIS AVE	Local	AAC	E	2	35	658	26	18,858	74	40	58	2	4/2/25	Surface Reconstruction - AC	7/1/12
499	1375	WARNE ST	NORTH END	FRANCIS	Local	AAC	E	2	35	783	26	23,052	70	0	99	1	4/2/25	Surface Reconstruction - AC	7/1/12
500	1376	WATERBURY WAY	WEST END	WHITEBOOK	Local	AAC	E	2	11	149	32	6,318	76	0	100	0	3/4/25	Surface Reconstruction - AC	8/1/05
501	1377	WAVERLY TERR	WEST END	STURBRIDGE	Local	AAC	E	2	05	110	26	4,435	94	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
502	1378	WEDGEWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	365	26	10,995	65	66	34	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
502	1379	WEDGEWOOD LN	KIRKWOOD	COACHWOOD	Local	AAC	E	2	26	1,541	32	50,312	69	40	32	28	3/10/25	Surface Treatment - Slurry Seal	1/1/20
503	1380	WESTFIELD WAY	SHELburne	EAST END	Local	AC	E	2	37	189	26	6,461	92	0	93	7	3/25/25	New Construction - Initial	1/1/80
046	1382	WHITEBOOK DR	SHEFFIELD DR	MIDDLETON ST	Local	AAC	E	2	11	922	32	30,254	79	0	84	16	2/26/25	Surface Reconstruction - AC	8/1/05
046	148	WHITEBOOK DR	LAMBERT RD	SHEFFIELD DR	Local	AC	E	2	11	1,085	36	43,560	64	69	25	6	3/4/25	Surface Treatment - Slurry Seal	8/4/23
505	1387	WHITTIER BLVD (FRONT RD)	CONCOURSE ST	BRIGHTON ST	Local	AC	E	2	37	715	28	20,020	88	0	100	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
505	1389	WHITTIER BLVD (FRONT RD)	MONTE VISTA ST	EAST END	Local	AC	E	2	16	657	26	23,652	88	41	59	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
506	1390	WILGAR DR	EAST END	LORELLA	Local	AC	E	2	10	401	30	14,480	77	49	51	0	2/26/25	New Construction - Initial	1/1/80
507	1391	WILLOW ST	GREENWOOD AVE	HIGHLANDER AVE	Local	AC	E	2	16	327	30	9,630	58	70	29	1	3/3/25	Surface Treatment - Slurry Seal	4/1/13
507	1392	WILLOW ST	LA HABRA BLVD	HEATHER AVE	Local	AC	E	2	16	616	30	18,300	82	35	42	23	3/3/25	New Construction - Initial	1/1/80
508	1396	WILSHIRE AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	927	36	33,156	82	0	100	0	3/5/25	Surface Reconstruction - AC	8/1/08
508	1397	WILSHIRE AVE	MARIPOSA DR	MARIPOSA ST	Local	AAC	E	2	04	979	35	35,280	79	32	68	0	3/5/25	Surface Reconstruction - AC	8/1/08
508	1398	WILSHIRE AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	479	30	15,920	87	0	76	24	3/4/25	New Construction - Initial	1/1/80
508	1402	WILSHIRE AVE	WEST END	WALL ST	Local	AAC	E	2	04	148	35	5,364	91	16	84	0	3/9/25	Surface Reconstruction - AC	8/1/08
510	1403	WILSON ST	VAQUERO AVE	STEARNS AVE	Local	AC	E	2	41	778	32	24,768	91	0	100	0	3/17/25	New Construction - Initial	1/1/80
511	1406	WILTON WAY	NORTH END	WHITEBOOK	Local	AAC	E	2	11	69	34	3,896	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
512	1407	WIMBELTON LN	GLENHAVEN	STURBRIDGE	Local	AC	E	2	05	330	36	11,664	95	0	100	0	2/26/25	New Construction - Initial	1/1/80
513	1408	WOODBRIER DR	WEST END	RIDGEHAVEN	Local	AC	E	2	05	227	36	7,956	74	87	13	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
514	1409	WOODCREST AVE	FALLENLEAF ST	ROANNE DR	Local	AC	E	2	34	1,369	36	52,284	72	48	43	9	3/25/25	Slurry Seal or Chip Seal	8/1/05
514	1410	WOODCREST AVE	ROANNE DR	EAST END	Local	AC	E	2	34	207	26	6,933	82	36	64	0	3/25/25	Surface Treatment - Cape Seal	4/1/13
514	1411	WOODCREST AVE	SUSAN LN	PALM ST	Local	AC	E	2	37	846	36	31,062	70	27	59	14	3/25/25	Surface Treatment - Slurry Seal	4/1/13
514	1412	WOODCREST AVE	WEST END	FALLENLEAF ST	Local	AC	E	2	34	478	36	19,005	92	19	81	0	3/26/25	Surface Treatment - Slurry Seal	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
515	1413	WOODMERE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	119	26	4,669	82	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
516	1414	WOODMONT PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	106	32	4,917	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
517	1415	WORTH AVE	DEXFORD	EAST END	Local	AAC	E	2	02	225	32	7,008	88	0	100	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
518	1416	ZEKE AND ELSIE DR	BRASS LANTERN	PENDLETON	Local	AC	E	2	06	252	36	9,606	77	35	65	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
										92.9		16,562,693							
		Alleys																	
065	1716	ALLEY E/BEACH BLVD	SAN JOSE AVE	ALLEY N/SAN JOSE	Alley	AC	O	1	10	179	19	3,600	11	64	16	20	2/25/25	New Construction - AC	1/1/80
065	1717	ALLEY E/BEACH BLVD	ALLEY S/SAN JOSE	SAN JOSE AVE	Alley	AC	O	1	10	428	19	8,580	14	47	10	43	2/25/25	New Construction - AC	1/1/80
065	204	ALLEY E/BEACH BLVD	ALLEY S/WHITTIER	GREGORY	Alley	AAC	O	1	09	614	14	9,225	99	0	100	0	2/25/25	Overlay - AC Structural	6/1/24
066	206	ALLEY E/BEDFORD ST	ALLEY S/ LA HABRA BL	SUPERIOR	Alley	AC	O	1	39	1,579	15	25,280	94	0	56	44	4/2/25	New Construction - Initial	1/1/80
067	0207	ALLEY E/BURWOOD	PARKWOOD	MONTWOOD	Alley	AC	O	1	32	882	19	17,660	85	57	43	0	3/10/25	New Construction - Initial	1/1/80
068	0208	ALLEY E/CORTO	WHITTIER BL	SOUTH END	Alley	AC	O	1	09	226	19	4,540	60	74	24	2	2/20/25	New Construction - Initial	1/1/80
069	209	ALLEY E/EUCLID STREET	N/END	N/O PINEHURST	Alley	AC	O	1	28	313	19	6,280	19	24	52	24	4/25/25	New Construction - Initial	1/1/80
070	210	ALLEY E/HARBOR-W/BEDFOR	N/O BEDFORD	N/O STEARNS	Alley	AAC	O	1	38	745	16	9,685	99	0	100	0	3/25/25	Overlay - AC Structural	12/1/21
071	211	ALLEY E/HAZEL-W/HILLSID	S/O ALLEY S/WHITTIER	N/O ALLEY N/GREENWOOD	Alley	PCC	O	1	21	481	10	4,810	19	69	4	27	5/5/25	New Construction - Initial	1/1/80
073	213	ALLEY E/VALENCIA ST	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	O	1	36	434	19	8,700	94	40	60	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
074	214	ALLEY E/WALNUT STREET	N/END	N/O ALLEY N/ERNA	Alley	AC	O	1	21	429	19	8,600	92	0	100	0	4/17/25	New Construction - Initial	1/1/80
074	215	ALLEY E/WALNUT STREET	FIRST ST	SOUTH END	Alley	AC	O	1	22	309	18	5,890	94	0	71	29	4/21/25	New Construction - Initial	1/1/80
074	216	ALLEY E/WALNUT STREET	NORTH END	ALLY N/GREENWOOD AVE	Alley	AC	O	1	21	372	10	4,103	52	36	51	13	4/25/25	New Construction - Initial	1/1/80
076	1706	ALLEY N/ERNA STREET	WILLOW ST	EAST END	Alley	AC	O	1	16	335	16	3,965	81	6	83	11	3/4/25	New Construction - Initial	1/1/80
076	1708	ALLEY N/ERNA STREET	WEST END	ALLEY W/O WALNUT ST	Alley	AC	O	1	16	240	20	4,080	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
076	217	ALLEY N/ERNA STREET	E/O ALLEY E/WALNUT	N/O HAZEL	Alley	AC	O	1	21	174	19	3,500	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
076	218	ALLEY N/ERNA STREET	HAZEL	E/END	Alley	AC	O	1	21	255	20	5,100	89	0	100	0	4/17/25	New Construction - Initial	1/1/80
076	219	ALLEY N/ERNA STREET	WALNUT ST	E/O ALLEY E/WALNUT	Alley	AC	O	1	21	144	19	2,900	90	0	95	5	4/17/25	New Construction - Initial	1/1/80
076	220	ALLEY N/ERNA STREET	WEST END	EUCLID ST	Alley	AC	O	1	21	315	14	4,740	87	0	100	0	4/18/25	New Construction - Initial	1/1/80
078	221	ALLEY N/GREENWOOD AVE	E/O ALLEY E/O WALNUT	W/O HAZEL	Alley	AC	O	1	21	162	15	2,608	47	39	61	0	4/25/25	New Construction - Initial	1/1/80
078	222	ALLEY N/GREENWOOD AVE	E/O HAZEL	MID ALLEY E/HAZEL-W/HILLSIDE	Alley	AC	O	1	21	136	12	1,781	45	60	14	26	4/25/25	New Construction - Initial	1/1/80
078	223	ALLEY N/GREENWOOD AVE	E/O WALNUT	E/O ALLEY E/WALNUT-W/HAZEL	Alley	AC	O	1	21	166	15	2,672	39	64	36	0	4/25/25	New Construction - Initial	1/1/80
078	224	ALLEY N/GREENWOOD AVE	MID ALLEY E/HAZEL-W/HILLSIDE	W/O HILLSIDE	Alley	PCC	O	1	21	150	10	1,500	21	83	0	17	4/25/25	New Construction - Initial	1/1/80
079	225	ALLEY N/INDUSTRY AVE	E/O EUCLID	W/O CYPRESS	Alley	AC	O	1	31	724	19	14,500	42	64	31	5	2/14/25	New Construction - Initial	1/1/80
080	226	ALLEY N/LA HABRA BLVD	E/O ALLEY E/CYPRESS	W/O LEMON	Alley	AC	O	1	35	144	14	2,175	89	0	74	26	4/2/25	New Construction - Initial	1/1/80
080	227	ALLEY N/LA HABRA BLVD	CYPRESS ST	E/O ALLEY E/CYPRESS	Alley	AC	O	1	35	146	14	2,205	91	0	100	0	4/2/25	New Construction - Initial	1/1/80
080	228	ALLEY N/LA HABRA BLVD	DEXFORD ST	E/END	Alley	AC	O	1	02	275	19	5,520	50	21	53	26	2/24/25	New Construction - Initial	1/1/80
080	229	ALLEY N/LA HABRA BLVD	EUCLID ST	CIVIC CENTER DR	Alley	AC	O	1	28	351	19	7,040	100	0	0	0	4/25/25	New Construction - Initial	1/1/80
080	230	ALLEY N/LA HABRA BLVD	ORANGE ST	EAST END	Alley	AAC	O	1	28	467	13	6,552	99	0	0	100	2/13/25	Overlay - AC Structural	4/4/24
080	231	ALLEY N/LA HABRA BLVD	WEST END	DEXFORD ST	Alley	AC	O	1	02	226	19	4,540	50	45	55	0	2/24/25	New Construction - Initial	1/1/80
081	232	ALLEY N/LAMBERT	N/END	W/O MOUNTAIN VIEW	Alley	AC	O	1	18	105	19	2,120	27	79	21	0	3/16/25	New Construction - Initial	1/1/80
097	290	ALLEY N/O WHITTIER	WEST END	HARBOR BL	Alley	AC	O	1	34	172	16	2,941	32	64	19	17	4/22/25	New Construction - Initial	1/1/80
536	1718	ALLEY N/SAN JOSE AVE	BEACH BLVD	ALLEY E/BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	15	70	25	5	2/25/25	New Construction - AC	1/1/80
082	1712	ALLEY N/THIRD ST	ALLEY W/O VALENCIA	VALENCIA ST	Alley	AC	O	1	36	153	20	2,091	84	0	15	85	4/2/25	New Construction - Initial	1/1/80
082	235	ALLEY N/THIRD ST	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	147	19	2,960	97	0	100	0	4/2/25	New Construction - Initial	1/1/80
083	236	ALLEY N/WHITTIER BLVD	KIRBY DR	WALNUT ST	Alley	AC	O	1	13	484	19	9,700	14	55	23	22	2/27/25	New Construction - Initial	1/1/80
083	237	ALLEY N/WHITTIER BLVD	WEST END	KIRBY DR	Alley	AC	O	1	13	167	19	3,360	31	44	53	3	5/6/25	New Construction - Initial	1/1/80
084	238	ALLEY S/ERNA	MCPHERSON ST	COLLEGE ST	Alley	AC	O	1	35	304	14	4,575	88	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	239	ALLEY S/ERNA	HAZEL ST	LOIS ST	Alley	AC	O	1	21	434	14	6,525	80	1	60	39	4/17/25	New Construction - Initial	1/1/80
084	240	ALLEY S/ERNA	LEORA ST	WALNUT ST	Alley	AC	O	1	16	454	19	9,100	63	32	26	42	3/3/25	New Construction - Initial	1/1/80
084	241	ALLEY S/ERNA	WILLOW ST	ALLEY W/LEORA ST	Alley	AC	O	1	16	359	14	5,400	15	55	22	23	3/4/25	New Construction - Initial	1/1/80
084	242	ALLEY S/ERNA	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	319	19	6,400	82	22	49	29	4/17/25	New Construction - Initial	1/1/80
084	243	ALLEY S/ERNA	SUNSET ST	ALLEY W/HARBOR BL	Alley	AC	O	1	35	308	15	4,635	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	244	ALLEY S/ERNA	COLLEGE ST	VALENCIA ST	Alley	AC	O	1	35	312	14	4,695	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	245	ALLEY S/ERNA	LOIS ST	EUCLID ST	Alley	AC	O	1	21	464	24	11,625	80	0	95	5	4/21/25	New Construction - Initial	1/1/80
084	247	ALLEY S/ERNA	VALENCIA ST	SUNSET ST	Alley	AC	O	1	35	283	9	2,840	92	0	53	47	3/26/25	New Construction - Initial	1/1/80
084	248	ALLEY S/ERNA	WEST END	MCPHERSON ST	Alley	AAC	O	1	35	402	14	6,045	93	0	62	38	3/26/25	Overlay - AC Structural	12/1/21
085	1710	ALLEY S/FIRST AVE	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	305	14	2,783	76	0	100	0	4/21/25	New Construction - Initial	1/1/80
085	249	ALLEY S/FIRST AVE	ALDRICH ST	CYPRESS ST	Alley	AAC	O	1	29	408	16	6,528	99	0	100	0	4/17/25	Overlay - AC Structural	3/4/23
085	250	ALLEY S/FIRST AVE	CYPRESS ST	MCPHERSON ST	Alley	AC	O	1	36	640	16	10,240	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
086	251	ALLEY S/FLORENCE AVENUE	WEST END	MCPHERSON ST	Alley	AAC	O	1	35	310	14	4,665	99	0	100	0	4/2/25	Overlay - AC Structural	12/1/21
087	252	ALLEY S/GREENWOOD AVE	ALLEY W/LOIS ST	EAST END	Alley	AC	O	1	21	122	20	2,440	55	0	100	0	4/25/25	New Construction - Initial	1/1/80
087	253	ALLEY S/GREENWOOD AVE	HAZEL ST	ALLEY W/LOIS ST	Alley	AC	O	1	21	164	19	3,300	45	44	53	3	4/25/25	New Construction - Initial	1/1/80
087	254	ALLEY S/GREENWOOD AVE	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	321	19	6,440	44	66	33	1	4/25/25	New Construction - Initial	1/1/80
087	255	ALLEY S/GREENWOOD AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	470	19	9,420	91	27	73	0	3/3/25	New Construction - Initial	1/1/80
088	256	ALLEY S/HIGHLANDER AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	O	1	16	471	15	7,552	88	19	55	26	3/3/25	New Construction - Initial	1/1/80
089	257	ALLEY S/INDUSTRY AVE	EUCLID ST	CYPRESS ST	Alley	AC	O	1	31	683	19	13,580	93	0	49	51	2/14/25	Complete Reconstruction - AC	8/17/17
090	258	ALLEY S/KENRICH COURT	W/END	W/O CHANTRY	Alley	AC	O	1	02	510	14	7,665	67	34	49	17	2/24/25	New Construction - Initial	1/1/80
091	259	ALLEY S/LA HABRA BLVD	ALDRICH ST	CYPRESS ST	Alley	AC	O	1	29	408	14	6,135	60	56	38	6	4/17/25	New Construction - Initial	1/1/80
091	260	ALLEY S/LA HABRA BLVD	ALLEY E/BEDFORD ST	COLFAX ST	Alley	AC	O	1	39	96	19	1,940	87	0	100	0	4/22/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, Name Order (A-Z)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
091	261	ALLEY S/LA HABRA BLVD	ALLEY W/EUCLID ST	EUCLID ST	Alley	AC	0	1	22	126	14	1,905	68	0	30	70	4/22/25	New Construction - Initial	11/1/80
091	262	ALLEY S/LA HABRA BLVD	ALLEY W/VALENCIA ST	VALENCIA ST	Alley	AC	0	1	36	125	19	2,520	98	0	100	0	4/2/25	New Construction - Initial	1/1/80
091	263	ALLEY S/LA HABRA BLVD	BEDFORD ST	ALLEY E/BEDFORD ST	Alley	AC	0	1	39	133	19	2,680	90	0	100	0	4/22/25	New Construction - Initial	1/1/80
091	264	ALLEY S/LA HABRA BLVD	CALIFORNIA ST	WALLACE ST	Alley	AC	0	1	22	268	14	4,035	58	57	23	20	4/22/25	New Construction - Initial	1/1/80
091	265	ALLEY S/LA HABRA BLVD	BANK OF AMERICA PARKING LOT	ALDRICH ST	Alley	AC	0	1	29	255	14	3,840	74	39	33	28	4/17/25	New Construction - Initial	1/1/80
091	266	ALLEY S/LA HABRA BLVD	COLFAX ST	DEXTER ST	Alley	AC	0	1	39	202	19	4,060	80	7	93	0	4/22/25	New Construction - Initial	1/1/80
091	267	ALLEY S/LA HABRA BLVD	CYPRESS ST	MCPHERSON ST	Alley	AC	0	1	36	640	14	9,615	79	0	66	34	4/15/25	New Construction - Initial	1/1/80
091	268	ALLEY S/LA HABRA BLVD	DEXFORD ST	MISSION ST	Alley	AC	0	1	03	1,013	19	20,280	12	68	26	6	2/20/25	New Construction - Initial	1/1/80
091	269	ALLEY S/LA HABRA BLVD	DEXTER ST	FONDA ST	Alley	AC	0	1	39	202	19	4,060	82	20	78	2	4/22/25	New Construction - Initial	1/1/80
091	271	ALLEY S/LA HABRA BLVD	FONDA ST	EAST END	Alley	AC	0	1	39	101	19	2,040	78	0	100	0	4/22/25	New Construction - Initial	1/1/80
091	272	ALLEY S/LA HABRA BLVD	HAZEL ST	CALIFORNIA ST	Alley	AC	0	1	22	269	19	5,400	76	25	37	38	4/22/25	New Construction - Initial	1/1/80
091	273	ALLEY S/LA HABRA BLVD	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	0	1	36	138	16	2,363	82	74	18	8	4/2/25	New Construction - Initial	1/1/80
091	274	ALLEY S/LA HABRA BLVD	WALLACE ST	ALLEY W/EUCLID ST	Alley	AC	0	1	22	192	14	2,895	82	0	64	36	4/25/25	New Construction - Initial	1/1/80
091	275	ALLEY S/LA HABRA BLVD	WALNUT ST	HAZEL ST	Alley	AC	0	1	22	318	19	6,380	70	42	25	33	4/22/25	New Construction - Initial	1/1/80
091	276	ALLEY S/LA HABRA BLVD	OAKLAND ST	DEXFORD ST	Alley	AC	0	1	03	446	19	8,940	33	62	28	10	2/20/25	New Construction - Initial	1/1/80
091	277	ALLEY S/LA HABRA BLVD	W/END	W/O MONTE VISTA	Alley	AC	0	1	15	211	19	4,240	11	82	12	6	3/4/25	New Construction - Initial	1/1/80
537	1719	ALLEY S/SAN JOSE AVE	ALLEY E/BEACH BLVD	BEACH BLVD	Alley	AC	0	1	10	139	19	2,800	38	69	31	0	2/25/25	New Construction - AC	1/1/80
092	278	ALLEY S/STEARNS AVENUE	E/O COLLEGE	W/O VALENCIA	Alley	AC	0	1	35	312	14	4,695	89	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	279	ALLEY S/STEARNS AVENUE	E/O MCPHERSON	W/O COLLEGE	Alley	AC	0	1	35	304	14	4,575	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	280	ALLEY S/STEARNS AVENUE	SUNSET ST	EAST END	Alley	AC	0	1	35	343	14	3,509	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	281	ALLEY S/STEARNS AVENUE	E/O VALENCIA	W/O SUNSET	Alley	AC	0	1	35	283	14	4,260	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
092	282	ALLEY S/STEARNS AVENUE	WEST END	MCPHERSON ST	Alley	AC	0	1	35	309	14	4,650	98	0	100	0	3/26/25	Complete Reconstruction - AC	12/1/21
093	284	ALLEY S/WHITTIER BLVD	ALLEY E/HAZEL ST	HILLSIDE ST	Alley	AC	0	1	21	121	12	1,586	12	48	14	38	5/5/25	New Construction - Initial	1/1/80
093	285	ALLEY S/WHITTIER BLVD	HAZEL ST	ALLEY E/HAZEL ST	Alley	AC	0	1	21	146	19	2,940	18	46	14	40	4/25/25	New Construction - Initial	1/1/80
093	286	ALLEY S/WHITTIER BLVD	W/O ALLEY E/BEACH	W/O RIDGEWAY	Alley	AC	0	1	09	162	19	3,260	99	0	100	0	5/5/25	New Construction - Initial	1/1/80
094	287	ALLEY W/BEDFORD STREET	S/O ALPINE	N/O SUPERIOR	Alley	AC	0	1	39	1,252	19	25,060	93	0	100	0	4/2/25	Complete Reconstruction - AC	4/2/18
095	288	ALLEY W/BURWOOD ST	NORTH END	MONTWOOD AVE	Alley	AC	0	1	32	1,035	20	21,756	92	0	100	0	4/15/25	New Construction - Initial	1/1/80
096	289	ALLEY W/EUCLID	ALLEY S/LA HABRA BL	FIRST ST	Alley	AAC	0	1	22	152	11	1,836	99	0	100	0	4/21/25	Overlay - AC Structural	4/1/24
098	294	ALLEY W/LEORA STREET	ALLEY S/ERNA ST	LA HABRA BL	Alley	AC	0	1	16	145	9	1,460	13	77	23	0	3/4/25	New Construction - Initial	1/1/80
098	295	ALLEY W/LEORA STREET	ERNA ST	ALLEY S/ERNA ST	Alley	AC	0	1	16	153	9	1,540	15	41	14	45	5/6/25	New Construction - Initial	1/1/80
099	296	ALLEY W/LOIS STREET	ALLEY S/GREENWOOD ST	ROSE AVE	Alley	AC	0	1	21	168	19	3,380	43	67	20	13	4/25/25	New Construction - Initial	1/1/80
099	297	ALLEY W/LOIS STREET	ROSE AVE	ALLEY S/ROSE AVE	Alley	AC	0	1	21	156	19	3,140	36	63	8	29	4/25/25	New Construction - Initial	1/1/80
102	307	ALLEY W/O HARBOR BLVD	ERNA AVE	LA HABRA BLVD	Alley	AC	0	1	35	343	19	6,880	86	0	100	0	3/26/25	New Construction - Initial	1/1/80
102	308	ALLEY W/O HARBOR BLVD	FRANCIS AVE	NORTH END	Alley	AC	0	1	35	524	20	8,908	94	0	100	0	4/2/25	New Construction - Initial	1/1/80
100	299	ALLEY W/VALENCIA	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	0	1	36	414	19	8,300	96	0	100	0	4/2/25	New Construction - Initial	1/1/80
101	300	ALLEY W/WALNUT STREET	ALLEY S/GREENWOOD AVE	HIGHLANDER AVE	Alley	AC	0	1	16	142	15	2,288	81	0	39	61	3/3/25	New Construction - Initial	1/1/80
101	301	ALLEY W/WALNUT STREET	ALLEY S/HEATHER AVE	ERNA ST	Alley	AC	0	1	16	141	15	2,272	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
101	302	ALLEY W/WALNUT STREET	ALLEY S/HIGHLANDER AVE	FLORENCE AVE	Alley	AC	0	1	16	146	15	2,352	87	0	57	43	3/3/25	New Construction - Initial	1/1/80
101	303	ALLEY W/WALNUT STREET	FLORENCE AVE	HEATHER AVE	Alley	AC	0	1	16	301	15	4,832	89	32	60	8	3/4/25	New Construction - Initial	1/1/80
101	304	ALLEY W/WALNUT STREET	GREENWOOD AVE	ALLEY S/GREENWOOD AVE	Alley	AC	0	1	16	160	15	2,576	90	24	68	8	3/3/25	New Construction - Initial	1/1/80
101	305	ALLEY W/WALNUT STREET	HEATHER AVE	ALLEY S/HEATHER AVE	Alley	AC	0	1	16	157	15	2,528	60	48	52	0	3/4/25	New Construction - Initial	1/1/80
101	306	ALLEY W/WALNUT STREET	HIGHLANDER AVE	ALLEY S/HIGHLANDER AVE	Alley	AC	0	1	16	156	15	2,512	92	0	100	0	3/3/25	New Construction - Initial	1/1/80
										6.4		582,079							

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
		Arterials / Collectors (MPAH)																	
002	8	IMPERIAL HWY	BRASS LANTERN DR	BEACH BLVD	Primary	AC	A	6	~	1,051	64	72,264	37	38	51	11	3/12/25	New Construction - Initial	1/1/72
002	7	IMPERIAL HWY	W. CITY LIMIT	BRASS LANTERN DR	Primary	AC	A	6	~	1,549	64	101,136	45	47	52	1	3/12/25	New Construction - Initial	1/1/72
061C	104	HARBOR BLVD	LA HABRA BLVD	SUPERIOR AVE	Primary	AC	A	6	~	1,400	72	102,000	61	32	56	12	5/5/25	New Construction - Initial	1/1/80
001	65	IDAHO ST	IMPERIAL HWY	SANDLEWOOD AVE	Secondary	AC	A	5	~	1,469	60	95,625	65	10	58	32	3/12/25	New Construction - Initial	1/1/80
001	4	IDAHO ST	HILLANDALE AVE	LAMBERT RD	Secondary	AC	A	5	~	1,713	59	102,840	65	36	43	21	3/12/25	New Construction - Initial	1/1/78
061	108	HARBOR BLVD WEST SIDE	IMPERIAL HWY	435' S/O IMPERIAL HWY	Major	AC	A	2	~	434	32	12,820	66	26	74	0	2/14/25	New Construction - Initial	1/1/80
006	40	WHITTIER BLVD	HARBOR BLVD	BRIGHTON ST	Collector	AC	A	4	~	1,187	56	66,472	68	10	90	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
003	13	LA HABRA BLVD	IDAHO ST	MONTE VISTA ST	Secondary	AC	A	4	~	1,309	55	70,745	69	54	38	8	2/26/25	New Construction - Initial	1/1/90
006	39	WHITTIER BLVD	BRIGHTON ST	PALM ST	Collector	AC	A	5	~	1,456	58	83,948	69	32	68	0	4/23/25	Slurry Seal or Chip Seal	8/1/05
003	18	LA HABRA BLVD	COLLEGE ST	HARBOR BLVD	Secondary	AC	A	4	~	1,249	60	70,800	71	34	50	16	5/5/25	New Construction - Initial	1/1/79
001	3	IDAHO ST	LA HABRA BLVD	HILLANDALE AVE	Secondary	AC	A	5	~	895	59	53,760	71	43	51	6	3/16/25	New Construction - Initial	1/1/78
001	5	IDAHO ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	5	~	1,084	60	66,290	71	15	85	0	3/12/25	New Construction - Initial	1/1/78
009	96	EUCUID ST	LAMBERT RD	LAS LOMAS DR	Secondary	AC	A	4	~	1,320	60	79,200	73	38	36	26	5/9/25	New Construction - Initial	1/1/75
061C	105	HARBOR BLVD	SUPERIOR AVE	LAMBERT RD	Primary	AC	A	6	~	1,240	78	96,720	73	20	63	17	4/23/25	New Construction - Initial	1/1/80
003	10	LA HABRA BLVD	DEXFORD ST	BEACH BLVD	Secondary	AC	A	4	~	1,540	55	86,296	73	24	32	44	2/25/25	New Construction - Initial	1/1/80
003	19	LA HABRA BLVD	HARBOR BLVD	FONDA ST	Primary	AC	A	4	~	1,126	60	66,060	74	30	57	13	4/23/25	New Construction - Initial	1/1/79
004	32	LAMBERT RD	BEACH BLVD	WHITEBOOK DR	Primary	AC	A	4	~	1,618	64	105,235	74	63	37	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
003	16	LA HABRA BLVD	EUCUID ST	CYPRESS ST	Secondary	AC	A	4	~	1,325	60	77,580	74	23	74	3	5/5/25	New Construction - Initial	1/1/79
001	66	IDAHO ST	SANDLEWOOD AVE	CITY LIMIT	Secondary	AC	A	4	~	2,549	66	168,234	76	12	80	8	3/11/25	New Construction - Initial	1/1/94
009	97	EUCUID ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	4	~	1,320	60	74,580	76	31	38	31	5/9/25	New Construction - Initial	1/1/75
009	94	EUCUID ST	SECOND ST	OLIVE AVE	Secondary	AC	A	2	~	975	60	58,500	77	15	63	22	5/9/25	New Construction - Initial	1/1/75
003	17	LA HABRA BLVD	CYPRESS ST	COLLEGE ST	Secondary	AC	A	4	~	1,318	60	76,655	77	15	64	21	5/5/25	New Construction - Initial	1/1/79
003	14	LA HABRA BLVD	MONTE VISTA ST	WALNUT ST	Secondary	AC	A	4	~	1,322	54	70,668	78	29	53	18	3/3/25	New Construction - Initial	1/1/90
061C	101	HARBOR BLVD	BROOKDALE AVE	WHITTIER AVE	Primary	AC	A	2	~	1,320	80	103,600	78	15	38	47	4/23/25	New Construction - Initial	1/1/80
003	9	LA HABRA BLVD	VALLEY HOME AVE	DEXFORD ST	Secondary	AC	A	4	~	1,002	56	56,112	79	16	76	8	2/25/25	New Construction - Initial	1/1/80
006	38	WHITTIER BLVD	PALM ST	CITY LIMITS	Collector	AC	A	2	~	1,262	36	45,468	79	16	80	4	4/23/25	New Construction - Initial	1/1/91
009	93	EUCUID ST	LA HABRA BLVD	SECOND ST	Secondary	AC	A	4	~	710	60	42,600	79	13	63	24	5/9/25	New Construction - Initial	1/1/75
009	95	EUCUID ST	OLIVE AVE	LAMBERT RD	Secondary	AC	A	4	~	935	60	56,100	79	27	73	0	5/9/25	New Construction - Initial	1/1/75
001	6	IDAHO ST	LAS LOMAS DR	IMPERIAL HWY	Secondary	AC	A	5	~	1,525	59	91,560	79	0	100	0	3/12/25	New Construction - Initial	1/1/77
014	73	RUSSELL ST	VALLEY HOME AVE	MACY ST	Secondary	AC	A	2	~	1,757	42	79,744	79	23	55	22	2/18/25	Surface Treatment - Slurry Seal	8/4/23
061C	103	HARBOR BLVD	FRANCIS AVE	LA HABRA BLVD	Primary	AC	A	4	~	1,440	72	103,680	80	29	67	4	4/23/25	New Construction - Initial	1/1/80
061B	109	HARBOR BLVD EAST SIDE	LAS RIENDAS DR	LAS PALMAS DR	Major	AC	A	2	~	1,075	32	34,400	80	11	58	31	2/14/25	Overlay - AC Rubber	8/7/17
004	31	LAMBERT RD	WHITEBOOK DR	IDAHO ST	Primary	AC	A	4	~	1,024	64	66,625	81	50	50	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
004	34	LAMBERT RD	CITY LIMITS	MARTINEZ DR	Primary	AC	A	6	~	1,246	79	99,760	81	34	66	0	3/16/25	Surface Treatment - Slurry Seal	10/1/18
003	20	LA HABRA BLVD	FONDA ST	PALM ST	Primary	AC	A	4	~	1,441	60	86,460	81	0	84	16	4/22/25	New Construction - Initial	1/1/76
003	15	LA HABRA BLVD	WALNUT ST	EUCUID ST	Secondary	AC	A	4	~	1,318	54	70,440	83	0	95	5	4/25/25	New Construction - Initial	1/1/90
003	21	LA HABRA BLVD	PALM ST	E. CITY LIMIT	Primary	AC	A	4	~	1,304	60	78,240	83	21	42	37	4/23/25	New Construction - Initial	1/1/76
061C	102	HARBOR BLVD	WHITTIER AVE	FRANCIS AVE	Primary	AC	A	4	~	1,185	72	85,320	84	0	91	9	4/23/25	New Construction - Initial	1/1/80
009	99	EUCUID ST	SANDLEWOOD AVE	CITY LIMIT	Major	AAC	A	4	~	1,580	80	126,400	84	13	80	7	5/9/25	Overlay - AC Structural	6/1/17
061	106	HARBOR BLVD WEST SIDE	LAMBERT RD	EDWARDS DR	Primary	AC	A	3	~	1,289	32	41,248	84	15	82	3	2/14/25	New Construction - Initial	1/1/80
061C	100	HARBOR BLVD	CITY LIMIT	BROOKDALE AVE	Primary	AC	A	4	~	1,315	80	89,075	84	38	42	20	4/23/25	New Construction - Initial	1/1/80
061	107	HARBOR BLVD WEST SIDE	EDWARDS DR	IMPERIAL HWY	Major	AC	A	3	~	1,338	16	21,408	85	19	64	17	2/14/25	New Construction - Initial	1/1/80
061C	167	HARBOR BLVD	435' S/O IMPERIAL HWY	LAS RIENDAS	Major	AC	A	6	~	526	80	42,160	85	16	84	0	2/14/25	Overlay - AC Rubber	8/7/17
004	33	LAMBERT RD	MARTINEZ DR	BEACH BLVD	Primary	AC	A	5	~	1,294	70	98,960	85	28	62	10	3/16/25	Surface Treatment - Slurry Seal	10/1/18
061B	110	HARBOR BLVD EAST SIDE	LAS PALMAS DR	450' S/O LAS PALMAS DR	Major	AC	A	2	~	450	32	14,400	86	0	100	0	2/14/25	Overlay - AC Rubber	8/7/17
004	27	LAMBERT RD	EUCUID ST	CYPRESS ST	Primary	AC	A	5	~	1,411	60	86,739	86	20	50	30	2/14/25	Complete Reconstruction - AC	10/1/18
009	98	EUCUID ST	IMPERIAL HWY	SANDLEWOOD AVE	Major	AAC	A	4	~	1,600	80	128,000	87	37	63	0	5/9/25	Overlay - AC Structural	6/1/17
004	25	LAMBERT RD	RAIL ROAD	HARBOR BLVD	Primary	AC	A	5	~	1,320	79	105,680	88	15	58	27	2/14/25	Complete Reconstruction - AC	10/1/18
004	26	LAMBERT RD	CYPRESS ST	RAILROAD	Primary	AC	A	5	~	1,320	79	105,680	89	17	69	14	2/14/25	Complete Reconstruction - AC	10/1/18
018	89	HACIENDA RD	WHITTIER BLVD	NORTH CITY LIMIT	Secondary	AAC	A	4	~	2,324	45	111,240	91	62	21	17	2/19/25	Overlay - AC Structural	1/1/21
004	23	LAMBERT RD	RAILROAD	PALM ST	Major	AC	A	2	~	1,327	39	53,120	91	21	79	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	24	LAMBERT RD	HARBOR BLVD	RAILROAD	Major	AC	A	2	~	1,324	39	53,000	91	32	68	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	22	LAMBERT RD	PALM ST	CITY LIMIT	Major	AC	A	5	~	1,289	77	100,620	92	0	100	0	2/14/25	Complete Reconstruction - AC	10/1/18
004	28	LAMBERT RD	WALNUT ST	EUCUID ST	Primary	AC	A	4	~	1,316	64	85,605	92	27	73	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	30	LAMBERT RD	IDAHO ST	MONTE VISTA ST	Primary	AC	A	4	~	1,310	64	91,850	93	0	100	0	3/16/25	Complete Reconstruction - AC	10/1/18
004	29	LAMBERT RD	MONTE VISTA ST	WALNUT ST	Primary	AC	A	2	~	1,236	65	79,345	93	36	64	0	3/16/25	Complete Reconstruction - AC	10/1/18
003	11	LA HABRA BLVD	BEACH BLVD	DEANNA ST	Secondary	AC	A	4	~	1,174	58	66,342	95	0	64	36	2/26/25	Complete Reconstruction - AC	1/1/20
009	92	EUCUID ST	FRANCIS ST	LA HABRA BLVD	Secondary	AC	A	2	~	1,115	52	49,425	96	0	30	70	2/13/25	Overlay - AC Rubber	2/1/25
001	2	IDAHO ST	HIGHLANDER AVE	LA HABRA BLVD	Secondary	AC	A	2	~	1,283	39	51,360	96	0	85	15	2/14/25	New Construction - Initial	10/1/86
001	1	IDAHO ST	WHITTIER BLVD	HIGHLANDER AVE	Secondary	AC	A	2	~	1,317	39	52,720	97	0	90	10	2/14/25	Surface Treatment - Slurry Seal	7/1/11
003	12	LA HABRA BLVD	DEANNA ST	IDAHO ST	Secondary	AC	A	4	~	1,487	56	90,132	97	0	100	0	2/26/25	Complete Reconstruction - AC	1/1/20
005	35	PALM ST	WHITTIER BLVD	FRANCIS AVE	Collector	AAC	A	2	~	1,182	35	42,588	97	0	25	75	3/24/25	Overlay - AC Structural	5/1/23
005	166	PALM ST	STEARNS AVE	LA HABRA BLVD	Collector	AAC	A	5	~	674	35	24,300	98	0	32	68	3/24/25	Overlay - AC Structural	5/1/23
005	36	PALM ST	FRANCIS AVE	STEARNS AVE	Collector	AAC	A	2	~	780	36	28,080	98	0	42	58	3/24/25	Overlay - AC Structural	5/1/23
009	91	EUCUID ST	WHITTIER BLVD	FRANCIS AVE	Secondary	AC	A	2	~	1,449	35	52,200	99	0	61	39	2/13/25	Overlay - AC Rubber	2/1/25

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
329	1101	MACY ST	WHITTIER BLVD	WALLACE AVE	Secondary	AC	A	2	~	869	45	40,020	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
329	1505	MACY ST	WALLACE AVE	RUSSELL ST	Secondary	AC	A	2	~	570	45	25,266	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
005	37	PALM ST	TANGLEWOOD ST	LAMBERT RD	Secondary	AC	A	4	~	1,521	60	88,855	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
										16.3		5,004,355							
		Locals																	
245	690	GREENWOOD AVE	COLLEGE	VALENCIA	Local	AC	E	2	35	185	28	5,208	37	76	10	14	4/18/25	Surface Treatment - Slurry Seal	7/1/12
471	1320	THIRD AVE	KNUDSON ST	CHINCHILLA ST	Local	AC	E	2	17	293	30	10,040	37	48	18	34	3/4/25	Surface Treatment - Slurry Seal	4/1/13
008	50	CYPRESS ST	305' N/O FOUNDATION	IMPERIAL HWY	Local	AC	C	2	31	1,201	35	43,272	41	42	55	3	2/14/25	New Construction - Initial	1/1/92
332	945	MAPLE ST	WHITTIER BLVD	SOUTH END	Local	AC	E	2	35	296	32	11,267	41	74	22	4	4/22/25	Surface Treatment - Slurry Seal	7/1/12
364	1019	NADA STREET	EL PORTAL	SOUTH END	Local	AAC	E	2	09	147	30	7,037	42	74	26	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
190	542	DOVER DR	WALNUT ST	DURHAM	Local	AC	E	2	24	459	35	16,560	45	82	18	0	4/21/25	Surface Treatment - Slurry Seal	7/1/12
224	634	FLORENCE CT	NORTH END	FLORENCE AVE	Local	AC	E	2	35	91	16	1,564	45	84	16	0	4/22/25	New Construction - Initial	1/1/80
040	181	HILLDALE AVE	CDS E/ EUNICE CIR	IDAHO ST	Local	AC	E	2	10	725	36	25,315	46	72	15	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
210	583	ERNA AVE	WILLOW ST	WALNUT ST	Local	AC	E	2	16	1,000	32	31,616	47	66	26	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
016	80	VALLEY HOME AVE	GREGORY LN	LA HABRA BLVD	Local	AAC	C	2	02	1,579	18	28,422	47	68	24	8	2/25/25	Overlay - AC Thin	10/1/06
446	1245	SONORA AVE	WEST END	LA CASA	Local	AC	E	2	19	355	27	10,815	48	40	60	0	4/15/25	3 in AC OVERLAY	7/1/12
017	83	WALNUT ST	WHITTIER AVE	HIGHLANDER AVE	Local	AC	C	2	21	1,284	29	38,550	48	38	48	14	3/3/25	New Construction - Initial	1/1/81
386	1081	PARK AVE	BUENA VISTA	SOUTH END	Local	AC	E	2	19	240	27	7,824	49	28	68	4	4/21/25	3 in AC OVERLAY	7/1/12
017	84	WALNUT ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	C	2	21	1,285	29	38,580	49	42	46	12	3/3/25	New Construction - Initial	1/1/81
001	63	IDAHO ST	END OF PVMNT	REBECCA DR	Local	AC	C	1	08	265	17	4,505	49	55	14	31	2/27/25	Surface Treatment - Slurry Seal	1/1/20
109	329	ASHLEY CIR	NORTH END	HILLDALE AVE	Local	AC	E	2	10	246	32	9,447	49	49	28	23	2/25/25	New Construction - Initial	1/1/80
016	79	VALLEY HOME AVE	WHITTIER AVE	GREGORY LN	Local	AAC	C	2	02	1,311	17	23,616	50	57	28	15	2/25/25	Overlay - AC Thin	10/1/06
176	506	DARBY CT	WEST END	CLIFTON	Local	AAC	E	2	30	183	26	6,333	51	63	25	12	4/21/25	Overlay - AC Thin	8/1/07
116	341	BAJA AVE	KERN ST	MARIPOSA ST	Local	AC	E	2	04	255	32	8,910	51	84	16	0	3/4/25	New Construction - Initial	1/1/80
389	1084	PARK WAY	PARK AVE	EAST END	Local	AC	E	2	19	204	26	5,535	51	66	16	18	4/25/25	Surface Treatment - Slurry Seal	7/1/12
025	324	ARBOLITA DR	RODDY DR	HARBOR BLVD	Local	AC	E	2	34	582	35	20,988	52	70	13	17	3/25/25	Slurry Seal or Chip Seal	8/1/05
033	647	FRANCIS AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	35	1,229	26	33,562	52	9	91	0	4/18/25	Surface Reconstruction - AC	7/1/12
157	453	CHESHAM AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	895	36	32,754	53	42	58	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
016	78	VALLEY HOME AVE	GORDON AVE	WHITTIER AVE	Local	AC	C	2	01	1,135	15	18,176	53	81	16	3	2/18/25	New Construction - Initial	1/1/94
134	389	BUENA VISTA AVE	W END	LA CASA AVE	Local	AC	E	2	19	1,210	36	43,128	53	71	17	12	4/25/25	Surface Treatment - Slurry Seal	7/1/12
251	728	HEATHER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,265	30	36,900	54	63	24	13	2/26/25	Surface Treatment - Slurry Seal	4/1/13
040	753	HILLDALE AVE	WEST END	DEANNA ST	Local	AC	E	2	10	776	36	29,731	54	67	21	12	2/25/25	Slurry Seal or Chip Seal	8/1/05
532	1701	LA HABRA HILLS DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	12	943	46	37,757	54	70	29	1	3/12/25	Surface Treatment - Slurry Seal	4/1/13
224	1709	FLORENCE CT	FLORENCE AVE	SOUTH END	Local	AC	E	2	35	107	16	1,836	54	52	14	34	4/22/25	New Construction - Initial	1/1/80
460	1292	SUNSET ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	54	78	22	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
227	642	FOURTH AVE	WEST END	CYPRESS ST	Local	AAC	E	2	30	642	26	16,536	55	63	31	6	4/21/25	Overlay - AC Thin	8/1/07
331	942	MAIN ST	FIRST AVE	SECONO ST	Local	AC	E	2	29	306	46	13,800	56	77	23	0	4/17/25	Surface Treatment - Cape Seal	4/1/13
015	76	SANDLEWOOD AVE	PATWOOD DR	EUCUID ST	Local	AC	E	2	25	1,449	35	52,200	56	71	17	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
527	1507	BEACH ST	WHITTER BLVD	NORTH END	Local	AC	E	2	07	221	36	9,531	56	82	13	5	2/19/25	Overlay - AC Rubber	4/1/13
022	114	CITRUS DR	WHITTIER BLVD	RYAN AVE	Local	AAC	E	2	13	773	29	26,156	56	30	67	3	2/27/25	Surface Reconstruction - AC	7/1/11
477	1328	VALENCIA ST	NORTH END	GREENWOOD AVE	Local	AAC	E	2	35	285	30	10,075	56	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
362	1016	MOUNTAIN VIEW AVE	LAMBERT RD	WALNUT ST	Local	AC	E	2	18	713	37	27,631	57	66	33	1	3/16/25	New Construction - Initial	1/1/80
245	687	GREENWOOD AVE	VALENCIA	SUNSET	Local	AC	E	2	35	299	28	8,400	57	53	28	19	4/25/25	Surface Treatment - Slurry Seal	7/1/12
223	629	FLORENCE AVE	LYDIA ST	MONTE VISTA ST	Local	AC	E	2	14	493	30	14,430	57	53	26	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
421	1176	ROSE AVE	MCPHERSON ST	COLLEGE ST	Local	AAC	E	2	35	260	30	8,300	58	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
507	1391	WILLOW ST	GREENWOOD AVE	HIGHLANDER AVE	Local	AC	E	2	16	327	30	9,630	58	70	29	1	3/3/25	Surface Treatment - Slurry Seal	4/1/13
008	51	CYPRESS ST	LAMBERT RD	498' S/O PACIFIC	Local	AC	C	2	31	1,642	35	59,148	58	33	59	8	2/14/25	New Construction - Initial	1/1/92
053	157	PATWOOD DR	GWYNWOOD AVE	SANDLEWOOD AVE	Local	AC	E	2	25	404	35	14,580	58	78	16	6	4/15/25	Surface Treatment - Slurry Seal	4/1/24
134	395	BUENA VISTA AVE	WALNUT ST	ENCINITAS ST	Local	AAC	E	2	24	1,209	30	35,910	58	0	100	0	4/15/25	Surface Reconstruction - AC	7/1/12
226	639	FOUNDATION AVE	EUCUID ST	CYPRESS ST	Local	AAC	E	2	31	907	46	41,170	58	59	40	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
047	150	LAS LOMAS DR	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,169	35	42,120	59	67	30	3	4/23/25	Surface Treatment - Slurry Seal	7/1/12
540	1729	RANDALL ST	RANDALL AVE	END	Local	AC	E	2	01	119	31	6,126	59	19	77	4	2/17/25	New Construction - AC	1/1/18
204	570	ELM ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	21	448	30	13,440	59	58	42	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
304	858	LAGUNA DRIVE	LINDAUER DR	HACIENDA RD	Local	AC	E	2	07	1,430	30	42,540	59	70	30	0	2/19/25	New Construction - Initial	1/1/80
530	1600	STEVENS AVE	STARLAND ST	ORANGE ST	Local	AAC	E	2	27	240	30	7,020	59	57	43	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
211	596	ESSEX DR	BEDFORD ST	FONDA ST	Local	AC	E	2	38	739	30	22,170	59	60	16	24	3/24/25	New Construction - Initial	1/1/80
260	757	HILLCREST ST	FIRST AVE	SOUTH END	Local	AC	E	2	17	815	33	29,282	59	59	24	17	3/4/25	Slurry Seal or Chip Seal	8/1/05
181	513	DEL SUR AVE	WEST END	E/O LA CASA	Local	AC	E	2	19	349	22	7,700	59	57	20	23	4/15/25	Surface Treatment - Slurry Seal	7/1/12
308	876	LATCHWOOD LN	DORWOOD	EAST END	Local	AAC	E	2	26	267	26	8,467	59	61	29	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
459	1285	SUMMERSHADE DR	RIDGEHAVEN DR	GRAVYVILLE DR	Local	AC	E	2	06	811	35	29,232	59	55	31	14	2/18/25	Surface Treatment - Slurry Seal	8/4/23
264	776	HOLLIS CIR	WEST END	WALNUT ST	Local	AC	E	2	19	181	26	6,231	60	69	31	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
220	610	FIFTH AVE	MONTE VISTA ST	MCFADDEN ST	Local	AAC	E	2	18	657	24	15,624	60	64	29	7	3/4/25	Overlay - AC Thin	8/1/07
018	130	HACIENDA RD	EL RANCHO DR	WHITTIER BLVD	Local	AC	E	2	09	324	50	16,295	60	38	61	1	2/24/25	Surface Treatment - Slurry Seal	1/1/20
033	651	FRANCIS AVE	LOIS ST	EUCUID ST	Local	AC	E	2	21	459	26	11,778	60	68	32	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
428	1198	RYE AVE	DERRY ST	WALNUT ST	Local	AC	E	2	19	1,144	36	41,718	60	59	23	18	4/15/25	Surface Treatment - Slurry Seal	7/1/12
292	837	LA CASA AVE	LAS LOMAS AVE	BUENA VISTA AVE	Local	AC	E	2	19	260	36	9,120	60	79	21	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
524	1504	COMMERCIAL WY	CYPRESS AVE	PARK INDUSTRIAL DR	Local	AC	E	2	36	1,026	36	36,972	60	45	36	19	4/21/25	Slurry Seal or Chip Seal	8/1/05
062	111	LINDAUER DR	WHITTIER BLVD	HACIENDA RD	Local	AC	E	2	07	2,034	30	62,620	60	64	36	0	2/19/25	New Construction - Initial	1/1/74
047	149	LAS LOMAS DR	IDAHO ST	DERRY ST	Local	AAC	E	2	19	1,514	35	54,540	60	0	100	0	4/23/25	Surface Reconstruction - AC	7/1/12
538	1740	JANISON DR	RANDALL AVE	CREEK LN	Local	AC	E	2	01	245	26	6,535	61	54	46	0	2/17/25	New Construction - AC	1/1/18
488	1357	VIEW DR	AMANDA	HILL	Local	AC	E	2	27	358	31	12,598	61	60	27	13	4/18/25	Surface Treatment - Slurry Seal	1/1/20
316	899	LESLIE ST	NORTH END	IMPERIAL HWY	Local	AAC	E	2	32	1,305	36	49,127	61	59	27	14	3/11/25	Overlay - AC Structural	1/1/20
268	781	INDUSTRY AVE	EUCUID	CYPRESS	Local	AAC	E	2	31	684	36	24,192	61	35	51	14	2/14/25	Surface Treatment - Slurry Seal	1/1/20
465	1307	TEAKWOOD AVE	DORWOOD AVE	EAST END	Local	AC	E	2	26	239	26	7,739	61	58	29	13	3/10/25	Surface Treatment - Slurry Seal	1/1/20
337	951	MARIAN ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AC	E	2	14	1,277	30	39,060	61	43	36	21	2/26/25	Surface Treatment - Slurry Seal	4/1/13
523	1460	CALIFORNIA ST	LA HABRA BLVD	SOUTH END	Local	AAC	E	2	22	635	30	18,790	62	56	44	0	4/21/25	Overlay - AC Thin	4/1/13
245	693	GREENWOOD AVE	MONTE VISTA	LEORA	Local	AC	E	2	16	596	30	17,520	62	38	35	27	3/3/25	Surface Treatment - Slurry Seal	4/1/13
528	1722	RANDALL AVE	RUSSELL ST	JANISON DR	Local	AC	E	2	01	718	35	25,569	62	64	36	0	2/17/25	New Construction - AC	1/1/18
430	1200	SAN JOSE AVE	BEACH BLVD	MARIN ST	Local	AC	E	2	10	583	36	20,556	62	43	57	0	2/25/25	New Construction - Initial	1/1/80
255	738	HIGHLAND CT	ORANGE ST	EAST END	Local	AC	E	2	27	347	30	11,935	62	76	22	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
239	671	GRANADA DR	HANLINE	GRANADA CT	Local	AAC	E	2	09	326	30	11,305	62	7	81	12	2/20/25	Surface Treatment - Slurry Seal	1/1/20
302	856	LA CADENA WAY	GREGORY LN	SOUTH END	Local	AC	E	2	09	276	36	11,511	62	66	34	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
045	399	CAJON DR	RIDGEHAVEN DR	BRIERCLIFF DR	Local	AC	E	2	05	687	35	24,768	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
171	492	CONCORD WAY	CAJON DR	N/O REDCOACH	Local	AC	E	2	05	464	26	11,752	62	69	31	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
152	444	CEDARWOOD DR	SILVERSPUR LN	BRIERCLIFF DR	Local	AC	E	2	05	1,001	36	35,820	63	54	30	16	2/25/25	Surface Treatment - Slurry Seal	8/4/23
022	115	CITRUS DR	RYAN AVE	CITY LIMITS 140' N/ENTRADA DR	Local	AAC	E	2	13	1,763	31	55,664	63	36	58	6	2/27/25	Surface Reconstruction - AC	7/1/11
311	879	LEMON ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	35	800	30	23,820	63	65	27	8	4/22/25	Surface Treatment - Slurry Seal	7/1/12
324	925	LOMA VERDE AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	63	0	82	18	3/16/25	Slurry Seal or Chip Seal	8/1/05
331	943	MAIN ST	FLORENCE AVE	SOUTH END	Local	AC	E	2	28	276	39	12,671	63	74	26	0	4/2/25	Surface Treatment - Slurry Seal	4/1/13
182	514	DERRY ST	RYE AVE	N/O LAS LOMAS	Local	AC	E	2	19	520	36	19,220	63	62	19	19	4/15/25	Surface Treatment - Slurry Seal	7/1/02
546	1737	SHADYCREST LN	PALM ST	END	Local	AC	E	2	40	614	11	10,838	63	64	22	14	5/5/25	New Construction - AC	1/1/18
159	457	CHINCHILLA ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	660	30	20,300	63	52	38	10	3/4/25	Slurry Seal or Chip Seal	8/1/05
442	1238	SILVERSPUR LN	RIDGEHAVEN DR	SILVERSPUR WAY	Local	AC	E	2	05	573	36	21,378	63	62	18	20	2/25/25	Surface Treatment - Slurry Seal	8/4/23
339	955	MARIN ST	LORELLA AVE	HILLDALE AVE	Local	AC	E	2	10	548	36	20,478	63	59	41	0	2/25/25	New Construction - Initial	1/1/80
347	985	MCPHERSON ST	ROSE AVE	FRANCIS AVE	Local	AAC	E	2	35	474	30	14,720	63	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
017	87	WALNUT ST	LAMBERT RD	LAS LOMAS AVE	Local	AC	C	2	24	1,287	35	46,368	64	36	53	11	4/22/25	Slurry Seal or Chip Seal	8/1/05
047	151	LAS LOMAS DR	WALNUT ST	EUCUID ST	Local	AC	E	2	24	1,320	36	47,088	64	67	24	9	4/23/25	Surface Treatment - Slurry Seal	7/1/12
063	200	ACACIA ST	PORTOLA	LOMA VERDE	Local	AAC	E	2	22	171	31	5,801	64	0	74	26	3/16/25	Surface Treatment - Slurry Seal	4/1/13
128	9368	BRIERCLIFF DR	CAJON DR	CEDARWOOD DR	Local	AC	E	2	05	500	36	17,568	64	55	40	5	2/25/25	Surface Treatment - Slurry Seal	8/4/23
046	148	WHITEBOOK DR	LAMBERT RD	SHEFIELD DR	Local	AC	E	2	11	1,085	36	43,560	64	69	25	6	3/4/25	Surface Treatment - Slurry Seal	8/4/23
291	834	KNUDSON ST	FIRST AVE	THIRD AVE	Local	AC	E	2	17	678	30	20,840	64	42	36	22	3/4/25	Surface Treatment - Slurry Seal	4/1/13
421	1172	ROSE AVE	SUNSET ST	COLLEGE ST	Local	AC	E	2	35	489	26	12,558	64	13	46	41	4/18/25	Surface Treatment - Slurry Seal	7/11/12
245	689	GREENWOOD AVE	WALNUT ST	HILLSIDE ST	Local	AC	E	2	21	663	30	19,710	64	57	43	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
528	1721	RANDALL AVE	RUSSELL ST	MACY ST	Local	AC	E	2	01	1,274	32	42,858	64	56	43	1	2/17/25	New Construction - AC	1/1/18
012	637	FONDA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	64	75	18	7	3/24/25	Surface Treatment - Slurry Seal	4/1/13
281	807	KEENE DR	LAS LOMAS DR	WALNUT ST	Local	AC	E	2	19	746	39	28,626	64	54	40	6	4/15/25	Surface Treatment - Slurry Seal	7/1/12
292	835	LA CASA AVE	BUENA VISTA AVE	DEL SUR AVE	Local	AC	E	2	19	717	36	23,424	64	68	32	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
502	1378	WEDGEWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	365	26	10,995	65	66	34	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
010	59	FASHION SQUARE LN	BEACH BLVD	EAST END	Local	AC	E	4	11	518	56	29,555	65	0	87	13	2/26/25	Slurry Seal or Chip Seal	8/1/05
347	973	MCPHERSON ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,007	44	43,876	65	67	33	0	4/22/25	Surface Treatment - Slurry Seal	8/4/23
016	77	VALLEY HOME AVE	CITY LIMIT	GORDON AVE	Local	AC	C	1	01	1,056	16	16,912	65	77	23	0	2/18/25	New Construction - Initial	1/1/81
189	536	DORWOOD AVE	LATCHWOOD LN	COUNTRY HILL DR	Local	AAC	E	2	26	631	36	22,716	65	75	25	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
040	141	HILLDALE AVE	DEANNA ST	CDS E/ EUNICE CIR	Local	AC	E	2	10	759	36	31,035	65	65	34	1	2/25/25	Slurry Seal or Chip Seal	8/1/05
296	845	LA PRESA DR	WALNUT ST	HILLSIDE ST	Local	AC	E	2	20	635	36	22,680	65	0	99	1	4/18/25	New Construction - Initial	1/1/80
323	918	LOIS ST	GREENWOOD AVE	FLORENCE AVE	Local	AC	E	2	21	979	32	31,360	65	49	47	4	4/21/25	Surface Treatment - Slurry Seal	1/1/20
182	516	DERRY ST	BUENA VISTA AVE	CHESHAM AVE	Local	AC	E	2	19	480	36	17,780	65	68	31	1	4/15/25	Surface Treatment - Slurry Seal	7/1/12
244	685	GREENWAY TER	NORTH END	HENSEL	Local	AC	E	2	34	386	32	15,677	65	59	21	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
431	1203	SANDOWN ST	NORTH END	CHESHAM	Local	AC	E	2	19	188	26	6,413	65	36	36	28	4/15/25	Surface Treatment - Slurry Seal	7/1/12
013	67	MONTE VISTA ST	WHITTIER BLVD	HIGHLANDER AVE	Local	AAC	E	2	16	1,316	39	52,680	66	56	26	18	2/26/25	Overlay - AC Structural	8/1/05
453	1256	STEARNS AVE	SUNSET ST	HARBOR BL	Local	AAC	E	2	35	627	33	20,493	66	12	87	1	4/18/25	Surface Reconstruction - AC	7/1/12
525	1509	CORTO WAY	WHITTIER BLVD	SOUTH END	Local	AAC	E	2	09	250	26	8,295	66	34	66	0	2/20/25	Surface Reconstruction - AC	7/1/11
122	353	BISHOP DR	AMANDA LN	ORANGE ST	Local	AC	E	2	27	589	30	17,700	66	71	28	1	4/17/25	Surface Treatment - Slurry Seal	1/1/20
031	128	EL PORTAL DR	BEACH BLVD	GRANADA DR	Local	AAC	E	2	09	1,725	30	51,642	66	37	63	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
059	162	VILLAGE DR	IMPERIAL HWY	SOUTH END	Local	AC	E	2	32	1,075	32	34,400	66	41	59	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
110	331	AVENIDA SANTA ANITA	CALLE DON GUILLERMO	BURWOOD	Local	AAC	E	2	33	1,047	36	37,188	66	69	26	5	3/10/25	Surface Treatment - Slurry Seal	1/1/20
125	363	BONNIE LN	CYPRESS ST	N/O CAPELLA	Local	AC	E	2	27	706	30	22,180	66	70	22	8	4/18/25	Surface Treatment - Slurry Seal	1/1/20
239	670	GRANADA DR	GRANADA CT	EL PORTAL	Local	AAC	E	2	09	297	30	8,730	66	45	55	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
244	684	GREENWAY TER	HENSEL	STONEWOOD	Local	AC	E	2	34	116	32	3,520	66	53	21	26	3/26/25	Surface Treatment - Slurry Seal	8/4/23
017	88	WALNUT ST	LAS LOMAS AVE	IMPERIAL HWY	Local	AC	C	2	24	1,407	35	50,688	66	30	55	15	4/22/25	Slurry Seal or Chip Seal	8/1/05
294	840	LA PLAZA CT	NORTH END	LA PLAZA DR	Local	AAC	E	2	09	128	30	5,635	66	12	77	11	2/20/25	Surface Treatment - Slurry Seal	1/1/20
317	903	LIBERTY ST	SOUTH END	OLIVE AVE	Local	AAC	E	2	30	435	26	13,105	66	30	50	20	3/16/25	Overlay AC Thin	11/30/10
398	1121	PORTOLA AVE	WALNUT ST	ACACIA	Local	AC	E	2	22	545	30	16,926	66	0	76	24	3/16/25	Slurry Seal or Chip Seal	8/1/05
001	64	IDAHO ST	REBECCA DR	WHITTIER BLVD	Local	AC	C	2	08	1,492	36	64,276	67	45	51	4	2/14/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
404	1130	REBECCA DR	SILLIKER	IDAHO ST	Local	AAC	E	2	08	862	36	31,782	67	33	62	5	1/14/25	Surface Treatment - Slurry Seal	1/1/20
169	479	COLLEGE ST	LA HABRA BLVD	THIRD AVE	Local	AAC	E	2	36	1,005	33	33,165	67	55	31	14	4/18/25	Overlay - AC Thin	8/1/05
044	1276	STURBRIDGE DR	WIMBLETON LN	WOODMERE CT	Local	AC	E	2	05	271	35	9,792	67	45	55	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
236	1731	GORDON AVE	MACY ST	BALDWIN ST	Local	AC	E	2	01	413	33	13,678	67	31	66	3	2/17/25	Surface Treatment - Slurry Seal	8/4/23
236	1728	GORDON AVE	RANDALL AVE	MACY ST	Local	AC	E	1	01	674	32	22,640	67	11	89	0	2/17/25	Surface Treatment - Slurry Seal	8/4/23
031	169	EL PORTAL DR	GRANADA DR	LA HABRA BLVD	Local	AAC	E	2	09	709	35	25,560	67	46	48	6	2/20/25	Surface Treatment - Slurry Seal	1/1/20
261	759	HILLSIDE ST	WHITTIER BLVD	GREENWOOD	Local	AC	E	2	21	786	36	27,356	67	40	58	2	4/17/25	Surface Treatment - Slurry Seal	1/1/20
169	485	COLLEGE ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	626	37	23,826	67	40	44	16	4/22/25	Surface Treatment - Slurry Seal	7/1/11
151	441	CARPENTER ST	RUSSELL ST	NORTH END	Local	AC	E	2	01	534	33	15,235	67	0	98	2	2/18/25	Surface Treatment - Cape Seal	4/1/13
207	577	EMERY AVE	PALM ST	EAST END	Local	AAC	E	2	39	666	36	25,456	67	46	45	9	2/14/25	Overlay - AC Thin	8/1/07
033	1501	FRANCIS AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	664	29	19,950	67	0	59	41	4/2/25	New Construction - Initial	1/1/80
447	1246	SONORA PL	NORTH END	STEARNS	Local	AC	E	2	38	468	26	13,758	68	54	45	1	3/25/25	New Construction - Initial	1/1/80
427	1192	RYAN AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	762	29	22,890	68	24	69	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
049	365	BRASS LANTERN DR	RIDGEHAVEN DR	ZEKE & ELSIE AVE	Local	AC	E	2	06	295	36	11,370	68	32	68	0	2/18/25	Overlay - AC Rubber	4/1/13
387	1082	PARK INDUSTRIAL DR	CYPRESS ST	COMMERCIAL	Local	AC	E	2	36	985	36	33,300	68	45	50	5	4/21/25	Surface Treatment - Slurry Seal	4/1/13
457	1268	STORY AVE	MISSION ST	EAST END	Local	AAC	E	2	03	451	30	15,325	68	41	59	0	2/20/25	Overlay - AC Thin	8/1/08
186	532	DITWOOD PL	RONWOOD	SOUTH END	Local	AC	E	2	25	132	26	4,957	68	51	33	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
457	1269	STORY AVE	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,058	35	38,124	68	38	44	18	2/20/25	Overlay - AC Thin	8/1/08
008	1715	CYPRESS ST	CITY BOUNDARY	BONNIE LN	Local	AC	C	2	27	501	35	18,072	68	47	50	3	4/18/25	New Construction - AC	1/1/80
180	512	DEBWOOD PL	PARKWOOD AVE	S/END	Local	AC	E	2	25	392	26	11,717	68	48	36	16	3/11/25	Surface Treatment - Slurry Seal	4/1/24
275	789	JOAN ST	DOT AVE	FRANCIS AVE	Local	AC	E	2	38	503	30	14,910	68	67	18	15	3/17/25	New Construction - Initial	1/1/80
164	470	COBBLESTONE RD	GRAYVILLE DR	RIDGEHAVEN DR	Local	AC	E	2	06	1,384	36	49,392	68	64	36	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
168	478	COLLEEN ST	LA HABRA BLVD	LORELLA	Local	AAC	E	2	10	495	36	17,388	68	45	55	0	2/26/25	Surface Reconstruction - AC	8/1/08
020	7150	SANSINENA LN	EDGEMONT ST	ANTOINETTE DR	Local	AC	E	2	08	747	33	24,684	68	55	35	10	2/19/25	Surface Treatment - Slurry Seal	1/1/20
241	677	GREENBRIER LN	RIDGEHAVEN	CAJON	Local	AC	E	2	05	1,180	36	43,086	68	47	41	12	2/19/25	Surface Treatment - Slurry Seal	8/4/23
288	827	KIRBY DR	W/END	KIRBY (SOUTH CDS)	Local	AAC	E	2	13	89	32	5,315	68	0	76	24	2/27/25	Surface Treatment - Slurry Seal	1/1/20
058	865	LAKEVIEW AVE	MONTWOOD AVE	CITY LIMITS	Local	AC	E	2	32	363	35	13,104	68	62	37	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
415	1160	ROBIN WAY	WEST END	IDAHO ST	Local	AC	E	2	09	178	26	6,453	68	19	81	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
014	1726	RUSSELL ST	RUSSELL ST	CUL-DE-SAC	Local	AC	E	2	01	93	71	5,715	68	0	100	0	2/17/25	New Construction - AC	1/1/18
198	556	EL NIDO ST	NORTH END	ROSECREST	Local	AAC	E	2	24	246	30	8,955	69	0	99	1	4/21/25	Surface Reconstruction - AC	7/1/12
478	1339	VALLEJO ST	STEARNS AVE	HODSON AVE	Local	AC	E	2	38	221	36	8,490	69	79	21	0	3/24/25	New Construction - Initial	1/1/80
210	7155	ERNA AVE	HAZEL ST	EUCLID ST	Local	AC	E	2	21	924	30	27,000	69	54	34	12	4/18/25	Surface Treatment - Slurry Seal	1/1/20
008	56	CYPRESS ST	CAPELLA AVE	WHITTIER BLVD	Local	AAC	C	2	34	1,419	35	51,120	69	64	32	4	4/18/25	Overlay - AC Structural	2/1/24
238	669	GRANADA CT	GRANADA DR	SOUTH END	Local	AAC	E	2	09	359	30	12,295	69	12	81	7	2/20/25	Surface Treatment - Slurry Seal	1/1/20
332	944	MAPLE ST	PINEHURST AVE	FRANCIS AVE	Local	AAC	E	2	35	743	30	22,110	69	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
483	1347	VERNON ST	LINDAUER	LAGUNA	Local	AC	E	2	07	455	30	13,470	69	49	51	0	2/19/25	New Construction - Initial	1/1/80
158	1506	CHESTNUT ST	CITY LIMIT NORTH	WHITTIER BLVD	Local	AC	E	2	35	153	36	5,698	69	58	42	0	4/22/25	New Construction - Initial	1/1/09
048	1247	SPRING MEADOW LN	GRAYVILLE	SOUTH END	Local	AC	E	2	06	67	60	5,570	69	0	64	36	2/19/25	Surface Treatment - Slurry Seal	8/4/23
539	1727	CREEK LN	JANISON DR	RUSSELL ST	Local	AC	E	1	01	749	29	21,456	69	16	84	0	2/17/25	New Construction - AC	1/1/18
295	841	LA PLAZA DR	N END	LA HABRA BLVD	Local	AAC	E	2	09	1,455	36	52,416	69	8	87	5	2/20/25	Surface Treatment - Slurry Seal	1/1/20
057	160	MONTWOOD AVE	EUCLID ST	LAKEVIEW AVE	Local	AC	E	2	32	2,259	35	81,360	69	64	35	1	3/11/25	Surface Treatment - Slurry Seal	1/1/20
169	484	COLLEGE ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	664	38	25,232	69	33	43	24	4/22/25	Surface Treatment - Slurry Seal	7/1/12
407	1144	RIDGEHAVEN DR	WOODBRIER DR	CAJON DR	Local	AC	E	2	05	632	35	22,788	69	78	22	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
120	351	BERKLEY AVENUE	WEST END	DEXFORD ST	Local	AAC	E	2	02	59	36	1,303	69	39	47	14	2/24/25	Surface Treatment - Slurry Seal	11/15/21
154	450	CHERI DR	REBECCA	SILLIKER	Local	AAC	E	2	08	461	26	11,830	69	16	84	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
011	614	FIRST AVE	CITY LIMIT	WALNUT ST	Local	AC	E	2	17	952	30	28,590	69	33	59	8	3/4/25	Surface Treatment - Slurry Seal	4/1/13
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Overlay - AC Thin	4/1/13
280	800	KEARNY LN	O'MALLEY	NORTH END	Local	AAC	E	2	06	139	31	6,104	69	0	97	3	2/18/25	Surface Treatment - Slurry Seal	4/1/13
334	947	MARCIA DR	RUSSELL ST	NORTH END	Local	AC	E	2	01	337	32	8,317	69	7	93	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
502	1379	WEDGEWOOD LN	KIRKWOOD	COACHWOOD	Local	AAC	E	2	26	1,541	32	50,312	69	40	32	28	3/10/25	Surface Treatment - Slurry Seal	1/1/20
362	1015	MOUNTAIN VIEW AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,287	37	47,397	69	36	53	11	3/4/25	Overlay - AC Thin	8/1/07
477	1331	VALENCIA ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	639	32	20,256	69	51	29	20	3/26/25	Surface Treatment - Slurry Seal	7/1/12
120	350	BERKLEY AVENUE	DEXFORD DR	LIME ST	Local	AAC	E	2	02	238	35	8,604	70	34	66	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
199	557	EL PORTAL CT	WEST END	EL PORTAL DR	Local	AAC	E	2	09	237	30	8,660	70	8	92	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
423	1180	ROSECREST AVE	LAMBERT RD	EUCLID ST	Local	AC	E	2	24	1,001	30	31,280	70	0	100	0	4/21/25	2 in overlay	7/1/12
541	1730	WALLACE AVE	MACY ST	BALDWIN ST	Local	AC	E	1	01	406	32	13,722	70	12	88	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
145	427	CANFIELD DR	CARPENTER ST	EAST END	Local	AC	E	2	01	748	33	25,236	70	0	100	0	2/18/25	New Construction - Initial	1/1/80
357	1006	MONTEREY ST	LINDAUER DR	LAGUNA DR	Local	AC	E	2	07	475	30	14,070	70	44	50	6	2/19/25	New Construction - Initial	1/1/80
240	672	GRAYVILLE DR	SUMMERSHADE	BRASS LANTERN	Local	AAC	E	2	06	787	35	28,368	70	36	41	23	2/18/25	Surface Treatment - Slurry Seal	8/4/23
013	68	MONTE VISTA ST	HIGHLANDER AVE	LA HABRA BLVD	Local	AAC	C	2	16	1,289	40	49,084	70	59	17	24	2/26/25	Overlay - AC Structural	8/1/05
135	396	BURCH WAY	NORTH END	PINEHURST	Local	AC	E	2	28	198	30	7,515	70	59	41	0	4/2/25	New Construction - Initial	1/1/80
041	142	MERCED AVE	BEACH BLVD	EAST END	Local	AAC	E	2	10	1,280	36	50,580	70	48	33	19	3/5/25	Overlay - AC Thin	8/1/05
367	1025	NASHUA ST	RYE AVE	LAS LOMAS DR	Local	AC	E	2	19	447	35	16,128	70	43	32	25	4/15/25	Surface Treatment - Slurry Seal	7/1/12
145	1723	CANFIELD DR	MACY ST	RANDALL AVE	Local	AC	E	1	01	817	32	27,246	70	8	69	23	2/17/25	Surface Treatment - Slurry Seal	8/4/23
514	1411	WOODCREST AVE	SUSAN LN	PALM ST	Local	AC	E	2	37	846	36	31,062	70	27	59	14	3/25/25	Surface Treatment - Slurry Seal	4/1/13
405	1132	RED COACH LN	RIDGEHAVEN DR	CAJON DR	Local	AC	E	2	05	1,167	26	29,718	70	29	51	20	2/19/25	Surface Treatment - Slurry Seal	8/4/23
499	1375	WARNE ST	NORTH END	FRANCIS	Local	AAC	E	2	35	783	26	23,052	70	0	99	1	4/2/25	Surface Reconstruction - AC	7/1/12

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
060	414	CALLE DON GUILLERMO	COUNTRY HILLS DR	SOUTH END	Local	AC	E	2	33	153	32	8,677	70	24	73	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
288	826	KIRBY DR	W/END	KIRBY (NORTH CDS)	Local	AAC	E	2	13	89	32	5,315	70	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
429	1199	RYE CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	70	50	50	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
548	1736	BALDWIN ST	RANDALL AVE	SOUTH END	Local	AC	E	2	01	255	31	11,792	71	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
184	135	DEXFORD ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	984	35	35,460	71	60	40	0	2/20/25	Overlay - AC Thin	8/1/08
118	343	BEA WAY	JOAN ST	EAST END	Local	AC	E	2	38	149	33	5,364	71	58	33	9	3/25/25	Surface Treatment - Slurry Seal	4/1/13
407	1137	RIDGEHAVEN DR	CAJON DR	GREENBRIER LN	Local	AC	E	2	05	708	36	26,238	71	54	46	0	2/19/25	Surface Treatment - Slurry Seal	8/4/23
261	1520	HILLSIDE ST	HILLSIDE CT	N END	Local	AAC	E	2	20	1,165	35	38,420	71	40	41	19	4/21/25	Overlay - AC Thin	8/1/07
319	908	LINDA AVE	SIERRA VISTA DR	EAST END	Local	AAC	E	2	13	347	30	12,205	71	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
372	1034	OAKLAND DR	DEXFORD ST	STORY AVE	Local	AAC	E	2	03	1,172	36	41,760	71	47	53	0	2/20/25	Overlay - AC Thin	8/1/08
264	775	HOLLIS CIR	WALNUT ST	EAST END	Local	AC	E	2	24	247	26	7,947	71	29	71	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
327	932	LYDIA ST	HIGHLANDER AVE	SOUTH END	Local	AC	E	2	14	963	30	30,685	71	44	45	11	2/26/25	Surface Treatment - Slurry Seal	8/4/23
014	1725	RUSSELL ST	MACY ST	CREEK LN	Local	AC	E	2	01	1,114	34	39,952	71	15	83	2	2/17/25	Surface Treatment - Slurry Seal	8/4/23
132	387	BROOKWOOD DR	NORTH END	ORCHID	Local	AC	E	2	40	408	36	17,236	71	78	14	8	3/17/25	New Construction - Initial	1/1/80
191	543	DURHAM ST	DOVER DR	LAS LOMAS AVE	Local	AC	E	2	24	817	36	29,196	71	51	30	19	4/15/25	Surface Treatment - Slurry Seal	7/1/12
530	1601	STEVENS AVE	EUCUID ST	STARLAND ST	Local	AAC	E	2	27	299	30	8,790	71	33	62	5	3/4/25	Surface Treatment - Slurry Seal	1/1/20
288	821	KIRBY DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	883	32	28,128	71	16	77	7	2/27/25	Surface Treatment - Slurry Seal	1/1/20
211	599	ESSEX DR	FONDA ST	NORTH END	Local	AC	E	2	38	172	30	6,906	72	0	100	0	3/24/25	New Construction - Initial	1/1/80
531	1700	KOOPMANS WY	WHITTIER BLVD	RANDALL AVE	Local	AC	E	2	01	544	32	17,864	72	20	80	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
440	1229	SIERRA VISTA DR	LA PRESA DR	LINDA AVE	Local	AAC	E	2	13	596	36	21,240	72	0	82	18	2/27/25	Surface Treatment - Slurry Seal	1/1/20
119	344	BEDFORD ST	LA HABRA BLVD	ALPINE ST	Local	AAC	E	2	39	207	41	8,736	72	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
223	623	FLORENCE AVE	MONTTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,284	26	32,916	72	47	53	0	3/3/25	New Construction - Initial	1/1/80
245	686	GREENWOOD AVE	LEORA	WALNUT ST	Local	AC	E	2	16	631	26	16,094	72	39	61	0	3/3/25	Surface Treatment - Cape Seal	4/1/13
269	782	INOLA CT	NORTH END	WHITTIER BLVD	Local	AC	E	2	40	236	26	7,683	72	73	25	2	3/17/25	New Construction - Initial	1/1/80
303	857	LADERA TERR	LAS RIENDAS	SOUTH END	Local	AC	E	2	32	524	26	10,677	72	35	65	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
514	1409	WOODCREST AVE	FALLENLEAF ST	ROANNE DR	Local	AC	E	2	34	1,369	36	52,284	72	48	43	9	3/25/25	Slurry Seal or Chip Seal	8/1/05
119	345	BEDFORD ST	ALPINE ST	SUPERIOR AVE	Local	AAC	E	2	39	1,473	31	47,168	72	28	72	0	4/2/25	Overlay - AC Thin	8/1/07
133	388	BRUCE LN	WEST END	W/O OAKLAND	Local	AAC	E	2	03	111	30	4,905	72	44	56	0	2/20/25	Overlay - AC Thin	8/1/08
189	537	DORWOOD AVE	SANDLEWOOD AVE	LATCHWOOD LN	Local	AC	E	2	26	852	36	30,672	72	54	42	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
025	118	ARBOLITA DR	HARBOR BLVD	BRIGHTON ST	Local	AAC	E	2	37	1,195	36	42,520	72	63	23	14	3/24/25	Overlay - AC Thin	4/1/13
245	692	GREENWOOD AVE	HILLSIDE ST	EUCUID ST	Local	AC	E	2	21	622	29	18,690	72	15	85	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
257	748	HILL RD	VIEW	BISHOP	Local	AC	E	2	27	369	31	11,939	72	71	29	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
298	848	LA SERNA AVE	MARLEI DR	LAUNER DR	Local	AC	E	2	13	616	36	24,012	72	26	74	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
534	1705	CIVIC CENTER PLAZA	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	214	39	7,878	72	0	100	0	4/18/25	Surface Treatment - Slurry Seal	4/1/13
227	640	FOURTH AVE	MONTTE VISTA ST	WALNUT ST	Local	AAC	E	2	18	1,285	36	45,900	72	47	43	10	3/4/25	Overlay - AC Thin	8/1/07
417	1165	RODDY DR	BROOKDALE AVE	RODDY WAY	Local	AC	E	2	34	229	36	8,028	72	31	60	9	3/25/25	New Construction - Initial	1/1/80
011	611	FIRST AVE	WALNUT ST	EUCUID ST	Local	AAC	E	2	22	1,290	45	57,510	73	58	41	1	4/21/25	Surface Reconstruction - AC	8/1/05
476	1327	URELL DR	LA SERNA AVE	LA PRESA DR	Local	AAC	E	2	20	474	25	12,350	73	18	81	1	2/27/25	Overlay - AC Thin	8/1/07
403	1128	RAYMOND ST	OAKLAND	STORY	Local	AAC	E	2	03	605	32	19,168	73	37	61	2	2/20/25	Overlay - AC Thin	8/1/08
240	673	GRAYVILLE DR	WEST END	SUMMERSHADE	Local	AC	E	2	06	723	35	26,064	73	4	54	42	2/18/25	Surface Treatment - Slurry Seal	8/4/23
251	727	HEATHER AVE	MONTTE VISTA ST	WALNUT ST	Local	AC	E	2	16	1,303	29	37,247	73	39	46	15	3/3/25	Surface Treatment - Slurry Seal	8/4/23
412	1154	ROANNE DR	CITY LIMIT	ARBOLITA DR	Local	AC	E	2	34	651	35	23,472	73	19	81	0	3/26/25	Slurry Seal or Chip Seal	8/1/05
307	874	LAS RIENDAS DR	HARBOR BLVD	CITY LIMITS	Local	AC	E	2	32	723	36	26,028	73	36	64	0	2/14/25	Surface Treatment - Slurry Seal	11/30/10
260	758	HILLCREST ST	LA HABRA BLVD	FIRST AVE	Local	AC	E	2	17	331	33	10,725	73	31	57	12	3/4/25	Surface Treatment - Slurry Seal	4/1/13
526	1510	LOMA NORTE PL	BROOKDALE AVE	SOUTH END	Local	AC	E	2	40	235	28	8,207	73	47	43	10	3/25/25	Surface Treatment - Slurry Seal	4/1/13
372	1036	OAKLAND DR	DEXFORD ST	MISSION ST	Local	AAC	E	2	03	1,014	36	35,640	73	31	62	7	2/20/25	Overlay - AC Thin	8/1/08
008	57	CYPRESS ST	BONNIE LN	CAPELLA AVE	Local	AC	C	2	34	467	35	16,848	73	9	89	2	4/18/25	New Construction - Initial	1/1/75
263	771	HOLGATE ST	VAQUERO ST	HODSON AVE	Local	AC	E	2	41	1,076	29	32,310	73	53	47	0	3/17/25	New Construction - Initial	1/1/80
021	1233	SILLIKER AVE	REBECCA DR	IDAHO ST	Local	AAC	E	2	08	522	36	18,792	73	0	88	12	2/27/25	Surface Treatment - Slurry Seal	1/1/20
043	144	SUPERIOR AVE	HARBOR BLVD	BEDFORD ST	Local	AAC	E	2	39	464	33	15,345	73	0	86	14	4/17/25	Overlay - AC Thin	8/1/07
490	1360	VIVIWOOD PL	PARKWOOD AVE	SOUTH END	Local	AC	E	2	25	392	26	11,717	74	45	26	29	3/11/25	Surface Treatment - Slurry Seal	4/1/24
103	315	ALPINE ST	W/O BEDFORD	N/O SUPERIOR	Local	AAC	E	2	39	1,409	31	45,120	74	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
166	472	COLFAX CT	WEST END	COLFAX ST	Local	AC	E	2	38	217	30	9,006	74	38	31	31	3/24/25	Surface Treatment - Slurry Seal	4/1/13
035	136	MISSION ST	LA HABRA BLVD	STORY AVE	Local	AAC	E	2	03	894	35	32,220	74	41	55	4	2/20/25	Overlay - AC Thin	8/1/08
450	1250	STANFORD ST	OAKLAND	STORY	Local	AAC	E	2	03	565	32	18,112	74	31	56	13	2/20/25	Overlay - AC Thin	8/1/08
045	147	CAJON DR	BRIERCLIFF DR	GREENBRIER LN	Local	AC	E	2	05	1,035	36	37,260	74	62	20	18	2/25/25	Surface Treatment - Slurry Seal	8/4/23
215	603	EXETER CIR	WALNUT ST	EAST END	Local	AC	E	2	24	180	26	6,205	74	12	88	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
430	1201	SAN JOSE AVE	MISSION ST	BEACH BLVD	Local	AAC	E	2	03	493	36	17,316	74	0	90	10	5/6/25	Overlay - AC Thin	8/1/08
236	1732	GORDON AVE	BALDWIN ST	SHARPLESS ST	Local	AC	E	2	01	551	30	17,891	74	11	89	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
433	1207	SCHOOLWOOD DR	ALMONDWOOD ST	PARKWOOD AVE	Local	AC	E	2	25	1,809	30	56,480	74	35	45	20	3/11/25	Surface Treatment - Slurry Seal	4/1/24
469	1312	TERRAZA SANTA ELENA	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	232	32	9,891	74	33	61	6	3/10/25	Surface Treatment - Slurry Seal	1/1/20
256	740	HIGHLANDER AVE	MONTTE VISTA ST	WALNUT ST	Local	AAC	E	2	16	1,283	26	39,226	74	27	73	0	3/3/25	Overlay - AC Thin	4/1/13
388	1083	PARK PL	GREENWOOD	ROSE	Local	AC	E	2	21	299	26	7,622	74	55	45	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
533	1713	RISNER WY	IDAHO ST	WESTRIDGE GATE	Local	AC	E	2	26	274	50	14,025	74	25	54	21	3/11/25	New Construction - AC	1/1/80
203	569	ELECTRIC AVE	WALNUT ST	EUCUID ST	Local	AAC	E	2	23	1,287	30	38,610	74	25	60	15	3/4/25	Overlay - AC Thin	8/1/07
418	1167	RODDY WAY	RODDY DR	EAST END	Local	AC	E	2	34	326	27	11,645	74	20	73	7	3/25/25	New Construction - Initial	1/1/80
489	1358	VIRGINIA ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	14	751	30	22,350	74	30	63	7	2/26/25	Surface Treatment - Slurry Seal	4/1/13

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
256	741	HIGHLANDER AVE	IDAHO ST	MONTE VISTA ST	Local	AC	E	2	14	1,278	40	50,200	74	12	79	9	2/26/25	Surface Treatment - Cape Seal	4/1/13
519	1417	OLIVE AVE	WALNUT ST	EUCLID ST	Local	AAC	E	2	23	1,415	35	45,025	74	7	72	21	3/4/25	Overlay - AC Thin	8/1/07
451	1251	STANTON AVE	WEST END	OAKLAND	Local	AC	E	2	03	466	29	14,010	74	25	36	39	2/20/25	New Construction - Initial	1/1/80
444	1280	STURBRIDGE DR	GREENBRIER LN	SOUTH END	Local	AC	E	2	05	135	27	5,495	74	0	100	0	2/25/25	New Construction - Initial	1/1/80
498	1374	WARD ST	NORTH END	FRANCIS AVE	Local	AAC	E	2	35	658	26	18,858	74	40	58	2	4/2/25	Surface Reconstruction - AC	7/1/12
038	139	MARIPOSA ST	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,100	36	36,420	74	46	52	2	3/5/25	New Construction - Initial	1/1/92
436	1214	SHARPLESS ST	CANFIELD	RUSSELL	Local	AC	E	2	01	592	33	19,338	74	0	100	0	2/18/25	New Construction - Initial	1/1/80
513	1408	WOODBRIER DR	WEST END	RIDGEHAVEN	Local	AC	E	2	05	227	36	7,956	74	87	13	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
355	1724	MIKINDA AVE	MACY ST	RANDALL AVE	Local	AC	E	1	01	813	31	26,815	75	13	86	1	2/17/25	Surface Treatment - Slurry Seal	8/4/23
158	456	CHESTNUT ST	WHITTIER BLVD	PINEHURST AVE	Local	AC	E	2	35	503	30	14,910	75	19	81	0	3/26/25	3 in AC OVERLAY	7/1/12
167	477	COLFAX ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	1,802	32	57,376	75	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
368	1027	NORMA ST	LORELLA	HILLDALE	Local	AAC	E	2	10	613	36	21,852	75	34	66	0	2/25/25	Overlay - AC Thin	8/1/08
376	1054	O'MALLEY LN	PENDLETON	KEARNEY	Local	AC	E	2	06	313	36	11,802	75	0	99	1	2/18/25	Surface Treatment - Slurry Seal	4/1/13
381	1074	OTIS AVE	LIME	EAST END	Local	AAC	E	2	02	164	32	5,056	75	25	75	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
043	1298	SUPERIOR AVE	BEDFORD ST	EAST END	Local	AAC	E	2	39	930	32	30,370	75	12	88	0	4/17/25	Overlay - AC Thin	8/1/07
492	1362	WALKER AVE	MARIAN	EAST END	Local	AAC	E	2	15	218	30	7,040	75	33	65	2	3/4/25	Overlay - AC Thin	8/1/08
028	125	DEXFORD DR	GREGORY LN	FOXDALE DR	Local	AAC	E	2	02	877	35	31,608	75	56	44	0	2/24/25	Overlay - AC Structural	11/15/21
482	1346	VERDUGO AVE	VALLEJO ST	JUANITA	Local	AC	E	2	38	621	36	22,892	75	47	53	0	3/24/25	New Construction - Initial	1/1/80
030	127	CHANTRY DR	FOXDALE DR	WHITTIER BLVD	Local	AAC	E	2	02	474	35	17,100	75	40	60	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
218	607	FARRINGTON DR	RUSSELL ST	NORTH END	Local	AAC	E	2	07	186	30	7,105	75	22	78	0	2/19/25	Surface Reconstruction - AC	4/1/13
384	1078	PALERMO WAY	NORTH END	SOUTH END	Local	AC	E	2	41	1,010	26	29,562	75	15	55	30	3/17/25	New Construction - Initial	1/1/80
452	1252	STARLAND DR	NORTH END	STEVENS	Local	AAC	E	2	27	516	30	17,480	75	0	100	0	3/4/25	Surface Treatment - Slurry Seal	1/1/20
377	1745	ORANGE ST	ERNA AVE	ALLEY	Local	AC	E	2	28	191	34	6,720	75	58	29	13	4/22/25	New Construction - Initial	1/1/80
105	317	AMANDA LN	EUCLID ST	BISHOP	Local	AC	E	2	27	456	30	14,930	75	49	41	10	3/5/25	Surface Treatment - Slurry Seal	1/1/20
112	333	AVENIDA SANTA CATALINA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	978	31	31,328	75	30	46	24	3/10/25	Surface Treatment - Slurry Seal	1/1/20
185	531	DEXTER ST	LA HABRA BLVD	ALLEY S/LA HABRA	Local	AAC	E	2	39	145	31	4,672	75	0	100	0	4/22/25	Overlay - AC Thin	8/1/07
223	633	FLORENCE AVE	WEST END	MC PHERSON ST	Local	AC	E	2	35	310	30	9,120	75	17	83	0	4/2/25	2 in Cold Mill & Overlay	7/1/12
058	161	LAKEVIEW AVE	MONTWOOD AVE	IMPERIAL HWY	Local	AAC	E	2	32	1,144	35	41,220	75	7	75	18	3/11/25	Surface Treatment - Slurry Seal	1/1/20
365	1020	NANTUCKET ST	SHELburne ST	NORTH END	Local	AC	E	2	37	704	36	27,142	75	46	32	22	3/25/25	New Construction - Initial	1/1/80
383	1077	PAINTER ST	OAKLAND	STORY AVE	Local	AAC	E	2	03	600	32	19,008	75	31	66	3	2/20/25	Surface Reconstruction - AC	8/1/08
440	1226	SIERRA VISTA DR	CITY LIMITS	LA VEREDA DR	Local	AAC	E	2	13	860	30	35,908	75	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
443	1240	SILVERSPUR WAY	SILVERSPUR LN	SOUTH END	Local	AC	E	2	05	258	26	9,253	75	43	57	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
322	916	LINDEN LN	BROOKDALE AVE	EAST END	Local	AAC	E	2	34	272	26	8,867	75	46	46	8	3/26/25	Surface Reconstruction - AC	8/1/05
041	996	MERCED AVE	MARIPOSA ST	BEACH BLVD	Local	AC	E	2	04	512	36	18,000	75	42	45	13	3/4/25	New Construction - Initial	1/1/80
053	1102	PATWOOD DR	WALNUT ST	KENWOOD ST	Local	AC	E	2	25	1,235	36	44,994	75	52	36	12	3/11/25	Surface Treatment - Slurry Seal	4/1/24
396	1114	PINEHURST AVE	HILLSIDE ST	ELM ST	Local	AC	E	2	21	287	29	8,640	75	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
460	1287	SUNSET ST	NORTH END	THIRD AVE	Local	AC	E	2	36	340	32	10,688	75	57	30	13	4/2/25	Slurry Seal or Chip Seal	8/1/05
262	765	HODSON AVE	WEST END	EAST END	Local	AC	E	2	41	713	36	25,452	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
337	950	MARIAN ST	LA HABRA BLVD	WALKER AVE	Local	AAC	E	2	15	1,077	30	33,060	76	24	52	24	3/4/25	Overlay - AC Thin	8/1/08
281	802	KEENE DR	WALNUT ST	EUCLID ST	Local	AC	E	2	24	1,525	36	54,252	76	43	49	8	4/15/25	Surface Treatment - Slurry Seal	7/1/12
311	882	LEMON ST	PINEHURST AVE	FLORENCE AVE	Local	AAC	E	2	35	1,247	30	37,050	76	0	90	10	3/26/25	Surface Reconstruction - AC	7/1/12
128	368	BRIERCLIFF DR	CAJON DR	IMPERIAL HWY	Local	AC	E	2	05	1,083	36	38,556	76	29	44	27	2/25/25	Surface Treatment - Slurry Seal	8/4/23
185	528	DEXTER ST	ALLEY S/LA HABRA	SUPERIOR AVE	Local	AAC	E	2	39	1,762	32	56,256	76	0	98	2	4/2/25	Overlay - AC Thin	8/1/07
378	1068	ORANGWOOD ST	PARKWOOD AVE	SOUTH END	Local	AC	E	2	32	907	32	30,627	76	32	41	27	3/11/25	Surface Treatment - Slurry Seal	1/1/20
463	1302	SWANSEA CIR	NANTUCKET	EAST END	Local	AC	E	2	37	202	26	6,799	76	51	43	6	3/25/25	Surface Treatment - Slurry Seal	4/1/13
017	1371	WALNUT ST	PARKWOOD AVE	PATWOOD DR	Local	AC	E	2	25	812	35	29,268	76	57	38	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
500	1376	WATERBURY WAY	WEST END	WHITEBOOK	Local	AAC	E	2	11	149	32	6,318	76	0	100	0	3/4/25	Surface Reconstruction - AC	8/1/05
023	1503	BROOKDALE AVE	PALM ST	EAST END	Local	AC	E	2	40	319	35	10,955	76	33	52	15	3/25/25	New Construction - Initial	1/1/80
173	500	COUNTRY HILLS DR	CALLE DON JUAN	EAST END	Local	AC	E	2	33	62	32	3,259	76	6	94	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
293	839	LA MIRADA ST	LINDAUER	LAGUNA	Local	AC	E	2	07	345	29	10,380	76	51	49	0	2/19/25	New Construction - Initial	1/1/80
338	954	MARIE ST	OAKLAND	STORY	Local	AAC	E	2	03	719	31	23,040	76	30	70	0	2/20/25	Overlay - AC Thin	8/1/08
147	432	CAPELLA AVE	EUCLID ST	ORANGE ST	Local	AAC	E	2	27	692	36	24,696	76	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
299	852	LA SERNA DR	WALNUT ST	EAST END	Local	AAC	E	2	20	492	36	19,291	76	0	83	17	2/27/25	Overlay - AC Thin	8/1/07
474	1324	TROPICANA WAY	ORCHID AVE	WHITTIER BLVD	Local	AC	E	2	40	765	36	27,396	76	57	43	0	3/17/25	New Construction - Initial	1/1/80
214	602	EXETER AVE	DERRY ST	NASHUA ST	Local	AC	E	2	19	910	26	23,507	76	13	87	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
366	1024	NANWOOD ST	RONWOOD	PATWOOD	Local	AC	E	2	25	372	36	14,142	76	57	43	0	3/11/25	Surface Treatment - Slurry Seal	4/1/24
158	455	CHESTNUT ST	PINEHURST AVE	FRANCIS AVE	Local	AC	E	2	35	742	30	22,080	76	0	55	45	3/26/25	Surface Treatment - Slurry Seal	7/1/12
162	462	CLIFTON ST	OLIVE AVE	LAMBERT RD	Local	AAC	E	2	30	826	36	29,736	76	3	78	19	4/21/25	Overlay - AC Thin	8/1/07
012	61	FONDA ST	LA HABRA BLVD	SUPERIOR AVE	Local	AAC	E	2	39	2,014	32	64,192	76	1	99	0	4/17/25	Overlay - AC Thin	8/1/07
283	811	KENWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	25	646	36	23,756	76	49	40	11	3/11/25	Surface Treatment - Slurry Seal	4/1/24
427	1195	RYAN AVE	SIERRA VISTA DR	WALNUT ST	Local	AC	E	2	13	1,151	30	34,170	76	52	35	13	2/27/25	Surface Treatment - Slurry Seal	1/1/20
373	1044	OLINDA AVE	KIRBY DR	NORTH END	Local	AAC	E	2	13	380	30	12,925	76	8	92	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
402	1126	RAMONA ST	PALM	PALERMO	Local	AC	E	2	41	1,123	36	40,284	76	22	71	7	3/17/25	New Construction - Initial	1/1/80
014	1512	RUSSELL ST	HACIENDA RD	FARRINGTON DR	Local	AAC	E	2	07	355	36	12,564	76	17	76	7	2/19/25	Overlay - AC Thin	4/1/13
453	1253	STEARNS AVE	COLLEGE ST	SUNSET ST	Local	AAC	E	2	35	714	26	19,070	76	0	82	18	4/18/25	Surface Reconstruction - AC	7/1/12
208	578	ENCINITAS ST	LAS LOMAS DR	KEENE DR	Local	AC	E	2	24	698	36	24,912	77	37	47	16	4/15/25	Surface Treatment - Slurry Seal	7/1/12
533	1714	RISNER WY	CROSS GUTTER	BARRIER	Local	AC	E	2	26	113	50	5,814	77	0	75	25	3/11/25	New Construction - AC	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
457	1270	STORY AVE	CITY LIMITS	DEXFORD ST	Local	AAC	E	2	03	989	36	37,751	77	35	65	0	2/20/25	Overlay - AC Thin	8/1/08
218	608	FARRINGTON DR	RUSSELL ST	SOUTH END	Local	AAC	E	2	07	704	30	22,695	77	9	91	0	2/19/25	Overlay - AC Thin	4/1/13
326	927	LORELLA AVE	DEANNA ST	IDAHO ST	Local	AAC	E	2	10	1428	36	51,192	77	9	91	0	2/26/25	Surface Reconstruction - AC	8/1/08
414	890	LEMONWOOD DR	ORANGEWOOD ST	EAST END	Local	AC	E	2	32	194	32	7,733	77	8	55	37	3/11/25	Surface Treatment - Slurry Seal	1/1/20
365	1022	NANTUCKET ST	BRIGHTON ST	SHELburne ST	Local	AC	E	2	37	619	36	22,140	77	59	39	2	3/25/25	New Construction - Initial	1/1/80
528	1720	RANDALL AVE	KOOPMANS WAY	MACY ST	Local	AC	E	2	01	681	32	22,520	77	55	43	2	2/18/25	Surface Treatment - Slurry Seal	8/4/23
528	1508	RANDALL AVE	VALLEY HOME AVE	KOOPMANS WAY	Local	AC	E	2	01	983	31	30,995	77	23	50	27	2/18/25	Surface Treatment - Slurry Seal	8/4/23
484	1349	VERONA ST	WHITTIER BLVD	VAQUERO AVE	Local	AC	E	2	41	1,040	35	37,476	77	5	82	13	3/17/25	New Construction - Initial	1/1/80
475	1325	UNION AVE	WALL ST	BLAKE ST	Local	AC	E	2	04	634	31	20,320	77	25	75	0	3/9/25	New Construction - Initial	1/1/80
408	1146	RIDGEWAY LN	ALLEY NORTH END	SOUTH END	Local	AC	E	2	09	729	38	29,497	77	8	87	5	2/24/25	Surface Treatment - Slurry Seal	1/1/20
480	1342	VAQUERO AVE	PALM ST	VERONA ST	Local	AC	E	2	41	847	36	30,348	77	20	74	6	3/17/25	New Construction - Initial	1/1/80
187	533	DOLORES ST	LINDAUER DR	N/O LAGUNA	Local	AC	E	2	07	433	29	13,020	77	36	64	0	2/19/25	New Construction - Initial	1/1/80
033	1502	FRANCIS AVE	CYPRESS ST	ORANGE ST	Local	AC	E	2	28	658	29	19,770	77	0	83	17	4/2/25	New Construction - Initial	1/1/80
397	1120	PINEWOOD PL	SANDLEWOOD	SOUTH END	Local	AC	E	2	26	169	33	7,102	77	27	53	20	3/10/25	Surface Treatment - Slurry Seal	1/1/20
477	1329	VALENCIA ST	LA HABRA BLVD	THIRD AVE	Local	AC	E	2	36	1,006	36	36,000	77	52	48	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
344	968	MATEO AVE	VALLEJO	JUANITA	Local	AC	E	2	38	621	26	15,834	77	57	43	0	3/24/25	New Construction - Initial	1/1/80
406	1136	REDWOOD LN	DORWOOD	EAST END	Local	AC	E	2	26	299	26	9,299	77	17	81	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
442	1237	SILVERSPUR LN	CANDLEWOOD DR	RIDGEHAVEN DR	Local	AC	E	2	05	332	26	9,382	77	0	26	74	2/25/25	Surface Treatment - Cape Seal	4/1/13
319	907	LINDA AVE	CITRUS DR	SIERRA VISTA DR	Local	AC	E	2	13	793	29	23,820	77	8	52	40	2/27/25	Surface Treatment - Slurry Seal	1/1/20
342	964	MARLEI DR	ENTRADA DR	LA SERNA AVE	Local	AC	E	2	13	717	32	23,694	77	9	91	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
414	1159	ROANOKE ST	CANFIELD	RUSSELL	Local	AC	E	2	01	577	32	19,074	77	8	92	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
487	1356	VIA LOS BONITOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	154	32	6,503	77	25	61	14	3/10/25	Surface Treatment - Slurry Seal	1/1/20
506	1390	WILGAR DR	EAST END	LORELLA	Local	AC	E	2	10	401	30	14,480	77	49	51	0	2/26/25	New Construction - Initial	1/1/80
393	1105	PENDELTON LN	O'MALLEY	ZEKE AND ELSIE	Local	AC	E	2	06	290	32	10,780	77	0	93	7	2/18/25	Surface Treatment - Slurry Seal	4/1/13
396	1108	PINEHURST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,247	30	36,990	77	45	53	2	3/26/25	New Construction - Initial	1/1/80
518	1416	ZEKE AND ELSIE DR	BRASS LANTERN	PENDELTON	Local	AC	E	2	06	252	36	9,606	77	35	65	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
234	663	GLENCLIFF ST	SHEFFIELD	FASHION SQUARE	Local	AC	E	2	11	720	36	25,704	77	71	29	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
014	1191	RUSSELL ST	WEST END	FARRINGTON DR	Local	AC	E	2	07	191	36	8,380	77	28	64	8	2/19/25	Overlay - AC Rubber	4/1/13
007	49	ALDRICH ST	LA HABRA BLVD	SOUTH END	Local	AC	E	2	29	885	28	23,650	78	62	38	0	4/17/25	Surface Treatment - Slurry Seal	8/4/23
495	1370	WALLING AVE	HOLGATE	QTY LIMIT	Local	AC	E	2	41	646	31	20,704	78	44	56	0	3/17/25	New Construction - Initial	1/1/80
484	1352	VERONA ST	VAQUERO AVE	SOUTH END	Local	AC	E	2	41	155	26	5,681	78	13	60	27	3/17/25	Surface Treatment - Slurry Seal	4/1/13
116	340	BAJA AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	468	30	15,615	78	29	49	22	3/4/25	New Construction - Initial	1/1/80
231	659	FRANTZ AVE	PALM	VERONA	Local	AC	E	2	41	864	36	30,960	78	0	100	0	3/17/25	New Construction - Initial	1/1/80
246	700	GREGORY LN	DEXFORD DR	BEACH BLVD	Local	AAC	E	2	02	1,022	31	32,736	78	61	39	0	2/24/25	Overlay - AC Structural	11/15/21
407	1141	RIDGEHAVEN DR	LAMBERT RD	WOODBRIER DR	Local	AC	E	2	05	1,169	35	42,120	78	13	87	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
465	1305	TEAKWOOD AVE	CHERRYWOOD	DORWOOD AVE	Local	AC	E	2	26	935	36	33,064	78	61	18	21	3/10/25	Surface Treatment - Slurry Seal	1/1/20
111	332	AVENIDA SANTA BARBARA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AAC	E	2	33	1,075	32	33,440	78	51	45	4	3/10/25	Surface Treatment - Slurry Seal	1/1/20
541	1733	WALLACE AVE	SHARPLESS ST	END	Local	AC	E	2	01	333	31	13,605	78	6	94	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
494	1367	WALLACE ST	LA HABRA BLVD	ALLEY S/FIRST AVE	Local	AAC	E	2	22	495	41	19,885	78	22	78	0	4/21/25	Surface Reconstruction - AC	8/1/05
172	493	CONCOURSE ST	DAVIT CIR	BRIGHTON ST	Local	AC	E	2	37	980	36	35,280	78	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
246	699	GREGORY LN	BEACH BLVD	RIDGEWAY LN	Local	AC	E	2	09	491	36	17,712	78	13	85	2	2/24/25	Surface Treatment - Slurry Seal	1/1/20
421	1173	ROSE AVE	EUCLID ST	ORANGE ST	Local	AC	E	2	28	623	30	18,510	78	0	68	32	3/26/25	New Construction - Initial	1/1/80
192	545	EAGLEWOOD PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	66	32	3,139	78	52	48	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
360	1013	MORRIS AVE	DEXFORD DR	EAST END	Local	AAC	E	2	02	321	36	11,124	78	49	51	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
377	1055	ORANGE ST	CITY LIMIT	STEVENS AVE	Local	AAC	E	2	27	823	30	25,062	78	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
236	666	GORDON AVE	VALLEY HOME	ROANOKE	Local	AAC	E	2	01	422	32	14,004	78	18	82	0	2/18/25	New Construction - Initial	4/24/15
323	922	LOIS ST	FLORENCE AVE	LA HABRA BLVD	Local	AC	E	2	21	785	31	25,152	78	1	99	0	4/21/25	Surface Treatment - Slurry Seal	1/1/20
346	970	MCFADDEN ST	NORTH END	SOUTH END	Local	AAC	E	2	18	541	30	21,484	78	12	88	0	3/4/25	Overlay - AC Thin	8/1/07
475	1326	UNION AVE	CITY LIMIT	WALL ST	Local	AC	E	2	04	113	32	3,424	78	9	91	0	3/9/25	New Construction - Initial	1/1/80
105	318	AMANDA LN	BISHOP	VIEW	Local	AC	E	2	27	397	30	12,660	78	59	39	2	4/18/25	Surface Treatment - Slurry Seal	1/1/20
167	476	COLFAX ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	765	30	22,770	78	57	41	2	3/24/25	New Construction - Initial	1/1/80
489	1359	VIRGINIA ST	HIGHLANDER AVE	HEATHER AVE	Local	AC	E	2	14	525	29	15,780	78	12	88	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
104	316	ALTO LN	E/O ROANNE	E/END	Local	AAC	E	2	34	207	26	6,933	78	34	42	24	3/25/25	Overlay - AC Thin	4/1/13
315	891	LEORA ST	PINEHURST AVE	FLORENCE AVE	Local	AC	E	2	16	994	30	30,014	78	29	59	12	3/3/25	Surface Treatment - Cape Seal	4/1/13
150	437	CAROL ST	CITY LIMIT	LA SERNA AVE	Local	AC	E	2	13	889	30	26,920	79	39	58	3	2/27/25	Surface Treatment - Slurry Seal	1/1/20
273	787	JAFFREY ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	79	20	22	58	4/15/25	Surface Treatment - Slurry Seal	7/1/12
015	75	SANDLEWOOD AVE	ALMONDWOOD ST	PAWWOOD DR	Local	AC	E	2	25	1,013	35	36,504	79	20	70	10	3/10/25	Surface Treatment - Slurry Seal	1/1/20
535	1707	FAHRINGER WY	IDAHO ST	WEST END	Local	AC	E	2	09	339	25	8,840	79	21	79	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
470	1313	TERRY WAY	ORANGE ST	NORTH END	Local	AAC	E	2	27	351	30	10,350	79	0	100	0	2/27/25	Surface Treatment - Slurry Seal	1/1/20
542	1735	BALDWIN ST	GORDON AVE	RANDALL AVE	Local	AC	E	2	01	545	31	18,011	79	10	90	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
174	504	COUNTRY LN	EAST END	MEADOWLARK	Local	AC	E	2	34	182	26	7,277	79	0	81	19	3/25/25	Slurry Seal or Chip Seal	8/1/05
202	568	EL REY DR	EL RANCHO DR	EL DON DR	Local	AAC	E	2	09	473	30	14,010	79	12	80	8	2/24/25	Overlay - AC Structural	1/1/20
223	625	FLORENCE AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	28	1,258	26	32,396	79	63	34	3	4/2/25	New Construction - Initial	1/1/81
377	1057	ORANGE ST	STEVENS AVE	BISHOP DR	Local	AAC	E	2	27	916	29	27,510	79	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
136	397	BURWOOD ST	MONTWOOD AVE	PARKWOOD AVE	Local	AC	E	2	32	883	36	32,538	79	48	26	26	3/10/25	Surface Treatment - Slurry Seal	1/1/20
030	446	CHANTRY DR	FOXDALE DR	GREGORY LN	Local	AAC	E	2	02	715	33	23,397	79	31	69	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
023	379	BROOKDALE AVE	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,386	35	49,932	79	34	66	0	3/24/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
147	431	CAPELLA AVE	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	495	36	17,604	79	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
471	1316	THIRD AVE	MARIAN ST	EAST END	Local	AAC	E	2	15	165	26	5,540	79	29	71	0	3/4/25	Overlay - AC Thin	8/1/08
008	52	CYPRESS ST	COMMERCIAL WAY	LAMBERT RD	Local	AC	C	2	36	1,094	35	39,420	79	43	37	20	4/21/25	New Construction - Initial	1/1/74
436	1734	SHARPLESS ST	RUSSELL ST	RANDALL AVE	Local	AC	E	2	01	837	31	26,528	79	12	88	0	2/18/25	New Construction - AC	1/1/18
34	133	STEARNS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	32	31,995	79	0	76	24	3/25/25	New Construction - Initial	1/1/88
250	715	HAZEL ST	LA HABRA BLVD	FIRST ST	Local	AC	E	2	22	308	38	11,488	79	10	53	37	4/22/25	Slurry Seal or Chip Seal	8/1/05
173	502	COUNTRY HILLS DR	DORWOOD AVE	EUCLID ST	Local	AC	E	2	26	511	36	17,964	79	13	87	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
274	788	JAMIE AVE	LESUE	EAST END	Local	AAC	E	2	32	605	36	23,305	79	12	88	0	3/11/25	Overlay - AC Structural	1/1/20
277	792	JOHNSON AVE	VALLEY HOME AVE	KINLEY ST	Local	AAC	E	2	02	537	30	16,680	79	12	67	21	2/25/25	Surface Treatment - Slurry Seal	11/15/21
046	1382	WHITEBOOK DR	SHEFFIELD DR	MIDDLETON ST	Local	AAC	E	2	11	922	32	30,254	79	0	84	16	2/26/25	Surface Reconstruction - AC	8/1/05
508	1397	WILSHIRE AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	979	35	35,280	79	32	68	0	3/5/25	Surface Reconstruction - AC	8/1/08
060	163	CALLE DON GUILLERMO	EUCLID ST	COUNTRY HILLS DR	Local	AAC	E	2	33	1,749	35	63,000	80	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
185	529	DEXTER ST	ESSEX DR	FRANCIS AVE	Local	AC	E	2	38	734	30	21,840	80	50	25	25	3/24/25	New Construction - Initial	1/1/80
522	1440	ELMSFORD AVE	GLENCLIFF	WHITEBOOK	Local	AC	E	2	11	1,003	36	36,714	80	19	57	24	3/4/25	Slurry Seal or Chip Seal	8/1/05
261	761	HILLSIDE ST	HILLSIDE CT	WHITTIER BLVD	Local	AAC	E	2	20	480	36	14,255	80	0	89	11	4/21/25	Overlay - AC Thin	8/1/07
322	917	LINDEN LN	WEST END	BROOKDALE AVE	Local	AAC	E	2	34	93	26	4,213	80	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
012	638	FONDA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,187	30	35,370	80	62	36	2	3/17/25	New Construction - Initial	1/1/80
298	849	LA SERNA AVE	LAUNER DR	SIERRA VISTA DR	Local	AAC	E	2	13	244	31	7,840	80	0	67	33	2/27/25	Overlay - AC Structural	1/1/20
173	497	COUNTRY HILLS DR	CITY LIMIT	CALLE DON JUAN	Local	AC	E	2	33	1,325	36	47,268	80	10	90	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
296	843	LA PRESA DR	HILLSIDE	KINGSTON	Local	AAC	E	2	20	224	33	7,650	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	7/1/11
420	1170	ROSCOE ST	MCCART AVE	LA HABRA BLVD	Local	AC	E	2	41	776	36	28,686	80	13	82	5	3/17/25	New Construction - Initial	1/1/80
435	1213	SHADY VALLEY	VALLEY HOME AVE	EAST END	Local	AAC	E	2	01	420	34	15,855	80	31	69	0	2/18/25	Overlay - AC Thin	4/1/13
464	1303	SYCAMORE AVE	STONEWOOD	MEADOWLARK	Local	AC	E	2	34	609	36	22,494	80	0	72	28	3/25/25	Slurry Seal or Chip Seal	8/1/05
113	334	AVENIDA SANTA DOMINGO	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,246	32	38,912	80	48	52	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
141	423	CANDACE LN	RODDY	EAST END	Local	AC	E	2	34	413	30	13,941	80	0	62	38	3/25/25	Slurry Seal or Chip Seal	8/1/05
167	474	COLFAX ST	COLFAX CT	ESSEX DR	Local	AC	E	2	38	254	30	8,190	80	1	40	59	3/24/25	Surface Treatment - Slurry Seal	4/1/13
473	1322	TOPAZ AVE	PALM	VERONA	Local	AC	E	2	41	846	36	30,312	80	1	99	0	3/17/25	New Construction - Initial	1/1/80
025	119	ARBOLITA DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,275	36	45,550	80	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
354	1000	MIDDLETON ST	SHEFFIELD	WHITEBOOK	Local	AAC	E	2	11	494	36	18,534	80	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
382	1075	PACIFIC AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	31	1,289	33	39,165	80	13	77	10	2/14/25	Surface Treatment - Slurry Seal	1/1/20
223	628	FLORENCE AVE	LOIS ST	EUCLID ST	Local	AC	E	2	21	459	30	13,590	80	27	73	0	4/2/25	Surface Treatment - Slurry Seal	1/1/20
033	132	FRANCIS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,454	35	52,380	80	22	58	20	3/24/25	Overlay - AC Rubber	4/1/13
250	717	HAZEL ST	WHITTIER BLVD	ALLEY S/GREENWOOD	Local	AC	E	2	21	946	36	34,696	80	0	100	0	4/18/25	Surface Treatment - Slurry Seal	1/1/20
403	1129	RAYMOND ST	WILSHIRE	BLAKE	Local	AAC	E	2	04	547	32	18,062	80	57	43	0	3/9/25	Overlay - AC Thin	8/1/08
114	338	AVENIDA SANTA DOROTEA	CALLE DON GUILLERMO	W/O CALLE DON JUAN	Local	AC	E	2	33	1,293	32	41,376	80	4	96	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
421	1174	ROSE AVE	ORANGE ST	EAST END	Local	AC	E	2	28	348	26	10,843	80	6	94	0	3/26/25	New Construction - Initial	1/1/80
336	949	MARDINA WAY	DEXFORD DR	GREGORY LN	Local	AAC	E	2	02	561	36	19,764	80	36	64	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
543	1739	SHARON WAY	VALLEY HOME AVE	END	Local	AC	E	2	01	774	31	27,001	80	28	72	0	2/18/25	Surface Treatment - Slurry Seal	8/4/23
471	1315	THIRD AVE	COLLEGE ST	HARBOR BLVD	Local	AAC	E	2	36	1,152	33	39,202	80	58	39	3	4/17/25	Surface Treatment - Slurry Seal	4/1/13
279	796	JUANITA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	739	29	22,200	81	0	100	0	3/24/25	New Construction - Initial	1/1/80
209	580	ENTRADA DR	CITRUS DR	CAROL ST	Local	AAC	E	2	13	447	30	13,230	81	63	37	0	2/27/25	Overlay - AC Structural	1/1/20
460	1289	SUNSET ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	634	32	20,096	81	35	65	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
243	682	GREENVIEW DR	CITY LIMIT	ANTOINETTE	Local	AAC	E	2	08	1,100	33	36,300	81	10	82	8	2/19/25	Overlay - AC Structural	1/1/20
419	1168	RONWOOD AVE	WALNUT ST	NANWOOD ST	Local	AC	E	2	25	569	36	21,018	81	48	47	5	3/11/25	Surface Treatment - Slurry Seal	4/1/24
423	1179	ROSECREST AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	31	1,292	30	38,580	81	13	87	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
048	152	SPRING MEADOW LN	GRAYVILLE DR	IMPERIAL HWY	Local	AC	E	2	06	195	36	6,732	81	34	66	0	2/19/25	Surface Treatment - Slurry Seal	4/1/13
286	814	KINGSTON DR	NORTH END	LA PRESA	Local	AAC	E	2	20	447	36	18,637	81	0	100	0	4/18/25	Overlay - AC Thin	8/1/07
033	648	FRANCIS AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	1,008	30	30,270	81	12	88	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
162	463	CLIFTON ST	LAMBERT RD	ROSECREST AVE	Local	AAC	E	2	31	496	30	14,880	81	23	77	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
462	1301	SUSAN LN	WOODCREST	NORTH HILLS	Local	AC	E	2	37	280	36	10,686	81	0	83	17	3/24/25	Surface Treatment - Slurry Seal	4/1/13
520	1311	TERRAZA SAN CARLOS	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	208	32	8,181	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
474	1323	TROPICANA WAY	NORTH END	ORCHID AVE	Local	AC	E	2	40	538	36	21,166	81	78	22	0	3/17/25	New Construction - Initial	1/1/80
038	146	MARIPOSA ST	LAMBERT RD	SHEFFIELD DR	Local	AAC	E	2	05	965	36	34,524	81	0	20	80	2/26/25	Surface Reconstruction - AC	4/1/13
122	7160	BISHOP DR	ORANGE ST	CYPRESS ST	Local	AAC	E	2	27	519	30	15,600	81	18	82	0	4/17/25	Overlay - AC Structural	1/1/20
139	415	CALLE DON JUAN	AVENIDA SANTA ANITA	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	859	36	31,674	81	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
206	576	EMBER LN	WEST END	FALLENLEAF ST	Local	AAC	E	2	34	409	36	16,275	81	0	100	0	3/26/25	Surface Reconstruction - AC	8/1/05
413	1158	ROANOKE AVE	GORDON	RUSSELL	Local	AAC	E	2	01	267	32	9,044	81	0	100	0	2/18/25	Overlay - AC Thin	4/1/13
478	1337	VALLEJO ST	VERDUGO AVE	STEARNS AVE	Local	AC	E	2	38	514	36	19,038	81	11	84	5	3/24/25	New Construction - Initial	1/1/80
262	768	HODSON AVE	VALLEJO ST	PALM ST	Local	AC	E	2	38	1,184	36	43,158	82	0	96	4	3/24/25	New Construction - Initial	1/1/80
486	1355	VIA LOS ALTOS	NORTH END	AVENIDA SANTA DOMINGO	Local	AC	E	2	33	226	32	8,807	82	32	68	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
036	137	WALL ST	WILSHIRE AVE	LAMBERT RD	Local	AAC	E	2	04	1,089	35	39,240	82	0	100	0	3/5/25	Overlay - AC Thin	8/1/08
434	1208	SECOND AVE	EUCLID ST	CYPRESS ST	Local	AAC	E	2	29	1,288	34	43,588	82	40	51	9	4/17/25	Overlay - AC Structural	1/1/15
184	527	DEXFORD ST	STORY AVE	SOUTH END	Local	AAC	E	2	03	219	36	8,634	82	34	66	0	2/20/25	Overlay - AC Thin	8/1/08
011	615	FIRST AVE	MCPHERSON ST	AC	Local	AC	E	2	36	640	44	27,896	82	0	90	10	4/15/25	Surface Treatment - Cape Seal	4/1/13
255	739	HIGHLAND CT	WEST END	ORANGE ST	Local	AC	E	2	27	176	29	5,310	82	67	33	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
309	877	LAUNER DR	NORTH END	LA SERNA AVE	Local	AAC	E	2	13	787	32	28,300	82	0	100	0	2/27/25	Overlay - AC Structural	1/1/20
196	552	EL DON DR	HACIENDA DR	EL RANCHO DR	Local	AAC	E	2	09	400	30	11,820	82	0	89	11	2/24/25	Overlay - AC Structural	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
34	134	STEARNS AVE	FONDA ST	PALM ST	Local	AC	E	2	38	1,455	30	43,650	82	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
514	1410	WOODCREST AVE	ROANNE DR	EAST END	Local	AC	E	2	34	207	26	6,933	82	36	64	0	3/25/25	Surface Treatment - Cape Seal	4/1/13
454	1264	STONEHAM WAY	WEST END	WHITEBOOK DR	Local	AAC	E	2	11	147	32	6,254	82	0	100	0	3/4/25	Surface Treatment - Slurry Seal	8/4/23
439	1223	SIDON AVE	MARIPOSA ST	EAST END	Local	AAC	E	2	04	469	30	15,865	82	14	86	0	3/4/25	Surface Reconstruction - AC	8/1/08
485	1354	VIA LOS COYOTES	NORTH END	AVENDIA SANTA DOMINGO	Local	AC	E	2	33	201	32	8,007	82	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
507	1392	WILLOW ST	HEATHER AVE	LA HABRA BLVD	Local	AC	E	2	16	616	30	18,300	82	35	42	23	3/3/25	New Construction - Initial	1/1/80
015	74	SANDLEWOOD AVE	IDAHO ST	ALMONDWOOD ST	Local	AC	E	2	25	1,156	35	41,652	82	15	55	30	3/10/25	Surface Treatment - Slurry Seal	1/1/20
438	1219	SHELBURNE ST	BROOKFIELD AVE	NANTUCKET ST	Local	AC	E	2	37	550	36	20,406	82	41	59	0	3/25/25	New Construction - Initial	1/1/80
023	116	BROOKDALE AVE	LINDEN LN	HARBOR BLVD	Local	AC	E	2	34	1,844	35	66,420	82	0	80	20	3/26/25	Slurry Seal or Chip Seal	8/1/05
028	124	DEXFORD DR	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	82	46	54	0	2/24/25	Overlay - AC Structural	11/15/21
508	1396	WILSHIRE AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	927	36	33,156	82	0	100	0	3/5/25	Surface Reconstruction - AC	8/1/08
515	1413	WOODMERE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	119	26	4,669	82	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
115	339	AVENIDA SANTA ELENA	CALLE DON GUILLERMO	CALLE DON JUAN	Local	AC	E	2	33	1,255	32	40,160	82	7	93	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
152	443	CEDARWOOD DR	BRIERCLIFF DR	SOUTH END	Local	AC	E	2	05	270	26	8,599	83	0	100	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
437	1217	SHEFFIELD DR	MIDDLETON DR	WHITEBOOK DR	Local	AC	E	2	11	565	35	20,376	83	0	100	0	2/26/25	Slurry Seal or Chip Seal	8/1/05
206	575	EMBER LN	FALLENLEAF ST	EAST END	Local	AAC	E	2	34	67	47	4,399	83	16	57	27	3/26/25	Surface Reconstruction - AC	8/1/05
253	735	HENDERSON WAY	NORTH END	IDAHO ST	Local	AC	E	2	09	439	30	15,821	83	15	49	36	2/20/25	Surface Treatment - Slurry Seal	1/1/20
317	901	LIBERTY ST	GRACE AVE	PACIFIC AVE	Local	AC	E	2	31	450	26	11,492	83	0	100	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
110	330	AVENIDA SANTA ANITA	BURWOOD	CALLE DON JUAN	Local	AAC	E	2	33	244	36	9,284	83	40	57	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
267	780	HONEYWOOD LN	WEST END	ALMONDWOOD	Local	AAC	E	2	26	526	32	13,816	83	33	65	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
330	940	MADONNA LN	PALM	EAST END	Local	AC	E	2	40	222	32	8,741	83	0	95	5	3/24/25	New Construction - Initial	1/1/80
491	1361	WADE ST	HODSON	LA HABRA BLVD	Local	AC	E	2	41	492	36	17,496	83	0	100	0	3/17/25	New Construction - Initial	1/1/80
026	121	BRIGHTON ST	CONCOURSE ST	QTY LIMIT	Local	AC	E	2	37	1,330	36	47,448	83	75	25	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
032	129	EL RANCHO DR	EL DORADO AVE	HACIENDA RD	Local	AAC	E	2	09	1,604	30	48,150	83	14	86	0	2/24/25	Overlay - AC Structural	1/1/20
055	313	ALMONDWOOD ST	SCHOOLWOOD DR	SANDLEWOOD AVE	Local	AC	E	2	26	169	35	6,120	83	53	47	0	3/11/25	Surface Treatment - Slurry Seal	11/30/10
270	783	IPSWICH ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	83	0	73	27	4/15/25	Surface Treatment - Slurry Seal	7/1/12
377	1056	ORANGE ST	BISHOP DR	WHITTIER BLVD	Local	AC	E	2	27	774	30	23,040	83	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
263	770	HOLGATE ST	HODSON AVE	SOUTH END	Local	AC	E	2	41	450	26	13,403	83	43	57	0	3/17/25	New Construction - Initial	1/1/80
439	1225	SIDON AVE	WALL ST	MARTINEZ DR	Local	AAC	E	2	04	1,099	32	34,784	83	35	63	2	3/5/25	Overlay - AC Thin	8/1/08
044	1279	STURBRIDGE DR	WOODMERE CT	CANTEBURY LN	Local	AC	E	2	05	845	35	30,456	83	0	70	30	2/26/25	Surface Treatment - Slurry Seal	4/1/13
460	1288	SUNSET ST	GREENWOOD AVE	FRANCIS AVE	Local	AC	E	2	35	523	26	13,692	83	0	100	0	4/2/25	Surface Treatment - Slurry Seal	7/1/12
348	987	MEADOW LARK ST	BROOKDALE AVE	COUNTRY LN	Local	AC	E	2	34	804	36	29,478	83	0	94	6	3/25/25	Slurry Seal or Chip Seal	8/1/05
042	143	OLIVE AVE	EUCUID ST	LAMBERT RD	Local	AAC	E	2	30	1,619	35	58,320	83	51	49	0	3/16/25	Overlay - AC Thin	8/1/07
008	171	CYPRESS ST	LA HABRA BLVD	SECOND ST	Local	AC	C	2	36	724	35	26,100	83	33	37	30	4/18/25	Slurry Seal or Chip Seal	8/1/05
396	1110	PINEHURST AVE	CYPRESS ST	GREENWOOD AVE	Local	AC	E	2	35	1,350	38	50,844	83	44	41	15	3/26/25	Surface Treatment - Slurry Seal	7/1/12
437	1215	SHEFFIELD DR	GLENCLIFF ST	MIDDLETON DR	Local	AC	E	2	11	439	35	15,840	83	0	94	6	2/26/25	Surface Treatment - Slurry Seal	8/4/23
169	480	COLLEGE ST	STEARNS AVE	LA HABRA BLVD	Local	AC	E	2	35	638	32	18,484	83	0	100	0	4/22/25	Surface Treatment - Slurry Seal	7/1/12
410	1152	RIO VERDE DRIVE	CHANTRY	EAST END	Local	AAC	E	2	02	250	33	9,825	83	29	71	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
024	117	STONEWOOD ST	WHITTIER BLVD	SYCAMORE AVE	Local	AC	E	2	34	1,055	36	38,730	83	46	52	2	3/25/25	Surface Treatment - Slurry Seal	4/1/13
466	1309	TERRAZA SAN ANGELO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	251	32	9,557	83	16	84	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
017	81	WALNUT ST	CITY LIMIT	LA PRESA DR	Local	AAC	C	2	13	1,386	36	46,215	84	15	79	6	2/13/25	Overlay - AC Structural	1/1/20
119	347	BEDFORD ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	754	29	22,650	84	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
237	667	GRACE AVE	EUCUID	LIBERTY	Local	AC	E	2	31	682	36	24,336	84	15	85	0	2/14/25	Surface Treatment - Slurry Seal	1/1/20
052	1090	PARKWOOD AVE	LAKEVIEW AVE	EAST END	Local	AC	E	2	32	434	32	15,491	84	1	87	12	3/10/25	Surface Treatment - Slurry Seal	1/1/20
472	1321	THORNE AVE	EAST END	LIME	Local	AAC	E	2	02	308	32	11,431	84	19	81	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
140	422	CAMPBELL AVE	WALL ST	BLAKE ST	Local	AAC	E	2	04	871	31	27,904	84	41	59	0	3/9/25	Overlay - AC Thin	8/1/08
150	438	CAROL ST	LA SERNA AVE	N/O RYAN	Local	AC	E	2	13	767	30	23,010	84	1	45	54	2/27/25	Surface Treatment - Slurry Seal	1/1/20
245	688	GREENWOOD AVE	EUCUID ST	ORANGE	Local	AC	E	2	28	623	30	18,510	84	0	100	0	3/26/25	New Construction - Initial	1/1/80
250	719	HAZEL ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	21	300	36	10,584	84	16	73	11	4/22/25	Surface Treatment - Slurry Seal	1/1/20
301	855	LA VITA PL	NORTH END	LA SERNA AVE	Local	AC	E	2	13	80	29	3,895	84	0	100	0	2/13/25	Surface Treatment - Slurry Seal	7/1/11
385	1080	PAMELA LN	NORTH END	NORTH HILLS	Local	AC	E	2	37	248	26	8,047	84	53	47	0	3/24/25	New Construction - Initial	1/1/80
197	554	EL DORADO AVE	HACIENDA	EL RANCHO	Local	AAC	E	2	09	432	29	12,990	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
037	138	MARTINEZ DR	WILSHIRE AVE	LAMBERT RD	Local	AC	E	2	04	1,169	35	42,120	84	8	84	8	3/9/25	New Construction - Initial	1/1/92
165	471	COLE WAY	NORTH END	OLINDA	Local	AAC	E	2	20	157	36	7,227	84	0	100	0	2/13/25	Surface Reconstruction - AC	8/1/05
318	904	LIME ST	MORRIS AVE	BERKLEY AVE	Local	AAC	E	2	02	800	30	22,820	84	0	93	7	2/25/25	Surface Treatment - Slurry Seal	11/15/21
467	1310	TERRAZA SAN BENITO	WEST END	CALLE DON GUILLERMO	Local	AC	E	2	33	173	32	7,331	84	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
106	319	AMORITA AVE	VECINO ST	VERONA ST	Local	AC	E	2	40	575	30	17,280	84	57	34	9	3/17/25	New Construction - Initial	1/1/80
191	544	DURHAM ST	LAMBERT RD	DOVER DR	Local	AC	E	2	24	471	36	16,740	84	0	95	5	4/15/25	Surface Treatment - Slurry Seal	7/1/12
248	711	HACIENDA DR	EL DON	EL DORADO	Local	AC	E	2	09	591	30	17,550	84	17	83	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
197	555	EL DORADO AVE	WEST END	HACIENDA	Local	AAC	E	2	09	829	30	26,665	84	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
341	963	MARLBORO ST	NORTH END	KEENE	Local	AC	E	2	24	209	26	6,959	84	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
394	1106	PENMAR AVE	CLIFTON	CYPRESS ST	Local	AAC	E	2	31	1,028	30	30,660	84	25	74	1	2/14/25	Surface Treatment - Slurry Seal	1/1/20
453	1260	STEARNS AVE	PALM ST	HOLGATE ST	Local	AC	E	2	41	626	30	18,660	84	0	100	0	3/17/25	New Construction - Initial	1/1/80
032	1511	EL RANCHO DR	EL PORTAL	SOUTH END	Local	AC	E	2	09	370	30	12,675	85	16	84	0	2/20/25	Surface Treatment - Slurry Seal	1/1/20
345	969	MCCART AVE	ROSCOE	QTY LIMIT	Local	AC	E	2	41	334	36	12,774	85	0	100	0	3/17/25	New Construction - Initial	1/1/80
167	475	COLFAX ST	FRANCIS AVE	ESSEX DR	Local	AC	E	2	38	706	30	21,000	85	22	78	0	3/24/25	New Construction - Initial	1/1/80
245	694	GREENWOOD AVE	ORANGE	EAST END	Local	AC	E	2	28	357	30	12,505	85	0	100	0	3/26/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
471	1314	THIRD AVE	BRIGHT ST	COLLEGE ST	Local	AAC	E	2	36	1,142	40	48,188	85	46	49	5	4/17/25	Overlay - AC Thin	4/1/13
044	1277	STURBRIDGE DR	CANTEBURY LN	GREENBRIER LN	Local	AC	E	2	05	584	35	21,060	85	0	100	0	2/26/25	New Construction - Initial	1/1/80
416	1161	ROCKINGHORSE LN	NORTH END	BROOKDALE AVE	Local	AC	E	2	37	1,031	37	40,824	85	57	37	6	3/24/25	New Construction - Initial	1/1/80
139	416	CALLE DON JUAN	AVENIDA SANTA DOMINGO	CITY LIMITS	Local	AC	E	2	33	737	36	26,532	85	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
193	546	EASTPARK DR	GREENTREE LN	FONDA ST	Local	AC	E	2	38	528	32	18,396	85	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
012	62	FONDA ST	EASTPARK DR	LA HABRA BLVD	Local	AC	E	2	38	444	35	16,020	85	0	98	2	3/24/25	Surface Treatment - Cape Seal	4/1/13
373	1043	OLINDA AVE	WALNUT ST	N/END	Local	AAC	E	2	20	1,058	36	39,397	85	0	77	23	2/13/25	Surface Reconstruction - AC	8/1/05
185	530	DEXTER ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	38	764	29	22,950	85	34	66	0	3/24/25	New Construction - Initial	1/1/80
032	7146	EL RANCHO DR	EL DORADO AVE	EL PORTAL DR	Local	AC	E	2	09	425	30	12,780	85	39	61	0	2/24/25	Surface Treatment - Slurry Seal	1/1/20
232	660	GALEN DR	KINLEY	RIGSBY	Local	AAC	E	2	02	958	30	31,990	85	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
123	358	BLAKE ST	WILSHIRE AVE	RAYMOND ST	Local	AC	E	2	04	1,089	32	35,214	85	26	74	0	3/9/25	New Construction - Initial	1/1/80
029	126	FOXDALE DR	DEXFORD DR	CHANNY DR	Local	AAC	E	2	02	376	35	13,572	85	15	85	0	2/24/25	Overlay - AC Structural	11/15/21
314	889	LEMONWOOD DR	LAKEVIEW AVE	ORANGEWOOD ST	Local	AC	E	2	32	205	32	6,560	85	46	54	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
217	605	FALLENLEAF ST	WOODCREST AVE	BROOKDALE AVE	Local	AC	E	2	34	773	36	27,828	85	0	100	0	3/25/25	Surface Treatment - Slurry Seal	4/1/13
377	1058	ORANGE ST	ROSE AVE	SOUTH END	Local	AC	E	2	28	944	36	33,935	85	17	83	0	3/26/25	New Construction - Initial	1/1/80
424	1183	ROSEWOOD LN	ORANGEWOOD	EAST END	Local	AC	E	2	32	194	32	7,783	85	17	83	0	3/11/25	Surface Treatment - Slurry Seal	1/1/20
026	120	BRIGHTON ST	WHITTIER BLVD	CONCOURSE ST	Local	AC	E	2	37	1,174	35	42,300	85	42	58	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
210	587	ERNA AVE	LEMON ST	COLLEGE ST	Local	AC	E	2	35	936	30	27,780	85	0	95	5	3/26/25	Surface Treatment - Slurry Seal	7/1/12
210	582	ERNA AVE	COLLEGE ST	ALLEY W/HARBOR BLVD	Local	AC	E	2	35	996	30	29,910	85	0	100	0	3/26/25	Surface Treatment - Slurry Seal	7/1/12
223	624	FLORENCE AVE	CYPRESS ST	FLORENCE CT	Local	AC	E	2	35	584	30	17,520	85	58	41	1	3/26/25	Surface Treatment - Slurry Seal	7/1/12
369	1028	NORTH HILLS DR	BRIGHTON ST	PALM ST	Local	AC	E	2	37	1,236	36	44,352	85	60	37	3	3/24/25	Surface Treatment - Slurry Seal	4/1/13
052	1085	PARKWOOD AVE	BURWOOD CT	LAKEVIEW AVE	Local	AC	E	2	32	1,060	36	38,910	85	0	97	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
421	1175	ROSE AVE	ALLEY W/LOIS	EUCLID ST	Local	AC	E	2	21	771	26	19,742	85	0	100	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
284	812	KERN ST	WILSHIRE	BAJA	Local	AC	E	2	04	524	32	17,518	86	15	78	7	3/4/25	New Construction - Initial	1/1/80
126	364	BRANFORD LN	WEST END	STURBRIDGE	Local	AC	E	2	05	223	26	7,373	86	16	84	0	2/26/25	Overlay - AC Rubber	4/1/13
142	424	CANDIA CIR	WEST END	KEENE DR	Local	AC	E	2	19	165	26	5,815	86	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/12
188	534	DONNYBROOK AVE	STONEWOOD	W/O MEADOWLARK	Local	AC	E	2	34	596	36	21,024	86	0	100	0	3/25/25	Slurry Seal or Chip Seal	8/1/05
437	1216	SHEFFIELD DR	MARIPOSA ST	BEACH BL	Local	AC	E	2	05	459	36	16,308	86	9	57	34	2/26/25	New Construction - Initial	1/1/80
194	549	EDGEMONT ST	RUSSELL ST	SILLIKER AVE	Local	AAC	E	2	08	875	32	27,872	86	17	83	0	2/19/25	Overlay - AC Structural	1/1/20
213	601	EUNICE CIR	NORTH END	N/O HILLDALE	Local	AAC	E	2	10	309	31	11,154	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/08
289	832	KIRKWOOD LN	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	566	32	19,687	86	17	80	3	3/10/25	Surface Treatment - Slurry Seal	1/1/20
453	1254	STEARNS AVE	WEST END	COLLEGE ST	Local	AAC	E	2	35	649	25	16,900	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
511	1406	WILTON WAY	NORTH END	WHITEBOOK	Local	AAC	E	2	11	69	34	3,896	86	0	100	0	2/26/25	Surface Reconstruction - AC	8/1/05
055	158	ALMONDWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	924	35	33,300	86	18	82	0	3/10/25	Surface Treatment - Slurry Seal	4/1/24
210	591	ERNA AVE	CYPRESS ST	WEST END	Local	AC	E	2	28	628	50	29,650	86	17	83	0	2/13/25	New Construction - Initial	1/1/80
276	791	JOCELYN AVE	LEMON	WEST END	Local	AAC	E	2	35	239	26	7,739	86	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
434	1209	SECOND AVE	CYPRESS ST	MCPHERSON ST	Local	AC	E	2	36	641	30	19,050	86	0	87	13	4/15/25	Surface Treatment - Slurry Seal	4/1/13
129	371	BRIGHT ST	SECOND ST	SOUTH END	Local	AC	E	2	36	402	32	15,331	86	0	89	11	4/17/25	Slurry Seal or Chip Seal	8/1/05
023	385	BROOKDALE AVE	FALLENLEAF ST	LINDEN LN	Local	AC	E	2	34	290	35	10,476	86	0	97	3	3/25/25	Slurry Seal or Chip Seal	8/1/05
278	794	JOSEPH CT	NORTH END	RUSSELL	Local	AC	E	2	08	119	33	5,927	86	0	73	27	2/19/25	Surface Treatment - Slurry Seal	1/1/20
014	1188	RUSSELL ST	GREENVIEW DR	SOUTH END	Local	AC	E	2	08	902	32	31,331	86	15	85	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
011	60	FIRST AVE	EUCLID ST	CYPRESS ST	Local	AC	E	2	29	1,288	43	53,024	86	0	95	5	4/17/25	Slurry Seal or Chip Seal	8/1/05
363	1018	MUIR WAY	WILSON	EAST END	Local	AC	E	2	41	108	32	5,093	86	0	100	0	3/17/25	New Construction - Initial	1/1/80
417	1164	RODDY DR	ARBOLITA DR	BROOKDALE AVE	Local	AC	E	2	34	509	36	19,074	86	0	100	0	3/25/25	New Construction - Initial	1/1/80
049	153	BRASS LANTERN DR	IMPERIAL HWY	ZEKE & ELSIE AVE	Local	AC	E	2	06	1,774	35	63,900	86	26	74	0	2/18/25	Surface Treatment - Slurry Seal	4/1/13
212	600	ESTATE DR	GREENTREE	FONDA ST	Local	AC	E	2	38	532	32	17,774	86	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
272	786	IVY PL	RIBSBY	EAST END	Local	AAC	E	2	02	92	30	3,760	86	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
477	1334	VALENCIA ST	FRANCIS AVE	STEARNS AVE	Local	AC	E	2	35	763	26	19,682	86	0	100	0	3/26/25	3 in AC OVERLAY	7/1/12
039	140	DEANNA ST	LA HABRA BLVD	HILLDALE AVE	Local	AAC	E	2	10	1,049	35	37,800	87	22	78	0	2/25/25	Surface Reconstruction - AC	8/1/08
250	714	HAZEL ST	NORTH END	ERNA AVE	Local	AC	E	2	21	658	36	25,483	87	0	94	6	4/22/25	Surface Treatment - Slurry Seal	1/1/20
331	941	MAIN ST	NORTH END	PINEHURST AVE	Local	AC	E	2	28	257	29	9,028	87	22	78	0	4/17/25	New Construction - Initial	1/1/80
335	948	MARCINE ST	NORTH END	CARMELA	Local	AAC	E	2	37	317	32	11,717	87	0	100	0	3/17/25	Surface Reconstruction - AC	4/1/13
021	113	SILLIKER AVE	HACIENDA RD	EDGEMONT ST	Local	AC	E	2	08	294	35	10,620	87	0	100	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
377	1061	ORANGE ST	WHITTIER BLVD	ROSE AVE	Local	AC	E	2	28	1,156	36	40,968	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
533	1703	RISNER WY	IDAHO ST	WESTHILLS ESTATE GATE	Local	AAC	E	2	26	340	51	13,834	87	24	60	16	3/11/25	Overlay - AC Structural	3/1/23
056	159	COACHWOOD ST	TEAKWOOD AVE	SANDLEWOOD AVE	Local	AAC	E	2	26	1,134	35	40,860	87	0	70	30	3/10/25	Overlay - AC Structural	1/1/20
326	929	LORELLA AVE	DEANNA ST	MARIN ST	Local	AAC	E	2	10	562	36	20,766	87	17	83	0	2/25/25	Surface Reconstruction - AC	8/1/08
508	1398	WILSHIRE AVE	MARIPOSA ST	EAST END	Local	AC	E	2	04	479	30	15,920	87	0	76	24	3/4/25	New Construction - Initial	1/1/80
014	1185	RUSSELL ST	HACIENDA RD	GREENVIEW DR	Local	AC	E	2	08	841	32	26,720	87	19	80	1	2/19/25	Surface Treatment - Slurry Seal	1/1/20
023	382	BROOKDALE AVE	ROCKING HORSE LN	BRIGHTON ST	Local	AC	E	2	37	998	36	36,678	87	1	51	48	3/24/25	Surface Treatment - Slurry Seal	4/1/13
300	854	LA VEREDA DR	SIERRA VISTA DR	KIRBY	Local	AAC	E	2	13	686	37	25,882	87	0	98	2	2/13/25	Overlay - AC Structural	1/1/20
369	1029	NORTH HILLS DR	BRIGHTON ST	ROCKING HORSE LN	Local	AC	E	2	37	739	36	26,316	87	46	54	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
396	1112	PINEHURST AVE	ELM ST	EUCLID ST	Local	AC	E	2	21	295	30	8,490	87	31	69	0	4/17/25	Surface Treatment - Slurry Seal	1/1/20
160	458	CIRCLE DR	RYAN AVE	WHITTIER BLVD	Local	AAC	E	2	13	761	30	24,080	87	21	79	0	2/13/25	Overlay - AC Structural	1/1/20
027	123	RIGSBY ST	GREGORY LN	WHITTIER BLVD	Local	AAC	E	2	02	1,324	35	47,700	87	23	77	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
020	112	SANSINENA LN	HACIENDA RD	EDGEMONT ST	Local	AAC	E	2	08	280	33	9,273	87	18	74	8	2/19/25	Overlay - AC Structural	1/1/20
267	779	HONEYWOOD LN	ALMONDWOOD	COACHWOOD	Local	AAC	E	2	26	1,497	32	47,136	87	18	82	0	3/10/25	Overlay - AC Structural	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
310	878	LAURA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,151	32	36,704	87	0	100	0	3/17/25	New Construction - Initial	1/1/80
484	1348	VERONA ST	AMORITA AVE	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	87	53	47	0	3/17/25	New Construction - Initial	1/1/80
279	795	JUANITA ST	WHITTIER BLVD	FRANCIS AVE	Local	AC	E	2	38	1,149	29	34,500	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
401	1125	RAINIER WY	VALLEY HOME	EAST END	Local	AAC	E	2	02	218	26	7,193	88	41	59	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
178	508	DAVID CIR	CONCOURSE ST	EAST END	Local	AC	E	2	37	128	30	5,467	88	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
008	53	CYPRESS ST	SECOND ST	COMMERCIAL WAY	Local	AC	C	2	36	835	36	30,060	88	1	57	42	4/18/25	New Construction - Initial	1/1/74
246	702	GREGORY LN	KINLEY ST	DEXFORD DR	Local	AAC	E	2	02	885	35	31,896	88	65	35	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
285	813	KERNER WAY	WEST END	HARBOR	Local	AAC	E	2	35	492	30	16,335	88	0	100	0	4/2/25	Surface Reconstruction - AC	7/1/12
505	1389	WHITTIER BLVD (FRONT RD)	MONTE VISTA ST	EAST END	Local	AC	E	2	16	657	26	23,652	88	41	59	0	2/26/25	Surface Treatment - Slurry Seal	4/1/13
517	1415	WORTH AVE	DEXFORD	EAST END	Local	AAC	E	2	02	225	32	7,008	88	0	100	0	2/24/25	Surface Treatment - Slurry Seal	11/15/21
173	501	COUNTRY HILLS DR	CHERRYWOOD	DORWOOD AVE	Local	AAC	E	2	26	991	35	35,712	88	24	61	15	3/10/25	Surface Treatment - Slurry Seal	1/1/20
134	390	BUENA VISTA AVE	LA CASA AVE	KEENE DR	Local	AC	E	2	19	871	36	31,356	88	0	100	0	4/15/25	Surface Treatment - Slurry Seal	7/1/11
298	847	LA SERNA AVE	SIERRA VISTA DR	WALNUT ST	Local	AAC	E	2	13	1,142	30	33,900	88	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
521	386	BROOKFIELD AVE	SHELburne ST	NANTUCKET ST	Local	AC	E	2	37	404	36	15,150	88	47	53	0	3/25/25	New Construction - Initial	1/1/80
233	661	GERRY ST	NORTH END	FRANCIS	Local	AC	E	2	38	467	30	15,577	88	0	100	0	3/17/25	New Construction - Initial	1/1/80
505	1387	WHITTIER BLVD (FRONT RD)	CONCOURSE ST	BRIGHTON ST	Local	AC	E	2	37	715	28	20,020	88	0	100	0	3/17/25	Surface Treatment - Slurry Seal	4/1/13
149	435	CARMELA LN	HARBOR BLVD	EAST END	Local	AAC	E	2	37	749	35	27,984	88	0	97	3	3/17/25	Surface Reconstruction - AC	4/1/13
205	573	ELMCROFT CIR	MARIPOSA	EAST END	Local	AAC	E	2	05	371	32	13,667	88	0	35	65	5/6/25	Surface Reconstruction - AC	4/1/13
222	622	FLAMINGO WAY	NORTH END	AMORITA	Local	AC	E	2	40	789	36	30,202	88	20	47	33	3/17/25	Surface Treatment - Slurry Seal	4/1/13
237	668	GRACE AVE	LIBERTY	CYPRESS	Local	AC	E	2	31	606	36	21,600	89	0	98	2	2/14/25	Surface Treatment - Slurry Seal	1/1/20
122	354	BISHOP DR	CYPRESS ST	EAST END	Local	AC	E	2	34	587	30	20,237	89	45	55	0	4/17/25	Surface Treatment - Slurry Seal	4/1/13
379	1072	ORCHARD PL	MONTE VISTA	WEST END	Local	AC	E	2	16	638	30	20,715	89	22	78	0	3/3/25	Surface Treatment - Slurry Seal	4/1/13
044	145	STURBRIDGE DR	LAMBERT RD	WIMBLETON LN	Local	AC	E	2	05	619	35	22,320	89	0	100	0	2/26/25	New Construction - Initial	1/1/90
195	551	EL CAMINO DR	SIERRA VISTA	WALNUT ST	Local	AC	E	2	13	1,143	30	33,930	89	22	78	0	2/13/25	Surface Treatment - Slurry Seal	1/1/20
252	734	HEATHER WAY	HAZEL	EAST END	Local	AAC	E	2	21	209	30	7,350	89	0	90	10	4/17/25	Overlay - AC Structural	1/1/20
210	586	ERNA AVE	WALNUT ST	HAZEL ST	Local	AAC	E	2	21	319	30	9,600	89	0	100	0	4/17/25	Overlay - AC Structural	1/1/20
289	828	KIRKWOOD LN	ALMONDWOOD ST	COACHWOOD ST	Local	AAC	E	2	26	1,483	36	52,428	89	21	79	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
370	1032	NORTHGATE WAY	STEARNS AVE	EASTPARK	Local	AC	E	2	38	223	32	6,944	89	0	100	0	3/24/25	Surface Treatment - Slurry Seal	4/1/13
440	1228	SIERRA VISTA DR	LA VEREDA DR	LA PRESA DR	Local	AC	E	2	13	831	35	29,952	89	0	98	2	2/13/25	Surface Treatment - Slurry Seal	1/1/20
250	716	HAZEL ST	FIRST ST	SOUTH END	Local	AC	E	2	22	327	38	12,426	89	0	95	5	4/22/25	2 in overlay	10/1/12
287	817	KINLEY ST	FOXDALE AVE	GREGORY LN	Local	AC	E	2	02	901	30	26,850	89	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
170	491	COMITY CIR	CONCOURSE ST	EAST END	Local	AAC	E	2	37	209	30	7,817	89	0	100	0	3/17/25	Overlay - AC Thin	4/1/13
248	712	HACIENDA DR	HACIENDA	EL DON	Local	AAC	E	2	09	828	29	24,900	89	0	100	0	2/24/25	Overlay - AC Structural	1/1/20
407	1138	RIDGEHAVEN DR	GRAYVILLE DR	BRASS LANTERN DR	Local	AAC	E	2	06	989	36	36,318	89	0	100	0	2/18/25	Surface Reconstruction - AC	4/1/13
328	935	LYNWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	622	29	18,690	90	0	38	62	3/10/25	Surface Treatment - Slurry Seal	1/1/20
027	122	RIGSBY ST	LA HABRA BLVD	GREGORY LN	Local	AAC	E	2	02	1,684	35	60,660	90	24	76	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
439	1224	SIDON AVE	MARTINEZ DR	MARIPOSA ST	Local	AAC	E	2	04	741	31	23,744	90	12	88	0	3/5/25	Overlay - AC Thin	8/1/08
107	321	ANTOINETTE DR	CITY LIMIT	GREENVIEW DR	Local	AC	E	2	08	978	33	32,274	90	21	56	23	2/19/25	Surface Treatment - Slurry Seal	1/1/20
242	681	GREENTREE LN	EASTPARK	ESTATE	Local	AC	E	2	38	297	36	12,192	90	0	92	8	3/24/25	Surface Treatment - Slurry Seal	4/1/13
315	893	LEORA ST	ERNA AVE	LA HABRA BLVD	Local	AC	E	2	16	299	30	8,850	90	49	51	0	3/3/25	New Construction - Initial	1/1/80
296	844	LA PRESA DR	SIERRA VISTA	WALNUT ST	Local	AAC	E	2	13	1,144	30	33,960	90	0	99	1	2/13/25	Overlay - AC Structural	1/1/20
053	1100	PATWOOD DR	IRONWOOD ST	LORAWOOD ST	Local	AC	E	2	32	507	36	18,786	90	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
033	131	FRANCIS AVE	HARBOR BLVD	FONDA ST	Local	AC	E	2	38	1,185	36	41,580	90	0	100	0	3/24/25	Surface Treatment - Cape Seal	4/1/13
265	777	HOLLY AVE	VALLEY HOME	PARSONS	Local	AAC	E	2	02	274	32	9,268	90	59	41	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
465	1308	TEAKWOOD AVE	WEST END	ALMONDWOOD ST	Local	AAC	E	2	26	422	32	15,029	90	23	77	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
124	362	BOND AVE	KINLEY ST	RIGSBY ST	Local	AAC	E	2	02	421	30	12,450	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
228	643	FOXDALE AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	1,158	30	34,560	91	72	28	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
510	1403	WILSON ST	VAQUERO AVE	STEARNS AVE	Local	AC	E	2	41	778	32	24,768	91	0	100	0	3/17/25	New Construction - Initial	1/1/80
177	507	DAVID AVE	VALLEY HOME AVE	RIGSBY ST	Local	AAC	E	2	02	619	30	18,390	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
287	815	KINLEY ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	870	30	26,670	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
347	977	MCPHERSON ST	STEARNS AVE	LA HABRA BLVD	Local	AAC	E	2	35	637	30	18,630	91	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
234	662	GLENCLIFF ST	ELMSFORD	SHEFFIELD	Local	AC	E	2	11	282	36	10,902	91	0	100	0	3/4/25	Slurry Seal or Chip Seal	8/1/05
437	1218	SHEFFIELD DR	STURBRIDGE DR	MARIPOSA ST	Local	AC	E	2	05	290	36	10,224	91	0	100	0	2/26/25	New Construction - Initial	1/1/80
391	1099	PARSONS ST	GREGORY LN	JOHNSON AVE	Local	AAC	E	2	02	872	30	25,980	91	22	70	8	2/25/25	Surface Treatment - Slurry Seal	11/15/21
508	1402	WILSHIRE AVE	WEST END	WALL ST	Local	AAC	E	2	04	148	35	5,364	91	16	84	0	3/9/25	Surface Reconstruction - AC	8/1/08
444	426	CANDLEWOOD WAY	E/O CANDLEWOOD	E/END	Local	AAC	E	2	05	94	51	6,544	91	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
235	665	GLENHAVEN DR	WIMBLETON	CANTEBURY	Local	AAC	E	2	05	1,024	36	37,614	91	0	71	29	2/26/25	Surface Reconstruction - AC	4/1/13
371	1033	OAK TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	93	38	5,329	91	0	0	100	3/12/25	Overlay - AC Structural	2/1/23
396	1118	PINERHURST AVE	MONTE VISTA ST	LEORA ST	Local	AC	E	2	16	625	30	19,100	91	25	62	13	3/3/25	Surface Treatment - Slurry Seal	4/1/13
529	1530	DOT AVE	JOAN ST	JUANITA ST	Local	AC	E	2	38	414	32	13,695	91	0	100	0	3/17/25	Surface Treatment - Cape Seal	4/1/13
280	801	KEARNY LN	SOUTH END	O'MALLEY	Local	AAC	E	2	06	163	31	6,848	91	0	100	0	2/24/25	Overlay - AC Thin	4/1/13
391	1098	PARSONS ST	FOXDALE AVE	HOLLY AVE	Local	AAC	E	2	02	330	32	11,310	91	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
465	1304	TEAKWOOD AVE	ALMONDWOOD ST	CHERRYWOOD	Local	AC	E	2	26	834	32	26,208	92	27	71	2	3/10/25	Surface Treatment - Slurry Seal	1/1/20
516	1414	WOODMONT PL	NORTH END	KIRKWOOD	Local	AAC	E	2	26	106	32	4,917	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
136	398	BURWOOD ST	MONTWOOD AVE	AVENIDA SANTA ANITA	Local	AC	E	2	32	257	35	9,288	92	0	92	8	3/10/25	Surface Treatment - Slurry Seal	1/1/20
156	452	CHERRYWOOD ST	TEAKWOOD AVE	COUNTRY HILLS DR	Local	AAC	E	2	26	151	32	4,640	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
173	503	COUNTRY HILLS DR	WEST END	CHERRYWOOD	Local	AAC	E	2	26	383	32	14,051	92	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
266	778	HOLT DR	WILSON	HOLGATE	Local	AC	E	2	41	371	30	12,677	92	0	100	0	3/17/25	New Construction - Initial	1/1/80
146	430	CANTERBURY LN	GLENHAVEN	W/O STURBRIDGE	Local	AAC	E	2	05	465	36	17,346	92	0	84	16	2/26/25	Surface Reconstruction - AC	4/1/13
172	495	CONCOURSE ST	WHITTIER AVE (FRONTAGE)	DAVIT CIR	Local	AC	E	2	37	637	36	22,932	92	0	100	0	3/17/25	Overlay - AC Rubber	4/1/13
333	946	MAPLE TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	263	36	11,043	92	0	81	19	3/12/25	Overlay - AC Structural	2/1/23
514	1412	WOODCREST AVE	WEST END	FALLENLEAF ST	Local	AC	E	2	34	478	36	19,005	92	19	81	0	3/26/25	Surface Treatment - Slurry Seal	4/1/13
057	1012	MONTWOOD AVE	VALWOOD ST	EUCLID ST	Local	AAC	E	2	25	138	35	5,004	92	0	40	60	4/15/25	Overlay - AC Structural	4/1/24
021	1234	SILLIKER AVE	EDGEMONT ST	RUSSELL ST	Local	AC	E	2	08	633	32	20,064	92	2	98	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
380	1073	ORCHID AVE	BROOKWOOD	TROPICANA	Local	AC	E	2	40	314	36	11,910	92	0	98	2	3/17/25	New Construction - Initial	1/1/80
194	548	EDGEMONT ST	SANSINENA LN	N/O RUSSELL	Local	AAC	E	2	08	599	32	19,040	92	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
503	1380	WESTFIELD WAY	SHELBURNE	EAST END	Local	AC	E	2	37	189	26	6,461	92	0	93	7	3/25/25	New Construction - Initial	1/1/80
055	311	ALMONDWOOD ST	TEAKWOOD AVE	SOUTH END	Local	AC	E	2	26	236	36	10,643	92	29	71	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
288	820	KIRBY DR	CITY LIMIT	LA VEREDA DR	Local	AAC	E	2	13	541	30	16,980	92	0	95	5	2/13/25	Overlay - AC Structural	1/1/20
325	926	LORAWOOD ST	PARKWOOD	PATWOOD	Local	AC	E	2	32	623	36	22,928	92	0	81	19	3/10/25	Surface Treatment - Slurry Seal	1/1/20
235	664	GLENHAVEN DR	NORTH END	WIMBLETON	Local	AC	E	2	05	124	36	4,248	93	0	100	0	2/26/25	New Construction - Initial	1/1/80
243	683	GREENVIEW DR	ANTOINETTE	RUSSELL	Local	AAC	E	2	08	305	33	9,867	93	0	100	0	2/19/25	Overlay - AC Structural	1/1/20
119	346	BEDFORD ST	ESSEX	FRANCIS AVE	Local	AC	E	2	38	742	29	22,290	93	0	100	0	3/24/25	Overlay - AC Rubber	4/1/13
148	434	CARLISLE CIR	WEST END	STURBRIDGE	Local	AAC	E	2	05	114	26	4,539	93	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
246	706	GREGORY LN	VALLEY HOME	KINLEY ST	Local	AAC	E	2	02	529	36	18,828	93	38	62	0	2/25/25	Surface Treatment - Slurry Seal	11/15/21
425	1184	ROXBURY TERR	GREENBRIER	SOUTH END	Local	AAC	E	2	05	96	28	4,483	93	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
347	978	MCPHERSON ST	FRANCIS AVE	STEARNS AVE	Local	AAC	E	2	35	655	29	19,680	93	0	100	0	3/26/25	Surface Reconstruction - AC	7/1/12
438	1220	SHELBURNE ST	NANTUCKET ST	WHITTIER BLVD	Local	AC	E	2	37	739	36	26,460	93	0	100	0	3/25/25	New Construction - Initial	1/1/80
282	810	KENRICH CT	WEST END	CHANNY	Local	AAC	E	2	02	262	26	8,387	94	0	100	0	5/6/25	Surface Treatment - Slurry Seal	11/15/21
481	1345	VECINO ST	AMORITA	WHITTIER BLVD	Local	AC	E	2	40	479	36	17,850	94	0	81	19	3/17/25	New Construction - Initial	1/1/80
062	915	LINDAUER DR	WEST END	RUSSELL ST	Local	AC	E	2	08	204	33	8,582	94	3	97	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
445	1242	SMOKE TREE DR	OLIVE TREE DR	LEMON TREE CT	Local	AAC	E	2	12	681	36	24,300	94	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
189	535	DORWOOD AVE	COUNTRY HILLS DR	SOUTH END	Local	AAC	E	2	26	158	36	7,835	94	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
550	997	PARK LA HABRA MOBILE HOMES	LAMBERT RD	NORTH END	Local	AC	E	2	10	3,244	19	77,550	94	0	78	22	3/4/25	Complete Reconstruction - AC	8/15/22
399	1122	RADCLIFF PL	NORTH END	REDCOACH	Local	AAC	E	2	05	182	26	6,283	94	0	100	0	2/19/25	Overlay - AC Rubber	4/1/13
497	1373	WALTHAM WAY	SHELBURNE	EAST END	Local	AC	E	2	37	188	26	6,435	94	0	100	0	3/25/25	New Construction - Initial	1/1/80
012	635	FONDA ST	CONCOURSE	WHITTIER (FRONTAGE)	Local	AC	C	2	37	1,072	29	32,190	94	0	100	0	3/17/25	New Construction - Initial	1/1/80
501	1377	WAVERLY TERR	WEST END	STURBRIDGE	Local	AAC	E	2	05	110	26	4,435	94	0	100	0	2/26/25	Surface Reconstruction - AC	4/1/13
355	1001	MIKINDA AVE	EDGEMONT	ANTOINETTE	Local	AC	E	2	08	656	32	20,736	95	4	96	0	2/19/25	Surface Treatment - Slurry Seal	1/1/20
117	342	BANCROFT AVE	KINLEY	RIGSBY ST	Local	AAC	E	2	02	335	29	10,080	95	0	100	0	2/14/25	Surface Treatment - Slurry Seal	11/15/21
512	1407	WIMBELTON LN	GLENHAVEN	STURBRIDGE	Local	AC	E	2	05	330	36	11,664	95	0	100	0	2/26/25	New Construction - Initial	1/1/80
271	784	IRONWOOD ST	PARKWOOD AVE	MONTWOOD AVE	Local	AC	E	2	32	883	36	31,572	95	0	100	0	3/10/25	Surface Treatment - Slurry Seal	1/1/20
143	425	CANDLEWOOD DR	SILVERSPUR	S/O CANDLEWOOD	Local	AAC	E	2	05	369	26	11,094	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
241	678	GREENBRIER LN	CAJON	STURBRIDGE	Local	AAC	E	2	05	405	36	14,148	95	0	100	0	2/25/25	Surface Reconstruction - AC	4/1/13
459	1286	SUMMERSHADE DR	CITY LIMIT	RIDGEHAVEN DR	Local	AAC	E	2	06	123	35	4,464	95	0	100	0	5/6/25	Surface Reconstruction - AC	4/1/13
045	168	CAJON DR	GREENBRIER LN	IMPERIAL HWY	Local	AC	E	2	05	340	46	14,110	96	34	66	0	2/25/25	Surface Treatment - Slurry Seal	8/4/23
395	1107	PINE TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	222	38	10,231	96	0	25	75	3/12/25	Overlay - AC Structural	2/1/23
005	72	PALM ST	MADONNA LN	WHITTIER AVE	Local	AAC	C	2	40	928	35	33,444	96	0	23	77	3/24/25	Overlay - AC Structural	3/1/23
479	1340	VALWOOD ST	PARKWOOD AVE	GWYNWOOD AVE	Local	AAC	E	2	25	921	36	33,690	97	0	75	25	4/15/25	Overlay - AC Structural	4/1/24
312	885	LEMON TREE CT	WEST END	SMOKE TREE	Local	AAC	E	2	12	400	36	16,195	97	0	1	99	3/12/25	Overlay - AC Structural	2/1/23
050	1053	OLIVE TREE DR	WEST END	SMOKE TREE DR	Local	AAC	E	2	12	238	36	6,421	97	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
005	1738	PALM ST	BROOKDALE AVE	MADONNA LN	Local	AAC	E	2	40	487	26	14,100	97	0	16	84	3/24/25	Overlay - AC Structural	3/1/23
444	1241	SMOKE TREE CT	LEMON TREE	SOUTH END	Local	AAC	E	2	12	210	32	8,515	97	0	6	94	3/12/25	Overlay - AC Structural	2/1/23
005	71	PALM ST	CITY LIMIT	BROOKDALE AVE	Local	AAC	C	2	37	1,200	36	43,200	97	0	35	65	3/24/25	Overlay - AC Structural	3/1/23
017	82	WALNUT ST	LA PRESA DR	WHITTIER AVE	Local	AAC	C	2	13	1,135	35	40,896	98	0	100	0	2/13/25	Overlay - AC Structural	5/1/23
054	164	DORWOOD AVE	GWYNWOOD AVE	SANDLEWOOD AVE	Local	AC	E	2	25	299	35	10,800	98	0	100	0	4/15/25	Surface Treatment - Slurry Seal	4/1/24
247	710	GWYNWOOD AVE	PATWOOD	DORWOOD	Local	AAC	E	2	25	795	35	28,656	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
247	709	GWYNWOOD AVE	DORWOOD	VALWOOD	Local	AAC	E	2	25	576	36	21,486	98	0	100	0	4/15/25	Overlay - AC Structural	4/1/24
017	86	WALNUT ST	LOMA VERDE AVE	LAMBERT RD	Local	AAC	C	2	23	1,403	36	50,180	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
400	1123	RAIN TREE DR	LEMON TREE CT	IDAHO ST	Local	AAC	E	2	12	578	35	20,844	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
017	85	WALNUT ST	LA HABRA BLVD	LOMA VERDE AVE	Local	AAC	C	2	22	1,206	33	41,038	98	0	100	0	2/14/25	Overlay - AC Structural	3/1/23
552	998	VIEW PARK MOBILE ESTATES	LAMBERT RD	SOUTH END	Local	AC	E	2	11	4,079	24	103,500	98	0	100	0	2/26/25	Complete Reconstruction - AC	8/15/22
219	609	FERN WY	RIGSBY ST	EAST END	Local	AAC	E	2	02	197	30	7,777	98	0	58	42	2/14/25	Surface Treatment - Slurry Seal	11/15/21
050	154	OLIVE TREE DR	SMOKE TREE DR	IDAHO ST	Local	AAC	E	2	12	1,044	35	37,620	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
155	451	CHERRY TREE CIR	RAIN TREE	S/END	Local	AAC	E	2	12	82	50	4,100	98	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
008	54	CYPRESS ST	FRANCIS AVE	LA HABRA BLVD	Local	AAC	C	2	35	1,109	35	40,716	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
008	55	CYPRESS ST	WHITTIER BLVD	FRANCIS AVE	Local	AAC	C	2	35	1,475	34	51,660	99	0	100	0	4/2/25	Overlay - AC Structural	3/1/23
052	156	PARKWOOD AVE	VIVIWOOD PL	EUCLID ST	Local	AAC	E	2	25	959	35	34,560	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
052	1094	PARKWOOD AVE	SCHOOLWOOD DR	VIVIWOOD PL	Local	AAC	E	2	25	988	35	35,604	99	0	100	0	3/11/25	Overlay - AC Structural	4/1/24
013	69	MONTE VISTA ST	LA HABRA BLVD	FOURTH AVE	Local	AAC	C	2	15	1,446	36	52,315	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
013	70	MONTE VISTA ST	FOURTH AVE	LAMBERT RD	Local	AAC	C	2	18	1,109	36	41,070	99	0	100	0	3/4/25	Overlay - AC Structural	3/1/24
051	155	LEMON TREE DR	SMOKE TREE DR	OLIVE TREE DR	Local	AAC	E	2	12	851	35	30,672	100	0	100	0	3/12/25	Overlay - AC Structural	2/1/23
329	937	MACY ST	RUSSELL ST	CITY LIMIT	Local	AC	E	2	01	743	35	26,784	100	0	0	0	5/9/25	Overlay - ARHM	5/9/25
009	58	EUCLID ST	NORTH CITY LIMITS	AMANDA DR	Local	AAC	C	2	27	2,240	36	67,603	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
009	165	EUCUID ST	AMANDA DR	WHITTIER BLVD	Local	AAC	C	2	27	424	35	15,300	100	0	0	0	2/27/25	Overlay - AC Structural	2/1/24
121	352	BIRCH TREE CT	OLIVE TREE DR	SOUTH END	Local	AAC	E	2	12	84	60	5,719	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
534	1704	CIVIC CENTER PLAZA	LA HABRA BLVD	ALLEY N/O LA HABRA BLVD	Local	AAC	E	2	28	341	34	15,594	100	0	0	0	4/25/25	Surface Treatment - Slurry Seal	8/4/23
449	1249	SPRING TREE CT	LEMON TREE CT	EAST END	Local	AAC	E	2	12	120	32	5,365	100	0	0	0	3/12/25	Overlay - AC Structural	2/1/23
		Alleys								92.9		16,562,693							
065	1716	ALLEY E/BEACH BLVD	SAN JOSE AVE	ALLEY N/SAN JOSE	Alley	AC	O	1	10	179	19	3,600	11	64	16	20	2/25/25	New Construction - AC	1/1/80
091	277	ALLEY S/LA HABRA BLVD	W/END	W/O MONTE VISTA	Alley	AC	O	1	15	211	19	4,240	11	82	12	6	3/4/25	New Construction - Initial	1/1/80
093	284	ALLEY S/WHITTIER BLVD	ALLEY E/HAZEL ST	HILLSIDE ST	Alley	AC	O	1	21	121	12	1,586	12	48	14	38	5/5/25	New Construction - Initial	1/1/80
091	268	ALLEY S/LA HABRA BLVD	DEXFORD ST	MISSION ST	Alley	AC	O	1	03	1,013	19	20,280	12	68	26	6	2/20/25	New Construction - Initial	1/1/80
098	294	ALLEY W/LEORA STREET	ALLEY S/ERNA ST	LA HABRA BL	Alley	AC	O	1	16	145	9	1,460	13	77	23	0	3/4/25	New Construction - Initial	1/1/80
065	1717	ALLEY E/BEACH BLVD	ALLEY S/SAN JOSE	SAN JOSE AVE	Alley	AC	O	1	10	428	19	8,580	14	47	10	43	2/25/25	New Construction - AC	1/1/80
083	236	ALLEY N/WHITTIER BLVD	KIRBY DR	WALNUT ST	Alley	AC	O	1	13	484	19	9,700	14	55	23	22	2/27/25	New Construction - Initial	1/1/80
084	241	ALLEY S/ERNA	WILLOW ST	ALLEY W/LEORA ST	Alley	AC	O	1	16	359	14	5,400	15	55	22	23	3/4/25	New Construction - Initial	1/1/80
098	295	ALLEY W/LEORA STREET	ERNA ST	ALLEY S/ERNA ST	Alley	AC	O	1	16	153	9	1,540	15	41	14	45	5/6/25	New Construction - Initial	1/1/80
536	1718	ALLEY N/SAN JOSE AVE	BEACH BLVD	ALLEY E/BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	15	70	25	5	2/25/25	New Construction - AC	1/1/80
093	285	ALLEY S/WHITTIER BLVD	HAZEL ST	ALLEY E/HAZEL ST	Alley	AC	O	1	21	146	19	2,940	18	46	14	40	4/25/25	New Construction - Initial	1/1/80
069	209	ALLEY E/EUCUID STREET	N/END	N/O PINEHURST	Alley	AC	O	1	28	313	19	6,280	19	24	52	24	4/25/25	New Construction - Initial	1/1/80
071	211	ALLEY E/HAZEL-W/HILLSID	S/O ALLEY S/WHITTIER	N/O ALLEY N/GREENWOOD	Alley	PCC	O	1	21	481	10	4,810	19	69	4	27	5/5/25	New Construction - Initial	1/1/80
078	224	ALLEY N/GREENWOOD AVE	MID ALLEY E/HAZEL-W/HILLSIDE	W/O HILLSIDE	Alley	PCC	O	1	21	150	10	1,500	21	83	0	17	4/25/25	New Construction - Initial	1/1/80
081	232	ALLEY N/LAMBERT	N/END	W/O MOUNTAIN VIEW	Alley	AC	O	1	18	105	19	2,120	27	79	21	0	3/16/25	New Construction - Initial	1/1/80
083	237	ALLEY N/WHITTIER BLVD	WEST END	KIRBY DR	Alley	AC	O	1	13	167	19	3,360	31	44	53	3	5/6/25	New Construction - Initial	1/1/80
097	290	ALLEY N/O WHITTIER	WEST END	HARBOR BL	Alley	AC	O	1	34	172	16	2,941	32	64	19	17	4/22/25	New Construction - Initial	1/1/80
091	276	ALLEY S/LA HABRA BLVD	OAKLAND ST	DEXFORD ST	Alley	AC	O	1	03	446	19	8,940	33	62	28	10	2/20/25	New Construction - Initial	1/1/80
099	297	ALLEY W/LOIS STREET	ROSE AVE	ALLEY S/ROSE AVE	Alley	AC	O	1	21	156	19	3,140	36	63	8	29	4/25/25	New Construction - Initial	1/1/80
537	1719	ALLEY S/SAN JOSE AVE	ALLEY E/BEACH BLVD	BEACH BLVD	Alley	AC	O	1	10	139	19	2,800	38	69	31	0	2/25/25	New Construction - AC	1/1/80
078	223	ALLEY N/GREENWOOD AVE	E/O WALNUT	E/O ALLEY E/WALNUT-W/HAZEL	Alley	AC	O	1	21	166	15	2,672	39	64	36	0	4/25/25	New Construction - Initial	1/1/80
079	225	ALLEY N/INDUSTRY AVE	E/O EUCUID	W/O CYPRESS	Alley	AC	O	1	31	724	19	14,500	42	64	31	5	2/14/25	New Construction - Initial	1/1/80
099	296	ALLEY W/LOIS STREET	ALLEY S/GREENWOOD ST	ROSE AVE	Alley	AC	O	1	21	168	19	3,380	43	67	20	13	4/25/25	New Construction - Initial	1/1/80
087	254	ALLEY S/GREENWOOD AVE	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	321	19	6,440	44	66	33	1	4/25/25	New Construction - Initial	1/1/80
078	222	ALLEY N/GREENWOOD AVE	E/O HAZEL	MID ALLEY E/HAZEL-W/HILLSIDE	Alley	AC	O	1	21	136	12	1,781	45	60	14	26	4/25/25	New Construction - Initial	1/1/80
087	253	ALLEY S/GREENWOOD AVE	HAZEL ST	ALLEY W/LOIS ST	Alley	AC	O	1	21	164	19	3,300	45	44	53	3	4/25/25	New Construction - Initial	1/1/80
078	221	ALLEY N/GREENWOOD AVE	E/O ALLEY E/O WALNUT	W/O HAZEL	Alley	AC	O	1	21	162	15	2,608	47	39	61	0	4/25/25	New Construction - Initial	1/1/80
080	231	ALLEY N/LA HABRA BLVD	WEST END	DEXFORD ST	Alley	AC	O	1	02	226	19	4,540	50	45	55	0	2/24/25	New Construction - Initial	1/1/80
080	228	ALLEY N/LA HABRA BLVD	DEXFORD ST	E/END	Alley	AC	O	1	02	275	19	5,520	50	21	53	26	2/24/25	New Construction - Initial	1/1/80
074	216	ALLEY E/WALNUT STREET	NORTH END	ALLY N/GREENWOOD AVE	Alley	AC	O	1	21	372	10	4,103	52	36	51	13	4/25/25	New Construction - Initial	1/1/80
087	252	ALLEY S/GREENWOOD AVE	ALLEY W/LOIS ST	EAST END	Alley	AC	O	1	21	122	20	2,440	55	0	100	0	4/25/25	New Construction - Initial	1/1/80
091	264	ALLEY S/LA HABRA BLVD	CALIFORNIA ST	WALLACE ST	Alley	AC	O	1	22	268	14	4,035	58	57	23	20	4/22/25	New Construction - Initial	1/1/80
091	259	ALLEY S/LA HABRA BLVD	ALDRICH ST	CYPRESS ST	Alley	AC	O	1	29	408	14	6,135	60	56	38	6	4/17/25	New Construction - Initial	1/1/80
068	0208	ALLEY E/CORTO	WHITTIER BL	SOUTH END	Alley	AC	O	1	09	226	19	4,540	60	74	24	2	2/20/25	New Construction - Initial	1/1/80
101	305	ALLEY W/WALNUT STREET	HEATHER AVE	ALLEY S/HEATHER AVE	Alley	AC	O	1	16	157	15	2,528	60	48	52	0	3/4/25	New Construction - Initial	1/1/80
084	240	ALLEY S/ERNA	LEORA ST	WALNUT ST	Alley	AC	O	1	16	454	19	9,100	63	32	26	42	3/3/25	New Construction - Initial	1/1/80
090	258	ALLEY S/KENRICH COURT	W/END	W/O CHANTRY	Alley	AC	O	1	02	510	14	7,665	67	34	49	17	2/24/25	New Construction - Initial	1/1/80
091	261	ALLEY S/LA HABRA BLVD	ALLEY W/EUCUID ST	EUCUID ST	Alley	AC	O	1	22	126	14	1,905	68	0	30	70	4/22/25	New Construction - Initial	11/1/80
091	275	ALLEY S/LA HABRA BLVD	WALNUT ST	HAZEL ST	Alley	AC	O	1	22	318	19	6,380	70	42	25	33	4/22/25	New Construction - Initial	1/1/80
091	265	ALLEY S/LA HABRA BLVD	BANK OF AMERICA PARKING LOT	ALDRICH ST	Alley	AC	O	1	29	255	14	3,840	74	39	33	28	4/17/25	New Construction - Initial	1/1/80
085	1710	ALLEY S/FIRST AVE	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	305	14	2,783	76	0	100	0	4/21/25	New Construction - Initial	1/1/80
091	272	ALLEY S/LA HABRA BLVD	HAZEL ST	CALIFORNIA ST	Alley	AC	O	1	22	269	19	5,400	76	25	37	38	4/22/25	New Construction - Initial	1/1/80
091	271	ALLEY S/LA HABRA BLVD	FONDA ST	EAST END	Alley	AC	O	1	39	101	19	2,040	78	0	100	0	4/22/25	New Construction - Initial	1/1/80
091	267	ALLEY S/LA HABRA BLVD	CYPRESS ST	MCPHERSON ST	Alley	AC	O	1	36	640	14	9,615	79	0	66	34	4/15/25	New Construction - Initial	1/1/80
084	239	ALLEY S/ERNA	HAZEL ST	LOIS ST	Alley	AC	O	1	21	434	14	6,525	80	1	60	39	4/17/25	New Construction - Initial	1/1/80
091	266	ALLEY S/LA HABRA BLVD	COLFAX ST	DEXTER ST	Alley	AC	O	1	39	202	19	4,060	80	7	93	0	4/22/25	New Construction - Initial	1/1/80
084	245	ALLEY S/ERNA	LOIS ST	EUCUID ST	Alley	AC	O	1	21	464	24	11,625	80	0	95	5	4/21/25	New Construction - Initial	1/1/80
076	1706	ALLEY N/ERNA STREET	WILLOW ST	EAST END	Alley	AC	O	1	16	335	16	3,965	81	6	83	11	3/4/25	New Construction - Initial	1/1/80
101	300	ALLEY W/WALNUT STREET	ALLEY S/GREENWOOD AVE	HIGHLANDER AVE	Alley	AC	O	1	16	142	15	2,288	81	0	39	61	3/3/25	New Construction - Initial	1/1/80
084	242	ALLEY S/ERNA	WALNUT ST	HAZEL ST	Alley	AC	O	1	21	319	19	6,400	82	22	49	29	4/17/25	New Construction - Initial	1/1/80
091	269	ALLEY S/LA HABRA BLVD	DEXTER ST	FONDA ST	Alley	AC	O	1	39	202	19	4,060	82	20	78	2	4/22/25	New Construction - Initial	1/1/80
091	273	ALLEY S/LA HABRA BLVD	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	O	1	36	138	16	2,363	82	74	18	8	4/2/25	New Construction - Initial	1/1/80
101	301	ALLEY W/WALNUT STREET	ALLEY S/HEATHER AVE	ERNA ST	Alley	AC	O	1	16	141	15	2,272	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
076	1708	ALLEY N/ERNA STREET	WEST END	ALLEY W/O WALNUT ST	Alley	AC	O	1	16	240	20	4,080	82	0	100	0	3/4/25	New Construction - Initial	1/1/80
091	274	ALLEY S/LA HABRA BLVD	WALLACE ST	ALLEY W/EUCUID ST	Alley	AC	O	1	22	192	14	2,895	82	0	64	36	4/25/25	New Construction - Initial	1/1/80
082	1712	ALLEY N/THIRD ST	ALLEY W/O VALENCIA	VALENCIA ST	Alley	AC	O	1	36	153	20	2,091	84	0	15	85	4/2/25	New Construction - Initial	1/1/80
067	0207	ALLEY E/BURWOOD	PARKWOOD	MONTWOOD	Alley	AC	O	1	32	882	19	17,660	85	57	43	0	3/10/25	New Construction - Initial	1/1/80
102	307	ALLEY W/O HARBOR BLVD	ERNA AVE	LA HABRA BLVD	Alley	AC	O	1	35	343	19	6,880	86	0	100	0	3/26/25	New Construction - Initial	1/1/80
091	260	ALLEY S/LA HABRA BLVD	ALLEY E/BEDFORD ST	COLFAX ST	Alley	AC	O	1	39	96	19	1,940	87	0	100	0	4/22/25	New Construction - Initial	1/1/80
076	220	ALLEY N/ERNA STREET	WEST END	EUCUID ST	Alley	AC	O	1	21	315	14	4,740	87	0	100	0	4/18/25	New Construction - Initial	1/1/80

City of La Habra, CA
Pavement Condition Index (PCI) Report - All Streets

Sorted by Rank, PCI Order (0-100)

BranchID	Sec ID	Name	From	To	MPAH	Surface Type	Rank	Lanes	Zone	L	W	Area	PCI	% Load	% Climate	% Other	Insp. Date	Work History Type	Work History Date
101	302	ALLEY W/WALNUT STREET	ALLEY S/HIGHLANDER AVE	FLORENCE AVE	Alley	AC	0	1	16	146	15	2,352	87	0	57	43	3/3/25	New Construction - Initial	1/1/80
092	280	ALLEY S/STEARNS AVENUE	SUNSET ST	EAST END	Alley	AC	0	1	35	343	14	3,509	87	0	100	0	3/26/25	New Construction - Initial	1/1/80
088	256	ALLEY S/HIGHLANDER AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	0	1	16	471	15	7,552	88	19	55	26	3/3/25	New Construction - Initial	1/1/80
084	238	ALLEY S/ERNA	MCPHERSON ST	COLLEGE ST	Alley	AC	0	1	35	304	14	4,575	88	0	100	0	3/26/25	New Construction - Initial	1/1/80
101	303	ALLEY W/WALNUT STREET	FLORENCE AVE	HEATHER AVE	Alley	AC	0	1	16	301	15	4,832	89	32	60	8	3/4/25	New Construction - Initial	1/1/80
092	278	ALLEY S/STEARNS AVENUE	E/O COLLEGE	W/O VALENCIA	Alley	AC	0	1	35	312	14	4,695	89	0	100	0	3/26/25	New Construction - Initial	1/1/80
076	218	ALLEY N/ERNA STREET	HAZEL	E/END	Alley	AC	0	1	21	255	20	5,100	89	0	100	0	4/17/25	New Construction - Initial	1/1/80
080	226	ALLEY N/LA HABRA BLVD	E/O ALLEY E/CYPRESS	W/O LEMON	Alley	AC	0	1	35	144	14	2,175	89	0	74	26	4/2/25	New Construction - Initial	1/1/80
101	304	ALLEY W/WALNUT STREET	GREENWOOD AVE	ALLEY S/GREENWOOD AVE	Alley	AC	0	1	16	160	15	2,576	90	24	68	8	3/3/25	New Construction - Initial	1/1/80
091	263	ALLEY S/LA HABRA BLVD	BEDFORD ST	ALLEY E/BEDFORD ST	Alley	AC	0	1	39	133	19	2,680	90	0	100	0	4/22/25	New Construction - Initial	1/1/80
076	219	ALLEY N/ERNA STREET	WALNUT ST	E/O ALLEY E/WALNUT	Alley	AC	0	1	21	144	19	2,900	90	0	95	5	4/17/25	New Construction - Initial	1/1/80
080	227	ALLEY N/LA HABRA BLVD	CYPRESS ST	E/O ALLEY E/CYPRESS	Alley	AC	0	1	35	146	14	2,205	91	0	100	0	4/2/25	New Construction - Initial	1/1/80
087	255	ALLEY S/GREENWOOD AVE	LEORA ST	ALLEY W/WALNUT ST	Alley	AC	0	1	16	470	19	9,420	91	27	73	0	3/3/25	New Construction - Initial	1/1/80
076	217	ALLEY N/ERNA STREET	E/O ALLEY E/WALNUT	W/O HAZEL	Alley	AC	0	1	21	174	19	3,500	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
085	250	ALLEY S/FIRST AVE	CYPRESS ST	MCPHERSON ST	Alley	AC	0	1	36	640	16	10,240	91	0	100	0	4/17/25	New Construction - Initial	1/1/80
074	214	ALLEY E/WALNUT STREET	N/END	N/O ALLEY N/ERNA	Alley	AC	0	1	21	429	19	8,600	92	0	100	0	4/17/25	New Construction - Initial	1/1/80
092	279	ALLEY S/STEARNS AVENUE	E/O MCPHERSON	W/O COLLEGE	Alley	AC	0	1	35	304	14	4,575	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
101	306	ALLEY W/WALNUT STREET	HIGHLANDER AVE	ALLEY S/HIGHLANDER AVE	Alley	AC	0	1	16	156	15	2,512	92	0	100	0	3/3/25	New Construction - Initial	1/1/80
095	288	ALLEY W/BURWOOD ST	NORTH END	MONTWOOD AVE	Alley	AC	0	1	32	1,035	20	21,756	92	0	100	0	4/15/25	New Construction - Initial	1/1/80
084	244	ALLEY S/ERNA	COLLEGE ST	VALENCIA ST	Alley	AC	0	1	35	312	14	4,695	92	0	100	0	3/26/25	New Construction - Initial	1/1/80
084	247	ALLEY S/ERNA	VALENCIA ST	SUNSET ST	Alley	AC	0	1	35	283	9	2,840	92	0	53	47	3/26/25	New Construction - Initial	1/1/80
092	281	ALLEY S/STEARNS AVENUE	E/O VALENCIA	W/O SUNSET	Alley	AC	0	1	35	283	14	4,260	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
094	287	ALLEY W/BEDFORD STREET	S/O ALPINE	N/O SUPERIOR	Alley	AC	0	1	39	1,252	19	25,060	93	0	100	0	4/2/25	Complete Reconstruction - AC	4/2/18
089	257	ALLEY S/INDUSTRY AVE	EUCLID ST	CYPRESS ST	Alley	AC	0	1	31	683	19	13,680	93	0	49	51	2/14/25	Complete Reconstruction - AC	8/17/17
084	248	ALLEY S/ERNA	WEST END	MCPHERSON ST	Alley	AAC	0	1	35	402	14	6,045	93	0	62	38	3/26/25	Overlay - AC Structural	12/1/21
084	243	ALLEY S/ERNA	SUNSET ST	ALLEY W/HARBOR BL	Alley	AC	0	1	35	308	15	4,635	93	0	100	0	3/26/25	New Construction - Initial	1/1/80
066	206	ALLEY E/BEDFORD ST	ALLEY S/ LA HABRA BL	SUPERIOR	Alley	AC	0	1	39	1,579	15	25,280	94	0	56	44	4/2/25	New Construction - Initial	1/1/80
074	215	ALLEY E/WALNUT STREET	FIRST ST	SOUTH END	Alley	AC	0	1	22	309	18	5,890	94	0	71	29	4/21/25	New Construction - Initial	1/1/80
102	308	ALLEY W/O HARBOR BLVD	FRANCIS AVE	NORTH END	Alley	AC	0	1	35	524	20	8,908	94	0	100	0	4/2/25	New Construction - Initial	1/1/80
073	213	ALLEY E/VALENCIA ST	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	0	1	36	434	19	8,700	94	40	60	0	4/2/25	Slurry Seal or Chip Seal	8/1/05
100	299	ALLEY W/VALENCIA	S/O ALLEY S/LA HABRA	N/O ALLEY N/THIRD	Alley	AC	0	1	36	414	19	8,300	96	0	100	0	4/2/25	New Construction - Initial	1/1/80
082	235	ALLEY N/THIRD ST	VALENCIA ST	ALLEY E/VALENCIA ST	Alley	AC	0	1	36	147	19	2,960	97	0	100	0	4/2/25	New Construction - Initial	1/1/80
091	262	ALLEY S/LA HABRA BLVD	ALLEY W/VALENCIA ST	VALENCIA ST	Alley	AC	0	1	36	125	19	2,520	98	0	100	0	4/2/25	New Construction - Initial	1/1/80
092	282	ALLEY S/STEARNS AVENUE	WEST END	MCPHERSON ST	Alley	AC	0	1	35	309	14	4,650	98	0	100	0	3/26/25	Complete Reconstruction - AC	12/1/21
065	204	ALLEY E/BEACH BLVD	ALLEY S/WHITTIER	GREGORY	Alley	AAC	0	1	09	614	14	9,225	99	0	100	0	2/25/25	Overlay - AC Structural	6/1/24
070	210	ALLEY E/HARBOR-W/BEDFOR	W/O BEDFORD	N/O STEARNS	Alley	AAC	0	1	38	745	16	9,685	99	0	100	0	3/25/25	Overlay - AC Structural	12/1/21
086	251	ALLEY S/FLORENCE AVENUE	WEST END	MCPHERSON ST	Alley	AAC	0	1	35	310	14	4,665	99	0	100	0	4/2/25	Overlay - AC Structural	12/1/21
080	230	ALLEY N/LA HABRA BLVD	ORANGE ST	EAST END	Alley	AAC	0	1	28	467	13	6,552	99	0	0	100	2/13/25	Overlay - AC Structural	4/4/24
085	249	ALLEY S/FIRST AVE	ALDRICH ST	CYPRESS ST	Alley	AAC	0	1	29	408	16	6,528	99	0	100	0	4/17/25	Overlay - AC Structural	3/4/23
093	286	ALLEY S/WHITTIER BLVD	W/O ALLEY E/BEACH	W/O RIDGEWAY	Alley	AC	0	1	09	162	19	3,260	99	0	100	0	5/5/25	New Construction - Initial	1/1/80
096	289	ALLEY W/EUCLID	ALLEY S/LA HABRA BL	FIRST ST	Alley	AAC	0	1	22	152	11	1,836	99	0	100	0	4/21/25	Overlay - AC Structural	4/1/24
080	229	ALLEY N/LA HABRA BLVD	EUCLID ST	CIVIC CENTER DR	Alley	AC	0	1	28	351	19	7,040	100	0	0	0	4/25/25	New Construction - Initial	1/1/80
										6.4		582,079							

XIII. APPENDIX C – GIS DIGITAL DATA

Introduction

The OCTA GIS Section maintains a spatial inventory of transportation infrastructure which mostly consists of major arterial streets, roads, and highways. A key component of road information is pavement condition. Maintaining an inventory of pavement condition will enhance OCTA's GIS visualization and analysis capabilities and assist in understanding the transportation investment needs throughout the region. Therefore, a GIS dataset in digital format should be included in this report.

Structure of GIS Data

The GIS dataset must consist of linear geographic features that represent road/street segments. All segments that are part of the report should be included in the GIS dataset. The attribute information of each segment should generally follow the format of the Complete Listing of Current Street Conditions in Appendix B above.

The GIS data requirements are discussed below. Most commercial and open-source GIS software provide industry-standard tools to manage GIS data to meet these requirements.

GIS Digital Data Format

The GIS data must be submitted in either one of the following formats:

- Esri Shapefile, or
- Esri File Geodatabase

Metadata

The GIS data are required to have associated metadata. The minimum metadata items required are:

- Title of Dataset
- Tags (A set of words that can be used by GIS to search for the resource. For example: "pavement", "transportation", "roads")
- Summary (A brief purpose statement of the dataset)
- Description (A brief narrative of the dataset's content)
- Credits (A recognition of those who created or contributed to the resource)

Spatial Geometry Type

The spatial geometry of the segment features must be lines that represent the roadway centerline as accurately as possible.

Projection

The GIS data must have spatial reference information and have its coordinate system identified and

**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

embedded in or associated with the data file(s). All GIS data submitted to OCTA should be in the following projected coordinate system:

- NAD 1983 State Plane California VI FIPS 0406 (US Feet) - More information about this system can be found at: <https://spatialreference.org/ref/epsg/nad83-california-zone-6-ftus/>

GIS Feature Attributes

The required segment attributes are:

- Street name
- Unique segment identifier (Segment ID from original source if available)
- Name of intersecting road at the beginning of a segment
- Name of intersecting road at the end of the segment
- Current pavement condition index (PCI)
- Current PCI inspection date
- Length of road segment in feet
- Width of road segment in feet
- Paved area of road segment in square feet or square yards
- Projected PCI at end of Seven-Year Road Maintenance and Rehabilitation Plan

Additional attributes such as number of through travel lanes, direction of travel and pavement surface type may be provided.

XIV. APPENDIX D – QUALITY ASSURANCE / QUALITY CONTROL PLAN**Introduction**

When performing data collection in any field, the need for quality control is paramount as it is essential for accurate planning, analysis and design. This is particularly true for collecting pavement distress data for a pavement management program.

The Quality Assurance / Quality Control (QA/QC) Plan establishes minimum quality standards for performance and procedures for update of the pavement management program.

Objectives

This document constitutes a formal QA/QC Plan for the City of La Habra. It was prepared on March, 2018 and last revised in January, 2023.

Specifically, it is intended for the 2025 Pavement Management Plan Update. The focus is on the collection of network-level pavement distress data (defined by National Cooperative Highway Research Program (NCHRP) Synthesis 401 Quality Management of Pavement Data Collection, as “Network-level data collection involves collection of large quantities of pavement condition data, which is often converted to individual condition indices or aggregated into composite condition indices”).

This document also addresses the QA/QC plan requirements of the Orange County Transportation

2025 Citywide Pavement Management Plan – OCTA Submittal

Final Report – May 20th, 2025

Authority (OCTA)'s "Countywide Pavement Management Plan Guidelines" (Section 2.4), adopted in May 2010.

Structure of QA/QC Plan

The following components are addressed in this QA/QC Plan:

- Condition survey procedures used;
- Accuracy required for data collection;
- Inspector qualifications and experience; and
- Safety.

Condition Survey Procedures

The governing document in performing condition surveys for the City of La Habra is ASTM D6433 "Standard Practice for Roads and Parking Lots Pavement Condition Index (PCI) Surveys." Both asphalt concrete (AC) and Portland cement concrete (PCC) pavements are included in this protocol. The following distresses are collected for each pavement type:

Asphalt Concrete	Portland Cement Concrete (Jointed)
1. Alligator (fatigue) cracking	1. Blow-up/Buckling
2. Bleeding	2. Corner Breaks
3. Block Cracking	3. Divided Slab
4. Bumps and sags	4. Durability ("D") Cracking
5. Corrugation	5. Faulting
6. Depression	6. Joint Seal damage
7. Edge Cracking	7. Lane/Shoulder Drop-off
8. Joint Reflection Cracking	8. Linear Cracking
9. Lane/Shoulder Drop-off	9. Patching (large) and Utility Cuts
10. Longitudinal & Transverse Cracking	10. Patching (small)
11. Patching and Utility Cut Patching	11. Polished Aggregate
12. Polished aggregate	12. Popouts
13. Potholes	13. Pumping
14. Railroad Crossing	14. Punchout
15. Rutting	15. Railroad Crossing
16. Shoving	16. Scaling, map cracking and crazing
17. Slippage Cracking	17. Shrinkage Cracks
18. Swell	18. Spalling (corner)
19. Weathering	19. Spalling (joint)
20. Raveling	

As required by the Orange County Transportation Authority (OCTA), the City of La Habra must prepare and implement a quality assurance / quality control (QA/QC) plan regarding pavement management inspection as they pertain to MicroPAVER. For the purposes of this report, Bucknam has demonstrated below how our project team implemented QA/QC procedures during the project.

2025 Citywide Pavement Management Plan – OCTA Submittal

Final Report – May 20th, 2025

Our QA/QC plan focuses on the how each pavement inspection is performed, what distresses are collected and ensures that it complies with the OCTA guidelines defined within the “Countywide Pavement Management Plan Guidelines (CPMPG)”.

As shown within the OCTA (CPMPG), our staff followed and delivered on the requirements stated within Chapter 2, page 2-5 which require specific QA/QC data (Items A through G). Additionally, Chapter 3 requires numerous data/deliverables from local agencies for OC Go eligibility. All general PCI budgetary report submittals will follow the Chapter 3 guidelines.

In conjunction with the outlined items within the CPMPG Section 2 we have summarized our QA/QC procedures below:

- a. **Descriptions of condition survey** - Our staff follows the required Condition Survey Protocols (CPMPG, Chapter 2); our staff assesses each pavement section for the minimum distresses outlined within Chapter 2, page 2-1. Additionally, based on the pavement conditions found, we collect all MicroPAVER/StreetSaver Army Corps of Engineers (USACE) distresses, if found within the sample sections; for example, if slippage cracking, potholes, etc. are found our survey technicians record the proper information.
- b. **How data was collected** - Our surveys follow the OCTA accepted walking requirements. All sections that our staff surveys are performed through the walking method, approximately 10% of all sections surveyed were complemented with windshield surveys based on unique conditions found. Our staff physically measures the width of every section as well as measure for any square footage adjustment that need to be added or taken away from a sections “true area” (i.e. cul-de-sac, bus pads, street width variances, etc.). Samples taken always include a minimum of 2,500 SF coverage unless specific section limits prohibit this. Arterial section samples typically utilize a 3,500 SF sample size due to the larger section area (this is within the ASTM D6433 sample size calculation. Field crews typically include one individual for residential pavement sections while Arterial (MPAH) routes utilize a two-person crew for safety, traffic control and increases quality control.
- c. **Accuracy required for data collection** - We use a statistical sampling approach for measuring the quality of our field technician’s work. In this manner, 10 percent of the original surveys are re-surveyed by a different survey crew than the original, supervised by a field supervisor, and the results are compared to the original surveys. Our QC process involves checking the field crews’ work in a “blind study” fashion. Quality control checks are performed at the end of each survey week. This ensures that all field personnel are properly collecting section samples, distress types and distress severities for all street segments.
 - ❖ When QA/QC issues are found, our staff documents the issues within MicroPAVER’s user interface. If distress types found are not within the 97% accuracy our QA/QC is expanded beyond our minimum 10% resurvey to 20% of the original survey
- d. **Random and Systematic Re-Inspections** – As described above our staff re-inspects, as a minimum, 10% of the original survey (OCTA only requires 5%). Per the agencies requests, our staff will submit PCI reports to the agency as project status reports for their review. Agencies will typically review specific pavement sections for PCI accuracy based on recent overlay or slurry seal maintenance; this serves as an initial accuracy check on our surveys (outside Bucknam QC efforts).

2025 Citywide Pavement Management Plan – OCTA Submittal

Final Report – May 20th, 2025

Additionally, our staff performs “ride-a-long” surveys with local agency staff to build consensus on how our MicroPAVER/StreetSaver USACE surveys are performed, recorded and reported on.

Random re-inspections will include a representative selection across the following categories:

- Functional classed (i.e. MPAH, locals);
- Surface types (e.g. AC or PCC);
- Pavement conditions (e.g. good, fair, poor);
- Inspectors;
- Geographical areas, if applicable.

For systematic re-inspections, this could be due to noticed trends such as specific treatment types (e.g. open-graded mixed), a specific inspector or geographical area. In these cases Bucknam continues to utilize a 10% re-inspection policy.

- e. **PCI Comparison with Past Surveys** - if previous inspection data is available, new PCI's calculated through the most recent inspections will be compared to previous PCI's. If the variance in PCI is greater than +/- 10 PCI points, these sections will be flagged for further investigation and/or re-inspection (In the cases that a PCI increases or decreases by 10 points follows the established CPMPG guidelines; Appendix A, page A-18).
- f. **Schedule of data submittal** – Pending on the City's last major PMP submittal, Bucknam will assist the agency in submitting the following:
 - ❖ Master Plan of Arterial Highways (MPAH) routes will be surveyed and reported on at least once every two years
 - ❖ Local streets will be surveyed and reported on every six years
 - ❖ Corresponding MPAH and local PCI reporting and budgetary reporting will be submitted every two years
- g. **Experience of Inspectors** – Bucknam staff have been trained on the use of StreetSaver and the USACE segment calibration and inspection practices. Mr. Peter Bucknam (Project Manager) and staff (see below) have completed the PMP Certification of Professional Development courses. Bucknam field technicians are trained using the USACE survey methodologies and have passed OCTA's prequalification testing.

Bucknam Infrastructure Group inspectors have attended formal training on pavement condition distress surveys. This training was conducted prior to performing any work using the ASTM D6433 protocols, consistent with OCTA's requirements

Inspector Name	Date of ASTM D6433 Training	Training Conducted by
Aaron Cohodas	8/12/24	OCTA
Nicko Bustamante	8/12/24	OCTA
Cade Bucknam	8/12/24	OCTA

**2025 Citywide Pavement Management Plan – OCTA Submittal
Final Report – May 20th, 2025**

- h. **Field data collection safety procedures** – Bucknam field survey techniques utilize the following procedures:
- a. All vehicles are properly marked or flagged with appropriate sign markings indicating that a “PAVEMENT SURVEY IS IN PROGRESS”
 - b. All vehicles have the proper flashing amber light beacons placed on the top of the vehicle to allow for proper visibility and line-of-site warning
 - c. Large MPAH routes are surveyed using two field technicians to increase traffic control warning and safety
 - d. While parking or stopping along the survey route, vehicles legally park within the right-of-way or use a parking lot
 - e. All field technicians wear ANSI – 105 Class II safety vests

XV. APPENDIX E – PAVEMENT MANAGEMENT DATA FILES

The City of La Habra MicroPAVER database (.e70 file) has been enclosed for City and OCTA use. This data and the associated reporting data includes:

- Street names and limits for the City’s public streets
- Street identifiers (Branch ID, Section ID)
- Direction
- Begin and end of section
- Length, width and true areas
- Functional Classification (MPAH, Local)
- Number of travel lanes
- Pavement Condition Index (PCI) and date of inspection
- Type of recommended treatment
- Cost of recommended treatment

XVI. APPENDIX F – GIS MAPS / CURRENT CONDITIONS

