

PROPOSALS MUST BE RECEIVED BY:  
10:00 am on August 1<sup>st</sup>, 2018

DELIVER TO:

City of Ramsey Municipal Center  
7550 Sunwood Drive NW  
Ramsey, MN 55303  
763-427-1410

Or to: [mrivierblood@cityoframsey.com](mailto:mrivierblood@cityoframsey.com)

## REQUEST FOR QUOTATION

**Pave 140' feet by 9' wide bituminous parking bays,  
parallel to 16701 Variolite Street, south of Trott Brook**



## PROPOSAL SPECIFICATIONS

### Pave 140' by 9' wide parking bay with connection to boardwalk pursuant to Typical Section and Plan View and description as follows:

I/We agree to furnish all materials, labor and traffic control to perform the work below.

- Mobilization and place approximately 160' feet of Type MC Silt Fence
- Saw approximately 140' of bituminous pavement – full depth
- Remove bituminous – estimate of 7 square yards
- Excavate approximately 27 cubic yards of grass roots and organic soils
- Prepare subgrade for aggregate base
- Place 152 square yards of Geotextile Fabric Type VI
- Place and compact \*Aggregate Base Class 5 Modified (CV)
- Pave 14 ton Type 9.5 Wear Course (SPWEB340B) @ 2" for parking bay
- Pave 1.5 ton Type 9.5 Wear Course (SPWEB340B) @ 2.5" for trail connector
- Install 16 square feet steel truncated domes
- Traffic Control per most current addition of Minnesota Temporary Traffic Control Zone Layout Manual

*\*Contractor may substitute and utilize recycled ConBit at Ramsey's Public Works Campus 14100 Jasper Street NW at no cost if desired.*


**Utilization of excavated material:** Some of the 'grass roots' and organic soils excavated, may be placed over the specified 2' wide shoulder.


**Work and Staging Areas:** Confine work activities within the 'shoulder' area at all times. No equipment shall be left on City streets outside normal working hours.

**Specification Reference:** The Contractor shall conduct his/her work in conformance with the specifications set forth herein, and in accordance with the Minnesota Department of Transportation Standard Specifications for Construction, 2018 Edition, which is incorporated by reference to these specifications.




**TROTT BROOK BOARDWALK  
VARIOLITE STREET  
PARKING BAYS**



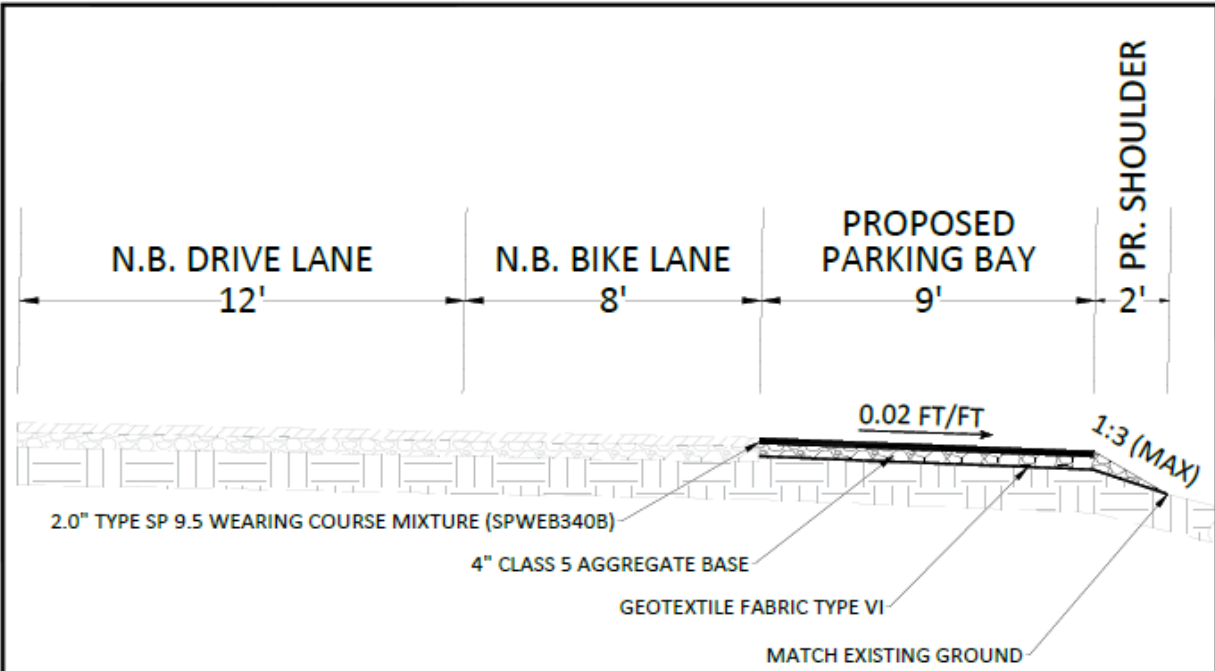


**PARKING BAY TYPICAL SECTION**

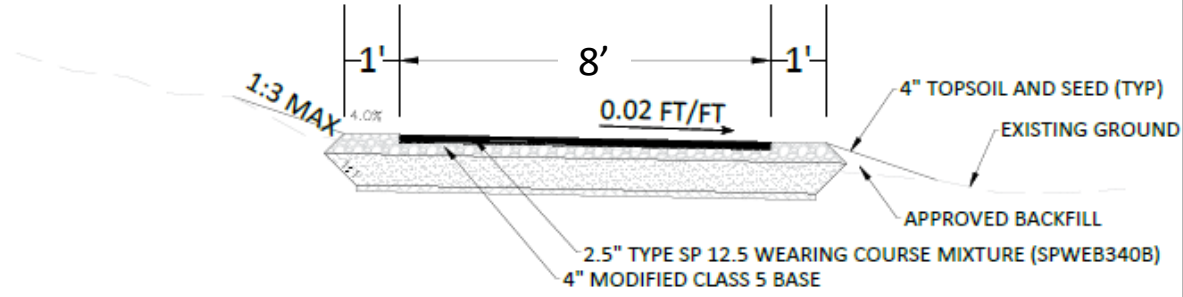

**BITUMINOUS TRAIL TYPICAL SECTION**

<p>TROTT BROOK BOARDWALK VARIOLITE STREET PARKING BAYS</p>	<p>TYPICAL SECTION</p>	
--	------------------------	---

## Quotation for Trott Brook Parking Bays

\$ \_\_\_\_\_ Lump Sum

In submitting the above quote, I/We warrant the quote valid for work to be completed on or before August 31st, 2018, after approval by the City.

Contractor name \_\_\_\_\_

Owner or representative \_\_\_\_\_

Signature \_\_\_\_\_

Phone(s) \_\_\_\_\_

E-mail \_\_\_\_\_