

**1 OVERALL TREE PRESERVATION PLAN**  
C702


**TREE PRESERVATION NOTES**

- TREE SURVEY FIELD WORK COMPLETED BY CARLSON ENGINEERING ON 02/05/25.
- TREES 4155-4165 AND 4185-4191 ARE TO BE SAVED AND PROTECTED WITH TREE PROTECTION FENCING PRIOR TO CONSTRUCTION START.
- UNLESS NOTED AS SAVED OR REMOVED (DENOTED BY X), ALL OTHER TREES (DENOTED BY O) ARE CONSIDERED OPTIONAL REMOVALS AND HAVE BEEN COUNTED AS REMOVED IN THE TREE INVENTORY CALCULATIONS. THESE TREES ARE INTENDED TO BE SAVED IF GRADING ALLOWS, BUT MAY BE REMOVED IF NEEDED WITHOUT MITIGATION.
- ANY OPTIONAL REMOVAL TREES AS NOTED ABOVE THAT ARE REMOVED, SHALL BE REPLACED WITH ADDITIONAL 6" BLACK HILL SPRUCE TREES AT 16" ON CENTER TO MAINTAIN SCREENING.


TREE INVENTORY						
Tag #	Tree Size (DBH)	Species (Common Name)	Condition (0-3)	Protection Category	Notes	Designation
4155	9	Spruce	3	Significant		SAVE
4156	13	Spruce	3	Significant		SAVE
4157	11	Spruce	3	Significant		SAVE
4158	11	Spruce	3	Significant		SAVE
4159	12	Spruce	3	Significant		SAVE
4160	10	Spruce	3	Significant		SAVE
4161	13	Spruce	3	Significant		SAVE
4162	7	Spruce	3	Significant		SAVE
4163	10	Jack Pine	3	Significant		SAVE
4164	12	Spruce	3	Significant		SAVE
4165	16	Spruce	3	Significant		SAVE
4166	13	Spruce	3	Significant		REMOVE
4167	9	Spruce	3	Significant		REMOVE
4168	13	Spruce	3	Significant		REMOVE
4169	15	Spruce	3	Significant		REMOVE
4170	12	Spruce	3	Significant		REMOVE
4171	12	Ash	3	NA - species	2-Stem	Remove (Exempt)
4172	7	Spruce	3	Significant		REMOVE
4173	13	Spruce	3	Significant		REMOVE
4174	13	Spruce	3	Significant		REMOVE
4175	9	Spruce	3	Significant		REMOVE
4176	21	Ash	3	NA - species	3-Stem	Remove (Exempt)
4177	8	Spruce	3	Significant		REMOVE
4178	10	Spruce	3	Significant		REMOVE
4179	10	Spruce	2	Significant		REMOVE
4180	13	Spruce	3	Significant		REMOVE
4181	15	Spruce	3	Significant		REMOVE
4182	17	Spruce	3	Significant		REMOVE
4183	12	Ash	3	NA - species	3-Stem	Remove (Exempt)
4184	6	Spruce	2	Significant		REMOVE
4185	9	Spruce	3	Significant	3-Stem	SAVE
4186	6	Red Cedar	3	Significant		SAVE
4187	8	Spruce	3	Significant		SAVE
4188	12	Spruce	3	Significant		SAVE
4189	6	Spruce	3	Significant		SAVE
4190	10	Spruce	3	Significant		SAVE
4191	11	Spruce	3	Significant		SAVE

SUMMARY		DBH (Inches)
Significant Trees Saved		186
Significant Trees Removed		183 (49.6%)
Significant Trees Total		369
Allowable Tree Removal (70%)		258
Mitigation Required		0

**TREE PROTECTION FENCE**

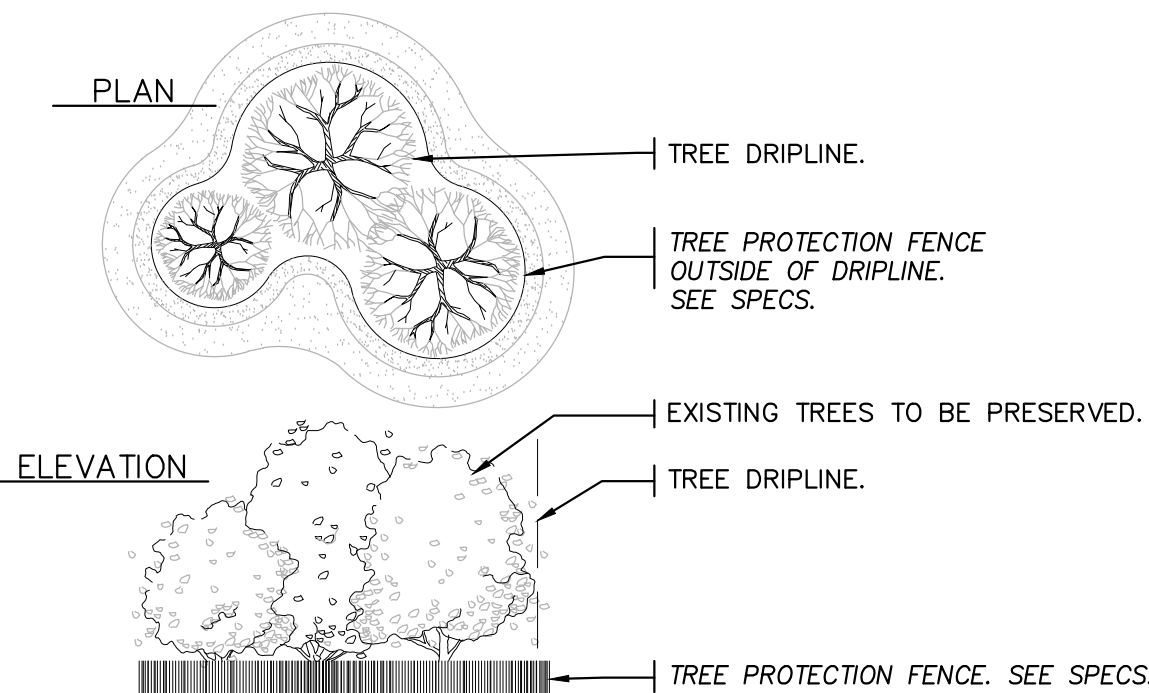

ERECT TREE PROTECTION FENCE PRIOR TO ANY CONSTRUCTION ACTIVITY. DO NOT STORE ANY EQUIPMENT OR MATERIALS WITHIN PROTECTIVE AREA. REMOVE THE TREE PROTECTION FENCE ONLY AFTER CONSTRUCTION OPERATIONS ARE COMPLETED.

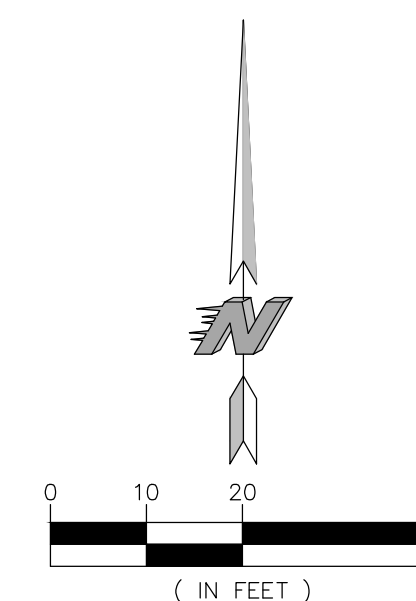

CALL BEFORE YOU DIG

Know what's below. Call before you dig.



KWIK TRIP, Inc.  
P.O. BOX 2107  
1626 OAK STREET  
LA CROSSE, WI 54602-2107  
PH. (608) 781-8988  
FAX (608) 781-8960

3890 PHEASANT RIDGE DRIVE NE, SUITE 100, BLAINE, MN 55449  
TEL 763.489.7900 | FAX 763.489.7959  
CARLSON-ENGINEERING.COM

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Landscape Architect under the laws of the State of Minnesota.

Name: Ryan J. Ruttger, RLA  
Signature: [Signature]  
Date: 01/30/25 License #: 56346

**TREE PRESERVATION PLAN**

**CONVENIENCE STORE #1782 WITH 1-BAY CARWASH**

**BUNKER LAKE BLVD & ARMSTRONG BLVD NW  
RAMSEY, MINNESOTA**

#	DATE	DESCRIPTION
1	03/10/25	Per Owner Comments
2	04/08/25	Per City Comments

DRAWN BY: RJR  
SCALE: GRAPHIC  
PROJ. NO.: 11224-00  
DATE: 2025-01-30  
SHEET: 1782 C702