

Statement of Work

Proposed IHSC Medical Trailers - Hutto

CCA will need to provide to accommodate the medical trailers, see attachment above for dimensions and floor plan.

ICE Health Service Corps is in need of additional Examination Space to be located at the Hutto Facility. The structures/trailers will be furnished and delivered by the Federal Government.


CCA will need to provide the following to insure a complete and operation facility/system:

- Establish a suitable location to accommodate two 53 foot long x 22 foot wide trailers
- Perform all required excavation/grading and foundation work. Buildings/Trailers will sit on a concrete slab
- Provide Electrical Service and connect to buildings/trailers electrical sub-panels. Electrical Service shall be a minimum of 200 amp 3 phase 120/240 volts for each Buildings/ trailers. CCA should verify electrical requirement when Buildings/Trailers arrive
- Provide water and sewer service and connect to Buildings/Trailers water and sewer connections
- Provide Phone and IT Service Cable to the buildings/ trailers. CCA is to insure that cabling meets ICE current cabling standards. Please see cabling stands attached:
- Provide construction schedule

TAB A

Note: Trailer Dimensions: 53 feet L x 22 feet W = 1,166 sq. ft.

Dental, Lab, and Mental Health Examination Facility

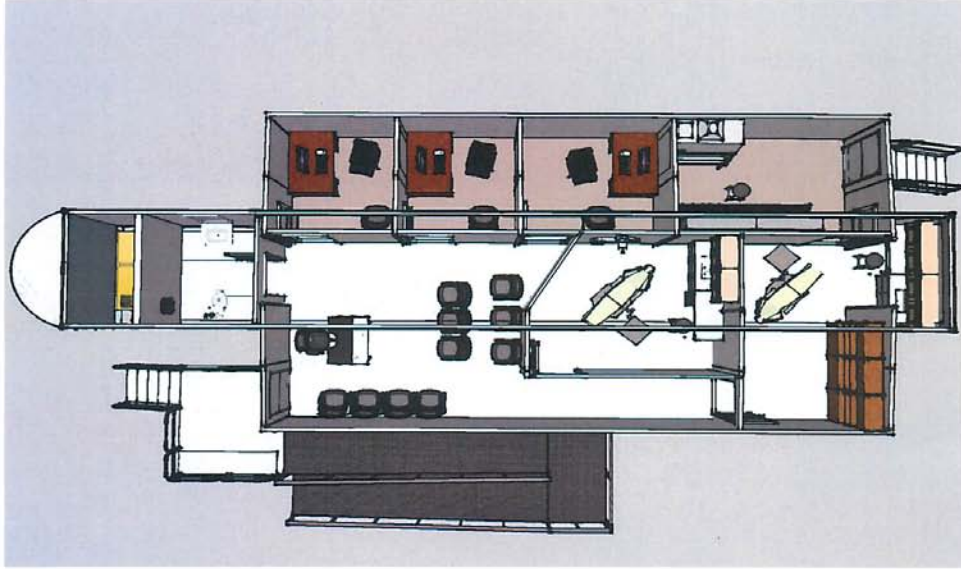

Short Stay Isolation Facility

