

see attached plan sheets

WILLIAMSON COUNTY, TEXAS

CHANGE ORDER NUMBER: 2

Project # 1607-102

TABLE A: Force Account Work and Materials Placed into Stock

	LABOR	HOURLY RATE			HOURLY RATE

TABLE B: Contract Items:

ITEM	DESCRIPTION	UNIT	UNIT PRICE	ORIGINAL + PREVIOUSLY REVISED		ADD or (DEDUCT)	NEW		OVERRUN/ UNDERRUN
				QUANTITY	ITEM COST		QUANTITY	ITEM COST	
104-6015	REMOVING CONC (SIDEWALKS)	SY	\$15.00	234	\$3,510.00	34.00	268.00	\$4,020.00	\$510.00
104-6022	REMOVING CONC (CURB & GUTTER)	LF	\$9.00	269	\$2,421.00	115.00	384.00	\$3,456.00	\$1,035.00
110-6001	EXCAVATION (ROADWAY)	CY	\$8.00	14,787	\$118,296.00	177.00	14,964.00	\$119,712.00	\$1,416.00
160-WC02	FURNISH AND PLACE TOPSOIL (4")	SY	\$2.00	11,834	\$23,668.00	83.00	11,917.00	\$23,834.00	\$166.00
247-6044	FL BS (CMP IN PLACE)(TY A GR 4)(FNL POS)	CY	\$42.00	13,604	\$571,368.00	82.00	13,686.00	\$574,812.00	\$3,444.00
310-6027	PRIME COAT (MC-30 OR AE-P)	GAL	\$3.20	6,369	\$20,380.80	49.00	6,418.00	\$20,537.60	\$156.80
316-6242	AGGR (TY-PD GR-5 SAC-B)	CY	\$100.00	188	\$18,800.00	1.50	189.50	\$18,950.00	\$150.00
316-6413	ASPH (AC-15P, HFRS-2P OR CRS-2P)	GAL	\$3.20	7,961	\$25,475.20	61.00	8,022.00	\$25,670.40	\$195.20
341-6027	D-GR HMA (SQ) TY-C PG70-22	TON	\$80.00	7,324	\$585,920.00	56.00	7,380.00	\$590,400.00	\$4,480.00
TOTALS					\$1,369,839.00			\$1,381,392.00	\$11,553.00

CHANGE ORDER REASON(S) CODE CHART

1. Design Error or Omission	1A. Incorrect PS&E 1B. Other
2. Differing Site Conditions (unforeseeable)	2A. Dispute resolution (expense caused by conditions and/or resulting delay) 2B. Unavailable material 2C. New development (conditions changing after PS&E completed) 2D. Environmental remediation 2E. Miscellaneous difference in site conditions (unforeseeable)(Item 9) 2F. Site conditions altered by an act of nature 2G. Unadjusted utility (unforeseeable) 2H. Unacquired Right-of-Way (unforeseeable) 2I. Additional safety needs (unforeseeable) 2J. Other
3. County Convenience	3A. Dispute resolution (not resulting from error in plans or differing site conditions) 3B. Public relations improvement 3C. Implementation of a Value Engineering finding 3D. Achievement of an early project completion 3E. Reduction of future maintenance 3F. Additional work desired by the County 3G. Compliance requirements of new laws and/or policies 3H. Cost savings opportunity discovered during construction 3I. Implementation of improved technology or better process 3J. Price adjustment on finished work (price reduced in exchange for acceptance) 3K. Addition of stock account or material supplied by state provision 3L. Revising safety work/measures desired by the County 3M. Other
4. Third Party Accommodation	4A. Failure of a third party to meet commitment 4B. Third party requested work 4C. Compliance requirements of new laws and/or policies (impacting third party) 4D. Other
5. Contractor Convenience	5A. Contractor exercises option to change the traffic control plan 5B. Contractor requested change in the sequence and/or method of work 5C. Payment for Partnering workshop 5D. Additional safety work/measures desired by the contractor 5E. Other
6. Untimely ROW/Utilities	6A. Right-of-Way not clear (third party responsibility for ROW) 6B. Right-of-Way not clear (County responsibility for ROW) 6C. Utilities not clear 6D. Other

Williamson County Road Bond Program

**Pearson Ranch Road Extension
Williamson County Project No. 1607-102**

Change Order No. 2

Reason for Change



This Change Order provides payment for additional work by the Contractor for intersection tie-in work at Neenah Avenue and Pearson Ranch Road. The tie-in location was adjusted 25' to provide a smooth profile through the intersection. This extended the limits of reconstruction of Neenah west of Pearson Ranch Road. Removal of existing sidewalks, curb & gutter, and rebuilding the pavement section were required to make the grades at the intersection drain properly and for the intersection to ride safely.

This Change Order results in a net increase of \$11,553.00 to the Contract amount, for an adjusted Contract total of \$4,435,110.07. The original Contract amount was \$4,516,178.77. As a result of this and all Change Orders to-date, \$81,068.70 has been deducted from the Contract, resulting in a 1.80% net decrease in the Contract cost. Zero days will be added to the Contract as a result of this Change Order.

HNTB Corporation


James Klotz, P.E.

Drawing Path: E:\2810201_Drawings\Production Drawings\Ph 2\SH-T-STREET P&P (INT & MED OPENINGS).dwg Plotted By: Curtis L. Morriss Date: 3/17/2017 4:22:24 PM Layout: 60 NEENAH AVENUE PLAN & PROFILE Page Size: ANSI full bleed B (11.00 x 17.00 Inches), 1:1

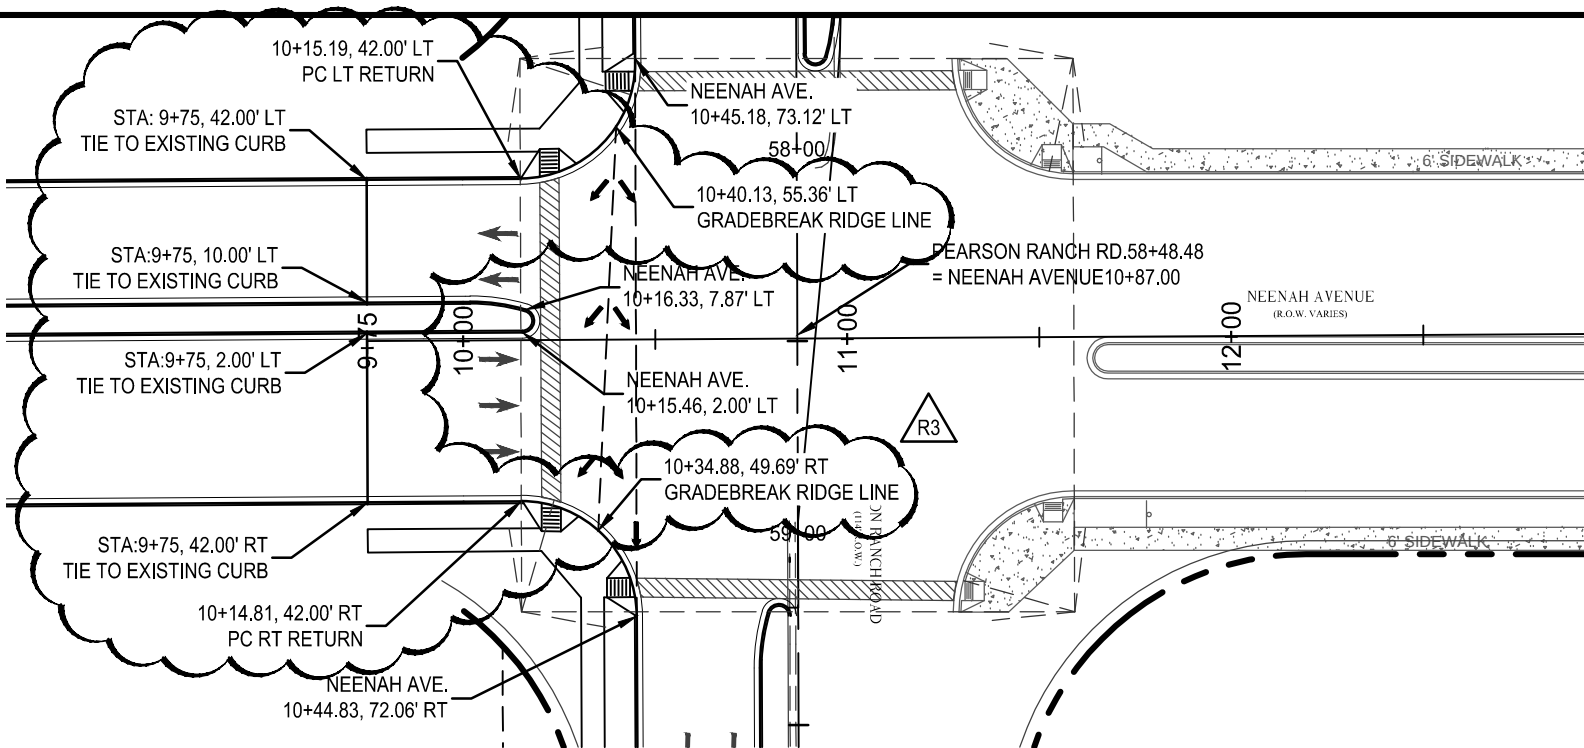


LEGEND

- ← CURB FLOW
- ==== CURB & GUTTER
- RIGHT OF WAY LINE
- - - - - EASEMENT LINE
- . - . - STREET CENTERLINE
- ===== SIDEWALK (S/W)

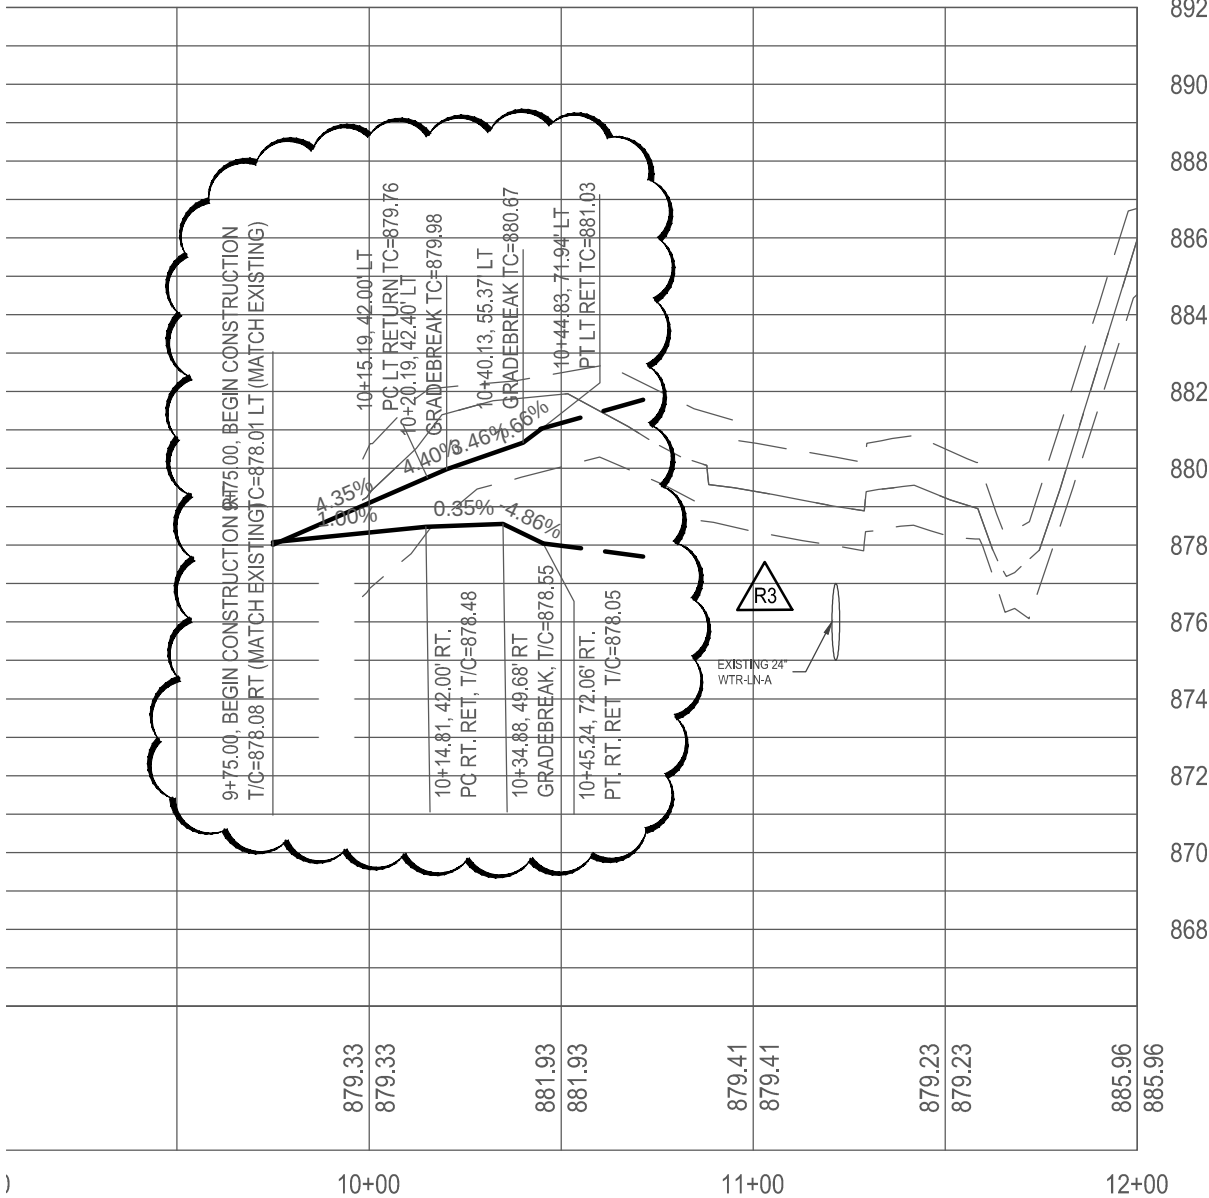

PROFILE SCALE
HORZ: 1"= 50
VERT: 1"= 5

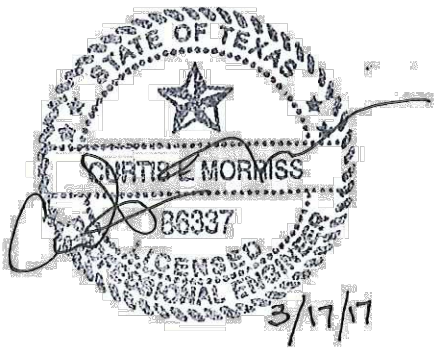

R3	8/17/17	Adjust TOC/SW ELEVS west of int	
R2	2/10/17	Correct curb offsets, adjust TOC in return	
NO.	DATE	REVISION	APPROV.

Cunningham | Allen, Inc.
Engineers • Surveyors
3103 BEE CAVES ROAD,
SUITE 202
AUSTIN, TEXAS 78746
TEL.: (512) 327-2946
FAX: (512) 327-2973
www.cunningham-allen.com
TBPE REG. NO. F-284
© COPYRIGHT 2015 CUNNINGHAM-ALLEN, INC.

NEENAH AVENUE PLAN & PROFILE


SHEET 14 OF 14

**WILLIAMSON COUNTY
PEARSON RANCH ROAD EXTENSION**

FED. RD. DIV. NO.	PROJECT NO.		SHEET NO.
6	1607-102		60
STATE	DIST.	COUNTY	
TEXAS	AUS	WILLIAMSON	
CONT.	SECT.	JOB	HIGHWAY NO.
			PEARSON RANCH ROAD

Drawing Path: E:\281020\Drawings\Production Drawings Ph 2\SH-T-STREET P&P (INT & MED OPENINGS).dwg Plotted By: Curtis L. Morriss Date: 3/17/2017 3:57:10 PM Layout: 51 PEARSON RANCH ROAD & NEENAH AVENUE (2) Page Size: ANSI full bleed B (11.00 x 17.00 in)

SEE MEDIAN OPENING SHEET
STA: 52+50.00-58+50.00 FOR
ADDITIONAL INFORMATION



LEGEND

← CURB FLOW

==== CURB & GUTTER

----- RIGHT OF WAY LINE

----- EASEMENT LINE

----- STREET CENTERLINE

----- SIDEWALK (S/W)



NO.	DATE	REVISION	APPROV.
R3	3-16-17	Adjust TOC/SW ELEV. west of int	
R2	2-10-17	Adjust TOC/SW ELEV. thru returns	

Cunningham | Allen, Inc.
Engineers • Surveyors
3103 BEE CAVES ROAD,
SUITE 202
AUSTIN, TEXAS 78746
TEL.: (512) 327-2946
FAX: (512) 327-2973
www.cunningham-allen.com
TBPB REG. NO. F-284
© COPYRIGHT 2015 CUNNINGHAM-ALLEN, INC.

PEARSON RANCH ROAD & NEENAH
AVENUE INTERSECTION DETAIL

SHEET 2 OF 9		WILLIAMSON COUNTY PEARSON RANCH ROAD EXTENSION	
FED. RD. DIV. NO. 6	PROJECT NO. 1607-102	SHEET NO. 62	
STATE TEXAS	DIST. AUS	COUNTY WILLIAMSON	
CONT.	SECT.	JOB	HIGHWAY NO. PEARSON RANCH ROAD

POINT	DESCRIPTION	STA.	OFFSET	TOP OF CURB ELEV.	NOTE
A	P.C. RET.	57+77.53	42.00 RT	881.03	
B	RIDGE POINT RET.	57+94.11	47.00 RT	880.67	RIDGE POINT
C	P.T. RET.	58+07.53	71.91 RT	879.76	
D	MATCH EXIST CURB	58+07.65	112.00 RT	878.01	
E	MATCH EXIST CURB	58+91.65	112.00 RT	878.08	
F	P.C. RET.	58+91.53	72.09 RT	878.48	
G	RIDGE POINT RET.	58+99.17	52.00 RT	878.55	RIDGE POINT
H	P.T. RET.	59+21.53	42.00 RT	878.05	
I	P.T. MEDIAN	59+35.12	10.00 RT	878.51	
J	PCC MEDIAN	59+20.69	7.84 RT	878.74	
K	MID MEDIAN	59+18.59	4.53 RT	878.85	
L	MATCH EXIST	59+21.55	1.96 RT	878.93	
M	MATCH EXIST	57+61.70	10.00 LT	882.11	
N	PCC MEDIAN	57+76.13	7.87 LT	881.75	
O	MID MEDIAN	57+78.23	4.56 LT	881.89	
P	P.T. MEDIAN	57+75.26	2.00 LT	881.97	
Q	MATCH EXIST	58+47.65	112.00 RT	878.73	
R	P.T. MEDIAN	58+47.53	71.54 RT	879.22	
S	MID MEDIAN	58+44.95	65.58 RT	879.25	
T	MATCH EXIST	58+39.65	112.00 RT	878.57	
U	P.C. MEDIAN	58+39.57	85.13 RT	878.99	
V	PCC MEDIAN	58+41.65	70.69 RT	879.22	
W	RIDGE POINT PVMT	58+07.45	47.64 RT	879.84**	RIDGE POINT
X	GRADE BK PVMT	58+07.09	66.91 RT	879.48**	GRADEBREAK
Y	RIDGE POINT PVMT	58+91.47	51.63 RT	878.16**	RIDGE POINT

(**) Denotes top of pavement elevation

NOTE:
SEE PLAN PROFILE SHEET
FOR CURVE DATA.

POINT	DESCRIPTION	STA.	OFFSET	TOP OF CURB ELEV.
AA	P.I. SIDEWALK	58+98.65	112.00 RT	Match Exist
BB	P.I. SIDEWALK	59+04.65	112.00 RT	Match Exist
CC	P.I. SIDEWALK	58+99.30	66.75 RT	*878.40
DD	P.I. SIDEWALK	59+04.48	66.81 RT	*878.48
EE	P.I. SIDEWALK	59+16.62	56.50 RT	*878.33
FF	P.I. SIDEWALK	59+16.58	50.50 RT	*878.25
GG	P.I. SIDEWALK	58+00.65	112.00 RT	Match Exist
HH	P.I. SIDEWALK	57+94.65	112.00 RT	Match Exist
II	P.I. SIDEWALK	57+99.80	66.93 RT	*879.98
JJ	P.I. SIDEWALK	57+94.51	66.95 RT	*880.06
KK	P.I. SIDEWALK	57+82.53	56.50 RT	*880.68
LL	P.I. SIDEWALK	57+82.53	50.50 RT	*880.76

(*) Denotes sidewalk finished surface spot elevation.