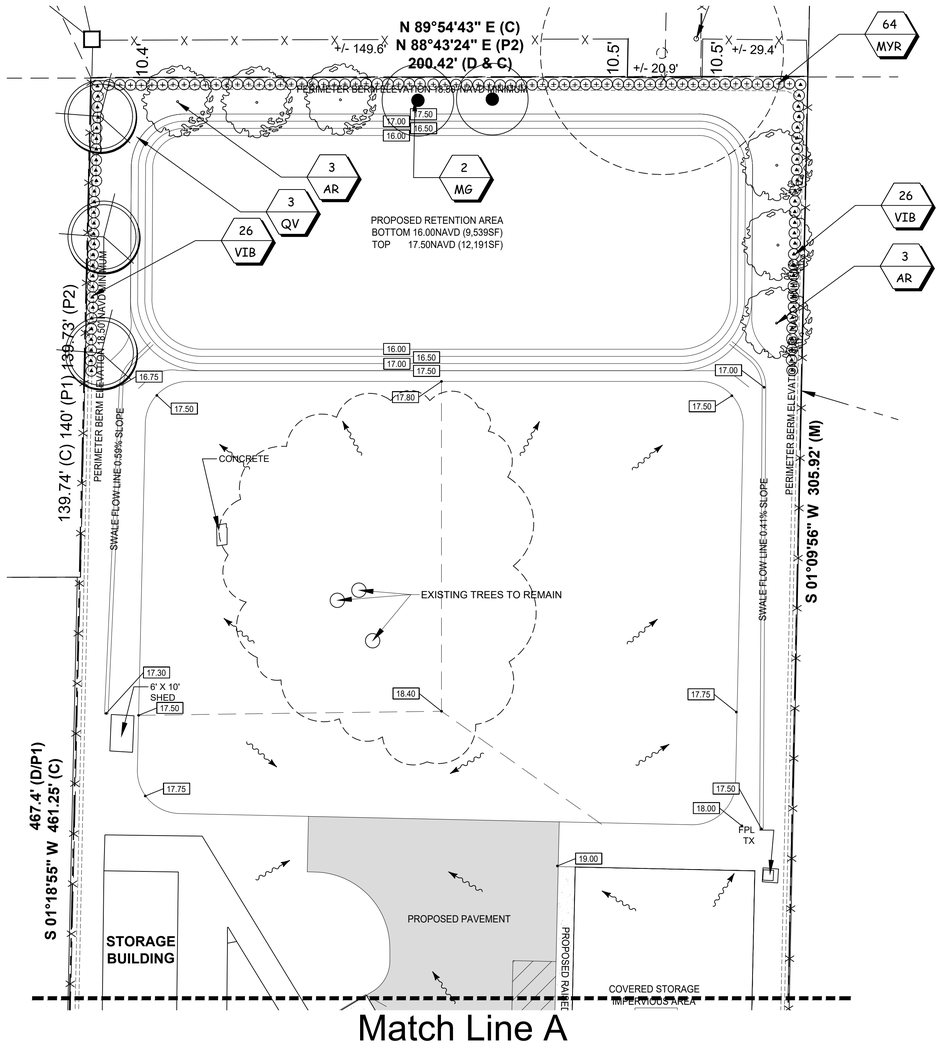

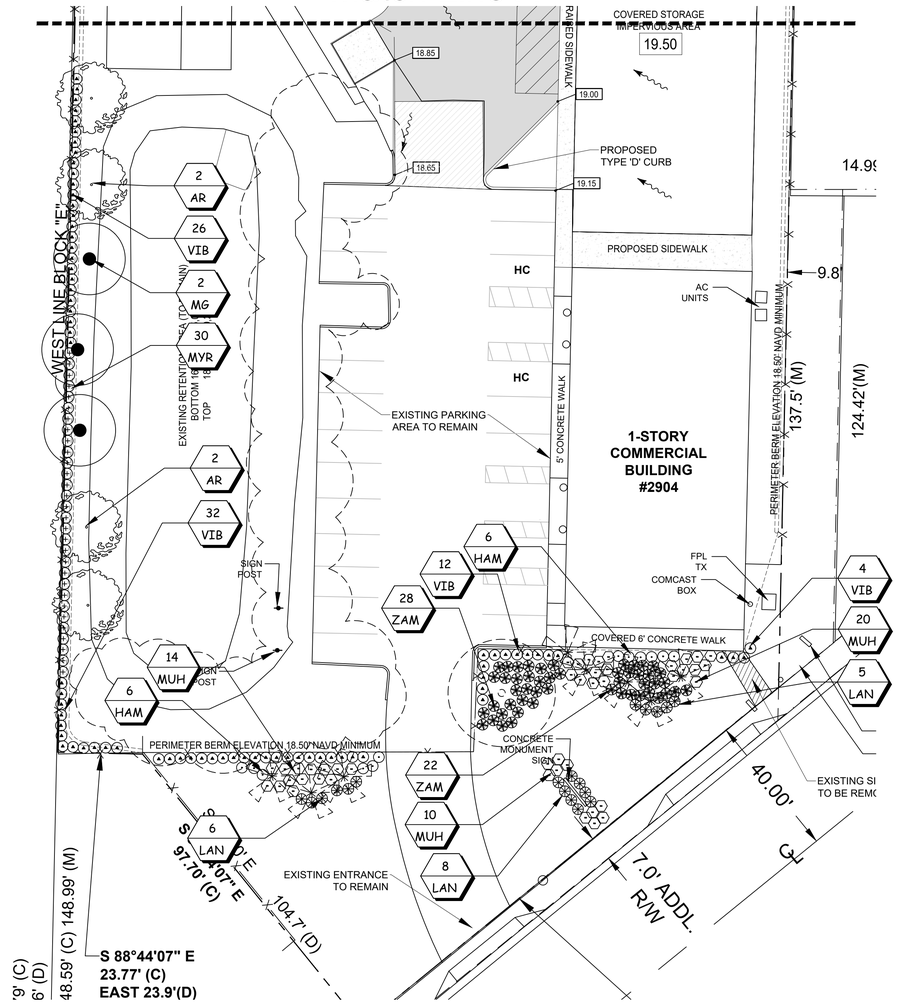



Landscape Legend:

Qty	Symb	Name
		Shrubs:
10	AR	Red Maple Acer rubrum 'Florida Flame', 30 gal, 10' Ht, 3' spr, 1.5" cal
5	MG	Southern Magnolia Magnolia grandiflora, 30 gal, 10' Ht, 3' spr, 1.5" cal
3	QV	Live Oak Quercus virginiana, 30 gal, 10' Ht, 3' spr, 1.5" cal
		Shrubs:
12	HAM	Dwarf Firebush (N) Hamelis patens 'Compacta', 3 gal, 18"x12", 36" oc
94	MYR	Wax Myrtle (N) Myrica cerifera, 3 gal, 18"x12", 36" oc
130	VIB	Walters Viburnum Viburnum obovatum, 3 gal, 18"x12", 36" oc
		Groundcover:
19	LAN	Pineland Lantana (N) Lantana depressa, 1 gal, 12" spr, 36" oc
44	MUH	Muhly Grass (N) Muhlenbergia capillaris, 1 gal, 36" o.c.
50	ZAM	Coontie Zamia floridana, 1 gal, 36" o.c.

Landscape Data: Perimeter Buffer

					Shade Trees: 1/300 SF; 10' CT					
					Required	Provided				
Perimeter	Length	Driveway	Buffer Type	Total SF		AR	MG	Ex Tree	QV	Total
N	200		10	2000	7	3	2	2		7
W	88		10	880	3				3	3
W front	200		10	2000	7	4	3			7
E	88		10	880	3	3				3
				Total	20	10	5		3	20

811 KNOW WHAT'S BELOW ALWAYS CALL 811 BEFORE YOU DIG
It's fast. It's free. It's the law.
www.callsunshine.com

REDTAIL LDG
p. 772.742.1555
todas@redtailldg.com

TM DESIGNED BY
AH DRAWN BY
26-010 LP.DWG FILENAME
LD-01 LAYOUT
SCALE
DATE

REVISION COMMENTS
DATE

The Porch Factory

Landscape Plan

City of Fort Pierce

LD-01