

# INVOICE

CONSULTANTS \* ENVIRONMENTAL \* FACILITIES \* INFRASTRUCTURE

**BILLING DATE :**  
7/26/2022

**PROJECT :**  
AMD2105500  
Hidalgo County Pct. 4 - New Justice

**CLIENT :**  
A11563 Hidalgo County Precinct 4



ACH INSTRUCTIONS for RABA KISTNER, Inc.  
Bank: JP Morgan Chase Bank, NA  
**ABA: 111000614 (domestic)**  
**ACCOUNT: 1821317326**  
**EMAIL: ar@rkci.com**

**Commissioner Ellie Torres**  
Hidalgo County Precinct 4  
1051 N. Doolittle Rd.  
Edinburg, TX 78539

**REMITTANCE ADDRESS:**  
**RABA KISTNER, INC.**  
**P.O. BOX 971037**  
**DALLAS, TX 75397-1037**

**PHONE (210) 699-9090**

**APPROVED**  
*By David at 9:21 am, Aug 02, 2022*

## CONSULTING SERVICES

### INVOICE SUMMARY INFORMATION

Center - Edinburg, Hidalgo County, Texas  
Project Administration 10% - RKCI Proposal No. PMD21-109-00  
RETMTC - Purchase Order No. 838621

### FOR PROFESSIONAL SERVICES RENDERED THROUGH: 7/1/2022

SERVICE DATE	06/09/2022	189.00	✓
SERVICE DATE	06/10/2022	189.00	✓
SERVICE DATE	06/16/2022	189.00	✓
SERVICE DATE	06/17/2022	189.00	✓
SERVICE DATE	06/20/2022	189.00	✓
SERVICE DATE	06/28/2022	299.50	✓
SERVICE DATE	06/29/2022	137.00	✓
SERVICE DATE	07/01/2022	138.15	✓

**AMOUNT DUE THIS INVOICE \*\*** 1,519.65

**THIS IS AN INTERIM INVOICE UNLESS OTHERWISE NOTED**

RK PROJECT MANAGER: EDWIN MANRIQUE  
CLIENT PHONE: 956-383-3112

PROJECT ACCOUNTS RECEIVABLE SUMMARY	
Amount Due This Invoice	\$ 1,519.65
Total of Previous Invoices - Currently Unpaid	4,590.30
Total Due And Payable	\$ 6,109.95

INVOICE RECEIVED BY: ON 8/2/22  
GOODS/SERVICES RECEIVED BY: ON 8-2-22

Please process this invoice/credit memo from this emailed copy as requested by County Auditor. Invoice entered in Tracker  
PO # 838621  
Acct # \_\_\_\_\_





INVOICE # :R031441

BILLING DATE :  
7/26/2022

PROJECT :  
AMD2105500 A11563  
Hidalgo County Pct. 4 - New Justice  
Hidalgo County Precinct 4

**SALARY / EXPENSE DETAILED BACKUP**

DESCRIPTION	REMARKS	QUANTITY	RATE	AMOUNT
CoMET, CONST, ENV, SWPPP FIELD NUCLEAR DENSITY TEST	M22-012016	1.00	24.000	24.00
CoMET, CONST, ENV, SWPPP VEHICLE TRAVEL CHARGE	M22-012016	1.00	53.000	53.00
CoMET, CONST, ENV, SWPPP TECH TIME-DENSITY TESTING	M22-012016	2.00	56.000	112.00
<b>SUBTOTAL</b>				<b>189.00</b>
06/28/2022				
CoMET, CONST, ENV, SWPPP CONCRETE CYLINDER	M22-012087	5.00	17.500	87.50
CoMET, CONST, ENV, SWPPP VEHICLE TRAVEL CHARGE	M22-012087	1.00	53.000	53.00
CoMET, CONST, ENV, SWPPP TECH TIME-CONCRETE TESTING	M22-012087	2.25	56.000	126.00
CoMET, CONST, ENV, SWPPP AIR CONTENT	M22-012087	1.00	33.000	33.00
<b>SUBTOTAL</b>				<b>299.50</b>
06/29/2022				
CoMET, CONST, ENV, SWPPP VEHICLE TRAVEL CHARGE	M22-012087	1.00	53.000	53.00
CoMET, CONST, ENV, SWPPP TECH TIME CASTING PICK UP SPEC	M22-012087	1.50	56.000	84.00
<b>SUBTOTAL</b>				<b>137.00</b>
07/01/2022				
CoMET, CONST, ENV, SWPPP TECHNICAL REVIEW & ADMIN	10%	138.15	1.000	138.15
<b>SUBTOTAL</b>				<b>138.15</b>
<b>** TOTAL PROJECT AMD2105500</b>				<b>1,519.65</b>

\* Invoices are submitted monthly and are due on receipt. \* Carrying charges may be assessed on invoices unpaid beyond 30 days from billing date.

# FIELD TEST REPORT



Soil/Base Material Nuclear Density Test

ATTN.: ELLIE TORRES, COMMISSIONER  
 TO: **HIDALGO COUNTY PRECINCT 4**  
 1051 N. DOOLITTLE RD.  
 EDINBURG, TX 78539

Raba Kistner, Inc.  
 800 East Hackberry  
 McAllen, Texas 78501  
 (956) 682-5332 • FAX(956) 682-5487  
 www.rkci.com  
 TBPE Firm F-3257

PROJECT NO.: AMD21-055-00  
 DATE OF TEST: 06/09/2022  
 ASSIGNMENT NO.: M22-011894  
 REPORT VERSION: A  
 SHEET NUMBER: 1 of 1  
 TECHNICIAN: VICTOR SALINAS III

**PROJECT: Hidalgo County Pct. 4 - New Justice Center - Edinburg, Hidalgo County, Texas**

TEST NO.	TEST LOCATION	SOIL TYPE	LIFT NO. /DEPTH	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	PERCENT PROCTOR (%)	CONFORM
	<u>Dog Kennel Pad</u>						
1	Approximately Center of pad	1	P/S/6"	13.0	113.0	96.7	Yes

CURVE ID.	SOIL TYPE	OPTIMUM MOISTURE (%)	MAX. DRY DENSITY (PCF)	REQUIRED MOISTURE (%)	REQUIRED DENSITY (%)	LAB TEST PROCEDURE
1	Light Brown Silty, Clayey Sand (Prepared Subgrade Material) (PI:7)	12.0	116.9	12-15	95	ASTM D 698 Method A

**REFERENCE:** FOUNDATION PAD - PREPARED SUBGRADE

**FIELD TEST PROCEDURE:** ASTM D 6938      **PERSON NOTIFIED:** Mr. Simon Alonzo      **CONTRACTOR:** ECON  
**GAUGE NUMBER:** M-1034 /5133      **GAUGE MODEL:** 3411      **GAUGE MAKE:** Troxler      **TEST MODE:** Method A  
**REMARKS:** Lift information is provided by contractor.


\* - Indicates noncompliance with specifications. # - Indicates a RETEST

NOTICE: Raba Kistner, Inc. considers the data and information contained in this report to be proprietary. This information is intended only for the use of the recipient(s) named herein. Test results presented herein relate only to those items tested. This document and any information contained herein shall not be disclosed and shall not be duplicated or used in whole or in part for any purpose other than to validate test results without written approval from Raba Kistner, Inc.

- COPIES TO: Above (1)
- Oscar.villarreal@co.hidalgo.tx.us (1)
  - Jaime.cortez@co.hidalgo.tx.us (1)
  - Leticia.saenz@co.hidalgo.tx.us (1)
  - Nick.perez@co.hidalgo.tx.us (1)
  - Pm3@econgroup.us (1)
  - genriquez@econgroup.us (1)
  - davidr@b2zeng.com (1)
  - monica.salinas@co.hidalgo.tx.us (1)
  - brandy.salinas@co.hidalgo.tx.us (1)

**RABA KISTNER, INC.**

BY: *Victor Salinas*  
 06/10/2022

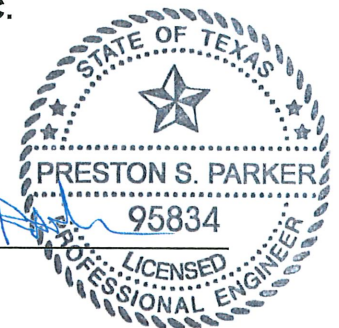

Updated By: EFM 6/10/2022 2:21:32PM

Reviewed By: EFM 6/10/2022 2:21:36PM



# FIELD TEST REPORT



## Soil/Base Material Nuclear Density Test

ATTN.: ELLIE TORRES, COMMISSIONER  
 TO: **HIDALGO COUNTY PRECINCT 4**  
 1051 N. DOOLITTLE RD.  
 EDINBURG, TX 78539

Raba Kistner, Inc.  
 800 East Hackberry  
 McAllen, Texas 78501  
 (956) 682-5332 • FAX(956) 682-5487  
 www.rkci.com  
 TBPE Firm F-3257

PROJECT NO.: AMD21-055-00  
 DATE OF TEST: 06/10/2022  
 ASSIGNMENT NO.: M22-011910  
 REPORT VERSION: A  
 SHEET NUMBER: 1 of 1  
 TECHNICIAN: VICTOR SALINAS III

**PROJECT: Hidalgo County Pct. 4 - New Justice Center - Edinburg, Hidalgo County, Texas**

TEST NO.	TEST LOCATION	SOIL TYPE	LIFT NO. /DEPTH	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	PERCENT PROCTOR (%)	CONFORM
	<u>Dog kennel</u>						
1	Approximately Center of pad	4	1st/6"	14.6	112.0	96.9	Yes

CURVE ID.	SOIL TYPE	OPTIMUM MOISTURE (%)	MAX. DRY DENSITY (PCF)	REQUIRED MOISTURE (%)	REQUIRED DENSITY (%)	LAB TEST PROCEDURE
4	Light Brown Clayey Sand (Select Fill Material) (Pl:11)	13.6	115.6	11.6-15.6	95	ASTM D 698 Method A

REFERENCE: FOUNDATION PAD - SELECT FILL

FIELD TEST PROCEDURE: ASTM D 6938      PERSON NOTIFIED: Mr. Simon Alonzo      CONTRACTOR: Econ  
 GAUGE NUMBER: M-1034 /5133      GAUGE MODEL: 3411      GAUGE MAKE: Troxler      TEST MODE: Method A  
 REMARKS: Lift information is provided by contractor.


\* - Indicates noncompliance with specifications.    # - Indicates a RETEST

NOTICE: Raba Kistner, Inc. considers the data and information contained in this report to be proprietary. This information is intended only for the use of the recipient(s) named herein. Test results presented herein relate only to those items tested. This document and any information contained herein shall not be disclosed and shall not be duplicated or used in whole or in part for any purpose other than to validate test results without written approval from Raba Kistner, Inc.

- COPIES TO: Above (1)  
 Oscar.villarreal@co.hidalgo.tx.us (1)  
 Jaime.cortez@co.hidalgo.tx.us (1)  
 Leticia.saenz@co.hidalgo.tx.us (1)  
 Nick.perez@co.hidalgo.tx.us (1)  
 Pm3@econgroup.us (1)  
 genriquez@econgroup.us (1)  
 davidr@b2zeng.com (1)  
 monica.salinas@co.hidalgo.tx.us (1)  
 brandy.salinas@co.hidalgo.tx.us (1)

**RABA KISTNER, INC.**

*Garth B. Reese*  
 BY: \_\_\_\_\_  
 06/14/2022

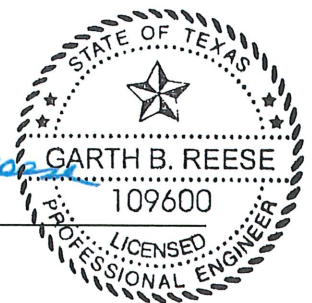

Updated By: EFM 6/13/2022 9:48:00AM

Reviewed By: EFM 6/13/2022 9:48:04AM



# FIELD TEST REPORT

## Soil/Base Material Nuclear Density Test



Raba Kistner, Inc.  
800 East Hackberry  
McAllen, Texas 78501  
(956) 682-5332 • FAX(956) 682-5487  
www.rkci.com  
TBPE Firm F-3257

ATTN.: ELLIE TORRES, COMMISSIONER  
TO: **HIDALGO COUNTY PRECINCT 4**  
1051 N. DOOLITTLE RD.  
EDINBURG, TX 78539

PROJECT NO.: AMD21-055-00  
DATE OF TEST: 06/16/2022  
ASSIGNMENT NO.: M22-011989  
REPORT VERSION: A  
SHEET NUMBER: 1 of 1  
TECHNICIAN: VICTOR SALINAS III

**PROJECT: Hidalgo County Pct. 4 - New Justice Center - Edinburg, Hidalgo County, Texas**

TEST NO.	TEST LOCATION	SOIL TYPE	LIFT NO. /DEPTH	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	PERCENT PROCTOR (%)	CONFORM
	4" Diameter - PVC electrical conduit to generator pad						
1	About 4' S & 15' W of NW corner outside of generator pad	8	1st/12"	18.7	107.5	100.3	Yes

CURVE ID.	SOIL TYPE	OPTIMUM MOISTURE (%)	MAX. DRY DENSITY (PCF)	REQUIRED MOISTURE (%)	REQUIRED DENSITY (%)	LAB TEST PROCEDURE
8	Brown Sandy Lean Clay (Backfill Material) (PI:12)	18.0	107.2	16-20	90	ASTM D 698 Method A

REFERENCE: UTILITY - BACKFILL

FIELD TEST PROCEDURE: ASTM D 6938      PERSON NOTIFIED: Mr. Simon Alonzo      CONTRACTOR: Econ  
GAUGE NUMBER: M-1034 /5133      GAUGE MODEL: 3411      GAUGE MAKE: Troxler      TEST MODE: Method A  
REMARKS: Lift information is provided by contractor.

\* - Indicates noncompliance with specifications. # - Indicates a RETEST

NOTICE: Raba Kistner, Inc. considers the data and information contained in this report to be proprietary. This information is intended only for the use of the recipient(s) named herein. Test results presented herein relate only to those items tested. This document and any information contained herein shall not be disclosed and shall not be duplicated or used in whole or in part for any purpose other than to validate test results without written approval from Raba Kistner, Inc.

- COPIES TO: Above (1)
- Oscar.villarreal@co.hidalgo.tx.us (1)
  - Jaime.cortez@co.hidalgo.tx.us (1)
  - Leticia.saenz@co.hidalgo.tx.us (1)
  - Nick.perez@co.hidalgo.tx.us (1)
  - Pm3@econgroup.us (1)
  - genriquez@econgroup.us (1)
  - davidr@b2zeng.com (1)
  - monica.salinas@co.hidalgo.tx.us (1)
  - brandy.salinas@co.hidalgo.tx.us (1)

**RABA KISTNER, INC.**

BY: *Katrin Leonard*  
06/24/2022



Updated By: EFM 6/21/2022 9:06:47AM

Reviewed By: EFM 6/21/2022 9:06:52AM



# FIELD TEST REPORT



## Soil/Base Material Nuclear Density Test

ATTN.: ELLIE TORRES, COMMISSIONER  
 TO: **HIDALGO COUNTY PRECINCT 4**  
 1051 N. DOOLITTLE RD.  
 EDINBURG, TX 78539

Raba Kistner, Inc.  
 800 East Hackberry  
 McAllen, Texas 78501  
 (956) 682-5332 • FAX(956) 682-5487  
 www.rkci.com  
 TBPE Firm F-3257

PROJECT NO.: AMD21-055-00  
 DATE OF TEST: 06/17/2022  
 ASSIGNMENT NO.: M22-011999  
 REPORT VERSION: A  
 SHEET NUMBER: 1 of 1  
 TECHNICIAN: ROGELIO DELGADO

**PROJECT: Hidalgo County Pct. 4 - New Justice Center - Edinburg, Hidalgo County, Texas**

TEST NO.	TEST LOCATION	SOIL TYPE	LIFT NO. /DEPTH	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	PERCENT PROCTOR (%)	CONFORM
	<u>Generator Pad - 4" Diameter Electrical Conduit Line</u>						
1	About 5' S and 17' W from the NW corner of generator pad	8	2nd/12"	19.2	99.7	93.0	Yes

CURVE ID.	SOIL TYPE	OPTIMUM MOISTURE (%)	MAX. DRY DENSITY (PCF)	REQUIRED MOISTURE (%)	REQUIRED DENSITY (%)	LAB TEST PROCEDURE
8	Brown Sandy Lean Clay (Backfill Material) (PI:12)	18.0	107.2	16-20	90	ASTM D 698 Method A

REFERENCE: UTILITY - BACKFILL

FIELD TEST PROCEDURE: ASTM D 6938      PERSON NOTIFIED: Mr. Simon Alonzo      CONTRACTOR: ECON  
 GAUGE NUMBER: M-1071 /7531      GAUGE MODEL: 5001 EZ      GAUGE MAKE: Humboldt      TEST MODE: Method A

REMARKS: Lift information is provided by contractor.

\* - Indicates noncompliance with specifications. # - Indicates a RETEST


NOTICE: Raba Kistner, Inc. considers the data and information contained in this report to be proprietary. This information is intended only for the use of the recipient(s) named herein. Test results presented herein relate only to those items tested. This document and any information contained herein shall not be disclosed and shall not be duplicated or used in whole or in part for any purpose other than to validate test results without written approval from Raba Kistner, Inc.

COPIES TO: Above (1)

- Oscar.villarreal@co.hidalgo.tx.us (1)
- Jaime.cortez@co.hidalgo.tx.us (1)
- Leticia.saenz@co.hidalgo.tx.us (1)
- Nick.perez@co.hidalgo.tx.us (1)
- Pm3@econgroup.us (1)
- genriquez@econgroup.us (1)
- davidr@b2zeng.com (1)
- monica.salinas@co.hidalgo.tx.us (1)
- brandy.salinas@co.hidalgo.tx.us (1)

Updated By: EFM 6/21/2022 9:07:24AM

**RABA KISTNER, INC.**

BY:   
 06/24/2022



Reviewed By: EFM 6/21/2022 9:07:28AM



# FIELD TEST REPORT

Soil/Base Material Nuclear Density Test



Raba Kistner, Inc.  
800 East Hackberry  
McAllen, Texas 78501  
(956) 682-5332 • FAX(956) 682-5487  
www.rkci.com  
TBPE Firm F-3257

ATTN.: ELLIE TORRES, COMMISSIONER  
TO: **HIDALGO COUNTY PRECINCT 4**  
1051 N. DOOLITTLE RD.  
EDINBURG, TX 78539

PROJECT NO.: AMD21-055-00  
DATE OF TEST: 06/20/2022  
ASSIGNMENT NO.: M22-012016  
REPORT VERSION: A  
SHEET NUMBER: 1 of 1  
TECHNICIAN: LUIS GARCIA

**PROJECT: Hidalgo County Pct. 4 - New Justice Center - Edinburg, Hidalgo County, Texas**

TEST NO.	TEST LOCATION	SOIL TYPE	LIFT NO. /DEPTH	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	PERCENT PROCTOR (%)	CONFORM
	4" Diameter Electrical Conduit Line for Generator Pad						
1	About 5' S and 17' W from the NW corner of generator pad	8	Final Lift	18.1	102.0	95.1	Yes

CURVE ID.	SOIL TYPE	OPTIMUM MOISTURE (%)	MAX. DRY DENSITY (PCF)	REQUIRED MOISTURE (%)	REQUIRED DENSITY (%)	LAB TEST PROCEDURE
8	Brown Sandy Lean Clay (Backfill Material) (PI:12)	18.0	107.2	16-20	90	ASTM D 698 Method A

REFERENCE: UTILITY - BACKFILL

FIELD TEST PROCEDURE: ASTM D 6938      PERSON NOTIFIED: Mr. Simon Alonzo      CONTRACTOR: ECON  
GAUGE NUMBER: M-1072 /7533      GAUGE MODEL: 5001 EZ      GAUGE MAKE: Humboldt      TEST MODE: Method A

REMARKS: Lift information is provided by contractor. ND-Not Determined; NP-Not Provided; NA- Not Available

\* - Indicates noncompliance with specifications. # - Indicates a RETEST

NOTICE: Raba Kistner, Inc. considers the data and information contained in this report to be proprietary. This information is intended only for the use of the recipient(s) named herein. Test results presented herein relate only to those items tested. This document and any information contained herein shall not be disclosed and shall not be duplicated or used in whole or in part for any purpose other than to validate test results without written approval from Raba Kistner, Inc.

COPIES TO: Above (1)

- Oscar.villarreal@co.hidalgo.tx.us (1)
- Jaime.cortez@co.hidalgo.tx.us (1)
- Leticia.saenz@co.hidalgo.tx.us (1)
- Nick.perez@co.hidalgo.tx.us (1)
- Pm3@ecogroup.us (1)
- genriquez@ecogroup.us (1)
- davidr@b2zeng.com (1)
- monica.salinas@co.hidalgo.tx.us (1)
- brandy.salinas@co.hidalgo.tx.us (1)

Updated By: EFM 6/21/2022 9:40:52AM

**RABA KISTNER, INC.**

BY: *Katrin Leonard*  
06/24/2022



Reviewed By: EFM 6/21/2022 9:41:02AM



# LABORATORY TEST REPORT



## Compressive Strength Test

Raba Kistner, Inc.  
800 East Hackberry  
McAllen, Texas 78501  
(956) 682-5332 • FAX(956) 682-5487  
www.rkci.com  
TBPE Firm F-3257

ATTN.: ELLIE TORRES, COMMISSIONER  
TO: HIDALGO COUNTY PRECINCT 4  
1051 N. DOOLITTLE RD.  
EDINBURG, TX 78539

PROJECT NO.: AMD21-055-00  
CAST DATE: 06/28/2022  
ASSIGNMENT NO.: M22-012087  
REPORT VERSION: A  
SHEET NUMBER: 1 of 1  
TECHNICIAN: RAFAEL THRASH

**PROJECT: Hidalgo County Pct. 4 - New Justice Center - Edinburg, Hidalgo County, Texas**


**PLACEMENT LOCATION: Slab-On-Grade and Grade Beam, About 50' West from the NW corner of the building (Footing) and about 120' South and 20' East from SE corner of the building (Dumpster/Generator Pad)**

SET INDEX: Set 1 of 1

SUPPLIER:	Alamo Concrete	BATCH TIME:	6:37AM	AIR CONTENT (%):	1.25
TRUCK NO:	7248	SAMPLE TIME:	7:07AM	UNIT WEIGHT (pcf):	ND
TICKET NO:	42481	SAMPLE TEMP. (°F):	85	FIELD CURED (day):	1
SAMPLED AT (cu yds):	10	AMBIENT TEMP. (°F):	76	SAMPLE TYPE:	Concrete Cylinder
DESIGN STR.(psi):	3,000	SLUMP (in.):	4.00	SAMPLE SIZE(in.):	4 x 8
PRODUCT NO.:	3000 PSI 1RR RET	CLASS:		WATER ADDED:	0
PLANT NUMBER:	88			RECEIVED DATE:	

SPECIMEN NUMBER	DATE OF TEST	AGE (days)	LOAD (lbs)	DIAMETER (in)	AREA (in. <sup>2</sup> )	STRENGTH (psi)	PERCENT OF DESIGN	FRACTURE TYPE	TESTED BY
1	07/05/2022	7	28,850	4.00	12.57	2,300	77	Type 3	R. Pinera
2	07/05/2022	7	31,020	4.00	12.57	2,470	82	Type 3	R. Pinera
3	07/26/2022	28	38,100	4.00	12.57	3,030	101	Type 3	R. Pinera
4	07/26/2022	28	38,260	4.00	12.57	3,040	101	Type 2	R. Pinera
5	07/26/2022	28	38,190	4.00	12.57	3,040	101	Type 2	R. Pinera

NOTE: Some information on this test report provided by others. Testing and reporting was conducted in general accordance with the following applicable A.S.T.M. references: C31(Excluding 10.1.2),C39,C143,C172,C231(Excluding 6),C1064,C1231, unless otherwise noted.



\* - Indicates noncompliance with specifications.


REMARKS: Mr. Simon Alonzo with ECON was notified of field test results. ND-Not Determined; NP-Not Provided; NA-Not Applicable.

NOTICE: Raba Kistner, Inc. considers the data and information contained in this report to be proprietary. This information is intended only for the use of the recipient(s) named herein. Test results presented herein relate only to those items tested. This document and any information contained herein shall not be disclosed and shall not be duplicated or used in whole or in part for any purpose other than to validate test results without written approval from Raba Kistner, Inc.

COPIES TO: Above (1)

- Oscar.villarreal@co.hidalgo.tx.us(1)
- Jaime.cortez@co.hidalgo.tx.us(1)
- Leticia.saenz@co.hidalgo.tx.us(1)
- Nick.perez@co.hidalgo.tx.us(1)
- Pm3@econgroup.us(1)
- genriquez@econgroup.us(1)
- davidr@b2zeng.com(1)
- monica.salinas@co.hidalgo.tx.us(1)
- brandy.salinas@co.hidalgo.tx.us(1)

RABA KISTNER, INC.

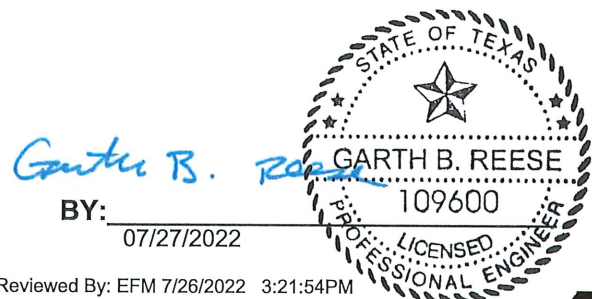

BY: \_\_\_\_\_  
07/27/2022



August 2, 2022

Hidalgo County Executive Office  
505 S. McColl Rd., Suite J  
Edinburg, TX 78539


Reference: P4 New Justice Center – Raba Kistner, Inc. Firm Reports

Dear Mr. Quintanilha:

I have reviewed the attached geotechnical and/or construction material testing results prepared by Raba Kistner, Inc. and billed with invoice number R031441 for the New Justice Center at Precinct 4. I hereby certify that the testing results meet or exceed project specifications.

Should you have any questions, please call me at (956) 585-3773.

Respectfully,



David Rivera  
Senior Project Manager