



**Hidalgo County  
Planning  
Department**

**Anthony Uresti**  
*Director of Planning*

**Main Office**

2818 S. Business Hwy 281  
Edinburg, Texas 78542  
Phone (956) 318-2840

**Precinct No. 1 Substation**

1900 Joe Stephens Ave. Ste. A  
Weslaco, Texas 78596  
Phone (956) 968-4734

**Precinct No. 3 Substation**

2401 N. Moorefield Road  
Mission, Texas 78572  
Phone (956) 205-7045

**MEMORANDUM**

**To: JUDGE RICHARD F. CORTEZ  
COUNTY COMMISSIONER'S COURT**

**From: ANTHONY URESTI DIRECTOR OF PLANNING**

**Date: NOVEMBER 25, 2024**

**Re: SIENNA RIDGE SUBDIVISION – PCT. 1**

---

ON MARCH 07, 2023, THE HIDALGO COUNTY COMMISSIONERS COURT GRANTED FINAL APPROVAL WITH FINANCIAL GUARANTEE FOR THE ABOVE REFERENCED SUBDIVISION WHICH CONSISTS OF FIFTY TWO (52) SINGLE FAMILY LOTS. THE CASH DEPOSIT IN THE AMOUNT OF SEVENTY EIGHT THOUSAND DOLLARS (\$78,000.00) WAS USED TO SECURE THE FUNDS FOR THE INSTALLATION OF FIFTY TWO (52) SEPTIC TANK SYSTEMS.

THE DEVELOPER IS REQUESTING A PARTIAL REIMBURSEMENT OF TEN THOUSAND FIVE HUNDRED DOLLARS (\$10,500.00) FROM THE CASH DEPOSIT WHICH REFLECTS THE INSTALLATION OF SEVEN (7) SINGLE FAMILY SEPTIC TANK SYSTEMS. ATTACHED IS A LETTER FROM HIDALGO COUNTY HEALTH DEPARTMENT STATING THAT SEVEN (7) SEPTIC TANK SYSTEMS HAVE BEEN INSTALLED, INSPECTED AND CAN BE EXPECTED TO FUNCTION SATISFACTORILY.

STAFF HAS NO OBJECTION TO THE APPROVAL FOR REIMBURSEMENT OF THE CASH DEPOSIT IN THE AMOUNT OF TEN THOUSAND FIVE HUNDRED DOLLARS (\$10,500.00) FOR THE AFOREMENTIONED IMPROVEMENT.

**CASH DEPOSIT**

ORIGINAL AMOUNT                      \$78,000.00

1<sup>ST</sup> REIMBURSEMENT REQUEST:                      \$10,500.00

REMAINING BALANCE AFTER APPROVAL:                      \$67,500.00

**\*\*\* END OF MEMORANDUM \*\*\***

Acct. # - 1100-211-00-000-018-0-000

OSSF

Price: \$1500.00

Quantity: 52

### Hidalgo County Planning Department

2/16/2023

3:41:01 PM

Main Office 2818 S Business Hwy 281 Edinburg, Texas 78539 Ph: 956-318-2840 Fax: 956-318-2844	Precinct No. 1 Substation 1900 Joe Stephens Ave. Ste. A Weslaco, Texas 78596 Ph: 956-968-4734 Fax: 956-973-7850	Precinct No. 3 Substation 2401 N. Moorefield Rd. Mission, Texas 78572 Ph: 956-205-7045 Fax: 956-205-7049
--	---	--

#### DII MANAGEMENT LLC.


Received of

#### SIENNA RIDGE SUBDIVISION

Subdivision

**flor.sesin**

Prepared by



Received by

Total Amount: \$78000.00

Method of Payment: Check

Check/M.O.#: 26915

Payment: \$78000.00

Change Due: \$0.00



**Main Office**

**Receipt No. 028026**

**DII MANAGEMENT LLC**

502 E EXPRESSWAY 83, SUITE G  
WESLACO, TX 78596

26915



88-7354/3149

Date 2/10/23

Pay to the  
order of

Hidalgo County Planning

\$ 78,000<sup>00</sup>

Seventy Eight Thousand + <sup>00</sup>/<sub>100</sub>

Dollars Security Features Included. Details on Back.

**GREATER STATE BANK**

FALFURRIAS, HEBBRONVILLE  
EDINBURG, TEXAS  
MEMBER FDIC



*[Signature]*

For Septic Tank Escrow - Sierra

MP

© CHECKS UNLIMITED® - SECURIGUARD PREMIUM CLASSIC BLUE



**HIDALGO COUNTY  
HEALTH & HUMAN SERVICES**

*Ivan Melendez, MD, MBA*  
*Health Authority/Chief Physician*

*Eduardo Olivarez*  
*Chief Administrative Officer*

***Environmental Health Division***

**—MEMORANDUM—**

October 10, 2024


Hidalgo County Planning Department  
2818 S Bus Hwy 281, Ste 8  
Edinburg, TX 78539

**OSSF UPDATE  
SIENNA RIDGE SUBDIVISION  
Lots 4, 19, 31, 32, 42, 43, 46**

To whom it may concern,

Our records indicate that seven (7) OSSF Systems have been installed, inspected, and approved at Sienna Ridge Subdivision [Lots 4,19,31,32,42,43,46]. The OSSF Systems can be expected to function at a satisfactory level.

Sincerely,

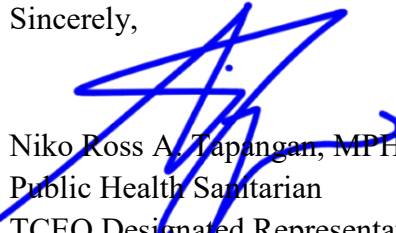  
Niko Ross A. Tapangan, MPH, RS  
Public Health Sanitarian  
TCEQ Designated Representative (#OS0035768)

# OSSF – Form G: Inspection Report



Permit#: 55273

Owner: GARCIA JUAN M DBA JJ HOME BUILDER

Location: \_\_\_\_\_

Legal Description: SIENNA RIDGE

Lot#: 4 Block#: \_\_\_\_\_ Section/F. Tract#: \_\_\_\_\_

Tank Type: \_\_\_\_\_ CONCRETE

Inside Diameter: \_\_\_\_\_ 5'

Inside Length of Sides: \_\_\_\_\_ 5'

Liq. Depths or Dist. From Tank Bottom to Outlet Bottom: \_\_\_\_\_ 48"

Airspace (approx.): \_\_\_\_\_ 3"

Gallon Cap. (approx.): \_\_\_\_\_ 2 x 500gal = 1,000 gal

Commercial  
 ▪ Type: \_\_\_\_\_

Residential  
 ▪ # Bedrooms: 3  
 ▪ Sq. Ft., (est.) < 2,500

Other: \_\_\_\_\_

Vacant Lot

Drain Field: Trench:  Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_

Distance from **Private/Public Well**: To Tank: N/A To Drainfield: N/A

Distance from Foundation: To Tank: 12' To Drainfield: 23'

Distance from Property Line: To Tank: 10' To Drainfield: 7'

Trench Depth: 30" Trench Width: 2'

Backfill Material: Ib: \_\_\_\_\_ II:  III: \_\_\_\_\_

Pipe: Brand (if known): SB2-8" Type: STD. GRAVELLESS No. of Feet: 240'

Gravel Drainfield (if applicable): Natural: N/A Crushed: N/A Washed: N/A

Amount: N/A Yards or Tons

Gravel Generally Consistent 12" depth throughout field..... N/A  Yes .....  No

Porous Media Uniform (0.72-2.0 inches)..... N/A  Yes .....  No

### General Conditions and Workmanship:

Solid Lines from House Schedule 40 with Cleanout.....  Yes .....  No

T's Installed at least 25% of Liquid Level.....  Yes .....  No

Inlet and Outlet Flow Clearly Marked.....  Yes .....  No

Manufacturer's Name, Address, & Tank Capacity Visible.....  Yes .....  No

Port Holes 12" in Diameter.....  Yes .....  No

Septic Tank Sturdy & Water-Tight.....  Yes .....  No

Trench or Bed Bottom Essentially Level.....  Yes .....  No

Perforated Pipe Generally Level throughout Field.....  Yes .....  No

End Caps provided on Drainfield (if not looped).....  Yes .....  No

Geo-Textile Fabric used for Permeable Soil Barrier.....  Yes .....  No

Installer: I. MATA License#: 4378

Remarks: \_\_\_\_\_

240' x 4' = 960 SQ FT INSTALLED

Inspector: A. FLORES License#: 38768

Date of Inspection: 04-05-2024

# OSSF – Form G: Inspection Report



Permit#: 55222

Owner: TREVINO TRISTAN JEREMIAS

Location: \_\_\_\_\_

Legal Description: SIENNA RIDGE

Lot#: 19 Block#: \_\_\_\_\_ Section/F. Tract#: \_\_\_\_\_

Tank Type: \_\_\_\_\_ CONCRETE

Inside Diameter: \_\_\_\_\_ 5'

Inside Length of Sides: \_\_\_\_\_ 5'

Liq. Depths or Dist. From Tank Bottom to Outlet Bottom: \_\_\_\_\_ 48"

Airspace (approx.): \_\_\_\_\_ 3"

Gallon Cap. (approx.): \_\_\_\_\_ 2 x 500gal = 1,000 gal

Commercial  
 ▪ Type: \_\_\_\_\_

Residential  
 ▪ # Bedrooms: 3  
 ▪ Sq. Ft., (est.) \_\_\_\_\_

Other: \_\_\_\_\_

Vacant Lot

Drain Field: Trench:  Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_

Distance from **Private/Public Well**: To Tank: \_\_\_\_\_ N/A To Drainfield: \_\_\_\_\_ N/A

Distance from Foundation: To Tank: \_\_\_\_\_ 17' To Drainfield: \_\_\_\_\_ 26'

Distance from Property Line: To Tank: \_\_\_\_\_ 16' To Drainfield: \_\_\_\_\_ 18'

Trench Depth: \_\_\_\_\_ 30" Trench Width: \_\_\_\_\_ 2'

Backfill Material: Ib: \_\_\_\_\_ II:  III: \_\_\_\_\_

Pipe: Brand (if known): \_\_\_\_\_ SB2-8" Type: STD. GRAVELLESS No. of Feet: \_\_\_\_\_ 240'

Gravel Drainfield (if applicable): Natural: N/A Crushed: N/A Washed: N/A

Amount: \_\_\_\_\_ N/A Yards or Tons

Gravel Generally Consistent 12" depth throughout field ..... N/A  Yes .....  No

Porous Media Uniform (0.72-2.0 inches) ..... N/A  Yes .....  No

### General Conditions and Workmanship:

Solid Lines from House Schedule 40 with Cleanout .....  Yes .....  No

T's Installed at least 25% of Liquid Level .....  Yes .....  No

Inlet and Outlet Flow Clearly Marked .....  Yes .....  No

Manufacturer's Name, Address, & Tank Capacity Visible .....  Yes .....  No

Port Holes 12" in Diameter .....  Yes .....  No

Septic Tank Sturdy & Water-Tight .....  Yes .....  No

Trench or Bed Bottom Essentially Level .....  Yes .....  No

Perforated Pipe Generally Level throughout Field .....  Yes .....  No

End Caps provided on Drainfield (if not looped) .....  Yes .....  No

Geo-Textile Fabric used for Permeable Soil Barrier .....  Yes .....  No

Installer: \_\_\_\_\_ J.A. GONZALEZ \_\_\_\_\_ License#: 1350

Remarks: \_\_\_\_\_

240' x 4' = 960 SQ FT INSTALLED

Inspector: A. FLORES \_\_\_\_\_ License#: 38768

Date of Inspection: 02-09-2024

# OSSF – Form G: Inspection Report



Permit#: 55432

Owner: TAPIA JUAN & SANDRA ORTIZ

Location: \_\_\_\_\_

Legal Description: SIENNA RIDGE

Lot#: 31 Block#: \_\_\_\_\_ Section/F. Tract#: \_\_\_\_\_

Tank Type: \_\_\_\_\_ CONCRETE

Inside Diameter: \_\_\_\_\_ 5'

Inside Length of Sides: \_\_\_\_\_ 5'

Liq. Depths or Dist. From Tank Bottom to Outlet Bottom: \_\_\_\_\_ 48"

Airspace (approx.): \_\_\_\_\_ 3"

Gallon Cap. (approx.): \_\_\_\_\_ 2 x 500gal = 1,000 gal

Commercial  
 ▪ Type: \_\_\_\_\_

Residential  
 ▪ # Bedrooms: 3  
 ▪ Sq. Ft., (est.) < 2,500

Other: \_\_\_\_\_

Vacant Lot

Drain Field: Trench:  Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_

Distance from **Private/Public Well**: To Tank: N/A To Drainfield: N/A

Distance from Foundation: To Tank: 22' To Drainfield: 36'

Distance from Property Line: To Tank: 9' To Drainfield: 7'

Trench Depth: 30" Trench Width: 2'

Backfill Material: Ib: \_\_\_\_\_ II:  III: \_\_\_\_\_

Pipe: Brand (if known): SB2-8" Type: STD. GRAVELLESS No. of Feet: 240'

Gravel Drainfield (if applicable): Natural: N/A Crushed: N/A Washed: N/A

Amount: N/A Yards or Tons

Gravel Generally Consistent 12" depth throughout field..... N/A  Yes .....  No

Porous Media Uniform (0.72-2.0 inches)..... N/A  Yes .....  No

### General Conditions and Workmanship:

Solid Lines from House Schedule 40 with Cleanout.....  Yes .....  No

T's Installed at least 25% of Liquid Level.....  Yes .....  No

Inlet and Outlet Flow Clearly Marked.....  Yes .....  No

Manufacturer's Name, Address, & Tank Capacity Visible.....  Yes .....  No

Port Holes 12" in Diameter.....  Yes .....  No

Septic Tank Sturdy & Water-Tight.....  Yes .....  No

Trench or Bed Bottom Essentially Level.....  Yes .....  No

Perforated Pipe Generally Level throughout Field.....  Yes .....  No

End Caps provided on Drainfield (if not looped).....  Yes .....  No

Geo-Textile Fabric used for Permeable Soil Barrier.....  Yes .....  No

Installer: J.A. GONZALEZ License#: 35502

Remarks: \_\_\_\_\_

240' x 4' = 960 SQ FT INSTALLED

Inspector: A. FLORES License#: 38768

Date of Inspection: 06-27-2024



# County of Hidalgo

1304 S. 25th Ave. - Edinburg, TX 78539  
Phone: (956) 383-0111 • Fax: (956) 383-7351

## On-Site Sewerage Inspection Report

Owner: EBERAZAR LUNA Permit #: 54974  
Address: SIENNA RODE Phone #: \_\_\_\_\_  
Location: 107 6 1/2 LOT 32 No. Bedrooms: 9 BATH  
Tank Type: CONCRETE

Inside diameter: 5'  
Inside length of sides: 5'  
Liquids depth or distance from tank bottom to outlet bottom: 48"  
Airspace (approximately): 3"  
Approximate gallon cap.: 2500-1000 gallons

Drain Field: Trench / Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_  
Distance from private well: N/A  
Distance from foundation: To tank: 20' To drainfield: 32'  
Distance from property line: To tank: 12' To drainfield: 13'  
Depth of Trench: 36" Width of trench: 24"  
Backfill material: Ib: \_\_\_\_\_ II: / III: \_\_\_\_\_

Dimensions: 300' X 4' = 1200 Sq. Ft.

Gravel: Natural: N/A Crushed: N/A Washed: N/A  
Amount: N/A yards, or Tons (per installation)

Pipe: Type: SPT-8" Brand (if known): GRAVALLER Number of feet: 300'

### General conditions and Workmanship:

- Solid Lines from house schedule 40 and have cleanout .....  YES .....  NO
- T's installed in tank at least 25% of liquid level .....  YES .....  NO
- Trench or bed bottom essentially level .....  YES .....  NO
- Gravel generally consistent 12" depth throughout field .....  YES .....  NO
- Perforated pipe generally level throughout field .....  YES .....  NO
- Porous media uniform (.72-2.0 inches) .....  YES .....  NO
- Inlet and outlet flow clearly marked .....  YES .....  NO
- Port holes 12" in diameter .....  YES .....  NO
- Are end caps provided if drainfield not looped .....  YES .....  NO
- Septic tank sturdy/water-tight .....  YES .....  NO
- Geo-textile fabric used for the permeable soil barrier .....  YES .....  NO
- Manufacturer's name address & tank capacity clearly visible .....  YES .....  NO

Installer: JOAQUIN GONZALEZ License No.: 1350

Remarks: APPROVED

Inspector: [Signature] Date: 09/06/2023

D.R. Lic. # 050020231



# OSSF – Form G: Inspection Report



Permit#: 55525

Owner: REYES & NEWMAN CONSTRUCTION LLC

Location: \_\_\_\_\_

Legal Description: SIENNA RIDGE

Lot#: 42 Block#: \_\_\_\_\_ Section/F. Tract#: \_\_\_\_\_

Tank Type: \_\_\_\_\_ CONCRETE

Inside Diameter: \_\_\_\_\_ 5'

Inside Length of Sides: \_\_\_\_\_ 5'

Liq. Depths or Dist. From Tank Bottom to Outlet Bottom: \_\_\_\_\_ 48"

Airspace (approx.): \_\_\_\_\_ 3"

Gallon Cap. (approx.): \_\_\_\_\_ 2 x 500gal = 1,000 gal

<input type="checkbox"/> Commercial
▪ Type: _____
<input checked="" type="checkbox"/> Residential
▪ # Bedrooms: <u>3</u>
▪ Sq. Ft., (est.) <u>&lt; 2,500</u>
<input type="checkbox"/> Other: _____
<input checked="" type="checkbox"/> Vacant Lot

Drain Field: Trench:  Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_

Distance from Private/Public Well: To Tank: N/A To Drainfield: N/A

Distance from Foundation: To Tank: V/L To Drainfield: V/L

Distance from Property Line: To Tank: 10' To Drainfield: 8'

Trench Depth: 30" Trench Width: 2'

Backfill Material: Ib: \_\_\_\_\_ II:  III: \_\_\_\_\_

Pipe: Brand (if known): SB2-8" Type: STD. GRAVELLESS No. of Feet: 240'

Gravel Drainfield (if applicable): Natural: N/A Crushed: N/A Washed: N/A

Amount: N/A Yards or Tons

Gravel Generally Consistent 12" depth throughout field ..... N/A  Yes .....  No

Porous Media Uniform (0.72-2.0 inches) ..... N/A  Yes .....  No

### General Conditions and Workmanship:

Solid Lines from House Schedule 40 with Cleanout ..... V/L  Yes .....  No

T's Installed at least 25% of Liquid Level .....  Yes .....  No

Inlet and Outlet Flow Clearly Marked .....  Yes .....  No

Manufacturer's Name, Address, & Tank Capacity Visible .....  Yes .....  No

Port Holes 12" in Diameter .....  Yes .....  No

Septic Tank Sturdy & Water-Tight .....  Yes .....  No

Trench or Bed Bottom Essentially Level .....  Yes .....  No

Perforated Pipe Generally Level throughout Field .....  Yes .....  No

End Caps provided on Drainfield (if not looped) .....  Yes .....  No

Geo-Textile Fabric used for Permeable Soil Barrier .....  Yes .....  No

Installer: J.A. GONZALEZ License#: 35502

Remarks: \_\_\_\_\_

240' x 4' = 960 SQ FT INSTALLED

Inspector: A. FLORES License#: 38768

Date of Inspection: 08-29-2024



# OSSF – Form G: Inspection Report

Permit#: 54839

Owner: ROSAS FLORES

Location: 26.194485, -98.017990

Legal Description: SIENNA RIDGE

Lot#: 43 Block#: \_\_\_\_\_ Section/F. Tract#: \_\_\_\_\_

Tank Type: \_\_\_\_\_ CONCRETE

Inside Diameter: \_\_\_\_\_ 5'

Inside Length of Sides: \_\_\_\_\_ 5'

Liq. Depths or Dist. From Tank Bottom to Outlet Bottom: \_\_\_\_\_ 48"

Airspace (approx.): \_\_\_\_\_ 3"

Gallon Cap. (approx.): \_\_\_\_\_ 2 x 500gal = 1,000 gal

- Commercial
  - Type: \_\_\_\_\_
- Residential
  - # Bedrooms: 3
  - Sq. Ft., (est.) 2500
- Other: \_\_\_\_\_
- Vacant Lot

Drain Field: Trench: X Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_

Distance from **Private/Public Well**: To Tank: N/A To Drainfield: N/A

Distance from Foundation: To Tank: 15' To Drainfield: 28"

Distance from Property Line: To Tank: 18' To Drainfield: 12'

Trench Depth: 36" Trench Width: 24'

Backfill Material: Ib: \_\_\_\_\_ II: X III: \_\_\_\_\_

Pipe: Brand (if known): SB2-8" Type: STD. GRAVELLESS No. of Feet: 240'  
120'

Gravel Drainfield (if applicable): Natural: N/A Crushed: N/A Washed: N/A

Amount: N/A Yards or Tons

Gravel Generally Consistent 12" depth throughout field..... N/A  Yes .....  No

Porous Media Uniform (0.72-2.0 inches)..... N/A  Yes .....  No

### General Conditions and Workmanship:

Solid Lines from House Schedule 40 with Cleanout .....  Yes .....  No

T's Installed at least 25% of Liquid Level .....  Yes .....  No

Inlet and Outlet Flow Clearly Marked .....  Yes .....  No

Manufacturer's Name, Address, & Tank Capacity Visible .....  Yes .....  No

Port Holes 12" in Diameter .....  Yes .....  No

Septic Tank Sturdy & Water-Tight .....  Yes .....  No

Trench or Bed Bottom Essentially Level .....  Yes .....  No

Perforated Pipe Generally Level throughout Field .....  Yes .....  No

End Caps provided on Drainfield (if not looped) .....  Yes .....  No

Geo-Textile Fabric used for Permeable Soil Barrier .....  Yes .....  No

Installer: JOSE A. GONZALEZ License#: 1350

Remarks: APPROVED

240"x 4' = 960 SQ FT INSTALLED

Inspector: JOSE G. GONZALES License#: OS0020831

Date of Inspection: 06/20/2023



# OSSF – Form G: Inspection Report

Permit#: 54914

Owner: ISABEL LYDIA BORREGO & ABRAHAM NEWMAN

Location: MILE 6 1/2 W. & MILE 10 N.

Legal Description: SIENNA RIDGE

Lot#: 46 Block#: \_\_\_\_\_ Section/F. Tract#: \_\_\_\_\_

Tank Type: \_\_\_\_\_ CONCRETE

Inside Diameter: \_\_\_\_\_ 5'

Inside Length of Sides: \_\_\_\_\_ 5'

Liq. Depths or Dist. From Tank Bottom to Outlet Bottom: \_\_\_\_\_ 48"

Airspace (approx.): \_\_\_\_\_ 3"

Gallon Cap. (approx.): \_\_\_\_\_ 2 x 500gal = 1,000 gal

Commercial  
 ▪ Type: \_\_\_\_\_

Residential  
 ▪ # Bedrooms: 3  
 ▪ Sq. Ft., (est.) \_\_\_\_\_

Other: \_\_\_\_\_

Vacant Lot

Drain Field: Trench: X Bed: \_\_\_\_\_ Evapotranspiration: \_\_\_\_\_

Distance from **Private/Public Well**: To Tank: N/A To Drainfield: N/A

Distance from Foundation: To Tank: 30' To Drainfield: 40'

Distance from Property Line: To Tank: 5' To Drainfield: 8'

Trench Depth: 30" Trench Width: 2'

Backfill Material: Ib: \_\_\_\_\_ II: X III: \_\_\_\_\_

Pipe: Brand (if known): SB2-8" Type: STD. GRAVELLESS No. of Feet: 240'

Gravel Drainfield (if applicable): Natural: N/A Crushed: N/A Washed: N/A

Amount: N/A Yards or Tons

Gravel Generally Consistent 12" depth throughout field.....N/A  Yes .....  No

Porous Media Uniform (0.72-2.0 inches).....N/A  Yes .....  No

### General Conditions and Workmanship:

Solid Lines from House Schedule 40 with Cleanout.....  Yes .....  No

T's Installed at least 25% of Liquid Level.....  Yes .....  No

Inlet and Outlet Flow Clearly Marked.....  Yes .....  No

Manufacturer's Name, Address, & Tank Capacity Visible.....  Yes .....  No

Port Holes 12" in Diameter.....  Yes .....  No

Septic Tank Sturdy & Water-Tight.....  Yes .....  No

Trench or Bed Bottom Essentially Level.....  Yes .....  No

Perforated Pipe Generally Level throughout Field.....  Yes .....  No

End Caps provided on Drainfield (if not looped).....  Yes .....  No

Geo-Textile Fabric used for Permeable Soil Barrier.....  Yes .....  No

Installer: J.A. GONZALEZ License#: 1350

Remarks: \_\_\_\_\_

240' x 4' = 960 SQ FT INSTALLED

Inspector: J. GONZALEZ License#: 20831

Date of Inspection: 08-03-2023