

STEP 1

**-This is the ONLY Item Required to be submitted before the deadline of:
Thursday February 5, 2015 AT 2:00 PM.**

SCHEDULE "A" **PRICE SHEET**

-REQUIRED AS A PART OF STEP 1-

**THIS FORM MUST BE COMPLETED AND RETURNED BY THE DEADLINE OF:
Thursday February 5, 2015 at 2:00 PM**

The undersigned Bidder, having become familiar with this IFB agrees to furnish the goods and/or services in accordance with this IFB.


Bidder Name: R.A. Adams Enterprises, Inc.

Item	Description	Estimated Quantities	Unit Price	Extended Price
1	Trailer	1	47,545.62	47,545.62

NOTE * NOT TO SCALE

N:\Cargo Group Drawing\Wells Cargo\DWG\SALESTexas\105484.dwg, 6/15/2010 1:03:47 PM, DWG6 aPlot.pc3


12 VOLT SLUB WIRE
110 VOLT FLUORESCENT
12 VOLT LED LIGHTS

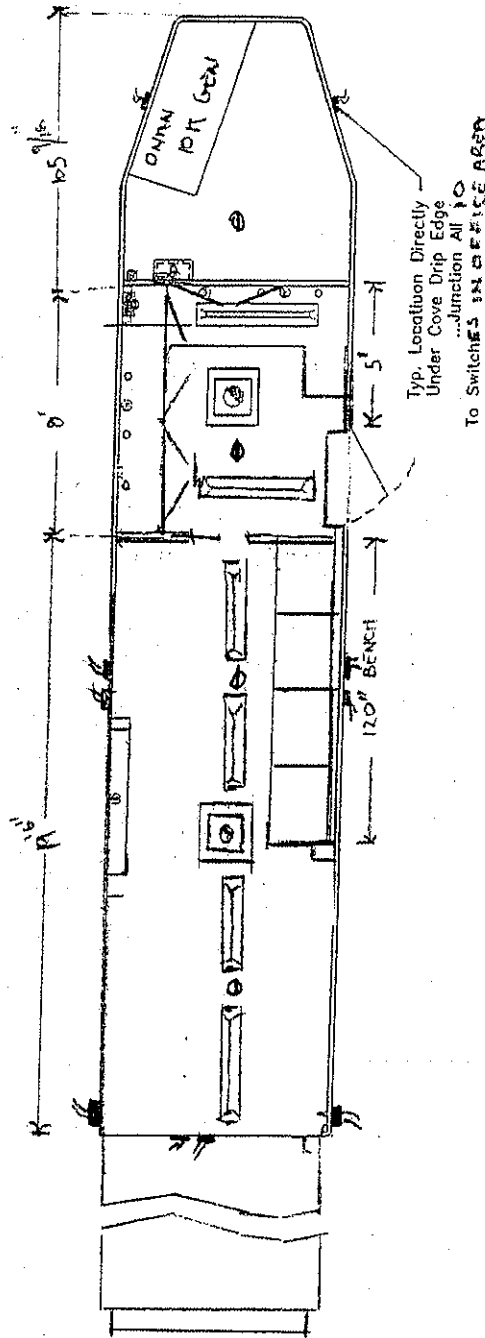

NOTES:

- Exterior Slub Wires Shown W/Bell Boxes Are All At Top Of Sidewalls

PLANVIEW: Electrical Layout

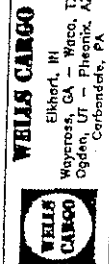

REVISION:
DATE:

Dealer Approved By:
Date Approved:
Customer Approved By:
Date Approved:

Model / CVG3627 Order#
Dr. Date 1/21/2015 Sales Approved
Customer WILLIAMSON COUNTY

Dealer
Salesperson
Division

R.A. ROMAS ENT. INC.
RONA HANSEN
WACO, TX

Schedule "B"

BID SPECIFICATIONS

Scope of Work

Williamson County requests bids regarding the purchase of a 36' gooseneck trailer, construction design features and interior design to facilitate the needs to respond to Haz-Mat emergency calls. Unit proposed shall meet or exceed these specifications. All exceptions to these specifications shall be listed on a separate sheet and attached to the bid. Please mark yes if unit is compliant or no if not. Bidder shall furnish the current published specifications of the unit proposed and a current product brochure.

Trailer Specifications

1.	☒ Y	N	Van type gooseneck trailer with and overall length of 36' and 93" 1/4" body width (Example is a Wells Cargo CVGT3627 CompacVan with tapered nose).
2.	☒ Y	N	Van type gooseneck trailer with tapered nose and the dimensions shall be; overall length of 36' width of 8' and height of 9'2". Interior length; lower deck 27'11" upper deck 105 9/16", interior height; lower deck 7' upper deck 38", interior width; 7'6", platform height; 25", rear door; width 85 3/4" height 75". Tapered nose shall be 54" at the front and become the full width of 93 1/4" 65" back from the nose.
3.	☒ Y	N	The trailer shall have a 20,000# GVWR
4.	☒ Y	N	Heavy duty anodized aluminum lower body extrusion at the bottom of the exterior walls on road and curb side of trailer.
5.	☒ Y	N	One pair heavy duty rear corner post jacks – 3000lb static load capacity. Drop leg style approx. 2" square tube with rectangular foot.
6.	☒ Y	N	Recessed step at curb side door. (11 1/2" D x 6 1/4" H x 36" L)
7.	☒ Y	N	2 5/16" 25,000lb capacity adjustable height ball coupler hitch.
8.	☒ Y	N	Tandem 2-speed 24,000lb capacity manual drop leg landing gear assembly.
9.	☒ Y	N	8" x 3" x 3/16" rectangular steel tube main rails with equal height 'C' section 12ga cross members with square outriggers & steel side plates on 24" centers. Install 8" high interior side plates. Construction shall include vinyl electrolytic barrier between lower steel body and aluminum exterior.
10.	☒ Y	N	Two 8000lb 102"wide, 22.5 degree up Torflex Axles with 12 1/4" x 3 3/8" with self adjusting electric brakes, E/Z lube, and 8 bolt on 6.5 hubs and drums with weather resistant wiring package.
11.	☒ Y	N	Four LT215/75R17.5 load range 'H' radial tire mounted on a 8 bolt silver conventional wheel.
12.	☒ Y	N	Chassis fully undercoated with CPC (corrosion preventative compound) Note: Trailer frame shall be hot phosphate washed before painting and undercoating.
13.	☒ Y	N	Vertical wall post shall be on 16" centers the full length of the trailer. The rear approx. 28' with the inside height of 7' the vertical post shall be 78 3/4". Heavy duty 12 gauge radius steel corner post at all four corners for maximum strength.
14.	☒ Y	N	30 gallon diesel fuel tank mounted under floor just ahead of forward axle with fuel fill mounted on road side exterior wall with aluminum cast lockable fuel door. Tank shall include a fuel booster pump to supply fuel to generator at gooseneck.
15.	☒ Y	N	Generator compartment shall be in goose neck portion of trailer. The compartment shall have a locking louvered door. The Generator specified has a bottom air inlet and outlet configuration and requires a cabinet enclosure to reside in which allows for the cooling required air flow. The dimensions are 57 7/8" long 36 1/4" high and 29 7/8" deep.

16.	(Y) N	One 36" wide single side entry door, aluminum RH hinge with grease zerks shall have rotary style flush lock latching mechanism for extra smooth operation. Door installed curbside wall to start 60" back from step-up wall, door opening: 36" W x 80" H and shall include a recessed step.
17.	(Y) N	Swing down rear ramp door with spring assist and aluminum anti-rack cam bar lock with stainless steel hasp. Door opening shall be; 85 3/4" W x 75" H. Door capacity 6500 lbs evenly distributed over entire door.
18.	(Y) N	Install strip curtain at rear door. Curtain shall be full width and height of door opening, 1/8" in thickness and cut in 12" wide strips.
19.	(Y) N	An 80 1/8" wide x 12 1/2" long extruded aluminum ramp extension with 2400lb rated capacity.
20.	(Y) N	Flip down aluminum diamond tread plate gap filler at ramp door allowing for a smooth transition from trailer floor to ramp door.
21.	(Y) N	36 Linear feet 3/4" exterior grade plywood floor, exterior surface undercoated interior surface painted gray, fastened with 1/4" -20 x 1 1/2" torx floor screws.
22.	(Y) N	3/8" plywood interior sidewall liner glued and screwed to vertical post.
23.	(Y) N	Interior sidewall shall have 1/4" white vinyl covering on the 3/8" plywood.
24.	(Y) N	36 linear feet 1" fiberglass sidewall insulation, R5 value.
25.	(Y) N	Total of 20' of "E" track starting at the rear of the trailer on the side walls extending forward for 10' on each side parallel to the floor 36" high.
26.	(Y) N	36 linear feet full width ceiling lined with 1/4" white vinyl covered plywood contoured to roof radius (includes lining end caps)
27.	(Y) N	36 linear feet 1" ceiling insulation.
28.	(Y) N	28 Square feet white 3/4" laminated permanent inside counter – L shaped in 6ft area behind step up wall, 20" deep along roadside, 24" deep across step – up wall and 20" deep on Curb side securely mounted to vertical post. Provide a total of six 3" cutouts with liners evenly spaced with 3 at step up wall and 3 at road side wall of the counter top.
29.	(Y) N	Full width partition wall on 16" centers complete with pocket door installed 8' back from step up wall.
30.	(Y) N	18" high x 18" deep x 96" long 3/4" white laminated plywood overhead cabinet with 4 doors on roadside wall. Start at rear of step-up wall and go to the partition wall and securely mounted to vertical wall post.
31.	(Y) N	Full width insulated partition wall with 2 – 24" doors at step-up wall with a positive latching system. Doors shall be 3/4" white laminated plywood with a positive latch matching the overhead cabinets. Partition wall shall be framed with 2"x2" on 24" centers and covered with white vinyl to match other interior walls.
32.	(Y) N	Starting at partition wall on curb side one 120" long x 20" high x 26" deep white 3/4" laminated seat/storage divided into 30" long sections secured to vertical post with 4" Black vinyl cushions attached with Snaps on top, hinged so that each 30" lid section can be lifted individually.
33.	(Y) N	Three 12 volt LED 6" Round Flush Mount Dome Light evenly space down the center line of interior ceiling.
34.	(Y) N	Two 3-way interior wall switches for 12 volt electric, one at curb side door and the other at rear door, curb side and both 4' high from the floor.
35.	(Y) N	One battery box assembly to be located under goose neck at exterior side of step up wall. Box shall consist of a 100 amp hour deep cycle battery, vented battery box, 6 circuit fuse panel & 30 amp PC30 power source with 120 volt receptacle.

36.	(Y) N	One 50 amp IOTA Engineering automatic transfer switch wired to generator and 50 amp Square D16 circuit service panel, to be located road side at step up wall.
37.	(Y) N	One 50 amp 120/240 volt Square D16 circuit service panel with 50 amp main breaker wired to transfer switch at step up wall on road side wall.
38.	(Y) N	Seven 15 amp, 120 volt duplex receptacles. Three evenly space under L-shaped counter top two at step-up wall and two at road side wall. Three on road side wall evenly spaced from rear door to partition wall.
39.	(Y) N	Seven 12 volt stub wire in bell boxes for customer provided LED Emergency lights. Locations are as follows; one on each side of tapered nose, as high as possible and equally spaced considering the generator door. One on each side of trailer as high as possible centered and One on each side at the back of the trailer. On the rear of trailer there shall be one centered above the ramp door. Switch located in the office.
40.	(Y) N	Three 12 volt stub wire boxes for customer provided LED scene lights. Locations are the same as the centered LED emergency light locations on the road and curb side as well as the rear location. Switch located in office.
41.	(Y) N	Four exterior 15 amp 120 volt GFI duplex receptacle (weather proof) flush mounted to be located one on each side of trailer just forward of fender and one on each side at the rear of the trailer.
42.	(Y) N	Two interior 3-way wall switches for 120 volt electric lights. One located at curbside door 4' high and the other at the rear door, curb side 6' high from floor.
43.	(Y) N	Four, 4ft double fluorescent light fixture with diffuser cover (tubes shall be included) evenly spaced down the center line or the interior ceiling.
44.	(Y) N	20ft 8500 Series Roll-Out Awning mounted on the curb side.
45.	(Y) N	4 ft. Antenna Rail on roof, located on the road side above the front office area.
46.	(Y) N	One 50 amp twist – lock motor base power inlet at step up wall at road side wall and include 25ft, 50 amp shore line cord.
47.	(Y) N	Dometic analog wall mount thermostat for A/C with heat. The thermostat shall be located on curb side wall just past the partition wall in rear of trailer to control the rear A/C with the heat strip allowing the A/C Heater to cycle in the energy saving mode.
48.	(Y) N	120 volt, 15000 BTU Dometic Duro-Therm roof mounted air conditioner mounted in the forward work area. Temperature and fan speed controls shall be located on unit.
49.	(Y) N	120 volt, 15,000 BTU Dometic Duro-Therm roof mounted air conditioner with 5600 BTU heat strip located in the rear work section of trailer controlled by thermostat listed in item #45.
50.	(Y) N	36 linear feet of .030 prefinished white smooth exterior aluminum installed vertically with non-corrosive mechanical fasteners. .080 Extruded anodized aluminum roof cove with formed drip rail to provide solid anchor for the attachment of 30 gauge roof sheet which adds structural strength.
51.	(Y) N	Two L.E.D. wraparound tail light with integrated side rear marker light.
52.	(Y) N	L.E.D. safety light package – shall consist of L.E.D. clearance lights in place of standard clearance lights. Clearance lights on rear roof cap used as high profile brake lights and side mounted clearance lights used as turn indicators.
53.	(Y) N	S.A.E. color coded 12 volt electrical system, D.O.T. required exterior lighting package. All 12 volt wiring shall run through tubular main rail and distributed from junction boxes at front and rear of unit.

54.	(Y)	N	D.O.T. 'A' frame mounted 22 amp hour UI series battery, breakaway switch, aluminum mounting bracket, cover, battery "charge" indicator, and diode isolation. Battery acid included.
55.	(Y)	N	One 12 volt electrical pigtail wired to front junction box with molded seven way truck connector. Center pin needs to be wired to the emergency lights so they can be turned on by the truck pulling the trailer as well as the switch in the office.
56.	(Y)	N	Spare tire & wheel – LT215/75R17.5 Load Range "H" Radial tire on a 8 bolt hole silver conventional wheel.
57.	(Y)	N	Exterior 8 bolt spare tire carrier/bracket.
58.	(Y)	N	D.O.T. required conspicuity tape installed on both sides and rear of trailer.
59.	(Y)	N	One 10.0KW Onan Commercial Quiet Diesel Generator package – 110 volt with 25ft remote harness – 2 year warranty. Package shall include steel lined generator compartment, remote start with hour meter, (30 gallon steel fuel, see line 14), fuel gauge, exterior generator door, 100 amp deep cycle battery mounted inside compartment, charging system and a carbon monoxide detector located in trailer.
60.	(Y)	N	Generator exhaust shall run up on the right side of the Generator access door to the roof line of the trailer with rain cap and a shroud covering the pipe to protect against burns. The exhaust pipe shall be installed in a manner that does not cause damage to the exterior surface of the trailer. Warnings of personal injury from exhaust pipe heat shall be included.

Vendor Specifications

A detailed set of drawings shall be provided with the bid

There shall be a pre-build meeting to verify all items and their locations.

There shall be a pre-delivery walk through inspection before delivery will be accepted. Any out of town (greater than 50 miles from Georgetown Texas) or state travel cost incurred by Williamson County for the pre-delivery inspection shall be at the expense of the bidder and included in this bid.

LITERATURE:

Successful bidder shall provide (two sets) of operation and maintenance guide, parts book and service manual for trailer and equipment furnished.

WARRANTY:

State warranties for the different items, components and trailer.

Y N Trailer warranty shall be for minimum a period of 6 (six) years starting from the date of delivery and shall cover defects in material and workmanship. The following items shall be covered for 1(one) year; jack rams, electrical wiring, glass, sealants, doors, seals, locks, paint, plumbing, couplers and jacks.

Y N Generator set shall have a minimum of 2 (two) year or 2,000 hour full coverage warranty.

Y N Roof mounted AC units shall have a minimum of 1 (one) year warranty.

-Include warranty terms and conditions on the trailer quoted.

-Include warranty terms and conditions on Generator Set quoted.

-Include warranty terms and conditions on roof mounted AC units quoted.

Contract Term

The Successful Bidder shall provide the goods and/or services described herein within 30 days of receipt of the Williamson County Purchase Order. Pricing shall be firm until September 30, 2015.

R.A.



QUOTATION

QUOTE # 145004

PAGE: 1

TRAILERS • HITCHES • TRUCK EQUIPMENT
2600 WEST ROUTE 120 McHENRY, ILLINOIS 60051-4563
(815) 385-2600 FAX (815) 385-6684

We are pleased to quote as follows to:

QUOTED BY: ADAM HANSEN
CUST. P.O. #
QUOTE DATE 01/29/15
EXPIRE DATE 03/07/15

CUSTOMER: 3 NON-TAXABLE CASH SALES
SHIP TO: WILLIAMSON COUNTY
BID# 151FB108
901 S. AUSTIN AVE
GEORGETOWN TX 78626
PHONE # 512-943-1271 FAX #

PART NUMBER	DESCRIPTION	QTY	UOM	PER UNIT PRICE	EXTENDED PRICE
WELLS CARGO	*CVGT3627	1	EA	47,545.62	47,545.62

**** HAZARDOUS MATERIALS RESPONSE UNIT TRAILER ***
BID NUMBER: 151FB108

***** BUILD TIME FOR TRAILER 10 -12 WEEKS *****

47,545.62
0.00

47,545.62



Salesperson: Adam Hansen

R.A.ADAMS ENTERPRISES, INC.

2600 W ROUTE 120

MCHENRY, IL 60051

Fax: 815-385-6684

Phone: 815-385-2600

Email:

FOB: MCHENRY, IL

Quote #: 1421332226

Quote Title: WILLIAMSON COUNTY BID# 15IFB108

Quote Date: 1/15/2015

Modified Date: 1/29/2015

Quote For:

Phone:

Email:

Qty	UOM	Description
1	EA	Wells Cargo - Gooseneck - Model# CVGT3627
1	EA	CompacVan
1	EA	Gooseneck
1	EA	V-Front
1	EA	Round Roof
1	EA	36ft Long
1	EA	8ft Wide
1	EA	2-5/16in 25,000lb Ball Coupler - Round.
1	EA	C Crossmembers
36	FT	Crossmembers 24in On Center
36	FT	3" x 8" Rectangular Steel Tube Mainrails
1	EA	Tandem Two-Speed Landing Gear Assembly Notes: ** 24,000LB CAPACITY MANUAL DROP LEG **
36	FT	Roof Bows 16in On Center
1	PR	1/2" Safety Chains w/ 1/2" Clevis Hook, Latch
36	FT	7'0" Inside Height
36	FT	78-3/4in Hat Posts
36	FT	Vertical Posts 16in On Center
1	EA	Tapered Nose Upper Deck Configuration
1	EA	Chassis Fully Undercoated with CPC
1	EA	22-1/2 Degree Up Angle
1	EA	Tandem Axle
1	EA	102" Wide Track
2	EA	Electric Drum Brakes(DOT Batt & Breakaway Req'd) Notes: ** SELF ADJUSTING **
2	EA	8 Bolt Pattern
2	EA	EZ Lube Hubs
1	EA	5/8in Studs
1	EA	Torflex Suspension
2	EA	8,000lb Axle (Gsnk)
4	EA	LT215/75R17.5 LRH Radial 8B Silver Conv. Wheel



Qty	UOM	Description
1	EA	Max Size Rear Ramp Door - Standard - 8/8.5W Notes: ** 85 3/4" W X 75" . DOOR CAPACITY 6500 LBS EVENLY DISTRIBUTED OVER ENTIRE DOOR. **
1	EA	36 x 80 Side Entry Door - Flush Lock/Rec Step
1	EA	**10KW Onan Comm Quiet Diesel Pkg(Under Flr Tank) Notes: ** GENERATOR EXHAUST SHALL RUN UP ON THE RIGHT SIDE OF THE GENERATOR ACCESS DOOR TO THE ROOF LINE OF THE TRAILERWITH RAIN CAPAND A SHROUD COVERING THE PIPE TO PROTECT AGAINST BURNS. THE EXHAUST PIPE SHALL BE INSTALLED IN A MANNER THAT DOES NOT CAUSE DAMAGE TO THE EXTERIOR SURFACE OF THE TRAILER. WARNINGS OF PERSONAL INJURY FROM EXHAUST PIPE HEAT SHALL BE INCLUDED. ** Items in package follow:
1	E A	Fuel Guage (included in package)
1	E A	100Amp Deep Cycle Battery & Charging System (included in package)
1	E A	10.0KW Onan Commercial Quiet Diesel Generator (included in package)
1	E A	Aluminum Cast Lockable Fuel Door (included in package)
1	E A	30 Gallon InFrame Diesel Fuel Tank (included in package)
1	E A	Compartment, Stationary quiet diesel Gen 7.5-12KW (included in package)
1	E A	Access Door,Generator,33 1/4"Hx55 1/2"W (included in package)
1	E A	Carbon Monoxide Detector - 9V (pkg) (included in package)
1	E A	Remote Start with Hour Meter(pkg) (included in package)
36	FT	3/4in DryMax Decking.
36	FT	3/8" White Vinyl Plywood Sidewall Liner
2	EA	12v LED 6" Round Flush Mount Dome Light.
9	EA	LED Clearance Lights
1	PR	LED Wraparound Tail Lights
1	EA	LED Safety Package (Tandem/Triple)
1	EA	S.A.E. Color Coded 12 Volt Electrical System
1	EA	Seven Way Trailer End Connector
1	EA	12 Volt Interior Wall Switch
1	EA	D.O.T. 'A' Frame Mounted Battery Assembly
36	FT	Polar White



Qty	UOM	Description
36	FT	.030 Aluminum Exterior
1	PR	Smooth Aluminum Fenderettes
36	FT	DOT Conspicuity Tape on Side & Rear of Trailer
36	FT	One Piece Aluminum Roof
1	PR	Heavy Duty Rear Cornerpost Jacks - 3,000lb Cap
1	EA	80 1/8"W Aluminum Ramp Extension
36	FT	1/4"White Vinyl Ceiling Liner & Insulation
36	FT	1" Sidewall Fiberglass Insulation - R5
1	EA	15MBTU RoofMnt A/C w/Heat Notes: ** WITH 5600 BTU HEAT STRIP LOCATED IN THE REAR WORK SECTION OF THE TRAILER CONTROLLED BY THERMOSTAT **
1	EA	Partition Wall with Pocket Door Notes: ** INSTALLED 8' BACK FROM STEP WALL **
1	EA	Spare LT215/75R17.5 LRH Radial 8B Silver Conv. Whl
1	EA	Exterior 8 Bolt Spare Tire/Wheel Bracket
20	FT	Horizontal "E" Track Notes: ** STARTING AT THE REAR OF THE TRAILER ON THE SIDE WALLS EXTENDING FORWARD FOR 10' ON EACH SIDE PARALLEL TO THE FLOOR 36" OFF FLOOR **
1	EA	20ft 8500 Series Roll-Out Awning. Notes: ** MOUNTED ON CURB SIDE **
1	EA	15M BTU Roof Mount A/C Notes: ** MOUNTED IN FORWARD WORK AREA. TEMPATURE AND FAN SPEED CONTROLS SHALL BE LOCATED ON UNIT **
2	EA	12 Volt 3-Way Wall Switch
4	EA	120V 15A Duplex Exterior GFI Recept(Flush Mount) Notes: ** WEATHERPROOF TO BE LOCATED ONE ON EACH SIDE OF TRAILER JUST FORAWRD OF FENDER AND ONE ON EACH SIDE AT THE REAR OF TRAILER **
8	FT	18"H x 18"D Overhead Cabinet Notes: ** 3/4" WHITE LAMINATED PLYWOOD OVERHEAD CABINET WITH 4 DOORS ON ROADSIDE WALL. START AT REAR STEP-UP WALL AND GO TO PARTITION WALL AND SECURELY MOUNTED TO VERTICAL POST. **
1	EA	GENERATOR EXHAUST SHALL RUN UP EXTERIOR Notes: SIDEWALL AND PROTRUDE 2" ABOVE ROOF. INSTALL FLARE ON TOP



Qty	UOM	Description
28	SF	White Lam. Permanent Inside Counter (Specify WxL) Notes: **** NOTE... COUNTER ONLY GOES 6' FROM DROP WALL ON ROAD SIDE 20" DEEP, 24" DEEP IN FRONT OF STEP WALL AND 20" DEEP ON CURB SIDE WALL **
1	EA	INSTALL FREEZER STRIP CURTAIN AT REAR DOOR
1	EA	Standard Duty Ramp Door Transition
1	EA	FULL WIDTH PARTITION WALL AT STEPUP WITH (2) 24"W DOORS WITH POSITIVE LATCHES Notes: (2) 24" WIDE DOORS WITH POSITIVE LATCHES
1	EA	Above Floor Assembly w/Marine Battery and PC45 Notes: MOUNTED ON EXTERIOR STEPUP WALL.
1	EA	50A Auto Trans Switch Wired to Gen & 50A Serv Pnl
1	EA	120/240V 50A Service Panel with 50A Main Breaker
2	EA	12v LED 6" Round Flush Mount Dome Light. Notes: TOTAL OF (4) FOUR.
1	EA	50A Separable 25'Shoreline,Molded Male,Twst Lk Fem
1	EA	120"L X 20"H X 267"D STORAGE BENCH WITH LIFT UP LID AND CUSHIONS Notes: LID TO BE DIVIDED INTO (4) SECTIONS EACH WITH CUSHIONS
1	EA	DOMETIC ANALOG WALL THERMOSTAT FOR A/C IN REAR
1	EA	INSTALL ALUMINUM ANTENNA RAIL Notes: *** LOCATE ON THE ROAD SIDE ABOVE FRONT OFFICE AREA ***
1	EA	LENGTHEN UPPER DECK Notes: *** LENGTHEN UPPER DECK 105 9/16" *****
6	EA	4ft Double Fluorescent Light w/Diffuser Notes: **** LOCATE 4 IN REAR COMPARTMENT AND 2 IN FRONT ****
7	EA	12 VOLT STUB-OUT TO BELL BOX FOR CUSTOMER TO INSTALL STROBE LIGHTS Notes: *****1- EACH SIDE OF TAPERED NOSE 1- EACH SIDE CENTERED AS HIGH AS POSSIBLE 1- ON THE REAR OF TRAILER SIDES AND 1- CENTERED ABOVE REAR RAMP DOOR..... SWITCHES TO BE INSTALLED IN OFFICE AREA.



Qty	UOM	Description
2	EA	120V 3-Way Interior Wall Switch Notes: **** ONE LOCATE AT CURBSIDE DOOR 4' HIGH AND THE OTHER AT REAR DOOR CURBSIDE, 6' HIGH FROM FLOOR FOR INTERIOR FLUORESCENT LIGHTS ***
3	EA	THREE 12 VOLT STUB WIRE BOXES PROVIDED SCENE LIGHTS Notes: **** LOCATE SAME AS THE CENTERED LED EMERGENCY LIGHTS LOCATIONS R/S & C/S AS WELL AS REAR.... SWITCH IN OFFICE ****
2	EA	12 Volt Interior Wall Switch Notes: **** LOCATE IN OFFICE AREA FOR LED EMERGENCY & SCENE LIGHTS ****
7	EA	120V 15A Duplex Recept Notes: *** 3- EVENLY SPACED UNDER L- SHAPED COUNTER TOP2- AT STEPUP WALL AND 3- ON ROADSIDE WALL EVENLY SPACED FROM REAR DOOR TO PARTION WALL. ***
6	EA	2" Round Grommet Hole Through Counter Top

Total 47,545.62

Pickup Location:

Schedule "A" – continued

Cooperative Purchasing Program

Check one of the following options below. A non-affirmative Bid will in no way have a negative impact on the evaluation of the Bid.

- ☒ I will offer the quoted prices to all authorized entities during the term of the contract.
- ☐ I will not offer the quoted prices to all authorized entities.


The undersigned hereby certifies that he or she has read the terms of this IFB and understands that this Price Sheet (Schedule "A") is a part of a complete IFB package which he or she has carefully read and understands. The undersigned acknowledges that Williamson County reserves the right to waive any informality in or to reject any or all Bids. The undersigned further agrees that this bid is valid for ninety (90) calendar days from the deadline for submittal of bid to Williamson County.

Bidder
Name: R.A. Adams Enterprises, Inc.

Address: 2600 W. IL Rte 120 McHenry, IL. 60051

Telephone: 815-385-2600 Email: info@raadams.com

Contact Name (please print): Adam Hansen

Authorized Signature: 

Title or Representative Capacity of Signer: President / MaryBeth Adams

State of Incorporation/Organization or Primary Place of Business: Illinois

Schedule "D"

Bidder References
-Required as a part of Step 2-

E-MAILED

11:45 AM

2/12/17

THIS FORM MUST BE COMPLETED AND RETURNED IN ACCORDANCE WITH SCHEDULE "C" OF THIS IFB.
List the last (3) companies or governmental agencies, where the same or similar goods and/or services as contained in this IFB package, were recently provided by Bidder.

Reference 1

Client Name: Source North America Location: Addison, IL.
City or County
Contact Name: Dennis Parker Title: Distribution Operations Mngrr.
Phone: 847-364-1744 Ext 1205 Email: dparker@sourcena.com
Contract Dates: 1996 Present Contract Value: \$ Over 100,000
Start End
Scope of Work: Custom Enclosed Trailers

Reference 2

Client Name: ARI Environmental, Inc. Location: Long Grove, IL.
City or County
Contact Name: Bill Crane Title: Purchasing/Manager
Phone: 847-487-1580 Ext 112 Email: bcrane@arienv.com
Contract Dates: 2004 Present Contract Value: \$ Over 100,000
Start End
Scope of Work: Custom Enclosed Trailers

Reference 3

Client Name: Illinois Fire Institute Service Location: Champaign, IL.
City or County
Contact Name: Ray Palczynski Title: Special Operations Training Programs Director
Phone: 563-468-8385 Email: rpalczyn@illinois.edu
Contract Dates: 2002 Present Contract Value: \$ Over 100,000
Start End
Scope of Work: Custom Enclosed Trailers

SCHEDULE "E"

CONFLICT OF INTEREST QUESTIONNAIRE

For Bidder or other person doing business with local government entity	
This questionnaire is being filed in accordance with chapter 176 of the Local Government Code by a person doing business with the governmental entity. By law this questionnaire must be filed with the records administrator of the local government not later than the 7th business day after the date the person becomes aware of facts that require the statement to be filed. See Section 176.006 Local Government Code. A person commits an offense if the person violates Section 176.0006, Local Government Code. An offense under this section is a Class C misdemeanor.	OFFICE USE ONLY
1. Name of person doing business with local governmental entity.	
2. ☐ Check this box if you are filing an update to a previously filed questionnaire. (The law requires that you file an updated completed questionnaire with the appropriate filing authority not later than September 1 of the year for which an activity described in Section 176.006(a), Local Government Code, is pending and not later than the 7th business day after the date the originally filed questionnaire becomes incomplete or inaccurate.)	
3. Describe each affiliation or business relationship with an employee or contractor of the local government entity who makes recommendations to a local government officer of the local governmental entity with respect to expenditure of money. NONE	
4. Describe each affiliation or business relationship with a person who is a local government officer and who appoints or employs a local government officer of the local governmental entity that is the subject of this questionnaire. NONE	
CONFLICT OF INTEREST QUESTIONNAIRE CIQ FORM Page	

2

For Bidder or other person doing business with local government entity

5. Name of local government officer with whom filer has affiliation or business relationship. (Complete this section only if the answer to A, B, or C is YES.)

This section, item 5 including subparts A, B, C & D, must be completed for each officer with whom the filer has affiliation or business relationship. Attach additional pages to this Form CIQ as necessary.

- A. Is the local government officer named in this section receiving or likely to receive taxable income from the filer of the questionnaire?

☐ Yes ☒ No

- B. Is the filer of the questionnaire receive or likely to receive taxable income from or at the direction of the local government officer named in this section AND the taxable income is not from the local government entity?

☐ Yes ☒ No

- C. Is the filer of the questionnaire affiliated with a Corporation or other business entity that the local government officer serves as an officer or director, or holds an ownership of 10 percent or more?

☐ Yes ☒ No

- D. Describe each affiliation or business relationship:


NONE

6. Describe any other affiliation or business relationship that might cause a conflict of interest.

NONE

7. Bidder Name: R.A. Adams Enterprises, Inc.

Authorized



Signature: _____

V.P.

Title V.P. or Representative Capacity of Signer: _____

Date: 2-12, 2015

SCHEDULE "F"
BID AFFIDAVIT/ACKNOWLEDGMENT OF ADDENDA

ACKNOWLEDGMENT OF ADDENDA

RESPONDENT HEREBY ACKNOWLEDGES RECEIPT OF ALL ADDENDA THROUGH AND INCLUDING:

INITIAL AND ACKNOWLEDGE # OF ADDENDA IN BLANK

ADDENDUM # _____ ADDENDUM # _____ ADDENDUM # _____ ADDENDUM # _____

The undersigned certifies that the IFB and the Bidder's Bid have been carefully reviewed and are submitted as correct and final. Bidder further certifies and agrees to furnish any and/or all goods and/or services upon which prices are extended at the price Bid, and upon the conditions contained in the IFB.

STATE OF Illinois COUNTY OF McHenry

BEFORE ME, the undersigned authority, a Notary Public in and for the State of IL, on this

day personally appeared Eileen G. Bergum (Name of Signer), who after being by me duly sworn, did depose and say:

"I, Richard A. Adams (Name of Signer) am a duly authorized officer

of/agent for R.A. Adams Enterprises, Inc. (Name of Bidder) and have been duly

authorized to execute the foregoing on behalf of the said_

R.A. Adams Enterprises, Inc.

(Name of Bidder).

I hereby certify that the foregoing Bid has not been prepared in collusion with any other Bidder or other person or persons engaged in the same line of business prior to the official opening of this Bid. Further, I certify that the Bidder is not now, nor has been for the past six (6) months, directly or indirectly concerned in any pool or agreement or combination, to control the price of services/commodities Bid on, or to influence any person or persons to submit a Bid or not to submit a Bid thereon."

Name and Address of Bidder:

R.A. Adams Enterprises, Inc. 2600 W. IL Rte 120 McHenry, IL. 60051

Fax: 815-385-6684

Telephone#: 815-385-2600

By: [Signature]

Printed Name: Richard A. Adams II

Title: V.P.

SUBSCRIBED AND SWORN to before me by the above-named RICHARD A. ADAMS II on

this the 12 day of FEBRUARY, 2015.

[Signature]

Notary Public in and for
the State of ILLINOIS



Schedule "H"

LIST OF OTHER MANDATORY DOCUMENTATION

- **Certificates of Insurance;**
- **Assumed Name Certificate;**
- Pending or Anticipated Litigation Information (as mandated by Section 3.2.46 of the Standard Terms & Conditions)



Business Entity Registration

PLEASE TYPE OR PRINT IN BLACK INK

FOR OFFICE USE ONLY

STATE BOARD OF ELECTIONS

09 JAN 12 PM 2:12

Full name and complete mailing address of Business Entity:

R.A. Adams Enterprises, Inc.
2600 W. Rte. 120
McHenry, IL 60051

E-MAIL ADDRESS: info@raadams.com

#826
FEDERAL TAX
IDENTIFICATION NUMBER
36-3313079

☐ CHECK HERE IF NAME OR ADDRESS CHANGE

SEE 10 ILCS 5/9-35 FOR GUIDANCE.

☒ NEW REGISTRATION

☐ AMENDED REGISTRATION

1.

AFFILIATED ENTITY: [List all affiliated entities as defined in 30 ILCS 50-37(a) of the Illinois Procurement Code]

NAME:

STREET ADDRESS:

CITY:

STATE:

ZIP CODE

NATURE OF AFFILIATION:

NAME:

STREET ADDRESS:

CITY:

STATE:

ZIP CODE

NATURE OF AFFILIATION:

NAME:

STREET ADDRESS:

CITY:

STATE:

ZIP CODE

NATURE OF AFFILIATION:

*IF MORE SPACE FOR INFORMATION IS REQUIRED, PLEASE ATTACH ADDITIONAL SHEETS.